

# Acknowledgement

**Customer name:** Xinpin Creation

**Customer data:** ARW-Q-XQ-016

**Our model number:** YZ-G25-2.5-7.6UH-3600GS-8MM

**Sample delivery date:** November 19, 2024

**Supply side:** Donguan jieruisi Technology Co.,Ltd

<b>Draw up</b>	<b>Audit</b>	<b>Permission granted</b>
陆 琳	邓 祥 桂	陆 如 圣



**Client acknowledges:**

<b>Qualified</b>	<b>Disqualified</b>	<b>Admit it</b>
<b>Notes</b>		

**Dongguan Jerice Technology Co., Ltd.**



**Tel:** \_\_\_\_\_

**Fax:** 86+13632701380

**address:** No. 96, Langhu Road, Dalingshan Town, Dongguan City (3rd Floor, Building L, Jinxionda Science and Technology Park)

<b>Customer name</b>	<b>Customer data</b>	<b>Our model number</b>	<b>Version</b>	<b>Date</b>
Xinpin Creation	ARW-Q-XQ-016	YZ-G25-2.5-7.6UH-3600GS-8MM	A0	2024.11.19


## 1、 Floor plan: unit: M

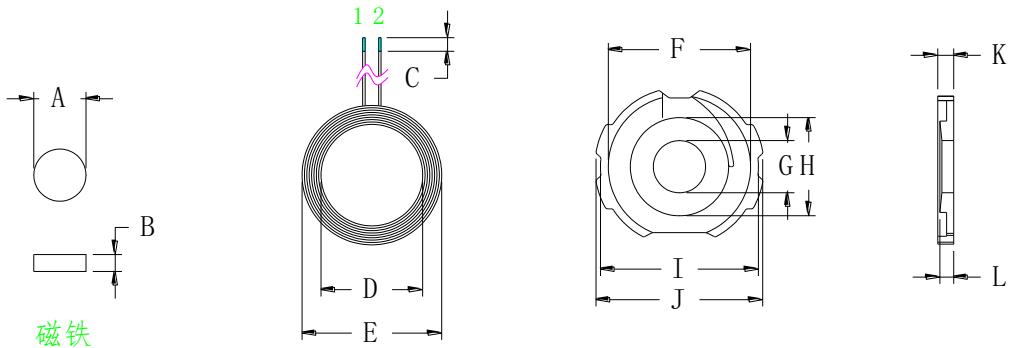

A	$7.5 \pm 0.1$
B	$2.5 \pm 0.1$
C	$2 \pm 1$
D	$15 \pm 0.2$
E	$20.7 \pm 0.3$
F	$21 \pm 0.2$
G	$7.6 \pm 0.1$
H	$14.5 \pm 0.2$
I	$23.5 \pm 0.3$
J	$25 \pm 0.2$
K	$2.5 \pm 0.15$
L	$2.4 \pm 0.15$
M	$8 \pm 1$

## 2、 Product parameters:


Feet	Line diameter	Number of turns	Notes
1- 2	0.08*24P	14	Hot Air Strand



---

### **3: Technical Requirements:**

1. Fix the head and tail of the copper wire to prevent loose or broken copper wire.
2. According to customer requirements to cut the head of the excess copper wire, tinned, tinned depth of 1 ~ 3mm.
3. Stick some white glue on the soft magnetic sheet and stick on the copper coil to ensure the clean and tidy surface of the product in the process.
4. Soft magnetic flaky objects have round holes and are not damaged.
5. Additional process (according to customer requirements) : in the finished product in the middle of the round hole loaded with 7.6 x 2.0 mm magnet, and in the back of the finished product and then paste a diameter of 16 mm round double-sided adhesive, and finally packaging.



### **4、 : Electrical parameter:**

**Inductance value,**

PIN 1 — 2 = 7.6uH ±0.2UH

$Q \geq 25$

The above inductance values are based on chuanhua 1062A instrument, using 10KHZ/0.3 vrms as the standard or equivalent instrument. The Q value is based on chuanhua 1062A instrument and 100KHZ/0.3 vrms or equivalent instrument

## 5、Bill of materials:

NO	Name	Material Quality	Suppliers	Notes
1	Hot Air Strand	0.08X24P	Uyghur or equivalent	
2	Disk	G25 die casting	TX or equivalent	
3	Tin	High temperature environmental protection	Thong Island or equivalent	
4	White glue	BY882	Treasure month or equivalent	
5	Strong magnetism	strength 7.7.5*2.5* 3600GS±100GS	Win-win or equal	
6	Double-sided glue	Ø14mm The diameter is 14mm	Hung Fai or equivalent	513-14