


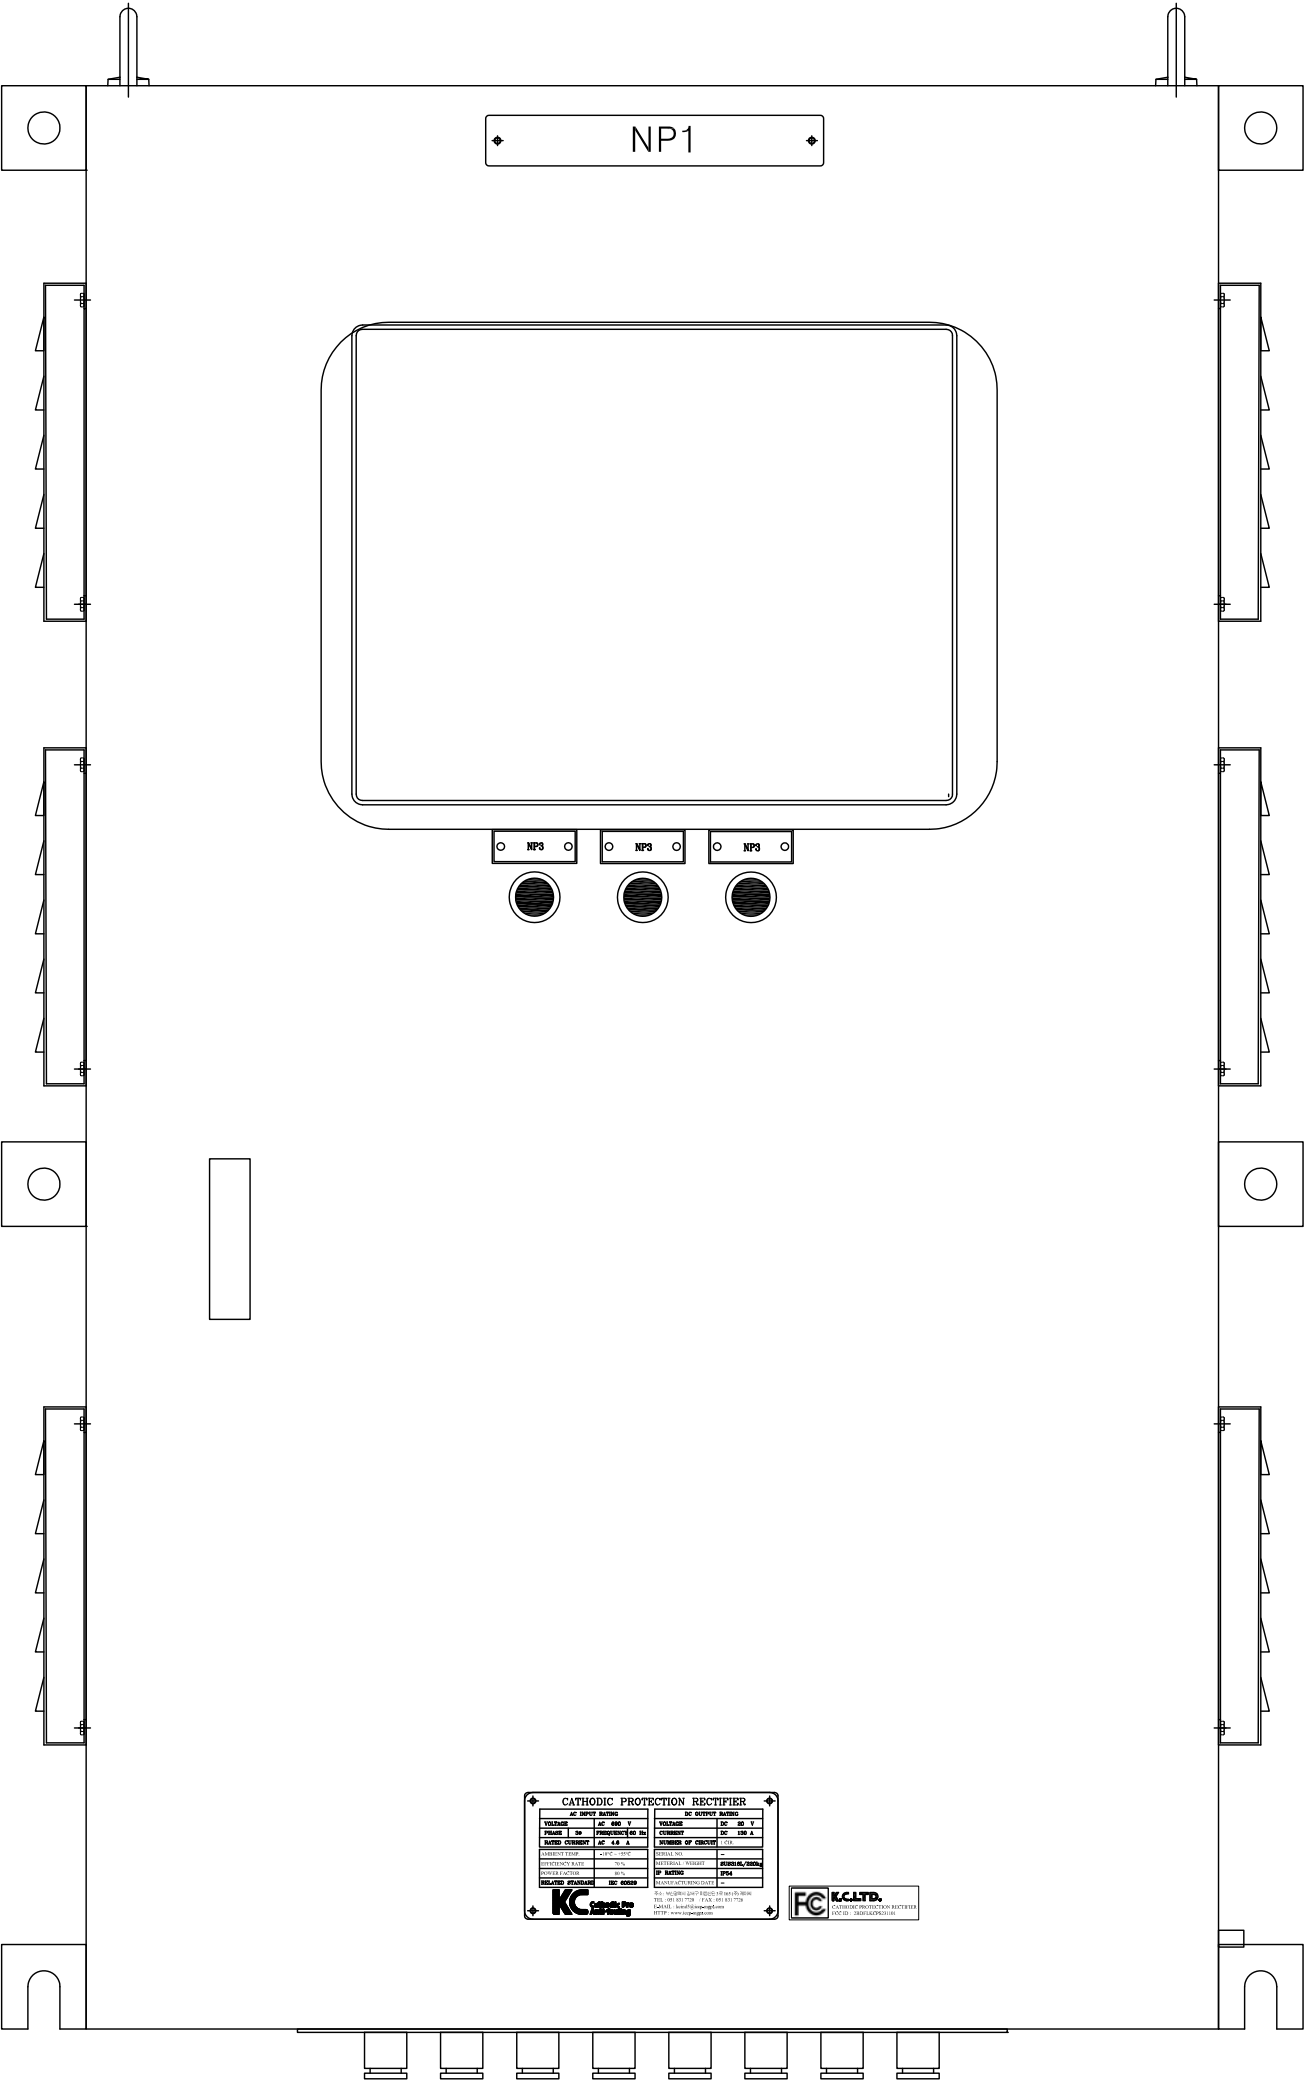

AC INPUT RATING				DC OUTPUT RATING			
VOLTAGE	AC 480 V	PHASE	3Ø	VOLTAGE	DC 50 V	CURRENT	DC 100 A
POWER	150 kW	FREQUENCY	60 Hz	OUTPUT	DC 5000 A	OUTPUT	DC 5000 A
MAXIMUM CURRENT	AC 480 A	MAXIMUM CURRENT	AC 480 A	OUTPUT	DC 5000 A	OUTPUT	DC 5000 A
MAXIMUM TEMPERATURE	50°C (122°F)	MAXIMUM TEMPERATURE	50°C (122°F)	OUTPUT	DC 5000 A	OUTPUT	DC 5000 A
MAXIMUM HUMIDITY	95%	MAXIMUM HUMIDITY	95%	OUTPUT	DC 5000 A	OUTPUT	DC 5000 A
MAXIMUM VIBRATION	100% (0.005g)	MAXIMUM VIBRATION	100% (0.005g)	OUTPUT	DC 5000 A	OUTPUT	DC 5000 A

KC LTD.
CATHODIC PROTECTION RECTIFIER
10010 - 20010000000

CATHODIC PROTECTION RECTIFIER

AC INPUT RATING			
VOLTAGE		AC 690 V	
PHASE	3□	FREQUENCY	60 Hz
RATED CURRENT		AC 4.6 A	

AMBIENT TEMP.	-10°C ~ +55°C
EFFICIENCY RATE	70 %
POWER FACTOR	80 %
RELATED STANDARD	IEC 60529

DC OUTPUT RATING	
VOLTAGE	DC 20 V
CURRENT	DC 130 A
NUMBER OF CIRCUIT	1 CIR.

SERIAL NO.	—
METERIAL / WEIGHT	SUS316L/220kg
IP RATING	IP54
MANUFACTURING DATE	—

KC Cathodic Pro
Anti-fouling

주소: 부산광역시 강서구 미음산단 3로 165 (주) 케이씨
TEL : 051 831 7720 / FAX : 051 831 7726
E-MAIL : kcind5@iccp-mgps.com
HTTP : www.iccp-mgps.com



K.C.LTD.

CATHODIC PROTECTION RECTIFIER
FCC ID : 2BDFLKCPS231101