

TEST REPORT

For WiFi-2.4GHz Band



Report No. : CHTEW24010019 **Report Verification:**

Project No..... : SHT2307016301EW

FCC ID..... : 2BDG9-697083172PF27

Applicant's name..... : Shenzhen Insighters Medical Technology Co.,Ltd

Address..... : The 13th floor of Hengtemei Building, Ganli Road No.3,518000
Shenzhen, Guangdong, PEOPLE'S REPUBLIC OF CHINA

Product Name : Insight Workstation

Trade Mark : 

Model No. : iS-PF1

Listed Model(s)..... : iS-PF2

Standard : FCC CFR Title 47 Part 15 Subpart C § 15.247


Date of receipt of test sample..... : Oct.24, 2023

Date of testing..... : Oct.24, 2023- Jan.10, 2024


Date of issue..... : Jan.11, 2024

Result..... : PASS


Compiled by
(Position+Printed name+Signature): File administrators Kiki Kong



Supervised by
(Position+Printed name+Signature): Project Engineer Kiki Kong



Approved by
(Position+Printed name+Signature): RF Manager Xu yang



Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd.

Address..... : Building 7, Baiwang Idea Factory, No.1051, Songbai Road,
Yangguang Community, Xili Subdistrict, Nanshan District,
Shenzhen, Guangdong, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Radio Specification Description	6
3.4.	Testing Laboratory Information	6
<u>4.</u>	<u>TEST CONFIGURATION</u>	<u>7</u>
4.1.	Test frequency list	7
4.2.	Test mode	7
4.3.	Test sample information	8
4.4.	Support unit used in test configuration and system	8
4.5.	Testing environmental condition	8
4.6.	Statement of the measurement uncertainty	9
4.7.	Equipment Used during the Test	10
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>12</u>
5.1.	Antenna Requirement	12
5.2.	AC Conducted Emission	13
5.3.	Peak Output Power	15
5.4.	Power Spectral Density	16
5.5.	6dB bandwidth	17
5.6.	99% Occupied Bandwidth	18
5.7.	Duty Cycle	19
5.8.	Conducted Band edge and Spurious Emission	20
5.9.	Radiated Band edge Emission	22
5.10.	Radiated Spurious Emission	27
<u>6.</u>	<u>TEST SETUP PHOTOS</u>	<u>35</u>
<u>7.</u>	<u>EXTERNAL AND INTERNAL PHOTOS</u>	<u>37</u>
<u>8.</u>	<u>APPENDIX REPORT</u>	<u>37</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

- [FCC CFR Title 47 Part 15 Subpart C § 15.247](#): Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz
- [ANSI C63.10:2020](#): American National Standard for Testing Unlicensed Wireless Devices
- [KDB 558074 D01 15.247 Meas Guidance v05r02](#): Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of The FCC Rules

1.2. Report version

Revision No.	Date of issue	Description
N/A	2024-01-11	Original

2. TEST DESCRIPTION

Report clause	Test Items	Standard Requirement	Result	Test Engineer
5.1	Antenna Requirement	15.203/15.247(c)	PASS	Xiangyuwei
5.2	AC Conducted Emission	15.207	PASS	Junman Wang
5.3	Peak Output Power	15.247(b)(3)	PASS	Xiangyuwei
5.4	Power Spectral Density	15.247(e)	PASS	Xiangyuwei
5.5	6dB Bandwidth	15.247(a)(2)	PASS	Xiangyuwei
5.6	99% Occupied Bandwidth	-	PASS ^{*1}	Xiangyuwei
5.7	Duty cycle	-	PASS ^{*1}	Xiangyuwei
5.8	Conducted Band Edge and Spurious Emission	15.247(d)/15.205	PASS	Xiangyuwei
5.9	Radiated Band Edge Emission	15.205/15.209	PASS	Yifan Wang
5.10	Radiated Spurious Emission	15.247(d)/15.205/15.209	PASS	Yifan Wang

Note:

- The measurement uncertainty is not included in the test result.
- ^{*1}: No requirement on standard, only report these test data.

3. SUMMARY

3.1. Client Information

Applicant:	Shenzhen Insighters Medical Technology Co.,Ltd
Address:	The 13th floor of Hengtemei Building, Ganli Road No.3,518000 Shenzhen, Guangdong, PEOPLE'S REPUBLIC OF CHINA
Manufacturer:	Shenzhen Insighters Medical Technology Co.,Ltd
Address:	The 13th floor of Hengtemei Building, Ganli Road No.3,518000 Shenzhen, Guangdong, PEOPLE'S REPUBLIC OF CHINA

3.2. Product Description

Main unit information:	
Product Name:	Insight Workstation
Trade Mark:	
Model No.:	iS-PF1
Listed Model(s):	iS-PF2
Power supply:	DC 7.4V from Battery
Hardware version:	1.0.82
Software version:	PF1V1.0.0.118
Accessory unit information:	
Battery information:	Model:18650-2S5P 7.4V 13000mAh 96.2Wh
Adapter information:	Model:PH50-112 Input:100-240V a.c., 50/60Hz 1.4-0.6A Output:12Vd.c., 4.0A

3.3. Radio Specification Description

Support type:	☒ 802.11b	☒ 802.11g	☒ 802.11n
Support bandwidth:	☒ 20MHz	☒ 40MHz	
Modulation:	802.11b:	DBPSK, DQPSK, BPSK, QPSK	
	802.11g/n:	BPSK, QPSK, 16QAM, 64QAM	
Operation frequency:	802.11b/g/n(HT20):	2412MHz~2462MHz	
	802.11n(HT40)	2422MHz~2452MHz	
Channel number:	802.11b/g/n(HT20):	11	
	802.11n(HT40)	7	
Channel separation:	5MHz		
Antenna technology:	☒ SISO	☐ MIMO	
Antenna type:	Monopole Antenna		
Antenna gain:	3.00dBi		

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	Building 7, Baiwang Idea Factory, No.1051, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong, China	
Contact information:	Phone: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn	
Qualifications	Type	Accreditation Number
	FCC Registration Number	762235
	FCC Designation Number	CN1181

4. TEST CONFIGURATION

4.1. Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channels which were tested. The Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the below blue front.

802.11b/g/n(HT20)		802.11n(HT40)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	03	2422
02	2417	04	2427
· :	· :	· :	· :
06	2437	06	2437
· :	· :	· :	· :
10	2457	08	2447
11	2462	09	2452

4.2. Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data Recorded in the report.

Preliminary tests were performed in different data rates, final test modes are considering the modulation and worse data rates as below table.

Modulation	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0

4.3. Test sample information

Test item	HTW sample no.
RF Conducted test items	Please refer to the description in the appendix report
RF Radiated test items	YPHT23070163005
EMI test items	YPHT23070163001

Note:

RF Conducted test items: Peak Output Power, Power Spectral Density, 6dB Bandwidth, 99% Occupied Bandwidth, Duty cycle, Conducted Band Edge and Spurious Emission

RF Radiated test items: Radiated Band Edge Emission, Radiated Spurious Emission

EMI test items: AC Conducted Emission

4.4. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?			
✓ No			
Item	Equipment	Trade Name	Model No.
1			
2			

4.5. Testing environmental condition

Type	Requirement	Actual
Temperature:	15~35°C	25°C
Relative Humidity:	25~75%	50%
Air Pressure:	860~1060mbar	1000mbar

4.6. Statement of the measurement uncertainty

No.	Test Items	Measurement Uncertainty
1	AC Conducted Emission	3.21dB
2	Peak Output Power	1.07
3	Power Spectral Density	1.07
4	6dB Bandwidth	0.002%
5	99% Occupied Bandwidth	0.002%
6	Duty cycle	-
7	Conducted Band Edge and Spurious Emission	1.68dB
8	Radiated Band Edge Emission	4.54dB for 30MHz-1GHz 5.10dB for above 1GHz
9	Radiated Spurious Emission	4.54dB for 30MHz-1GHz 5.10dB for above 1GHz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.7. Equipment Used during the Test

● RF Conducted test item							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	HTWE0242	FSV40	100048	2023/08/22	2024/08/21
●	Signal & Spectrum Analyzer	R&S	HTWE0262	FSW26	103440	2023/08/22	2024/08/21
●	Vector signal generator	R&S	HTWE0244	SMBV100A	260790	2023/05/23	2024/05/22
●	Test software	Tonscend	N/A	JS1120	N/A	N/A	N/A

● Conducted Emission							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	EMI Test Receiver	R&S	HTWE0111	ESCI	101247	2023/8/22	2024/8/21
●	Artificial Mains	SCHWARZBECK	HTWE0113	NNLK 8121	573	2023/8/18	2024/8/17
●	Protection Network	SCHWARZBECK	HTWE0567	VTSD9561FN	00899	2023/8/18	2024/8/17
●	ISN	FCC	HTWE0148	FCC-TLISN-T2-02	20371	2023/8/18	2024/8/17
●	ISN	FCC	HTWE0150	FCC-TLISN-T8-02	20375	2023/8/18	2024/8/17
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

● Radiated Emission – 9kHz~30MHz							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2023/4/6	2026/4/5
●	EMI Test Receiver	R&S	HTWE0099	ESCI 7	100900	2023/8/22	2024/8/21
●	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2021/4/6	2024/4/5
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

● Radiated Emission - 30MHz~1GHz							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2023/4/6	2026/4/5
●	EMI Test Receiver	R&S	HTWE0099	ESCI 7	100900	2023/8/22	2024/8/21
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0119	VULB9163	546	2023/2/22	2026/2/21
●	Pre-Amplifier	SCHWARZBECK	HTWE0295	BBV 9742	/	2023/5/25	2024/5/24
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

● Radiated emission-Above 1GHz

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	C11121	2023/4/17	2026/4/16
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2023/8/22	2024/8/21
●	Horn Antenna	SCHWARZBECK	HTWE0126	BBHA 9120D	1011	2023/2/14	2026/2/13
●	Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	BBHA9170472	2023/2/20	2026/2/19
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2023/5/25	2024/5/24
●	Test Software	R&S	N/A	EMC32	N/A	N/A	N/A

5. TEST CONDITIONS AND RESULTS

5.1. Antenna Requirement

REQUIREMENT

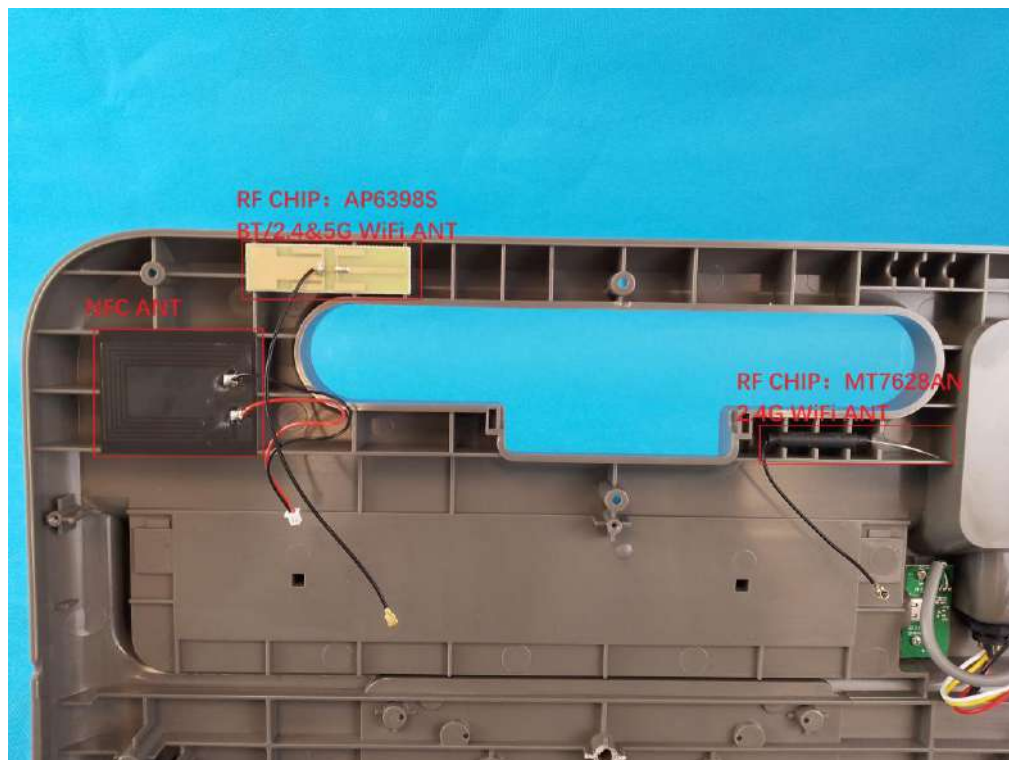
FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

TEST RESULT

☒ Passed ☐ Not Applicable

The antenna type is a Monopole antenna, please refer to the below antenna photo.



5.2. AC Conducted Emission


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

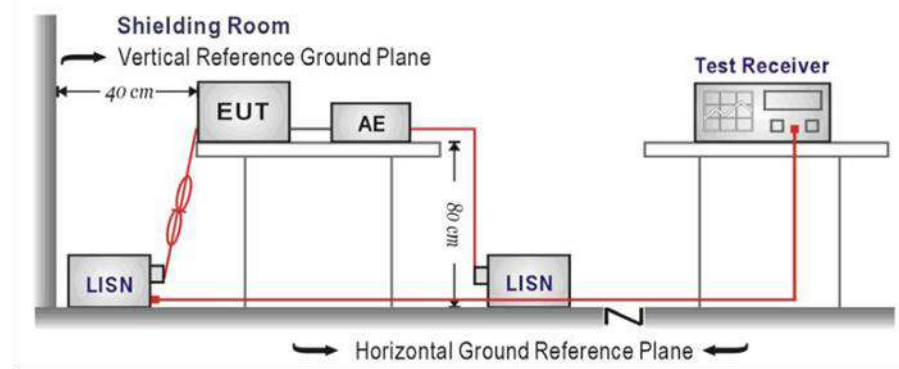TEST CONFIGURATION



TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE

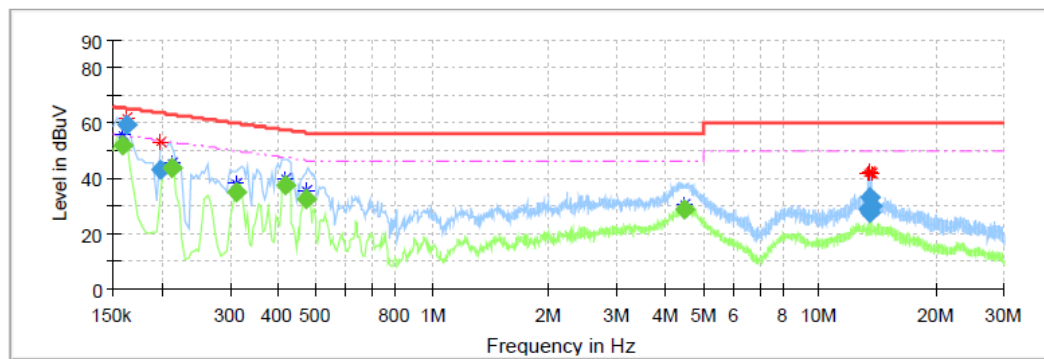
Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

Test Line:


L

**Final Result**

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.1580	---	51.83	55.57	3.74	L1	10.9
0.1620	59.11	---	65.36	6.25	L1	10.9
0.1995	43.15	---	63.63	20.48	L1	10.9
0.2115	---	43.76	53.15	9.39	L1	10.9
0.3115	---	35.11	49.93	14.82	L1	10.9
0.4155	---	37.30	47.54	10.24	L1	10.9
0.4715	---	32.68	46.49	13.81	L1	11.0
4.4715	---	28.66	46.00	17.34	L1	11.1
13.3475	28.59	---	60.00	31.41	L1	11.3
13.4555	27.37	---	60.00	32.63	L1	11.3
13.5165	33.03	---	60.00	26.97	L1	11.3
13.6355	29.76	---	60.00	30.24	L1	11.3

Test Line:

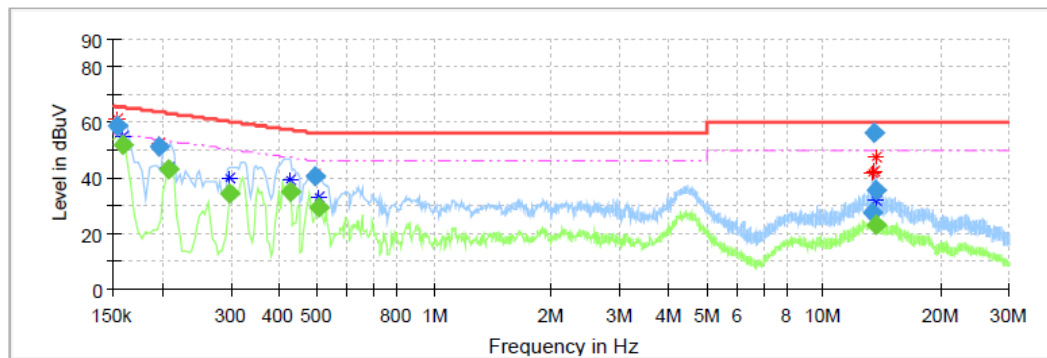N

**Final Result**


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.1540	58.72	---	65.78	7.06	N	10.7
0.1580	---	51.67	55.57	3.90	N	10.7
0.1955	51.13	---	63.80	12.67	N	10.7
0.2075	---	43.30	53.30	10.00	N	10.7
0.2995	---	34.19	50.26	16.07	N	10.7
0.4275	---	35.16	47.30	12.14	N	10.7
0.4915	40.69	---	56.14	15.45	N	10.7
0.5035	---	29.68	46.00	16.32	N	10.7
13.3275	27.60	---	60.00	32.40	N	11.0
13.5635	56.22	---	60.00	3.78	N	11.0
13.6075	35.85	---	60.00	24.15	N	11.0
13.6155	---	22.84	50.00	27.16	N	11.0

5.3. Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): 30dBm

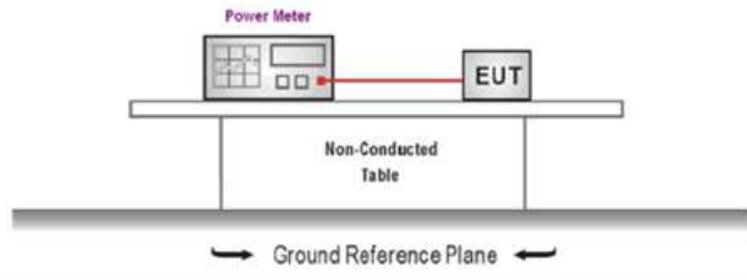TEST CONFIGURATION



TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10 and KDB 558074 D01 requirements.
2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.
4. Record the measurement data.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA

Refer to the appendix report

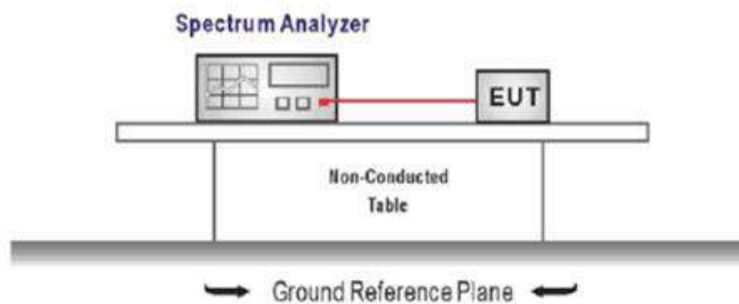
5.4. Power Spectral Density

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

TEST CONFIGURATION



TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input,
2. Configure the spectrum analyzer as shown below:
Center frequency=DTS channel center frequency
Span =1.5 times the DTS bandwidth
 $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$, $VBW \geq 3 \times RBW$
Sweep time = auto couple
Detector = peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA

Refer to the appendix report

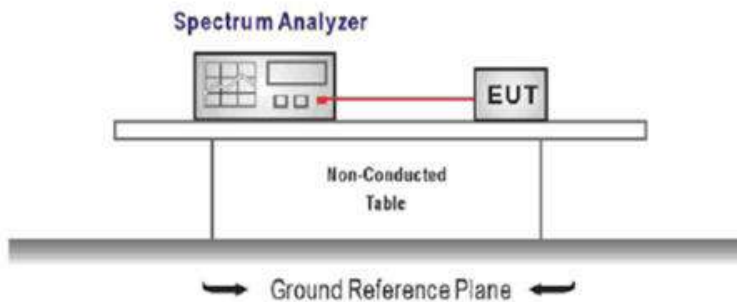
5.5. 6dB bandwidth

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2):

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST CONFIGURATION



TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency = DTS channel center frequency
Span = 2 x DTS bandwidth
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Sweep time = auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA

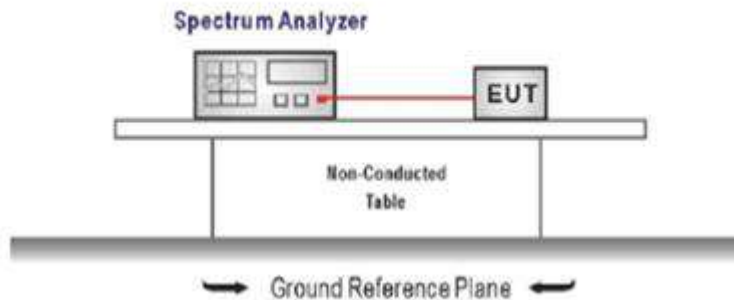
Refer to the appendix report

5.6. 99% Occupied Bandwidth

LIMIT

N/A

TEST CONFIGURATION



TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency = channel center frequency
Span $\geq 1.5 \times \text{OBW}$
RBW = 1%~5%OBW
VBW $\geq 3 \times \text{RBW}$
Sweep time = auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

TEST DATA

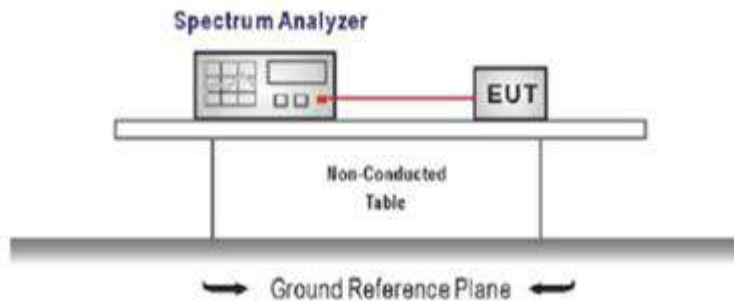
Refer to the appendix report

5.7. Duty Cycle

LIMIT

N/A

TEST CONFIGURATION



TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span=zero span, Frequency=centered channel, RBW= 1 MHz, VBW $\geq$ RBW
Sweep=as necessary to capture the entire dwell time,
Detector function = peak, Trigger mode
4. Measure and record the duty cycle data

TEST MODE

Refer to the clause 4.2

TEST DATA

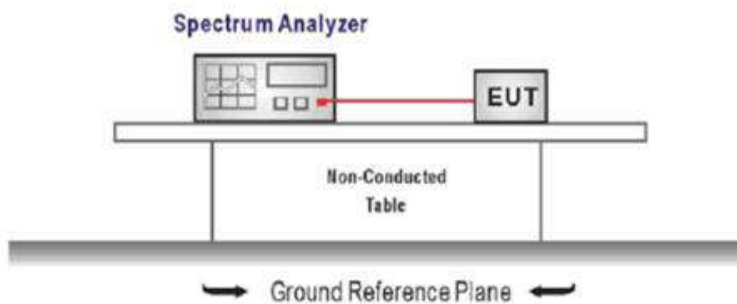
Refer to the appendix report

5.8. Conducted Band edge and Spurious Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION



TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Establish a reference level by using the following procedure
Center frequency=DTS channel center frequency
The span = 1.5 times the DTS bandwidth.
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum PSD level

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

3. Emission level measurement
Set the center frequency and span to encompass frequency range to be measured
RBW = 100 kHz, VBW $\geq 3 \times$ RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum amplitude level.
4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
5. Ensure that the amplitude of all unwanted emission outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emission relative to the limit.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ **Passed** ☐ **Not Applicable**

TEST DATA

Refer to the appendix report

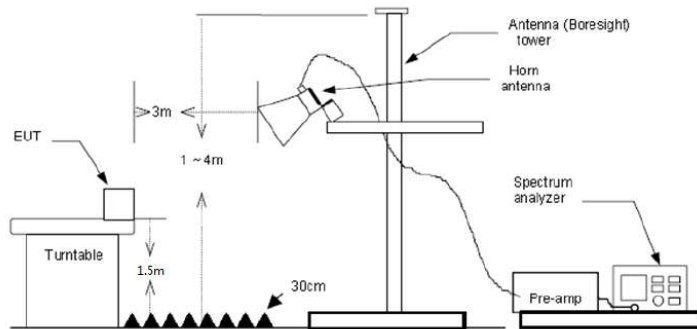
5.9. Radiated Band edge Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION



TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 on radiated measurement.
5. Use the following spectrum analyzer settings:
 - a) Span shall wide enough to fully capture the emission being measured
 - b) Set RBW=100kHz for <1GHz, VBW=3*RBW, Sweep time=auto, Detector=peak, Trace=max hold
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement

For average measurement:

 - VBW=10Hz, When duty cycle is no less than 98 percent
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.7 duty cycle.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

Note:

- 1) Level= Reading + Factor; Factor =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Over Limit = Level– Limit
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m).

Type	802.11b		Test channel		CH01		Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	31.59	27.86	4.01	41.80	20.00	41.66	54.00	-12.34	Average
2	2390.01	31.93	27.54	4.31	41.80	20.00	41.98	54.00	-12.02	Average
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	42.53	27.86	4.01	41.80	20.00	52.60	74.00	-21.40	Peak
2	2390.01	42.85	27.54	4.31	41.80	20.00	52.90	74.00	-21.10	Peak
Type	802.11b		Test channel		CH01		Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	43.01	27.86	4.01	41.80	20.00	53.08	74.00	-20.92	Peak
2	2390.01	44.63	27.54	4.31	41.80	20.00	54.68	74.00	-19.32	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	31.69	27.86	4.01	41.80	20.00	41.76	54.00	-12.24	Average
2	2390.01	31.46	27.54	4.31	41.80	20.00	41.51	54.00	-12.49	Average

Type	802.11b		Test channel		CH11		Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.49	44.10	27.33	4.18	41.80	20.00	53.81	74.00	-20.19	Peak
2	2550.00	43.20	27.40	4.28	41.80	20.00	53.08	74.00	-20.92	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.49	31.93	27.33	4.18	41.80	20.00	41.64	54.00	-12.36	Average
2	2550.00	31.43	27.40	4.28	41.80	20.00	41.31	54.00	-12.69	Average
Type	802.11b		Test channel		CH11		Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.49	42.97	27.33	4.18	41.80	20.00	52.68	74.00	-21.32	Peak
2	2550.00	42.52	27.40	4.28	41.80	20.00	52.40	74.00	-21.60	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.49	31.35	27.33	4.18	41.80	20.00	41.06	54.00	-12.94	Average
2	2550.00	31.40	27.40	4.28	41.80	20.00	41.28	54.00	-12.72	Average

Type	802.11g		Test channel		CH01		Polarity		Horizontal		
	Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
	1	2310.00	42.85	27.86	4.01	41.80	20.00	52.92	74.00	-21.08	Peak
	2	2390.01	44.41	27.54	4.31	41.80	20.00	54.46	74.00	-19.54	Peak
	Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
	1	2310.00	31.82	27.86	4.01	41.80	20.00	41.89	54.00	-12.11	Average
	2	2390.01	33.29	27.54	4.31	41.80	20.00	43.34	54.00	-10.66	Average

Type	802.11g		Test channel		CH01		Polarity		Vertical		
	Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
	1	2310.00	43.68	27.86	4.01	41.80	20.00	53.75	74.00	-20.25	Peak
	2	2390.01	46.39	27.54	4.31	41.80	20.00	56.44	74.00	-17.56	Peak
	Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
	1	2310.00	31.56	27.86	4.01	41.80	20.00	41.63	54.00	-12.37	Average
	2	2390.01	31.71	27.54	4.31	41.80	20.00	41.76	54.00	-12.24	Average

Type	802.11g		Test channel		CH11		Polarity		Horizontal		
	Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
	1	2483.49	47.04	27.33	4.18	41.80	20.00	56.75	74.00	-17.25	Peak
	2	2500.00	44.61	27.30	4.19	41.80	20.00	54.30	74.00	-19.70	Peak
	Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
	1	2483.49	33.94	27.33	4.18	41.80	20.00	43.65	54.00	-10.35	Average
	2	2500.00	34.16	27.30	4.19	41.80	20.00	43.85	54.00	-10.15	Average

Type	802.11g		Test channel		CH11		Polarity		Vertical		
	Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
	1	2483.49	42.67	27.33	4.18	41.80	20.00	52.38	74.00	-21.62	Peak
	2	2500.00	43.76	27.30	4.19	41.80	20.00	53.45	74.00	-20.55	Peak
	Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
	1	2483.49	31.71	27.33	4.18	41.80	20.00	41.42	54.00	-12.58	Average
	2	2500.00	33.34	27.30	4.19	41.80	20.00	43.03	54.00	-10.97	Average

Type	802.11n(HT20)		Test channel	CH01		Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	43.83	27.86	4.01	41.80	20.00	53.90	74.00	-20.10	Peak
2	2390.01	44.85	27.54	4.31	41.80	20.00	54.90	74.00	-19.10	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	31.77	27.86	4.01	41.80	20.00	41.84	54.00	-12.16	Average
2	2390.01	33.52	27.54	4.31	41.80	20.00	43.57	54.00	-10.43	Average

Type	802.11n(HT20)		Test channel	CH01		Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	42.38	27.86	4.01	41.80	20.00	52.45	74.00	-21.55	Peak
2	2390.01	43.94	27.54	4.31	41.80	20.00	53.99	74.00	-20.01	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	31.56	27.86	4.01	41.80	20.00	41.63	54.00	-12.37	Average
2	2390.01	31.86	27.54	4.31	41.80	20.00	41.91	54.00	-12.09	Average

Type	802.11n(HT20)		Test channel	CH11		Polarity		Horizontal		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.49	47.17	27.33	4.18	41.80	20.00	56.88	74.00	-17.12	Peak
2	2500.00	43.89	27.30	4.19	41.80	20.00	53.58	74.00	-20.42	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.49	34.97	27.33	4.18	41.80	20.00	44.68	54.00	-9.32	Average
2	2500.00	34.55	27.30	4.19	41.80	20.00	44.24	54.00	-9.76	Average

Type	802.11n(HT20)		Test channel	CH11		Polarity		Vertical		
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.49	44.24	27.33	4.18	41.80	20.00	53.95	74.00	-20.05	Peak
2	2500.00	43.26	27.30	4.19	41.80	20.00	52.95	74.00	-21.05	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.49	31.88	27.33	4.18	41.80	20.00	41.59	54.00	-12.41	Average
2	2500.00	33.43	27.30	4.19	41.80	20.00	43.12	54.00	-10.88	Average

Type	802.11n(HT40)		Test channel		CH03		Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	43.32	27.86	4.01	41.80	20.00	53.39	74.00	-20.61	Peak
2	2389.99	55.52	27.54	4.31	41.80	20.00	65.57	74.00	-8.43	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	32.15	27.86	4.01	41.80	20.00	42.22	54.00	-11.78	Average
2	2389.99	38.30	27.54	4.31	41.80	20.00	48.35	54.00	-5.65	Average

Type	802.11n(HT40)		Test channel		CH03		Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	42.53	27.86	4.01	41.80	20.00	52.60	74.00	-21.40	Peak
2	2389.99	47.43	27.54	4.31	41.80	20.00	57.48	74.00	-16.52	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2310.00	31.86	27.86	4.01	41.80	20.00	41.93	54.00	-12.07	Average
2	2389.99	34.15	27.54	4.31	41.80	20.00	44.20	54.00	-9.80	Average

Type	802.11n(HT40)		Test channel		CH09		Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	54.37	27.33	4.18	41.80	20.00	64.08	74.00	-9.92	Peak
2	2500.00	44.28	27.30	4.19	41.80	20.00	53.97	74.00	-20.03	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	38.61	27.33	4.18	41.80	20.00	48.32	54.00	-5.68	Average
2	2500.00	34.80	27.30	4.19	41.80	20.00	44.49	54.00	-9.51	Average

Type	802.11n(HT40)		Test channel		CH09		Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	45.86	27.33	4.18	41.80	20.00	55.57	74.00	-18.43	Peak
2	2484.03	48.32	27.33	4.18	41.80	20.00	58.03	74.00	-15.97	Peak
3	2500.00	43.94	27.30	4.19	41.80	20.00	53.63	74.00	-20.37	Peak
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Aux dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	2483.50	33.82	27.33	4.18	41.80	20.00	43.53	54.00	-10.47	Average
2	2500.00	33.52	27.30	4.19	41.80	20.00	43.21	54.00	-10.79	Average

5.10. Radiated Spurious Emission

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209

Frequency	Limit (dBuV/m)	Value
0.009 MHz ~0.49 MHz	2400/F(kHz) @300m	Quasi-peak
0.49 MHz ~ 1.705 MHz	24000/F(kHz) @30m	Quasi-peak
1.705 MHz ~30 MHz	30 @30m	Quasi-peak


Note: Limit dBuV/m @3m = Limit dBuV/m @300m + $40 \cdot \log(300/3)$ = Limit dBuV/m @300m +80,

Limit dBuV/m @3m = Limit dBuV/m @30m + $40 \cdot \log(30/3)$ = Limit dBuV/m @30m + 40.


Frequency	Limit (dBuV/m @3m)	Value
30MHz~88MHz	40.00	Quasi-peak
88MHz~216MHz	43.50	Quasi-peak
216MHz~960MHz	46.00	Quasi-peak
960MHz~1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION

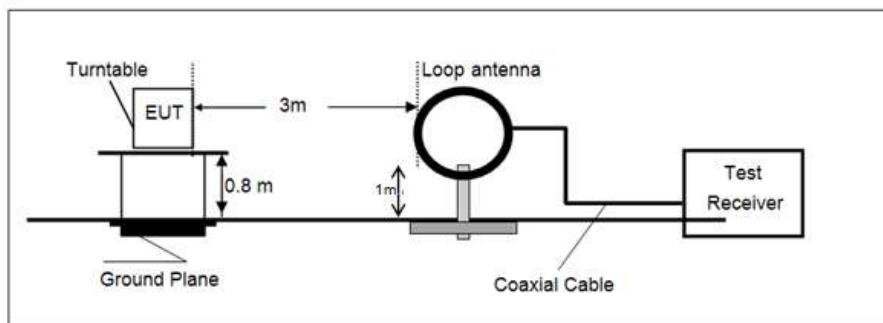
- 9 kHz ~ 30 MHz



- 30 MHz ~ 1 GHz

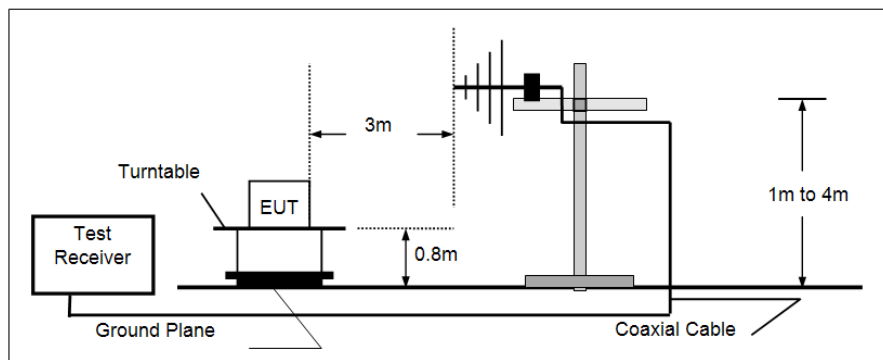

- Above 1 GHz

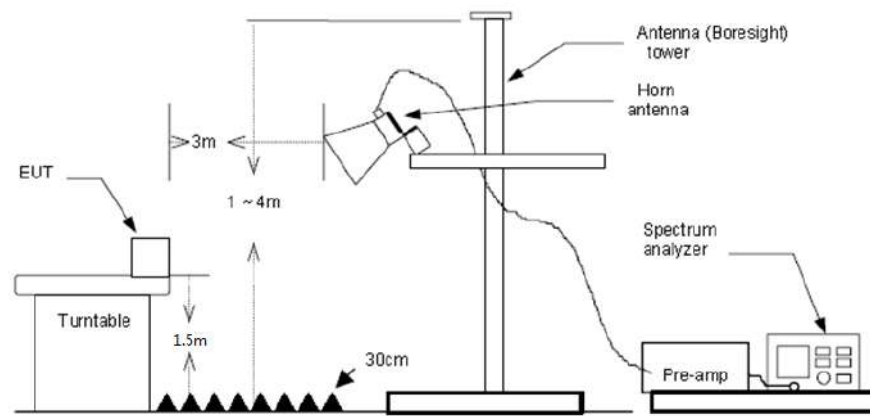

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - a) Span shall wide enough to fully capture the emission being measured;
 - b) Below 1 GHz:
 RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
 If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement
 For average measurement:
 - VBW=10Hz, When duty cycle is no less than 98 percent
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.7 duty cycle.

TEST MODE

Refer to the clause 4.2

TEST RESULT

☒ Passed ☐ Not Applicable

Note:

- 1) Level= Reading + Factor/Transd; Factor/Transd =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Over Limit = Level– Limit
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m) for above 1GHz.

For 9 kHz ~ 30 MHz

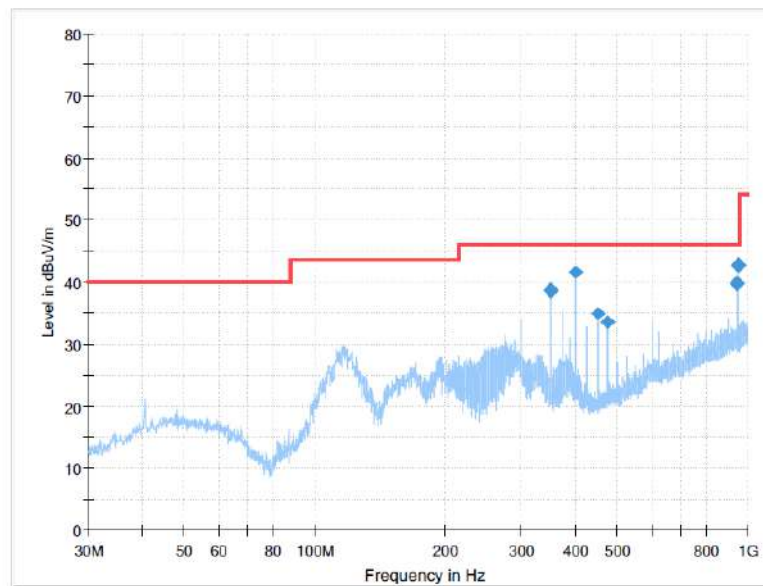
The EUT was pre-scanned this frequency band, found the radiated level 20dB lower than the limit, so don't show data on this report.

For 30 MHz ~ 1000 MHz

Have pre-scan all test channel, found CH06 of 802.11B which it was worst case, so only show the worst case's data on this report.

Polarization:


Horizontal

**Final Result**

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
349.9788	38.74	46.00	7.26	100.0	H	84.0	-5.4
400.0550	42.76	46.00	3.24	100.0	H	40.0	-4.5
450.0100	34.01	46.00	11.99	100.0	H	9.0	-3.4
474.9875	32.30	46.00	13.70	100.0	H	355.0	-3.0
945.1950	39.81	46.00	6.19	100.0	H	286.0	7.1
948.4688	42.78	46.00	3.22	100.0	H	216.0	7.1

Polarization:

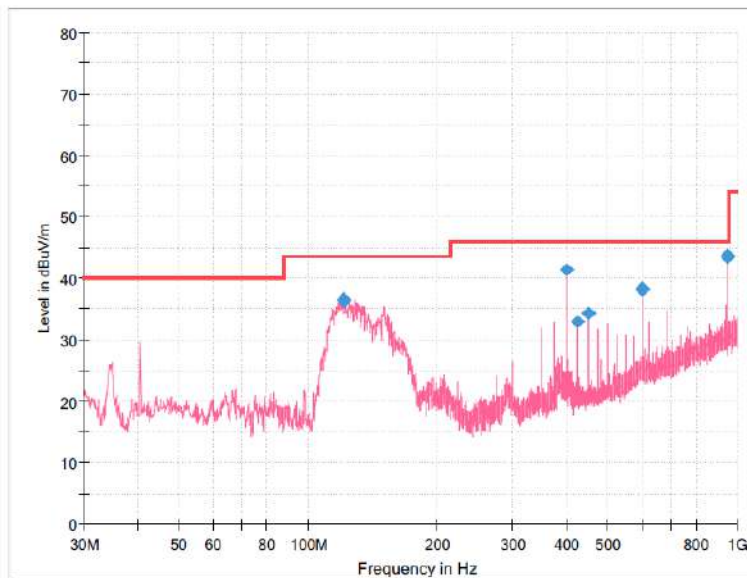Vertical

**Final Result**

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
120.6950	36.40	43.50	7.10	100.0	V	160.0	-12.9
400.0550	42.06	46.00	3.94	100.0	V	179.0	-4.5
425.0325	33.08	46.00	12.92	100.0	V	191.0	-3.7
450.0100	34.83	46.00	11.17	100.0	V	211.0	-3.4
599.9963	38.26	46.00	7.74	100.0	V	199.0	1.1
948.4688	43.56	46.00	2.44	100.0	V	262.0	7.1

For 1 GHz ~ 25 GHz

Type	802.11b	Test channel	CH01	Polarity	Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3616.45	54.78	29.27	5.07	41.60	47.52	74.00	-26.48	Peak
2	4821.76	55.32	31.26	6.00	41.33	51.25	74.00	-22.75	Peak
3	5406.96	51.49	31.63	6.50	40.88	48.74	74.00	-25.26	Peak
4	10400.86	40.99	39.90	9.71	40.60	50.00	74.00	-24.00	Peak
Type	802.11b	Test channel	CH01	Polarity	Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3192.37	53.10	28.90	4.80	41.60	45.20	74.00	-28.80	Peak
2	4821.76	50.26	31.26	6.00	41.33	46.19	74.00	-27.81	Peak
3	7190.69	45.96	36.00	7.55	40.94	48.57	74.00	-25.43	Peak
4	10534.09	40.03	40.00	9.77	41.04	48.76	74.00	-25.24	Peak
Type	802.11b	Test channel	CH06	Polarity	Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3653.46	53.83	29.20	5.09	41.60	46.52	74.00	-27.48	Peak
2	4883.52	54.63	31.20	6.21	41.25	50.79	74.00	-23.21	Peak
3	5406.96	51.19	31.63	6.50	40.88	48.44	74.00	-25.56	Peak
4	10400.86	40.30	39.90	9.71	40.60	49.31	74.00	-24.69	Peak
Type	802.11b	Test channel	CH06	Polarity	Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3192.37	56.30	28.90	4.80	41.60	48.40	74.00	-25.60	Peak
2	4871.10	52.33	31.20	6.30	41.27	48.56	74.00	-25.44	Peak
3	7209.02	45.60	36.00	7.56	40.95	48.21	74.00	-25.79	Peak
4	10427.37	39.89	39.93	9.72	40.69	48.85	74.00	-25.15	Peak
Type	802.11b	Test channel	CH11	Polarity	Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3428.21	53.71	28.57	4.98	41.60	45.66	74.00	-28.34	Peak
2	4920.96	54.62	31.20	6.06	41.20	50.68	74.00	-23.32	Peak
3	5406.96	50.53	31.63	6.50	40.88	47.78	74.00	-26.22	Peak
4	8104.56	43.64	36.98	8.11	40.59	48.14	74.00	-25.86	Peak
Type	802.11b	Test channel	CH11	Polarity	Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3192.37	58.50	28.90	4.80	41.60	50.60	74.00	-23.40	Peak
2	4920.96	55.74	31.20	6.06	41.20	51.80	74.00	-22.20	Peak
3	6032.40	44.64	32.46	6.89	40.62	43.37	74.00	-30.63	Peak
4	11515.68	40.99	40.47	10.37	42.30	49.53	74.00	-24.47	Peak


Type	802.11g	Test channel	CH01	Polarity	Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3616.45	55.36	29.27	5.07	41.60	48.10	74.00	-25.90	Peak
2	4821.76	51.82	31.26	6.00	41.33	47.75	74.00	-26.25	Peak
3	5406.96	50.99	31.63	6.50	40.88	48.24	74.00	-25.76	Peak
4	10321.74	39.62	39.67	9.67	40.74	48.22	74.00	-25.78	Peak
Type	802.11g	Test channel	CH01	Polarity	Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3616.45	54.63	29.27	5.07	41.60	47.37	74.00	-26.63	Peak
2	4278.06	52.93	30.11	5.78	41.40	47.42	74.00	-26.58	Peak
3	4821.76	52.35	31.26	6.00	41.33	48.28	74.00	-25.72	Peak
4	10427.37	40.27	39.93	9.72	40.69	49.23	74.00	-24.77	Peak
Type	802.11g	Test channel	CH06	Polarity	Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3428.21	53.83	28.57	4.98	41.60	45.78	74.00	-28.22	Peak
2	3653.46	53.31	29.20	5.09	41.60	46.00	74.00	-28.00	Peak
3	4871.10	52.07	31.20	6.30	41.27	48.30	74.00	-25.70	Peak
4	5406.96	51.22	31.63	6.50	40.88	48.47	74.00	-25.53	Peak
Type	802.11g	Test channel	CH06	Polarity	Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3428.21	51.49	28.57	4.98	41.60	43.44	74.00	-30.56	Peak
2	4785.08	47.46	31.27	5.98	41.37	43.34	74.00	-30.66	Peak
3	6032.40	45.47	32.46	6.89	40.62	44.20	74.00	-29.80	Peak
4	10374.42	40.06	39.82	9.69	40.65	48.92	74.00	-25.08	Peak
Type	802.11g	Test channel	CH11	Polarity	Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3419.49	53.09	28.52	5.02	41.60	45.03	74.00	-28.97	Peak
2	4920.96	53.74	31.20	6.06	41.20	49.80	74.00	-24.20	Peak
3	5406.96	50.67	31.63	6.50	40.88	47.92	74.00	-26.08	Peak
4	9042.04	41.89	38.08	9.06	41.07	47.96	74.00	-26.04	Peak
Type	802.11g	Test channel	CH11	Polarity	Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3200.50	54.00	28.90	4.84	41.60	46.14	74.00	-27.86	Peak
2	3428.21	52.83	28.57	4.98	41.60	44.78	74.00	-29.22	Peak
3	4933.50	48.07	31.20	6.05	41.19	44.13	74.00	-29.87	Peak
4	6032.40	45.56	32.46	6.89	40.62	44.29	74.00	-29.71	Peak


Type	802.11n(HT20)	Test channel	CH01	Polarity	Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3616.45	52.98	29.27	5.07	41.60	45.72	74.00	-28.28	Peak
2	4821.76	52.41	31.26	6.00	41.33	48.34	74.00	-25.66	Peak
3	5406.96	51.57	31.63	6.50	40.88	48.82	74.00	-25.18	Peak
4	10400.86	39.25	39.90	9.71	40.60	48.26	74.00	-25.74	Peak
Type	802.11n(HT20)	Test channel	CH01	Polarity	Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3616.45	54.31	29.27	5.07	41.60	47.05	74.00	-26.95	Peak
2	4821.76	51.34	31.26	6.00	41.33	47.27	74.00	-26.73	Peak
3	5406.96	47.38	31.63	6.50	40.88	44.63	74.00	-29.37	Peak
4	10453.95	39.02	39.95	9.73	40.77	47.93	74.00	-26.07	Peak
Type	802.11n(HT20)	Test channel	CH06	Polarity	Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3428.21	53.89	28.57	4.98	41.60	45.84	74.00	-28.16	Peak
2	4871.10	52.81	31.20	6.30	41.27	49.04	74.00	-24.96	Peak
3	5406.96	50.84	31.63	6.50	40.88	48.09	74.00	-25.91	Peak
4	8104.56	44.00	36.98	8.11	40.59	48.50	74.00	-25.50	Peak
Type	802.11n(HT20)	Test channel	CH06	Polarity	Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3192.37	52.33	28.90	4.80	41.60	44.43	74.00	-29.57	Peak
2	3428.21	52.11	28.57	4.98	41.60	44.06	74.00	-29.94	Peak
3	4797.27	48.77	31.29	5.99	41.36	44.69	74.00	-29.31	Peak
4	11457.21	40.54	40.46	10.33	42.30	49.03	74.00	-24.97	Peak
Type	802.11n(HT20)	Test channel	CH11	Polarity	Horizontal				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3428.21	53.40	28.57	4.98	41.60	45.35	74.00	-28.65	Peak
2	3690.85	51.25	29.20	5.17	41.60	44.02	74.00	-29.98	Peak
3	5406.96	50.56	31.63	6.50	40.88	47.81	74.00	-26.19	Peak
4	8104.56	43.29	36.98	8.11	40.59	47.79	74.00	-26.21	Peak
Type	802.11n(HT20)	Test channel	CH11	Polarity	Vertical				
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3419.49	53.31	28.52	5.02	41.60	45.25	74.00	-28.75	Peak
2	5406.96	45.64	31.63	6.50	40.88	42.89	74.00	-31.11	Peak
3	7981.72	42.10	36.96	7.99	40.85	46.20	74.00	-27.80	Peak
4	11486.41	40.35	40.49	10.35	42.30	48.89	74.00	-25.11	Peak

Type	802.11n(HT40)		Test channel	CH03		Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3428.21	52.86	28.57	4.98	41.60	44.81	74.00	-29.19	Peak
2	3681.47	51.87	29.20	5.14	41.60	44.61	74.00	-29.39	Peak
3	4712.55	52.44	31.13	5.88	41.40	48.05	74.00	-25.95	Peak
4	5406.96	49.06	31.63	6.50	40.88	46.31	74.00	-27.69	Peak
Type	802.11n(HT40)		Test channel	CH03		Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3192.37	52.63	28.90	4.80	41.60	44.73	74.00	-29.27	Peak
2	3428.21	51.92	28.57	4.98	41.60	43.87	74.00	-30.13	Peak
3	4785.08	51.00	31.27	5.98	41.37	46.88	74.00	-27.12	Peak
4	10427.37	40.07	39.93	9.72	40.69	49.03	74.00	-24.97	Peak
Type	802.11n(HT40)		Test channel	CH06		Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3428.21	52.59	28.57	4.98	41.60	44.54	74.00	-29.46	Peak
2	4712.55	53.37	31.13	5.88	41.40	48.98	74.00	-25.02	Peak
3	5406.96	51.25	31.63	6.50	40.88	48.50	74.00	-25.50	Peak
4	10427.37	39.61	39.93	9.72	40.69	48.57	74.00	-25.43	Peak
Type	802.11n(HT40)		Test channel	CH06		Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3428.21	53.18	28.57	4.98	41.60	45.13	74.00	-28.87	Peak
2	4785.08	48.37	31.27	5.98	41.37	44.25	74.00	-29.75	Peak
3	6017.06	44.20	32.43	6.88	40.62	42.89	74.00	-31.11	Peak
4	10778.21	40.72	40.23	9.89	41.83	49.01	74.00	-24.99	Peak
Type	802.11n(HT40)		Test channel	CH09		Polarity		Horizontal	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3428.21	52.90	28.57	4.98	41.60	44.85	74.00	-29.15	Peak
2	4908.44	50.13	31.20	6.07	41.22	46.18	74.00	-27.82	Peak
3	5406.96	50.91	31.63	6.50	40.88	48.16	74.00	-25.84	Peak
4	8104.56	43.31	36.98	8.11	40.59	47.81	74.00	-26.19	Peak
Type	802.11n(HT40)		Test channel	CH09		Polarity		Vertical	
Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	3428.21	52.59	28.57	4.98	41.60	44.54	74.00	-29.46	Peak
2	4785.08	49.44	31.27	5.98	41.37	45.32	74.00	-28.68	Peak
3	5406.96	47.20	31.63	6.50	40.88	44.45	74.00	-29.55	Peak
4	10427.37	40.29	39.93	9.72	40.69	49.25	74.00	-24.75	Peak

6. TEST SETUP PHOTOS

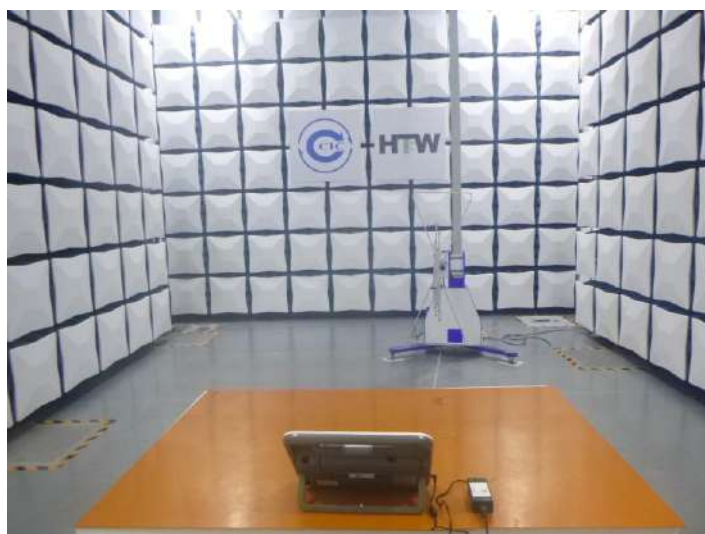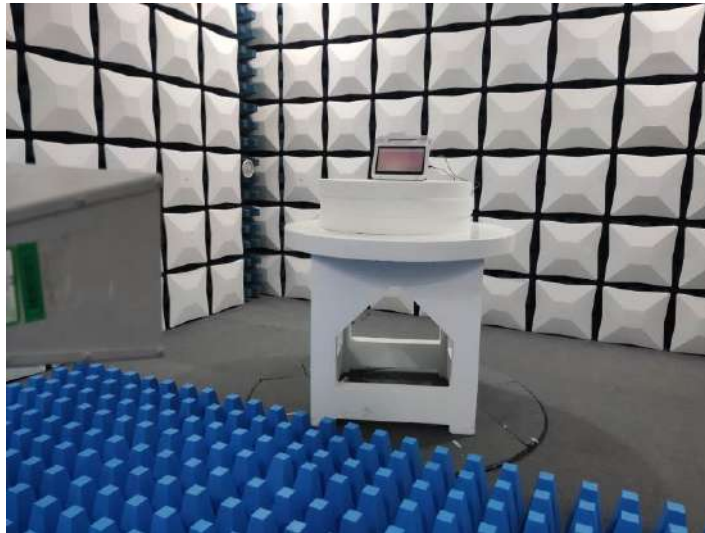Radiated Emission





AC Conducted Emission



7. EXTERNAL AND INTERNAL PHOTOS

Refer to the test report No. CHTEW24010014

8. APPENDIX REPORT

APPENDIX REPORT

Project No.	SHT2307016301EW	Radio Specification	WIFI 2.4G
Test sample No.	YPHT23070163003	Model No.	iS-PF1
Start test date	2023-11-03	Finish date	2023-11-03
Temperature	24.1℃	Humidity	48%
Test Engineer	Xiangyu Wei	Auditor	Xiaodong Zheo




Appendix clause	Test item	Result
A	Conducted Peak Output Power	PASS
B	Power Spectral Density	PASS
C	6 dB Bandwidth	PASS
D	99% Occupied Bandwidth	PASS
E	Duty Cycle	PASS
F	Band edge and Spurious Emissions (conducted)	PASS


Appendix A: Conducted Peak Output Power




Type	Channel	Peak Output power (dBm)	Average Output power (dBm)	Limit (dBm)	Result
802.11b	01	15.32	13.51	≤ 30.00	Pass
	06	16.01	13.77		
	11	15.98	13.25		
802.11g	01	16.19	12.64	≤ 30.00	Pass
	06	16.69	12.58		
	11	16.73	12.36		
802.11n (HT20)	01	15.97	12.45	≤ 30.00	Pass
	06	16.39	12.86		
	11	16.56	12.54		
802.11n(HT40)	03	16.12	12.29	≤ 30.00	Pass
	06	16.63	12.67		
	09	16.66	12.14		




Appendix B: Power Spectral Density

Type	Channel	Power Spectral Density (dBm/30KHz)	Limit (dBm/3KHz)	Result
802.11b	01	2.19	≤8.00	Pass
	06	2.68		
	11	2.46		
802.11g	01	-6.98	≤8.00	Pass
	06	-5.67		
	11	-5.41		
802.11n(HT20)	01	-6.18	≤8.00	Pass
	06	-5.70		
	11	-5.70		
802.11n(HT40)	03	-9.70	≤8.00	Pass
	06	-9.37		
	09	-8.91		

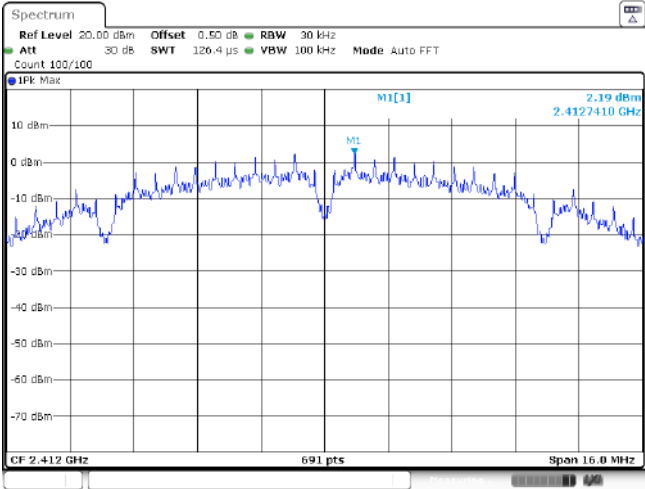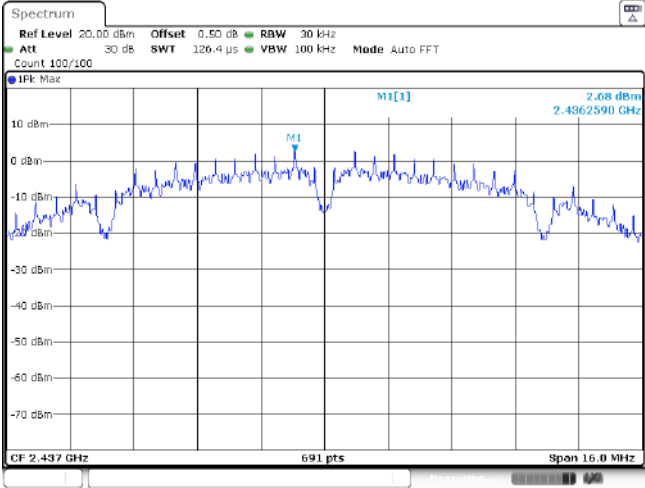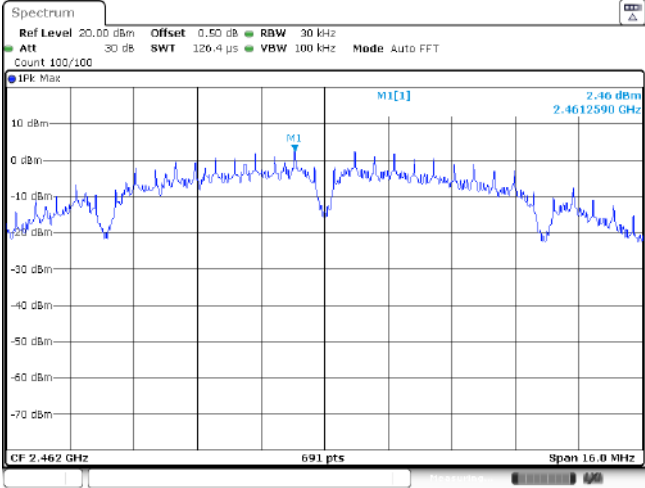Type: 802.11 b	
CH01	
CH06	
CH11	

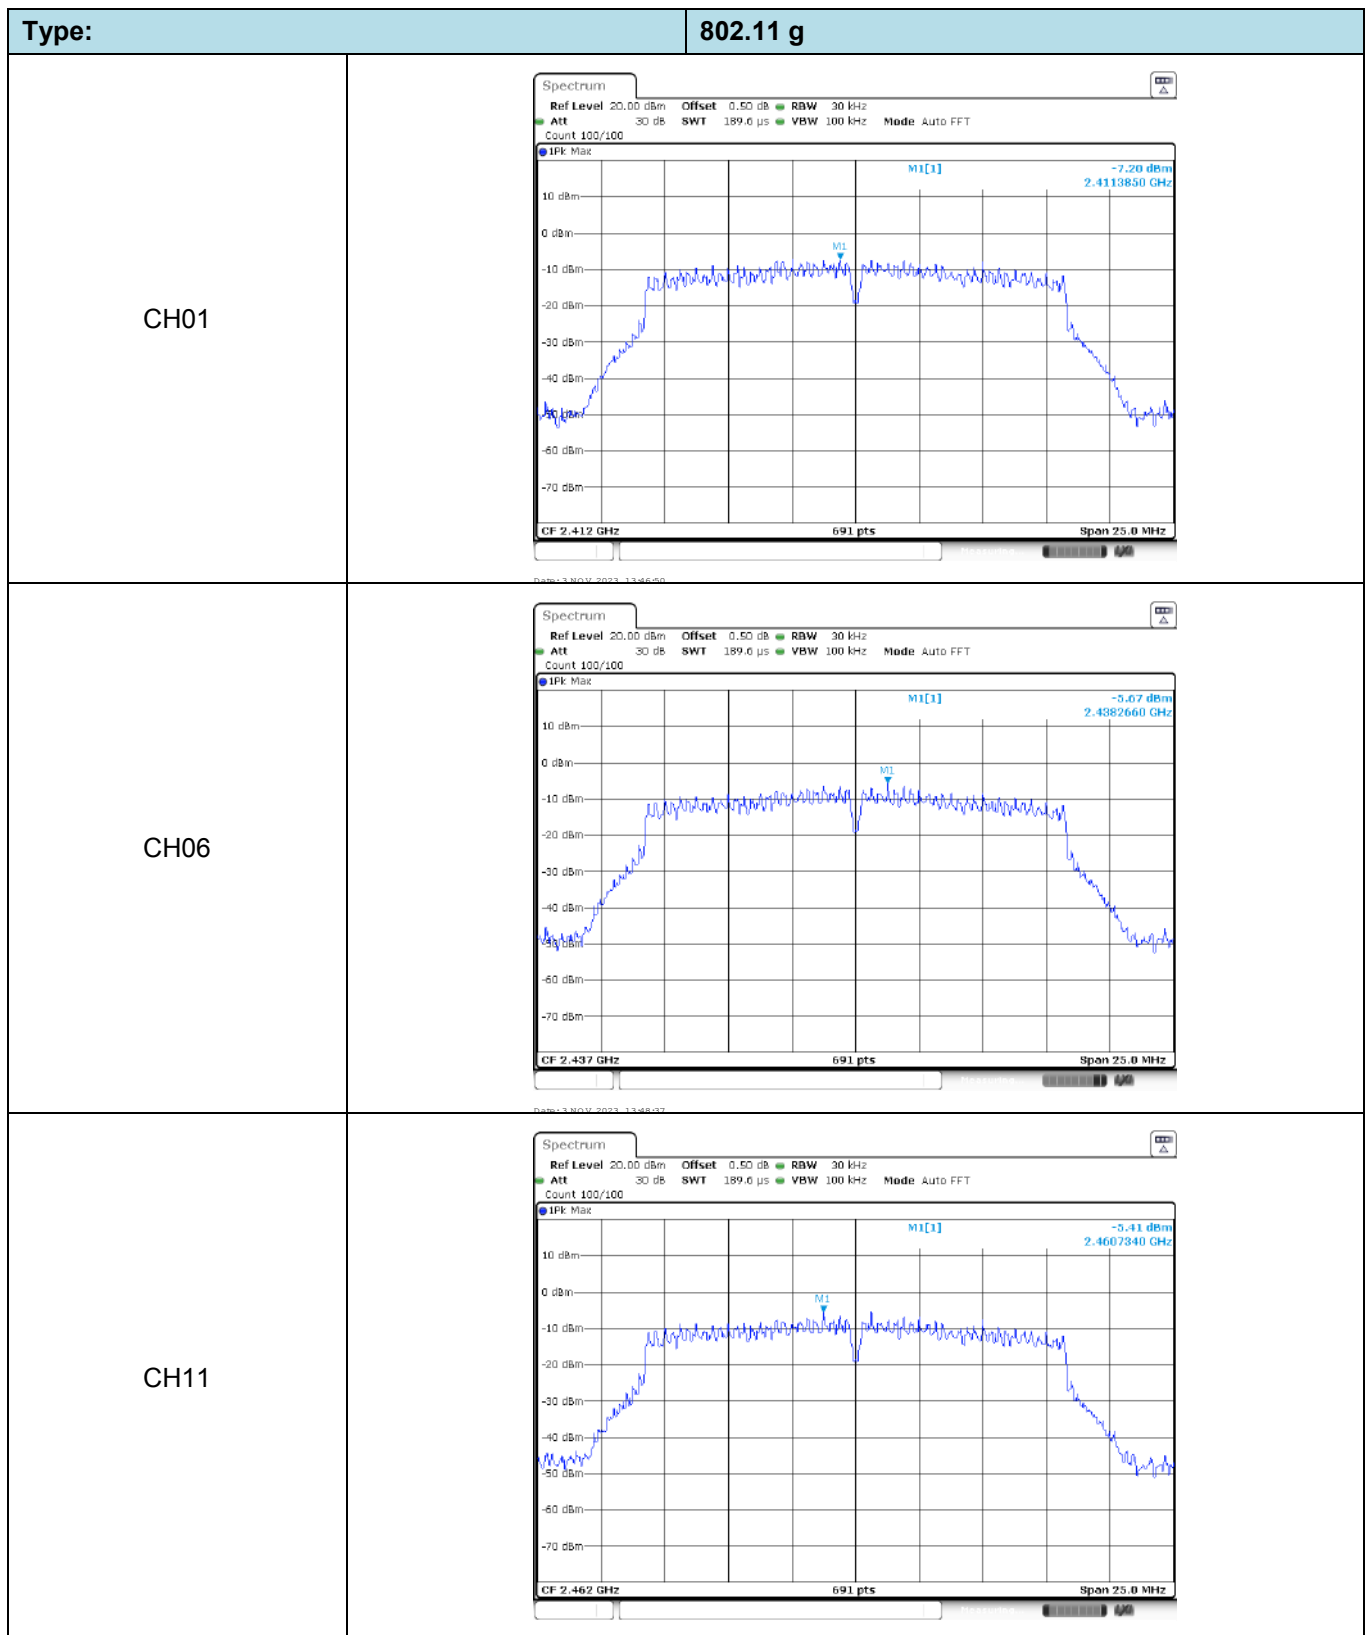


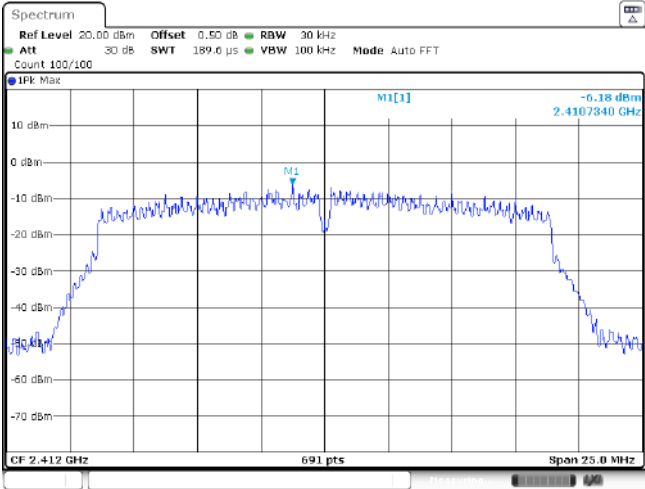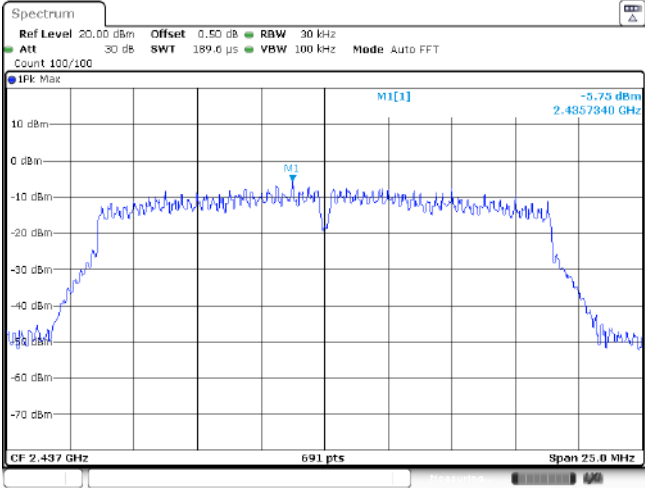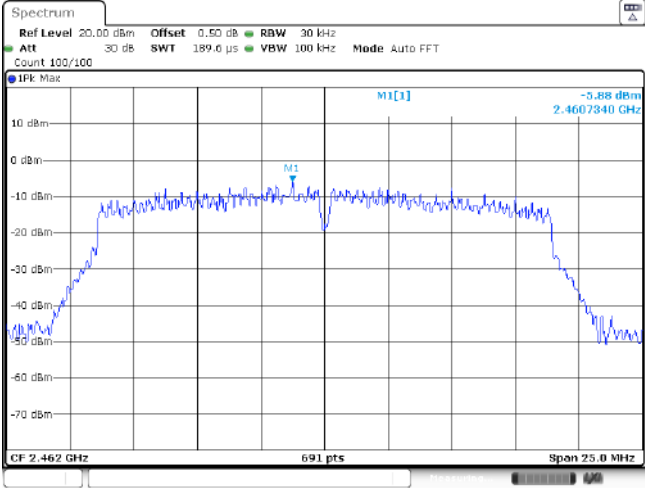
Type: 802.11n(HT20)	
CH01	
CH06	
CH11	

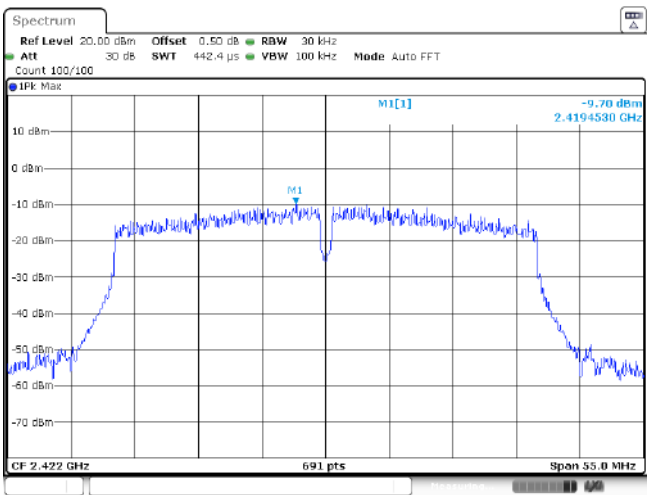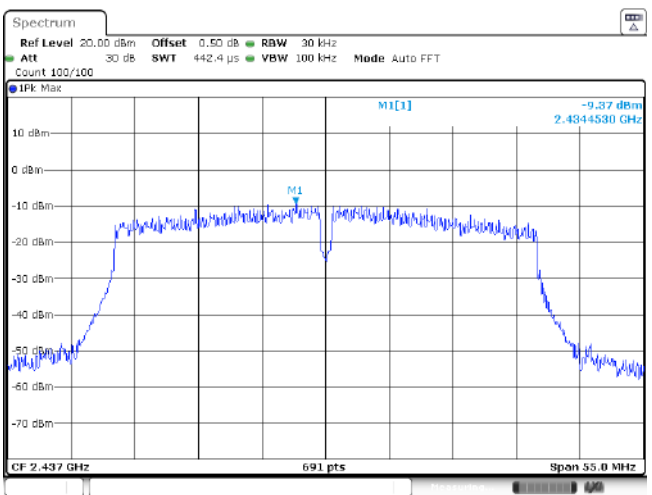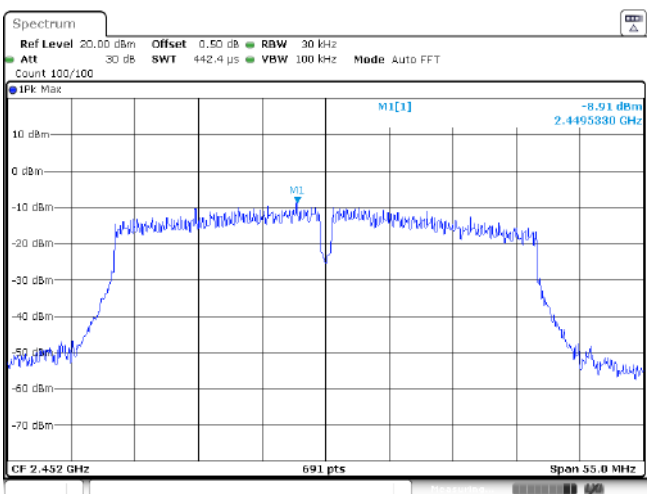
Type:	802.11n(HT40)
CH03	 CH03
CH06	 CH06
CH09	 CH09

Appendix C: 6dB bandwidth

Type	Channel	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11b	01	10.08	≥0.5	Pass
	06	9.63		
	11	9.60		
802.11g	01	12.66	≥0.5	Pass
	06	14.43		
	11	12.69		
802.11n(HT20)	01	13.92	≥0.5	Pass
	06	14.34		
	11	12.90		
802.11n(HT40)	03	34.02	≥0.5	Pass
	06	32.10		
	09	32.70		

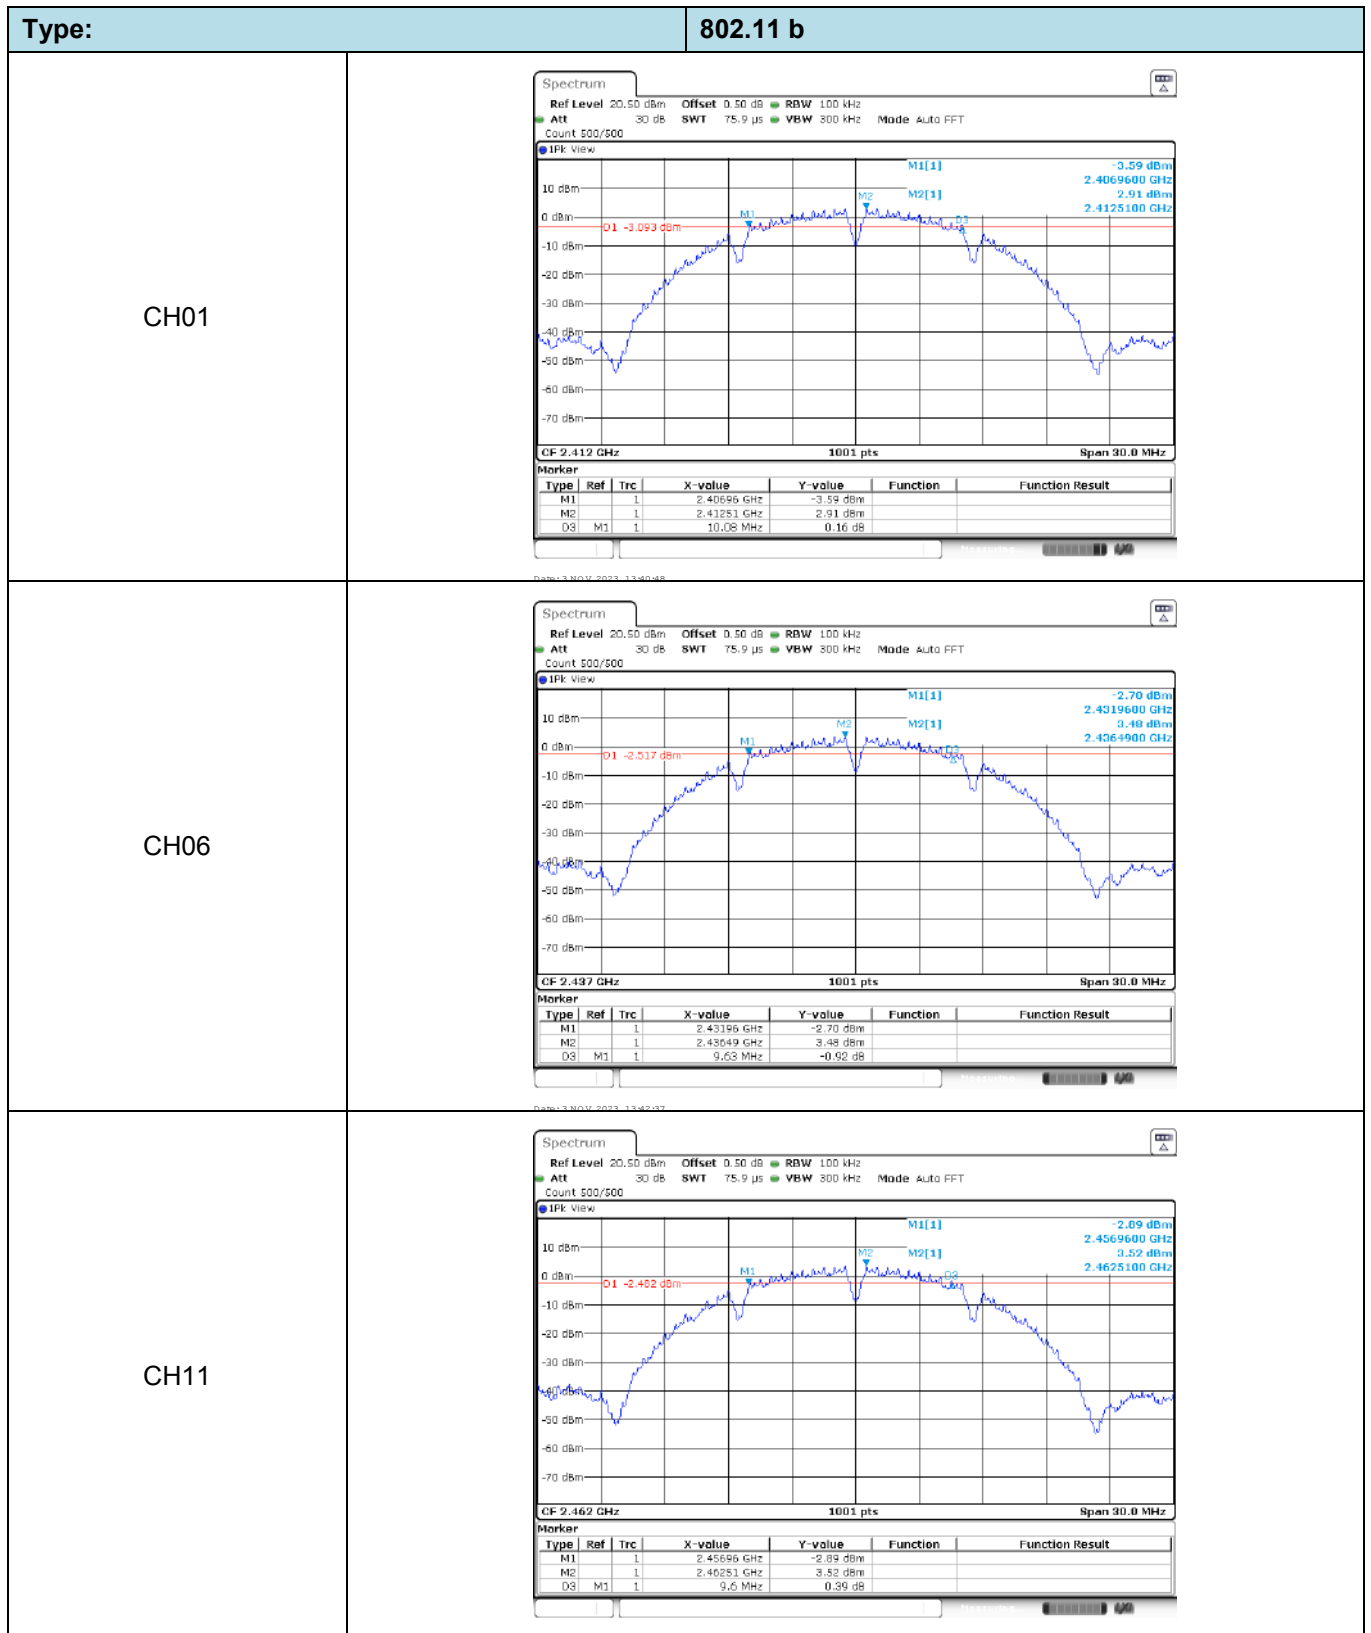

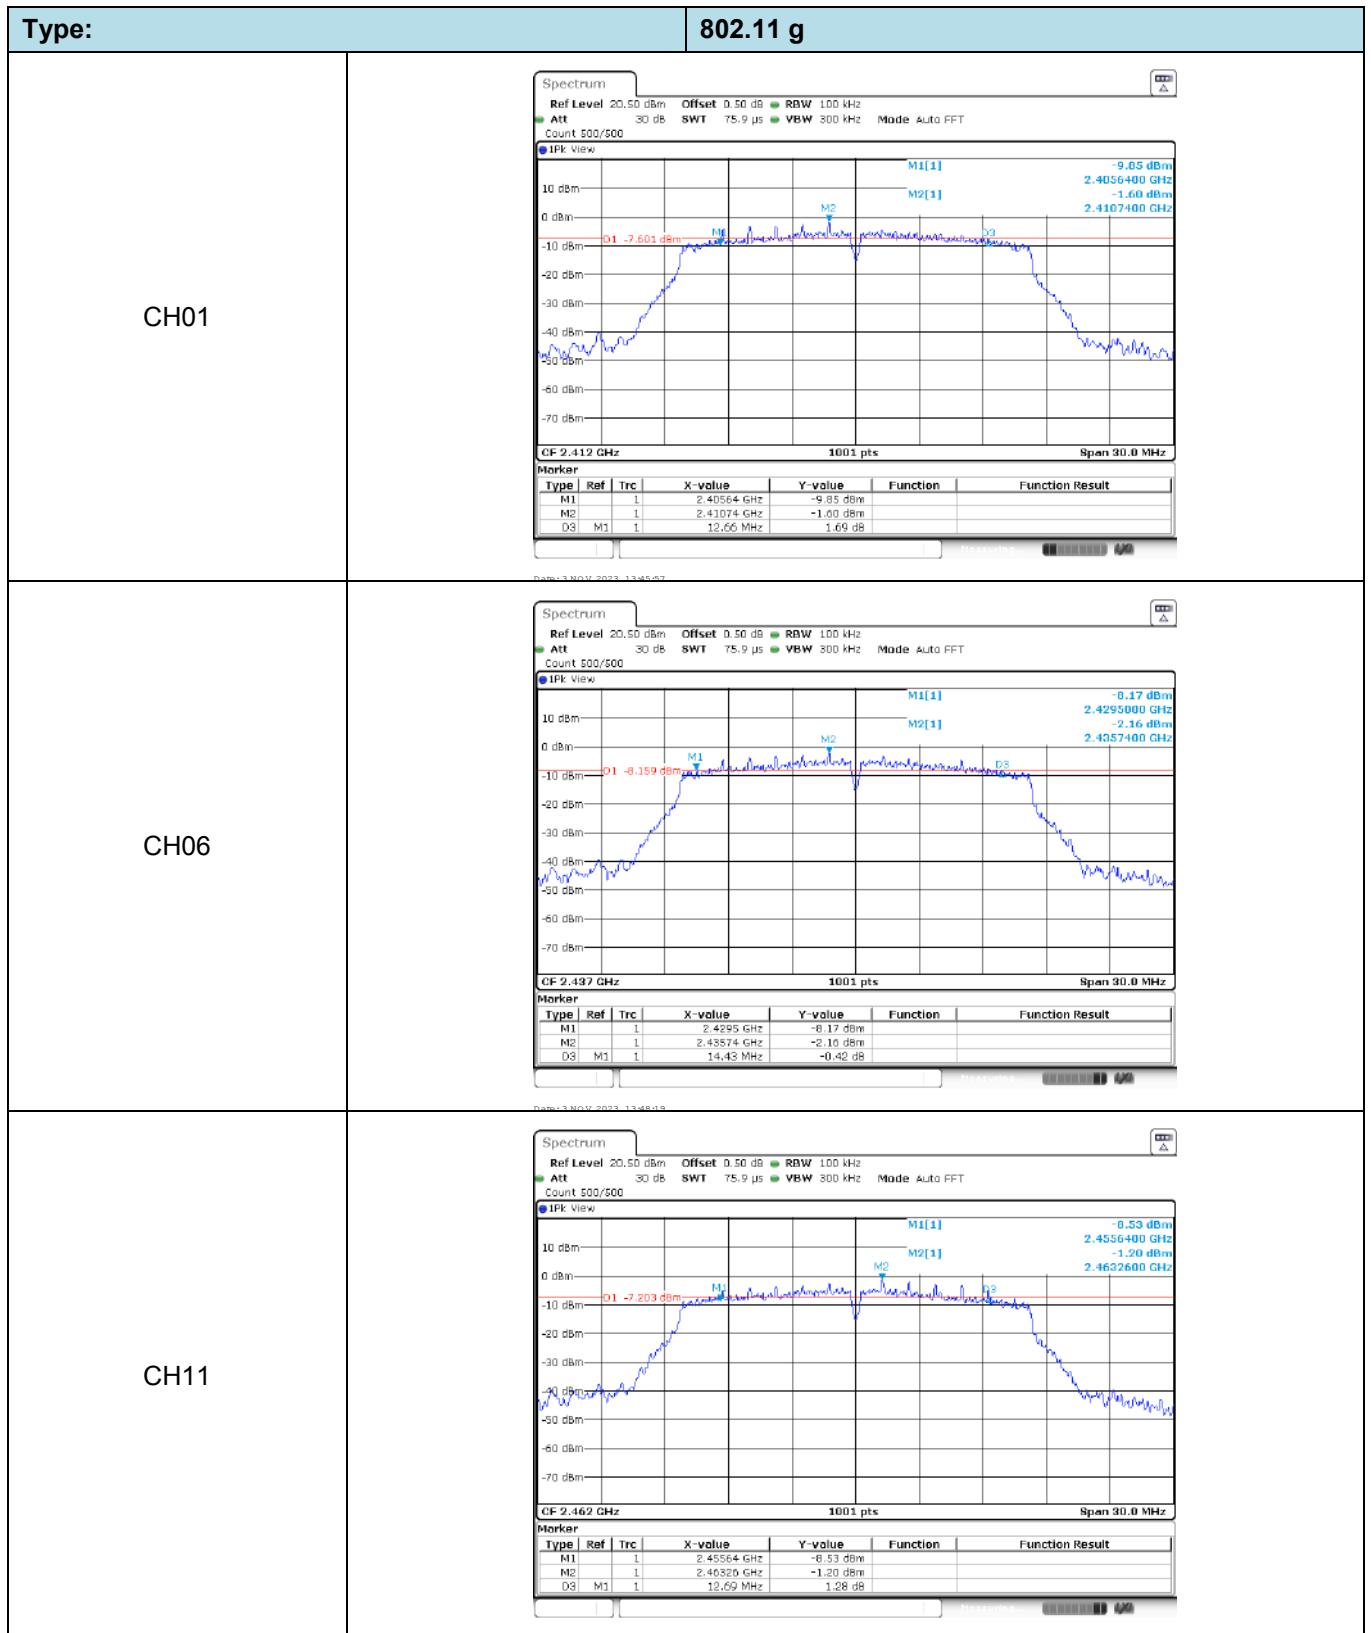


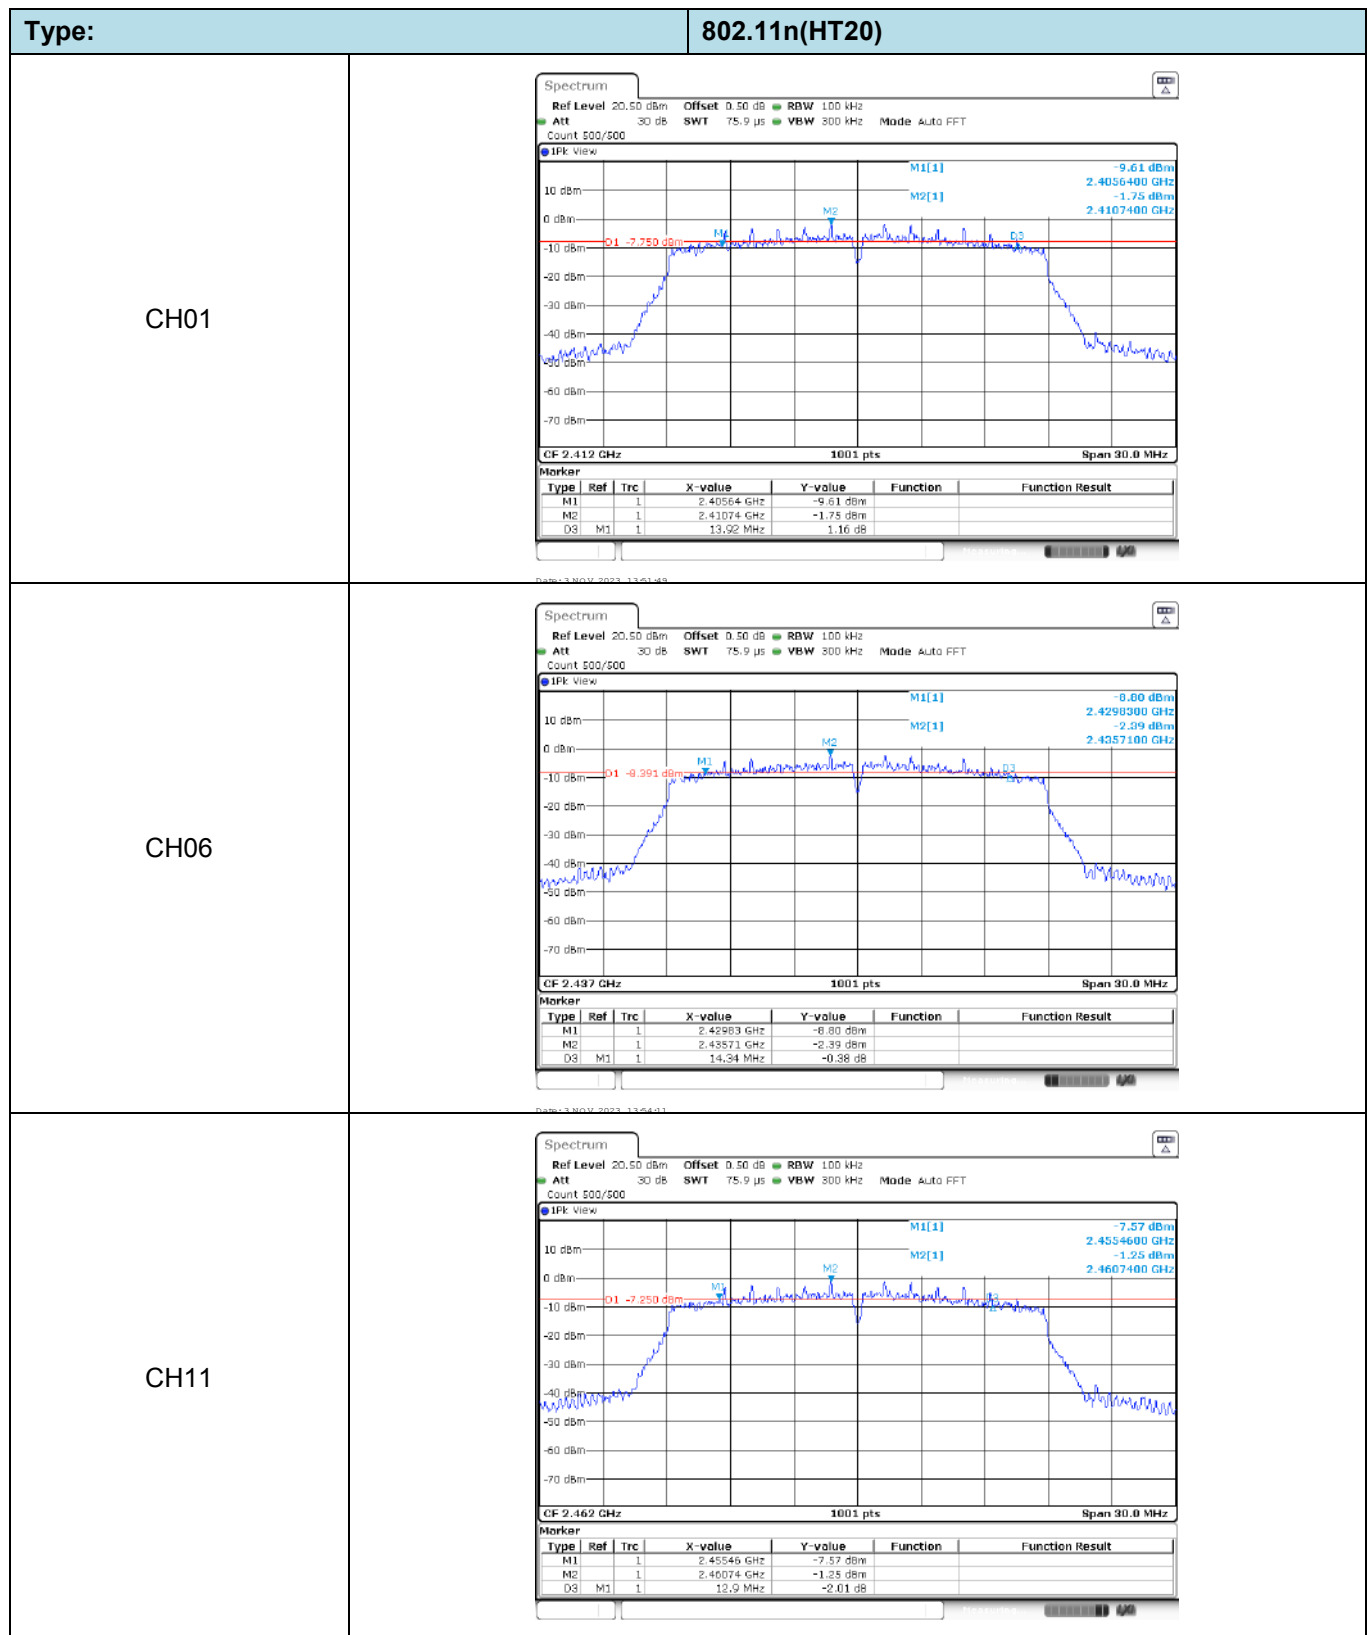





Type:	802.11n(HT40)																												
CH03	Spectrum Ref Level 20.50 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWI 132.7 μs VBW 300 kHz Mode Auto FFT Count 500/500 IFK View 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1[1] M2[1] -14.16 dBm 2.4056200 GHz -3.98 dBm 2.4194800 GHz CF 2.422 GHz 1001 pts Span 60.0 MHz Marker <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.40562 GHz</td><td>-14.16 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.41948 GHz</td><td>-3.98 dBm</td><td></td><td></td></tr><tr><td>DS</td><td>M1</td><td>1</td><td>34.02 MHz</td><td>-0.63 dB</td><td></td><td></td></tr></table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40562 GHz	-14.16 dBm			M2	1		2.41948 GHz	-3.98 dBm			DS	M1	1	34.02 MHz	-0.63 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1	1		2.40562 GHz	-14.16 dBm																									
M2	1		2.41948 GHz	-3.98 dBm																									
DS	M1	1	34.02 MHz	-0.63 dB																									
CH06	Spectrum Ref Level 20.50 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWI 132.7 μs VBW 300 kHz Mode Auto FFT Count 500/500 IFK View 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1[1] M2[1] -12.59 dBm 2.4225400 GHz -5.07 dBm 2.4344800 GHz CF 2.437 GHz 1001 pts Span 60.0 MHz Marker <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.42254 GHz</td><td>-12.59 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.43448 GHz</td><td>-5.07 dBm</td><td></td><td></td></tr><tr><td>DS</td><td>M1</td><td>1</td><td>32.1 MHz</td><td>-2.32 dB</td><td></td><td></td></tr></table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.42254 GHz	-12.59 dBm			M2	1		2.43448 GHz	-5.07 dBm			DS	M1	1	32.1 MHz	-2.32 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1	1		2.42254 GHz	-12.59 dBm																									
M2	1		2.43448 GHz	-5.07 dBm																									
DS	M1	1	32.1 MHz	-2.32 dB																									
CH09	Spectrum Ref Level 20.50 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWI 132.7 μs VBW 300 kHz Mode Auto FFT Count 500/500 IFK View 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1[1] M2[1] -13.27 dBm 2.4343600 GHz -3.24 dBm 2.4494800 GHz CF 2.452 GHz 1001 pts Span 60.0 MHz Marker <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.43436 GHz</td><td>-13.27 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.44948 GHz</td><td>-3.24 dBm</td><td></td><td></td></tr><tr><td>DS</td><td>M1</td><td>1</td><td>32.7 MHz</td><td>3.59 dB</td><td></td><td></td></tr></table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.43436 GHz	-13.27 dBm			M2	1		2.44948 GHz	-3.24 dBm			DS	M1	1	32.7 MHz	3.59 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1	1		2.43436 GHz	-13.27 dBm																									
M2	1		2.44948 GHz	-3.24 dBm																									
DS	M1	1	32.7 MHz	3.59 dB																									




Appendix D: 99% Occupied Bandwidth

Type	Channel	99% Bandwidth (MHz)	Limit (kHz)	Result
802.11b	01	14.27	-	Pass
	06	14.27		
	11	14.33		
802.11g	01	16.63	-	Pass
	06	16.48		
	11	16.57		
802.11n(HT20)	01	17.56	-	Pass
	06	17.56		
	11	17.59		
802.11n(HT40)	03	35.96	-	Pass
	06	35.90		
	09	35.90		

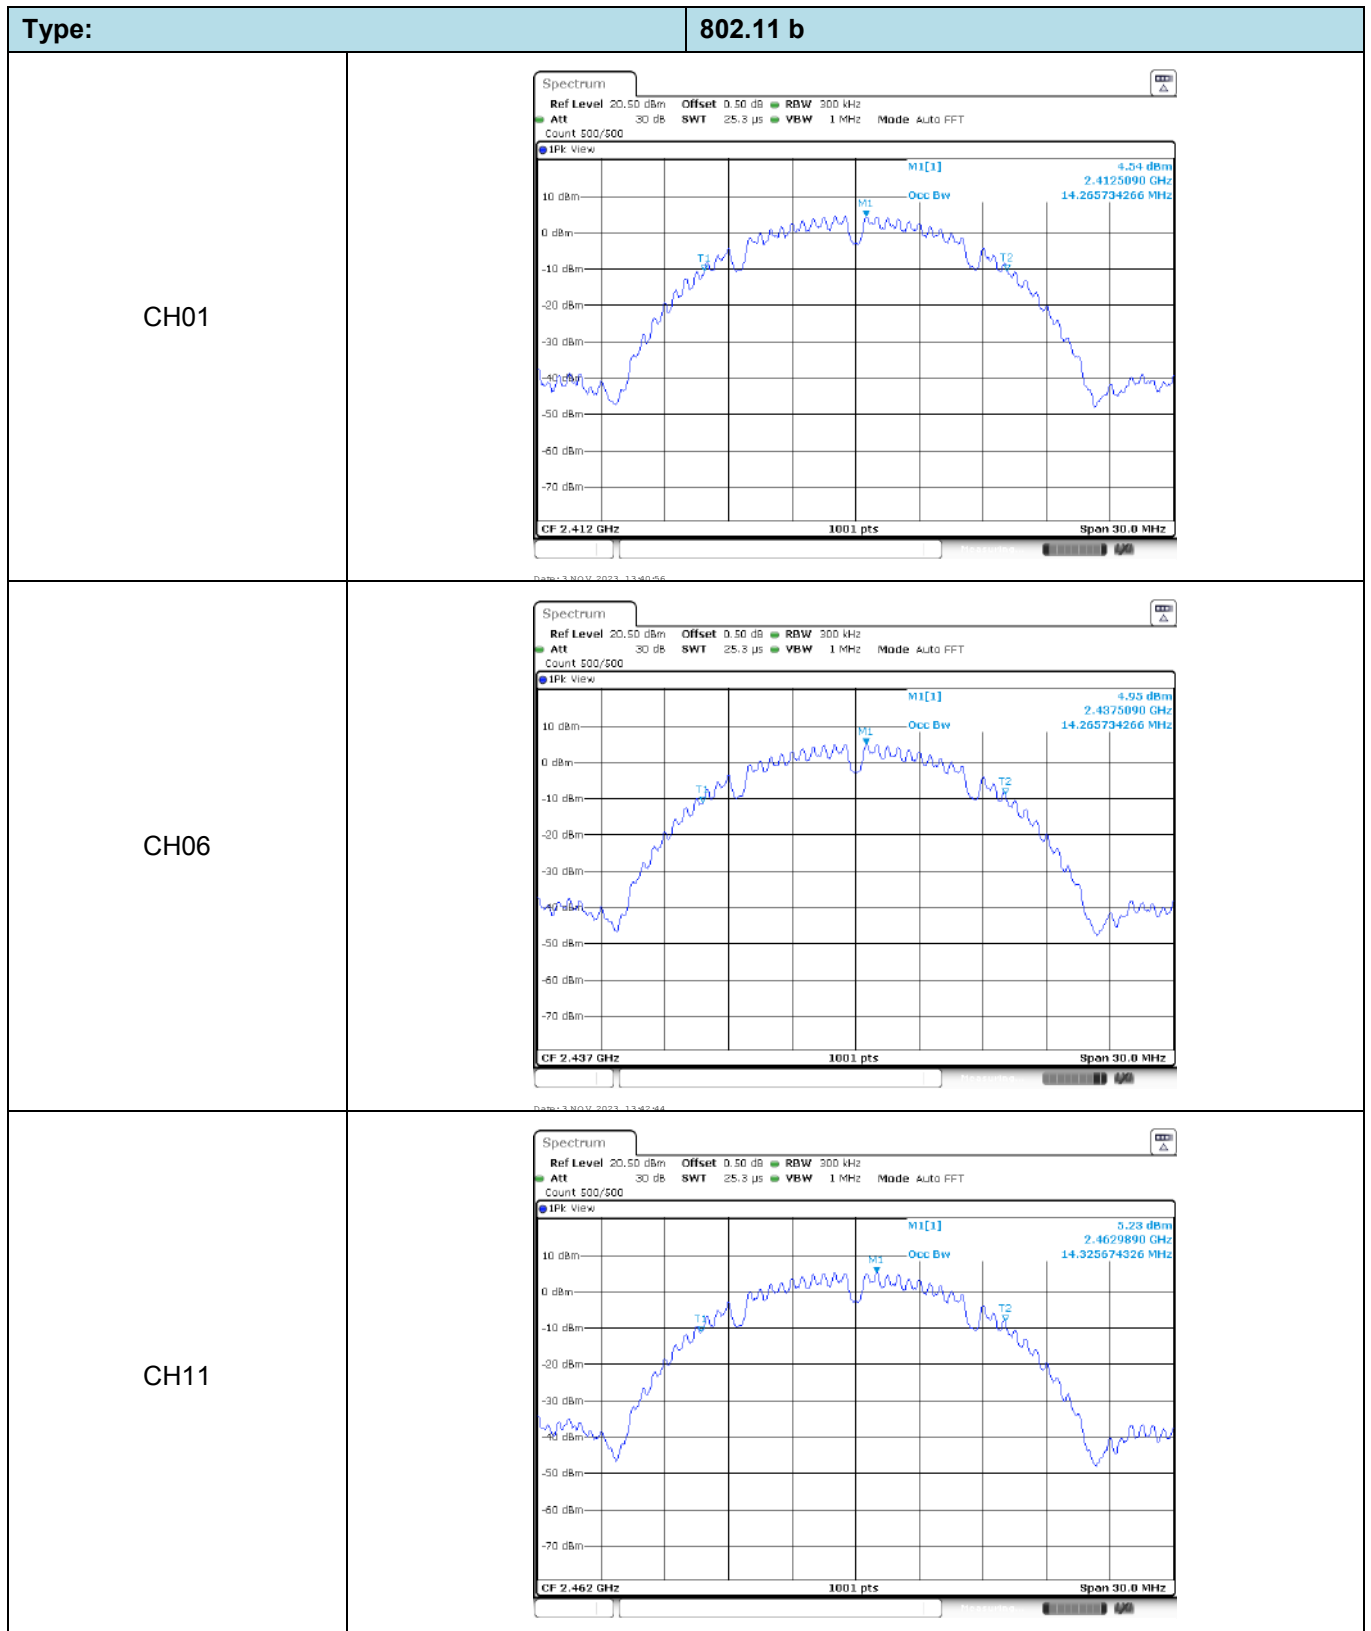

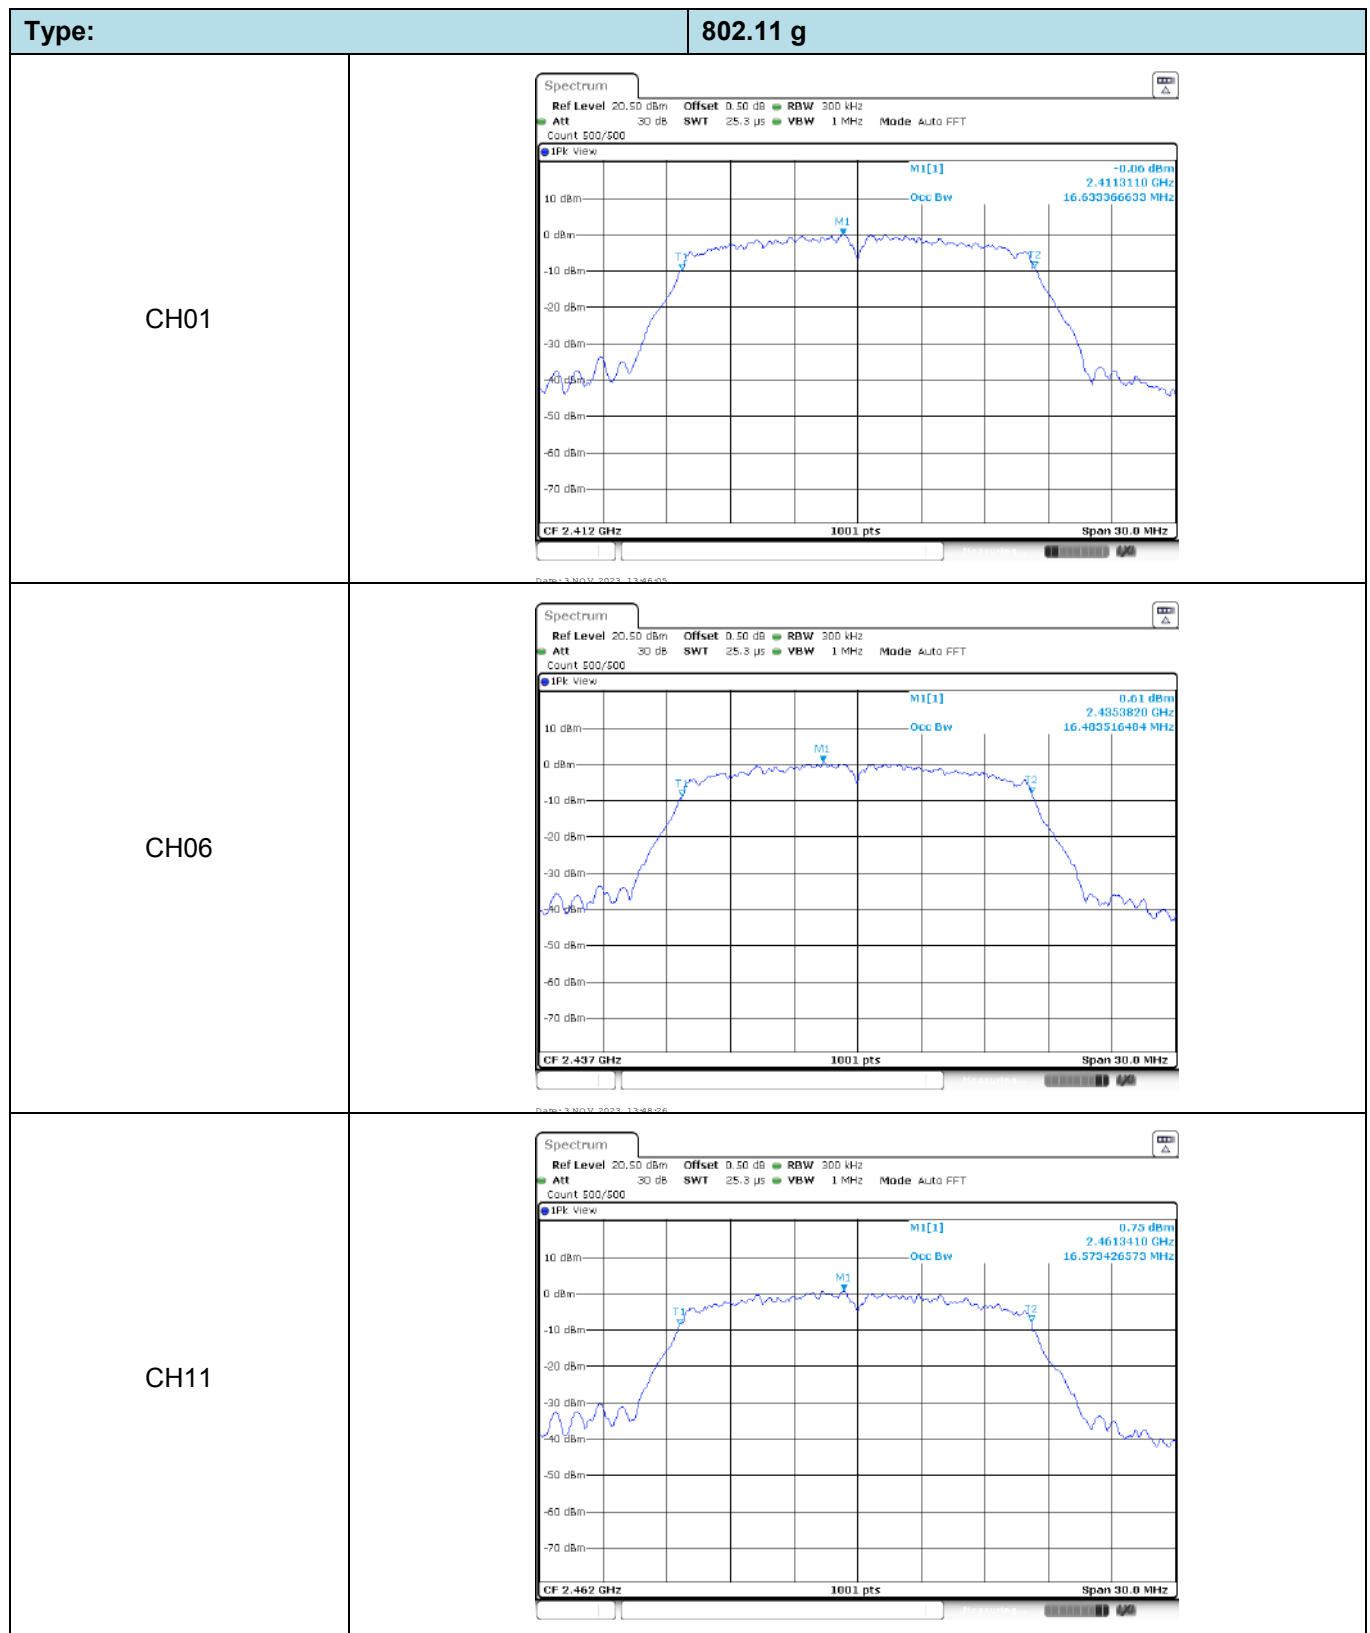

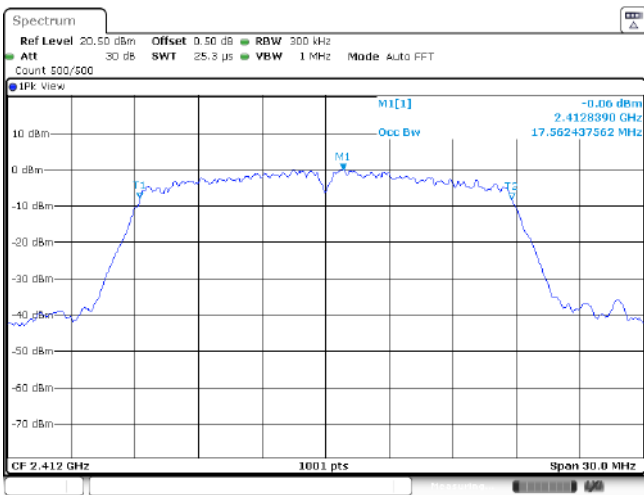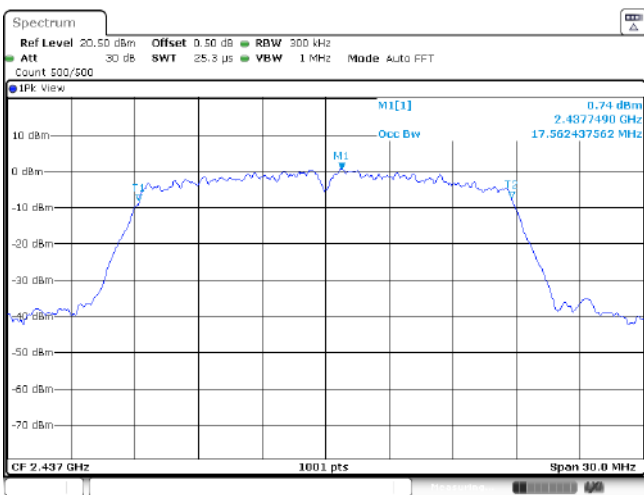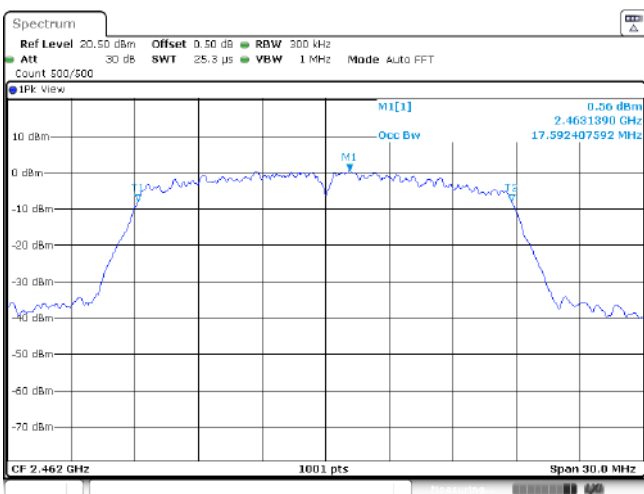
Type:	802.11n(HT20)
CH01	
CH06	
CH11	

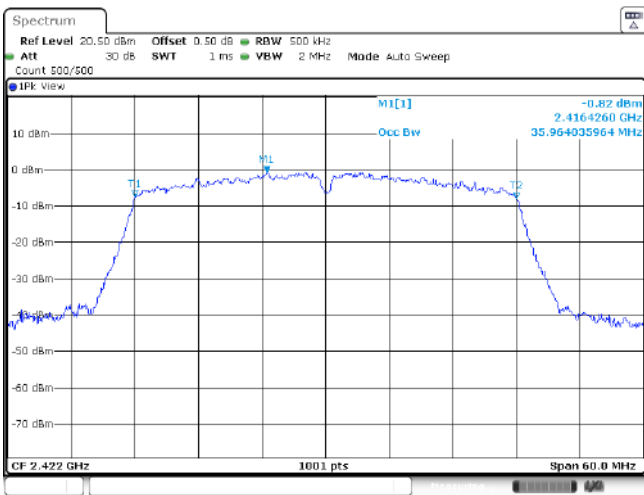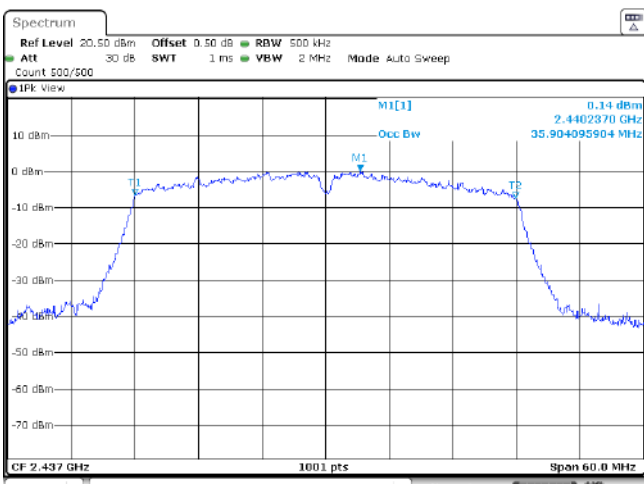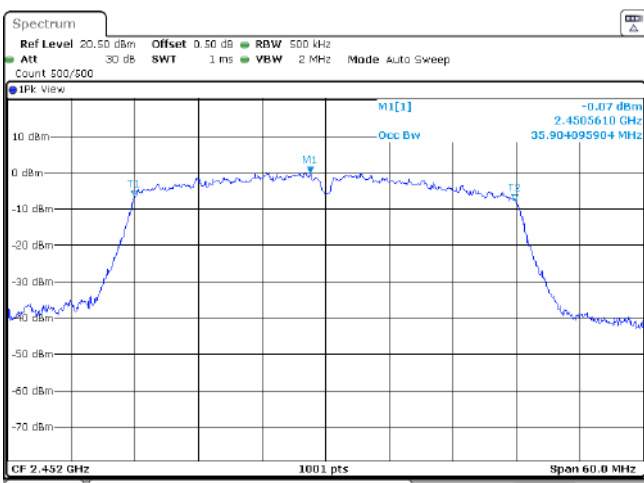Type:	802.11n(HT40)
CH03	 Spectrum plot for CH03. The plot shows a signal centered at 2.4164260 GHz with a peak level of -0.82 dBm. The plot shows a typical HT40 channel bandwidth of 40 MHz. The y-axis represents power in dBm from -70 to 10, and the x-axis represents frequency in GHz from 2.422 to 2.410. The signal is marked with M1[1] and Occ BW.
CH06	 Spectrum plot for CH06. The plot shows a signal centered at 2.4402370 GHz with a peak level of 0.14 dBm. The plot shows a typical HT40 channel bandwidth of 40 MHz. The y-axis represents power in dBm from -70 to 10, and the x-axis represents frequency in GHz from 2.437 to 2.443. The signal is marked with M1[1] and Occ BW.
CH09	 Spectrum plot for CH09. The plot shows a signal centered at 2.4505610 GHz with a peak level of -0.07 dBm. The plot shows a typical HT40 channel bandwidth of 40 MHz. The y-axis represents power in dBm from -70 to 10, and the x-axis represents frequency in GHz from 2.452 to 2.448. The signal is marked with M1[1] and Occ BW.


Appendix E: Duty Cycle


Modulation Type	Test Frequency (MHz)	T _{on time} for single burst (ms)	T _{period} (ms)	Duty cycle	1/T _{on time} (kHz)
11b	2437	8.39	8.61	97.4%	0.1
11g	2437	1.39	1.65	84.2%	0.7
11n20	2437	1.30	1.54	84.4%	0.8
11n40	2437	0.62	0.91	68%	1.61

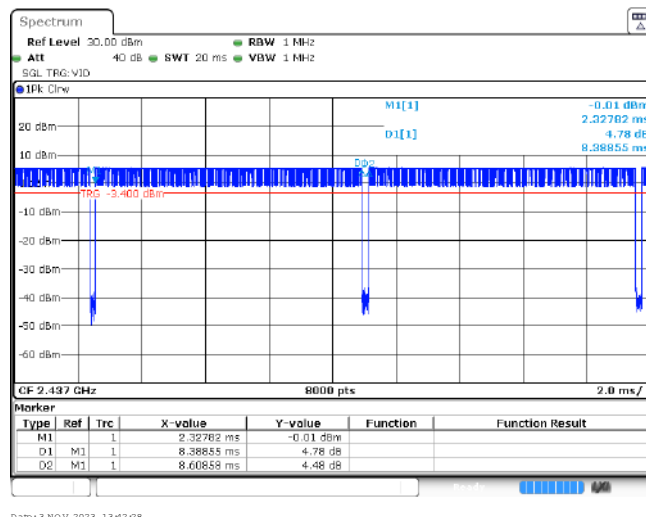11b



11g


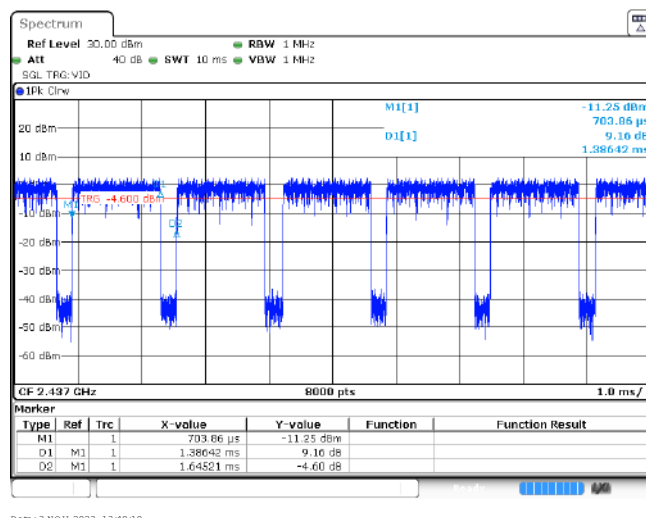


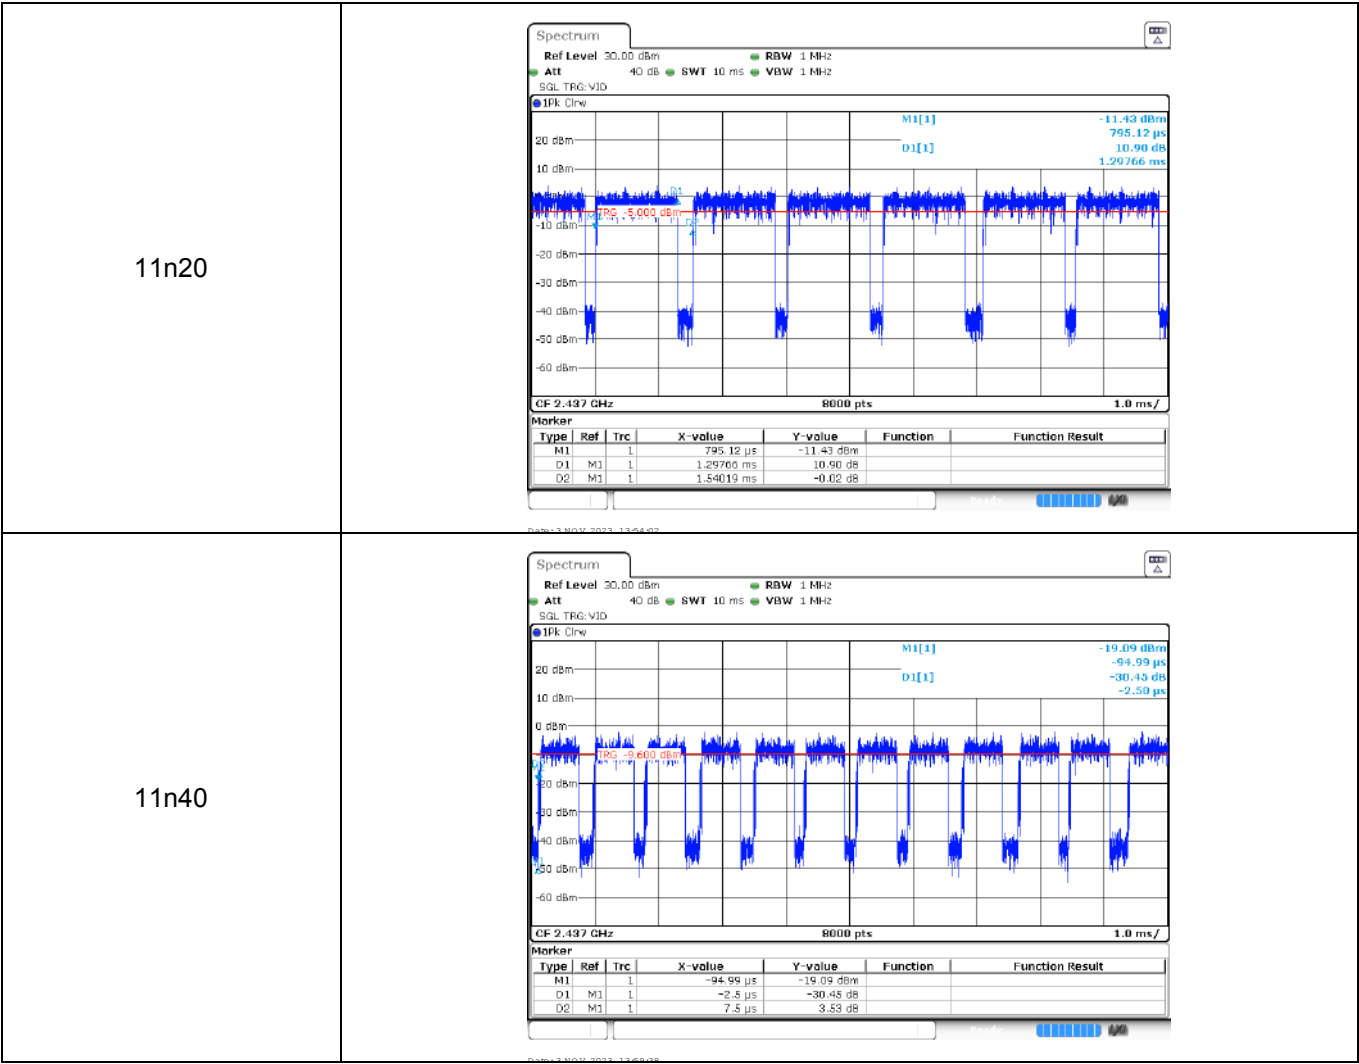




Appendix F: Band edge and Spurious Emissions (conducted)




Test Item:	Bandedge	Type:	802.11 b																																										
CH01	Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWI 246.5 μs VBW 300 kHz Mode Auto FFT Count 300/300 IPK Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1[1] M2[1] M3 M4 M5 2.68 dBm 2.411060 GHz 2.411060 GHz 2.397003 GHz 2.397003 GHz -17.320 dBm D1 Start 2.31 GHz 691 pts Stop 2.422 GHz Marker <table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td>1</td><td></td><td>2.41106 GHz</td><td>-2.68 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4 GHz</td><td>-44.19 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.39 GHz</td><td>-56.17 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.33 GHz</td><td>-58.12 dBm</td><td></td><td></td></tr><tr><td>M5</td><td>1</td><td></td><td>2.397003 GHz</td><td>-40.93 dBm</td><td></td><td></td></tr></tbody></table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.41106 GHz	-2.68 dBm			M2	1		2.4 GHz	-44.19 dBm			M3	1		2.39 GHz	-56.17 dBm			M4	1		2.33 GHz	-58.12 dBm			M5	1		2.397003 GHz	-40.93 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.41106 GHz	-2.68 dBm																																									
M2	1		2.4 GHz	-44.19 dBm																																									
M3	1		2.39 GHz	-56.17 dBm																																									
M4	1		2.33 GHz	-58.12 dBm																																									
M5	1		2.397003 GHz	-40.93 dBm																																									
CH11	Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWI 113.8 μs VBW 300 kHz Mode Auto FFT Count 300/300 IPK Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1[1] M2[1] M3 M4 3.45 dBm 2.4614620 GHz 2.4614620 GHz 2.4635000 GHz 2.4635000 GHz -16.550 dBm D1 Start 2.452 GHz 691 pts Stop 2.5 GHz Marker <table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td>1</td><td></td><td>2.461462 GHz</td><td>3.45 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4635 GHz</td><td>-57.36 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.5 GHz</td><td>-57.19 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.4903504 GHz</td><td>-53.53 dBm</td><td></td><td></td></tr></tbody></table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.461462 GHz	3.45 dBm			M2	1		2.4635 GHz	-57.36 dBm			M3	1		2.5 GHz	-57.19 dBm			M4	1		2.4903504 GHz	-53.53 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.461462 GHz	3.45 dBm																																									
M2	1		2.4635 GHz	-57.36 dBm																																									
M3	1		2.5 GHz	-57.19 dBm																																									
M4	1		2.4903504 GHz	-53.53 dBm																																									


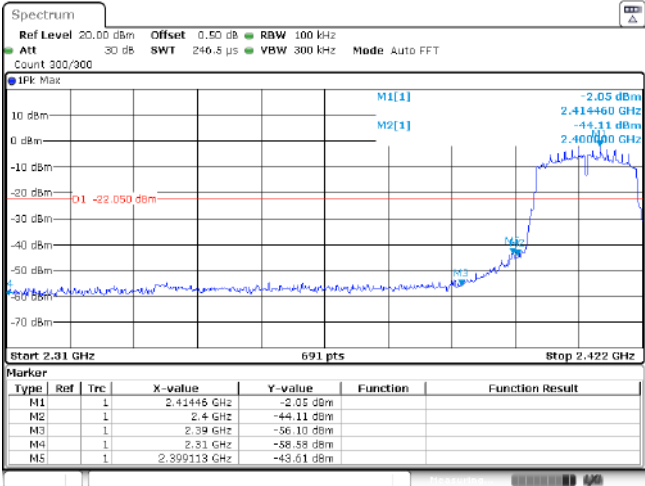
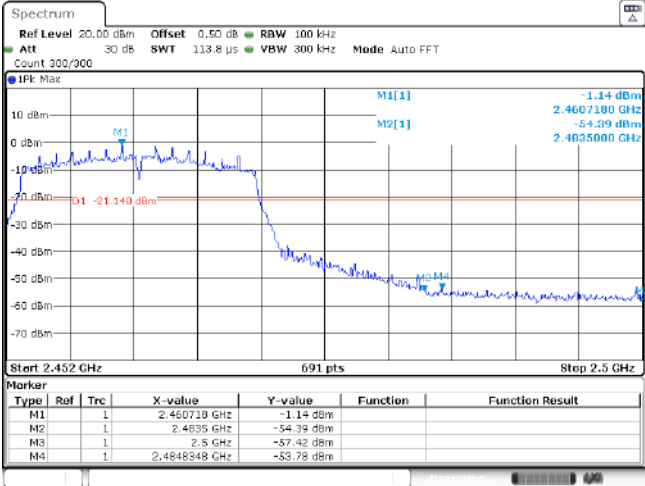
Appendix report page: 21 of 35




Test Item:	Bandedge	Type:	802.11 n(HT20)
CH01			
CH11			




Test Item:	Bandedge	Type:	802.11 n(HT40)																																										
CH03	Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 303.4 μs VBW 300 kHz Mode Auto FFT Count 266/300 IPK Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1[1] M2[1] M1 M3 -4.02 dBm 2.419550 GHz -44.56 dBm 2.400000 GHz D1 -24.020 dBm Start 2.31 GHz 691 pts Stop 2.442 GHz Marker <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>2.41955 GHz</td><td>-4.02 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.4 GHz</td><td>-44.56 dBm</td><td></td><td></td></tr><tr><td>M3</td><td></td><td>1</td><td>2.39 GHz</td><td>-51.36 dBm</td><td></td><td></td></tr><tr><td>M4</td><td></td><td>1</td><td>2.31 GHz</td><td>-57.58 dBm</td><td></td><td></td></tr><tr><td>M5</td><td></td><td>1</td><td>2.399339 GHz</td><td>-45.00 dBm</td><td></td><td></td></tr></table> Date: 3 NOV 2023 13:58:09			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.41955 GHz	-4.02 dBm			M2		1	2.4 GHz	-44.56 dBm			M3		1	2.39 GHz	-51.36 dBm			M4		1	2.31 GHz	-57.58 dBm			M5		1	2.399339 GHz	-45.00 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1		1	2.41955 GHz	-4.02 dBm																																									
M2		1	2.4 GHz	-44.56 dBm																																									
M3		1	2.39 GHz	-51.36 dBm																																									
M4		1	2.31 GHz	-57.58 dBm																																									
M5		1	2.399339 GHz	-45.00 dBm																																									
CH09	Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 1.1 ms VBW 300 kHz Mode Auto Sweep Count 300/300 IPK Max 10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm M1[1] M2[1] M1 M3 -3.91 dBm 2.4494670 GHz -40.60 dBm 2.4635000 GHz D1 -23.910 dBm Start 2.432 GHz 691 pts Stop 2.5 GHz Marker <table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td></td><td>1</td><td>2.449467 GHz</td><td>-3.91 dBm</td><td></td><td></td></tr><tr><td>M2</td><td></td><td>1</td><td>2.4635 GHz</td><td>-40.60 dBm</td><td></td><td></td></tr><tr><td>M3</td><td></td><td>1</td><td>2.5 GHz</td><td>-53.47 dBm</td><td></td><td></td></tr><tr><td>M4</td><td></td><td>1</td><td>2.4839362 GHz</td><td>-47.91 dBm</td><td></td><td></td></tr></table> Date: 3 NOV 2023 14:01:32			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.449467 GHz	-3.91 dBm			M2		1	2.4635 GHz	-40.60 dBm			M3		1	2.5 GHz	-53.47 dBm			M4		1	2.4839362 GHz	-47.91 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1		1	2.449467 GHz	-3.91 dBm																																									
M2		1	2.4635 GHz	-40.60 dBm																																									
M3		1	2.5 GHz	-53.47 dBm																																									
M4		1	2.4839362 GHz	-47.91 dBm																																									

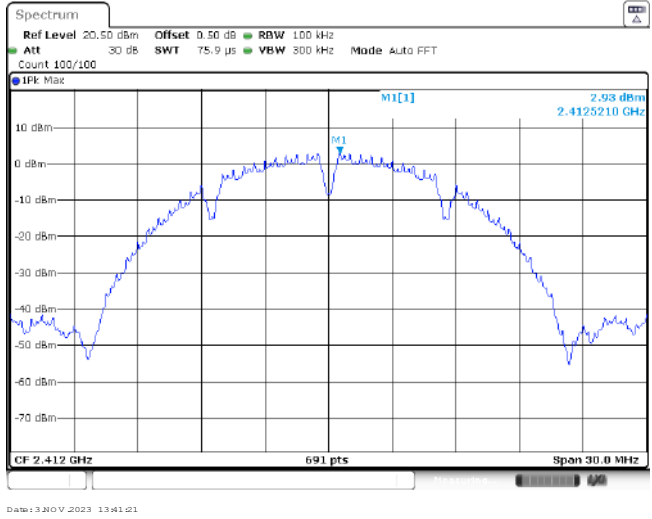
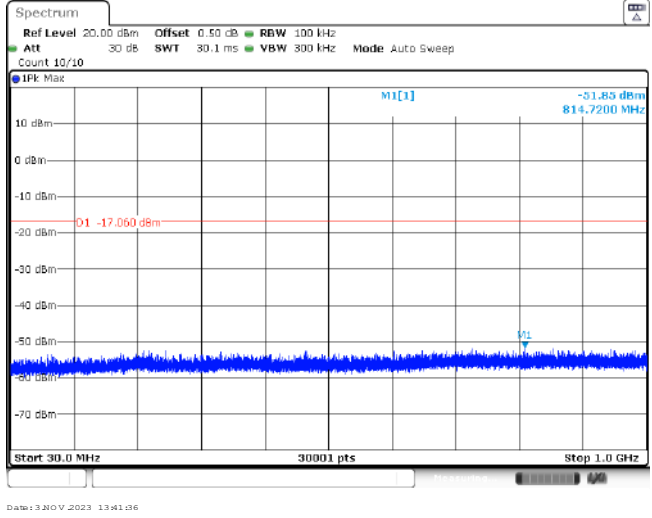
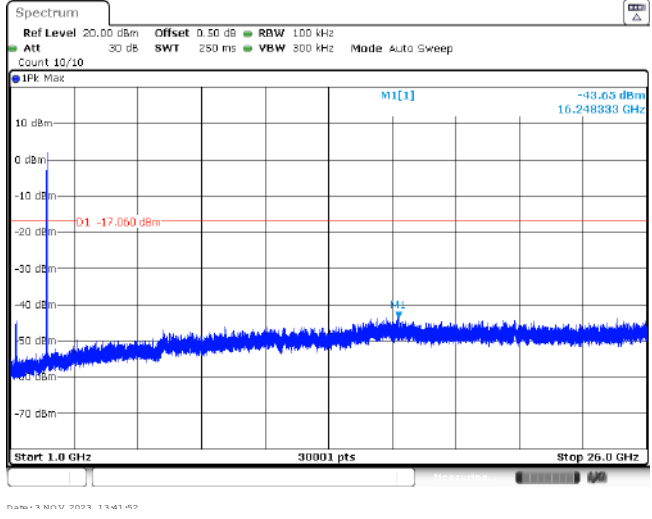
Test Item:	SE	Type:	802.11b
CH01 Reference level			
CH01 30MHz~1000MHz			
CH01 1GHz~26GHz			

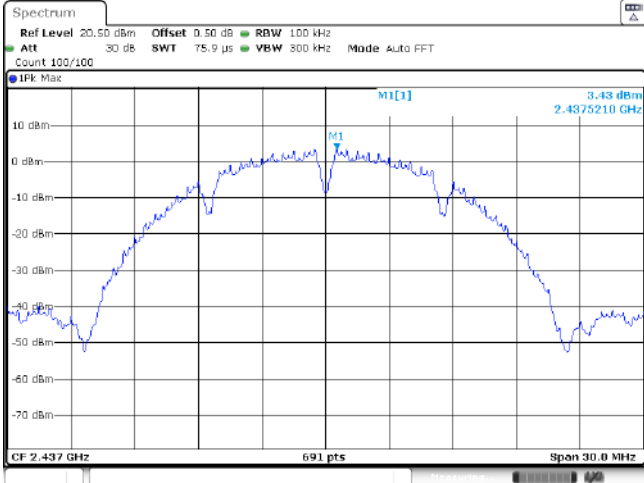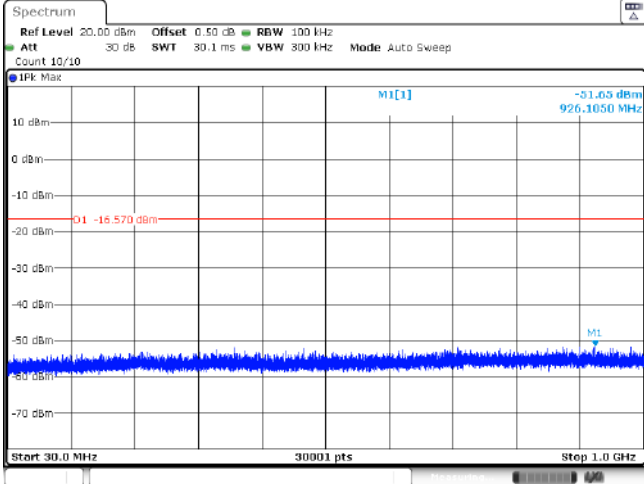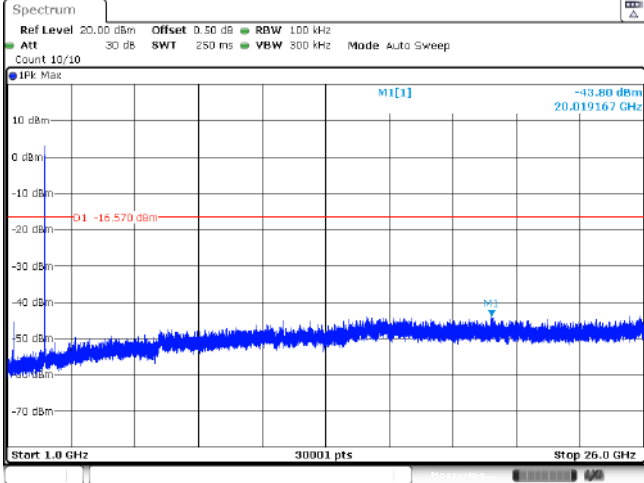CH06 Reference level	 Spectrum Ref Level: 20.50 dBm Offset: 0.50 dB RBW: 100 kHz Att: 30 dB SWT: 75.9 μs VBW: 300 kHz Mode: Auto FFT Count: 100/100 IPK Max M1[1] 3.43 dBm 2.4375210 GHz CF 2.437 GHz 691 pts Span 30.0 MHz Date: 3/30/2023 13:43:01
CH06 30MHz~1000MHz	 Spectrum Ref Level: 20.00 dBm Offset: 0.50 dB RBW: 100 kHz Att: 30 dB SWT: 30.1 ms VBW: 300 kHz Mode: Auto Sweep Count: 10/10 IPK Max M1[1] -51.65 dBm 926.1050 MHz Q1 -16.570 dBm Start 30.0 MHz 30001 pts Step 1.0 GHz Date: 3/30/2023 13:43:16
CH06 1GHz~26GHz	 Spectrum Ref Level: 20.00 dBm Offset: 0.50 dB RBW: 100 kHz Att: 30 dB SWT: 250 ms VBW: 300 kHz Mode: Auto Sweep Count: 10/10 IPK Max M1[1] -43.80 dBm 20.019167 GHz Q1 -16.570 dBm Start 1.0 GHz 30001 pts Stop 26.0 GHz Date: 3/30/2023 13:43:31

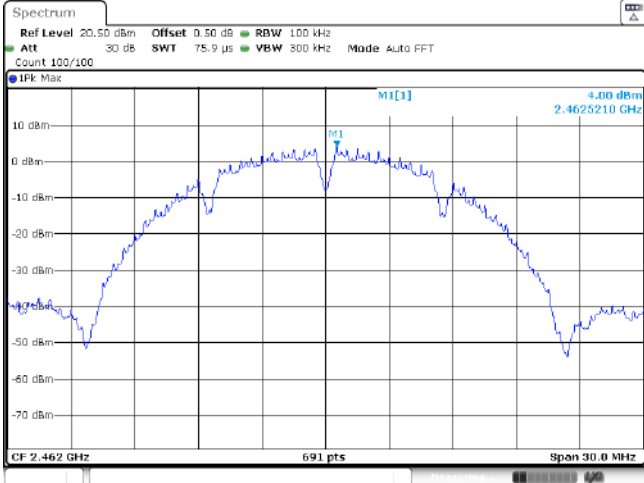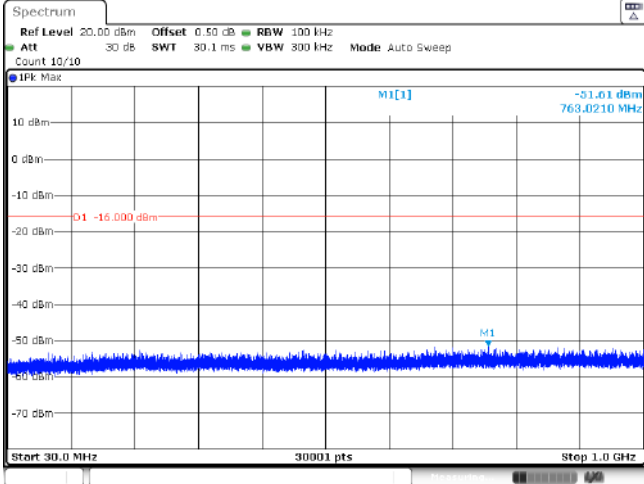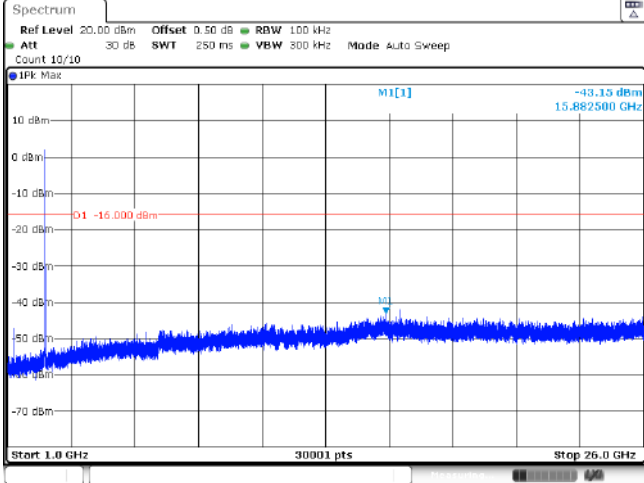CH11 Reference level	 Spectrum Ref Level: 20.50 dBm Offset: 0.50 dB RBW: 100 kHz Att: 30 dB SWT: 75.9 μs VBW: 300 kHz Mode: Auto FFT Count: 100/100 IPK Max 4.00 dBm 2.462510 GHz CF 2.462 GHz 691 pts Span 30.0 MHz Date: 3.30 V 2023 13:44:33
CH11 30MHz~1000MHz	 Spectrum Ref Level: 20.00 dBm Offset: 0.50 dB RBW: 100 kHz Att: 30 dB SWT: 30.1 ms VBW: 300 kHz Mode: Auto Sweep Count: 10/10 IPK Max -51.01 dBm 763.0210 MHz -16.000 dBm Start 30.0 MHz 30001 pts Step 1.0 GHz Date: 3.30 V 2023 13:44:48
CH11 1GHz~26GHz	 Spectrum Ref Level: 20.00 dBm Offset: 0.50 dB RBW: 100 kHz Att: 30 dB SWT: 250 ms VBW: 300 kHz Mode: Auto Sweep Count: 10/10 IPK Max -43.15 dBm 15.882500 GHz -16.000 dBm Start 1.0 GHz 30001 pts Stop 26.0 GHz Date: 3.30 V 2023 13:45:04

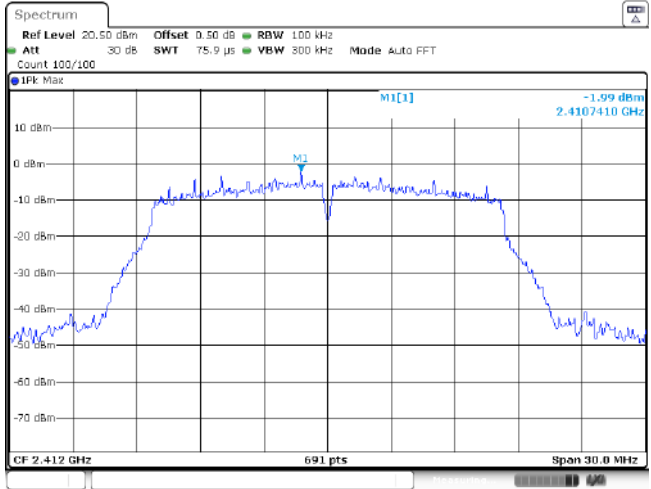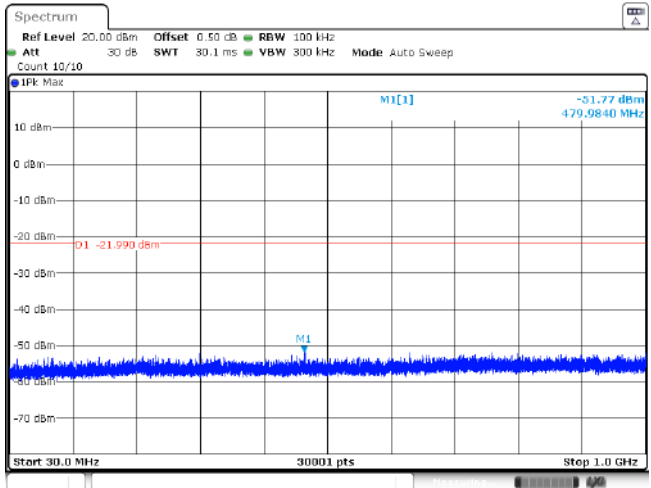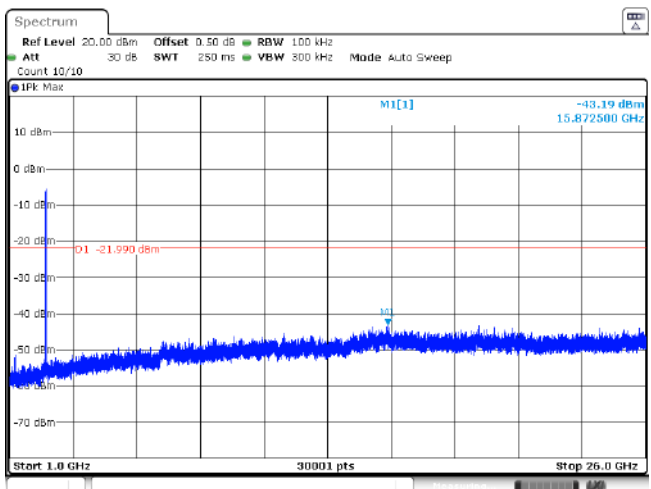
Test Item:	SE	Type:	802.11g
CH01 Reference level	 Spectrum Ref Level 20.50 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWI 75.9 μs VSW 300 kHz Mode Auto FFT Count 100/100 IPk Max M1[1] -1.99 dBm 2.4107410 GHz CF 2.412 GHz 691 pts Span 30.0 MHz Date: 13.10.2023 13:47:04		
CH01 30MHz~1000MHz	 Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWI 30.1 ms VSW 300 kHz Mode Auto Sweep Count 10/10 IPk Max M1[1] -51.77 dBm 479.9840 MHz Start 30.0 MHz 30001 pts Stop 1.0 GHz Date: 13.10.2023 13:47:19		
CH01 1GHz~26GHz	 Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWI 250 ms VSW 300 kHz Mode Auto Sweep Count 10/10 IPk Max M1[1] -43.19 dBm 15.872500 GHz Start 1.0 GHz 30001 pts Stop 26.0 GHz Date: 13.10.2023 13:47:25		

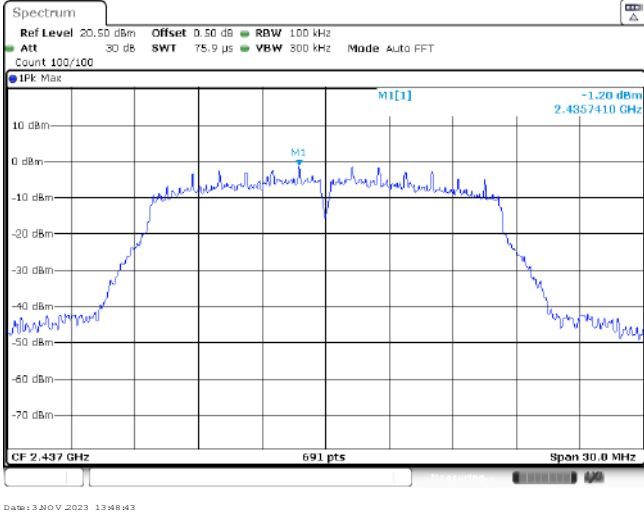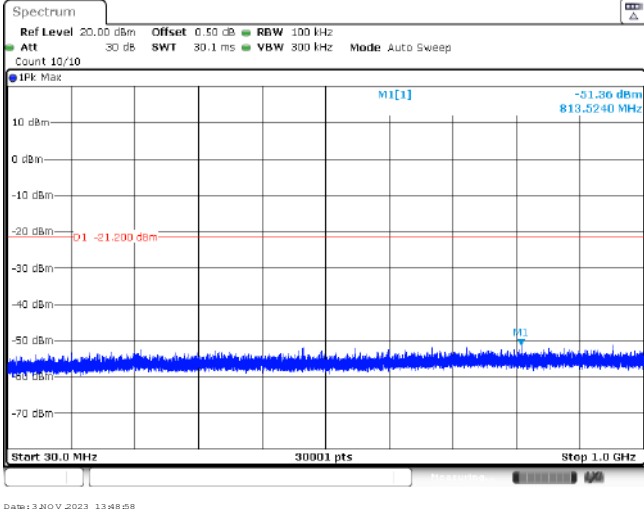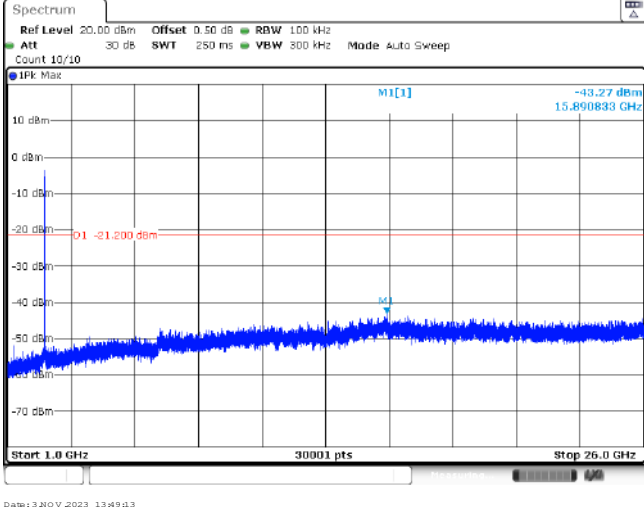CH06 Reference level	
CH06 30MHz~1000MHz	
CH06 1GHz~26GHz	

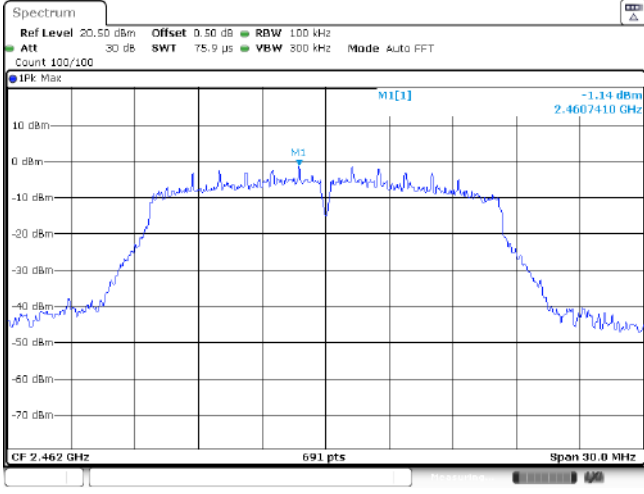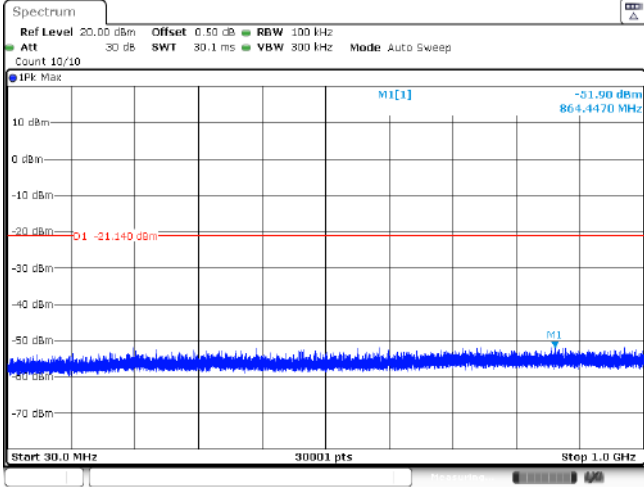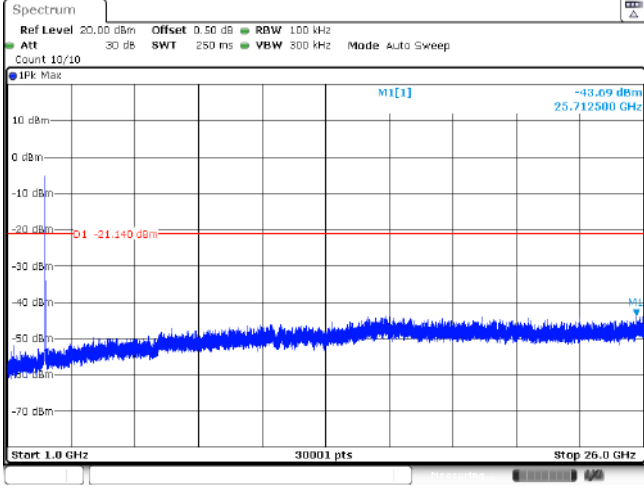
CH11 Reference level	
CH11 30MHz~1000MHz	
CH11 1GHz~26GHz	

Test Item:	SE	Type:	802.11n(HT20)
CH01 Reference level	Spectrum Ref Level 20.50 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 100/100 IPk Max M1[1] -3.00 dBm 2.4107410 GHz CF 2.412 GHz 691 pts Span 30.0 MHz Date: 13.10.17.2023 13:52:53		
CH01 30MHz~1000MHz	Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 30.1 ms VBW 300 kHz Mode Auto Sweep Count 10/10 IPk Max M1[1] -51.08 dBm 757.8480 MHz O1 -22.930 dBm M2 Start 30.0 MHz 30001 pts Stop 1.0 GHz Date: 13.10.17.2023 13:53:08		
CH01 1GHz~26GHz	Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 250 ms VBW 300 kHz Mode Auto Sweep Count 10/10 IPk Max M1[1] -43.58 dBm 16.540833 GHz O1 -22.930 dBm M2 Start 1.0 GHz 30001 pts Stop 26.0 GHz Date: 13.10.17.2023 13:53:04		

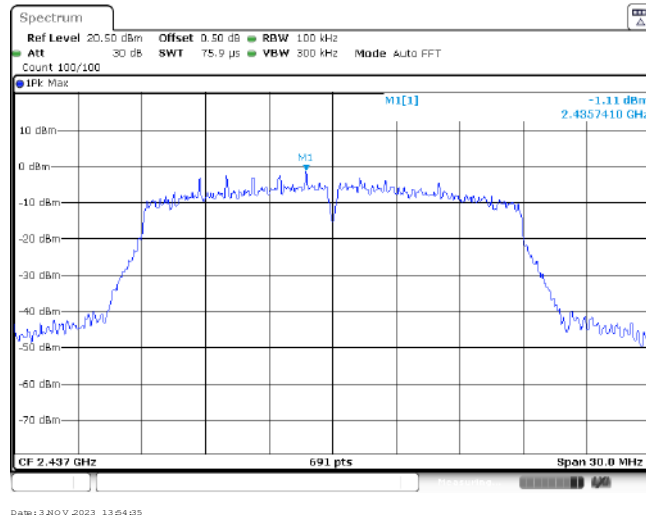
CH06
Reference level






CH06
30MHz~1000MHz



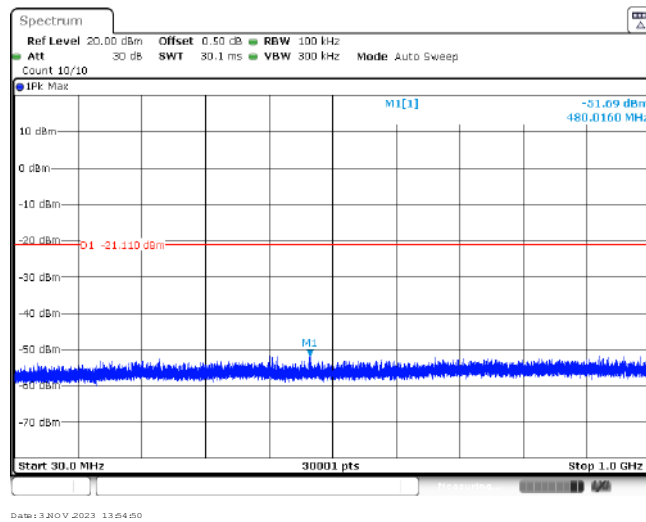





CH06
1GHz~26GHz

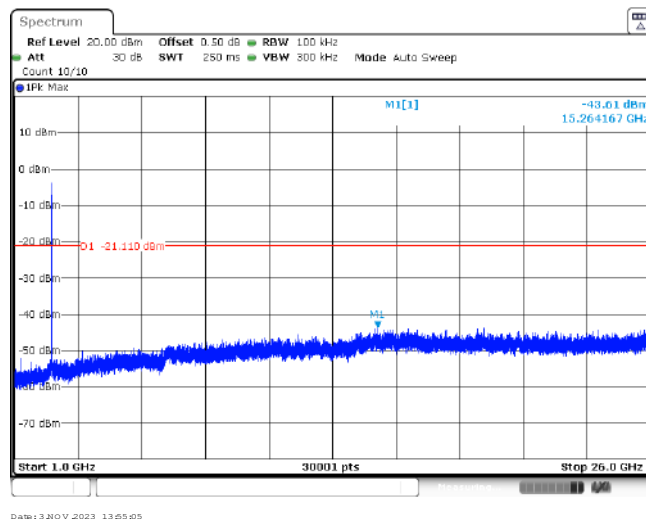

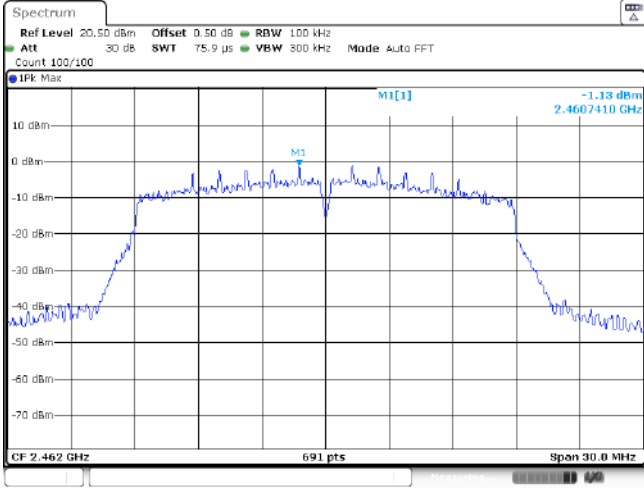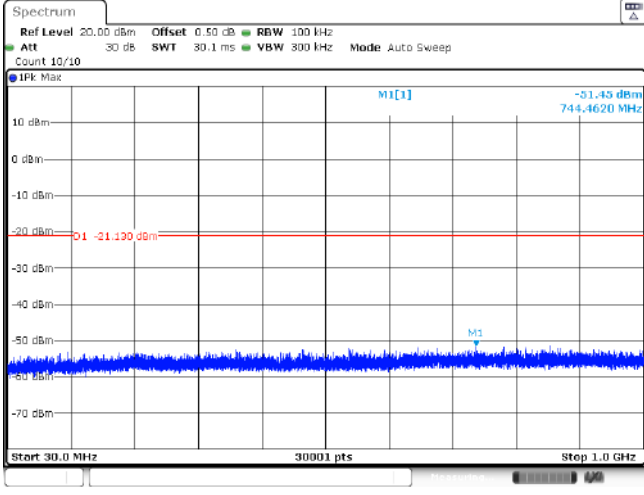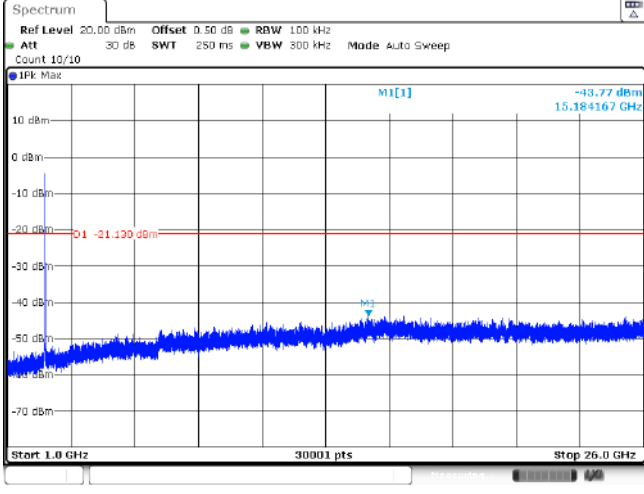CH11 Reference level	 Spectrum Ref Level 20.50 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 100/100 IPK Max M1[1] -1.13 dBm 2.4607410 GHz CF 2.462 GHz 691 pts Span 30.0 MHz Date: 3.30 V 2023 13.56 d.5
CH11 30MHz~1000MHz	 Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 30.1 ms VBW 300 kHz Mode Auto Sweep Count 10/10 IPK Max M1[1] -51.45 dBm 744.4620 MHz O1 -21.130 dBm Start 30.0 MHz 30001 pts Step 1.0 GHz Date: 3.30 V 2023 13.56 d.0
CH11 1GHz~26GHz	 Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 250 ms VBW 300 kHz Mode Auto Sweep Count 10/10 IPK Max M1[1] -43.77 dBm 15.184167 GHz O1 -21.130 dBm Start 1.0 GHz 30001 pts Stop 26.0 GHz Date: 3.30 V 2023 13.56 d.6

Test Item:	SE	Type:	802.11n(HT40)
CH03 Reference level	Spectrum Ref Level 20.50 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 132.7 μs VBW 300 kHz Mode Auto FFT Count 100/100 IPk Max M1[1] -4.73 dBm 2.4194820 GHz CF 2.422 GHz 691 pts Span 60.0 MHz Date: 13.10.10.2023 13:58:55		
CH03 30MHz~1000MHz	Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 30.1 ms VBW 300 kHz Mode Auto Sweep Count 10/10 IPk Max M1[1] -19.61 dBm 479.9840 MHz Start 30.0 MHz 30001 pts Stop 1.0 GHz Date: 13.10.10.2023 13:58:50		
CH03 1GHz~26GHz	Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 250 ms VBW 300 kHz Mode Auto Sweep Count 10/10 IPk Max M1[1] -13.81 dBm 15.865833 GHz Start 1.0 GHz 30001 pts Stop 26.0 GHz Date: 13.10.10.2023 13:59:05		

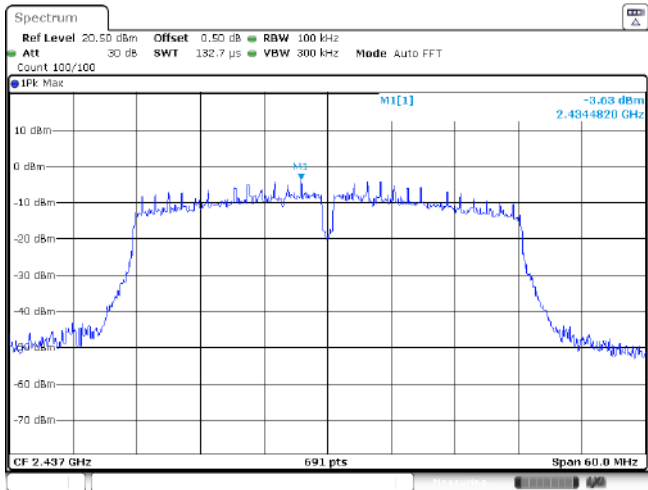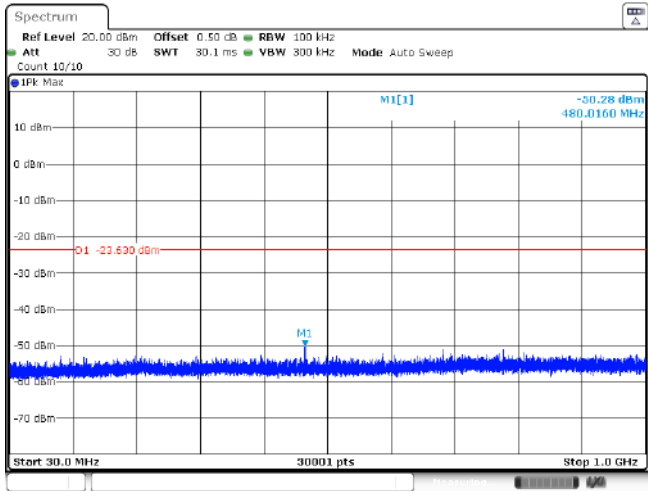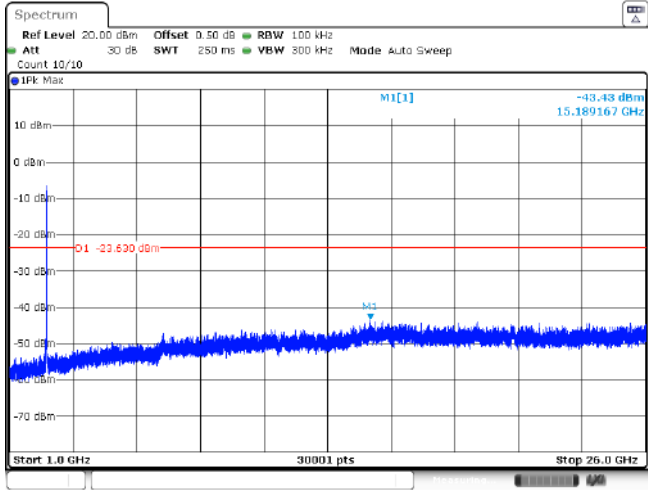CH06 Reference level	 Spectrum Ref Level 20.50 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 132.7 μs VBW 300 kHz Mode Auto FFT Count 100/100 IPK Max M1[1] -3.03 dBm 2.4344820 GHz CF 2.437 GHz 691 pts Span 60.0 MHz Date: 3.30 V 2023 14:00:00
CH06 30MHz~1000MHz	 Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 30.1 ms VBW 300 kHz Mode Auto Sweep Count 10/10 IPK Max M1[1] -30.28 dBm 480.0160 MHz Start 30.0 MHz 30001 pts Step 1.0 GHz Date: 3.30 V 2023 14:00:05
CH06 1GHz~26GHz	 Spectrum Ref Level 20.00 dBm Offset 0.50 dB RBW 100 kHz Att 30 dB SWT 250 ms VBW 300 kHz Mode Auto Sweep Count 10/10 IPK Max M1[1] -43.43 dBm 15.189167 GHz Start 1.0 GHz 30001 pts Stop 26.0 GHz Date: 3.30 V 2023 14:00:01

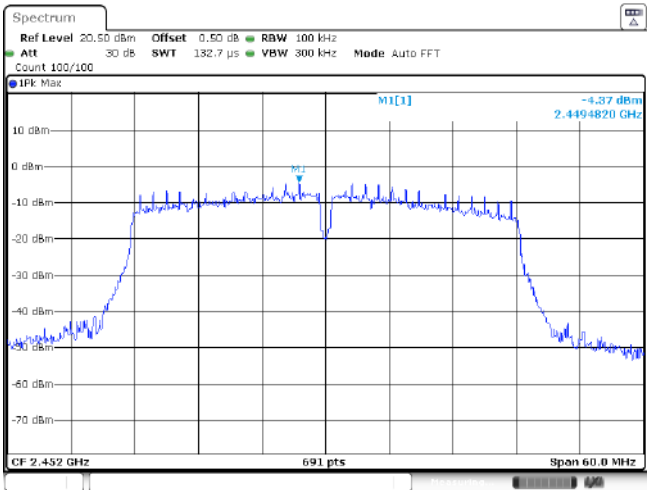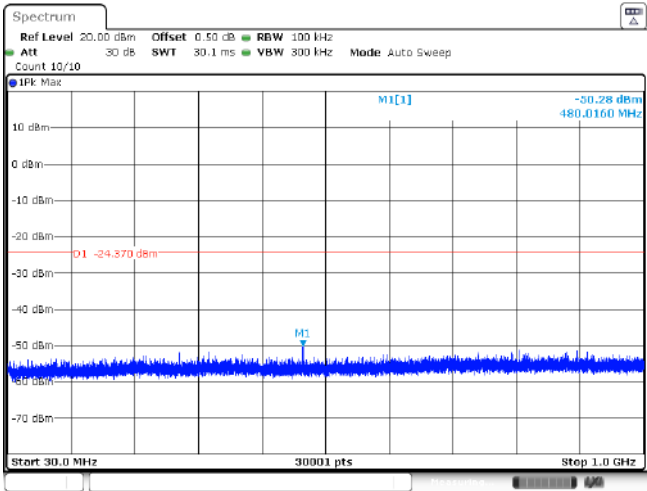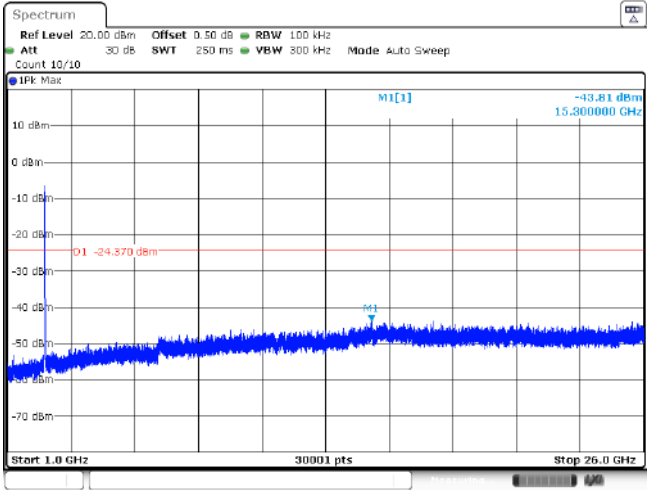CH09 Reference level	
CH09 30MHz~1000MHz	
CH09 1GHz~26GHz	

-----End of Report-----