


Series Model No.: P5 pro


Horizontal

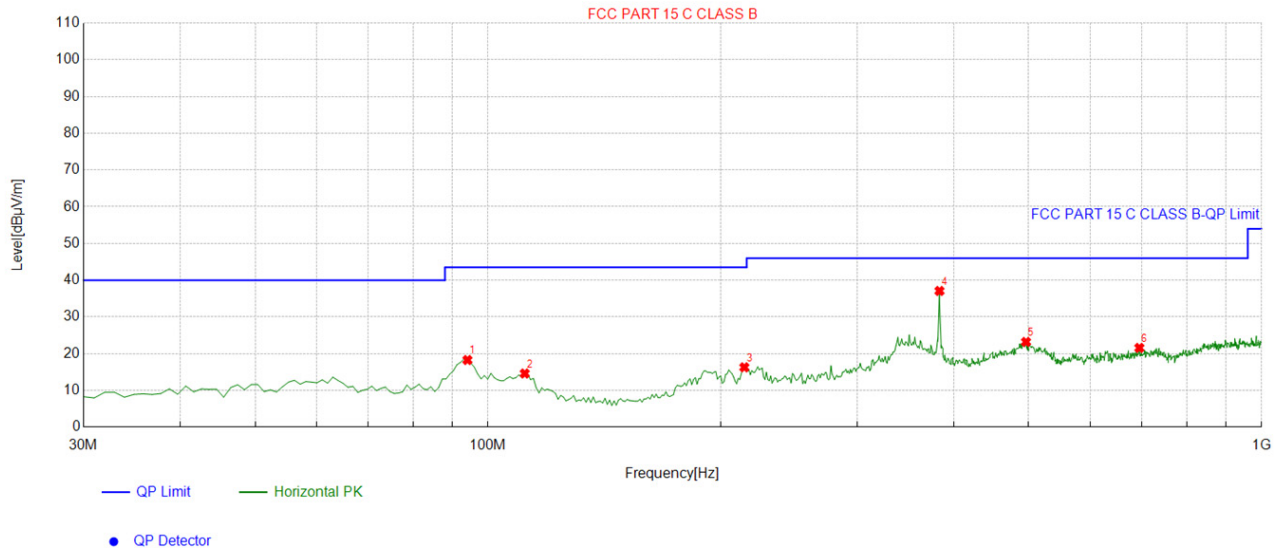

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	94.084084	-15.78	34.05	18.27	43.50	25.23	100	335	Horizontal
2	111.56156	-14.50	29.10	14.60	43.50	28.90	100	344	Horizontal
3	214.48448	-14.76	31.04	16.28	43.50	27.22	100	72	Horizontal
4	383.43343	-9.11	46.18	37.07	46.00	8.93	100	248	Horizontal
5	496.06606	-7.90	31.10	23.20	46.00	22.80	100	112	Horizontal
6	695.11511	-4.19	25.76	21.57	46.00	24.43	100	89	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

Vertical

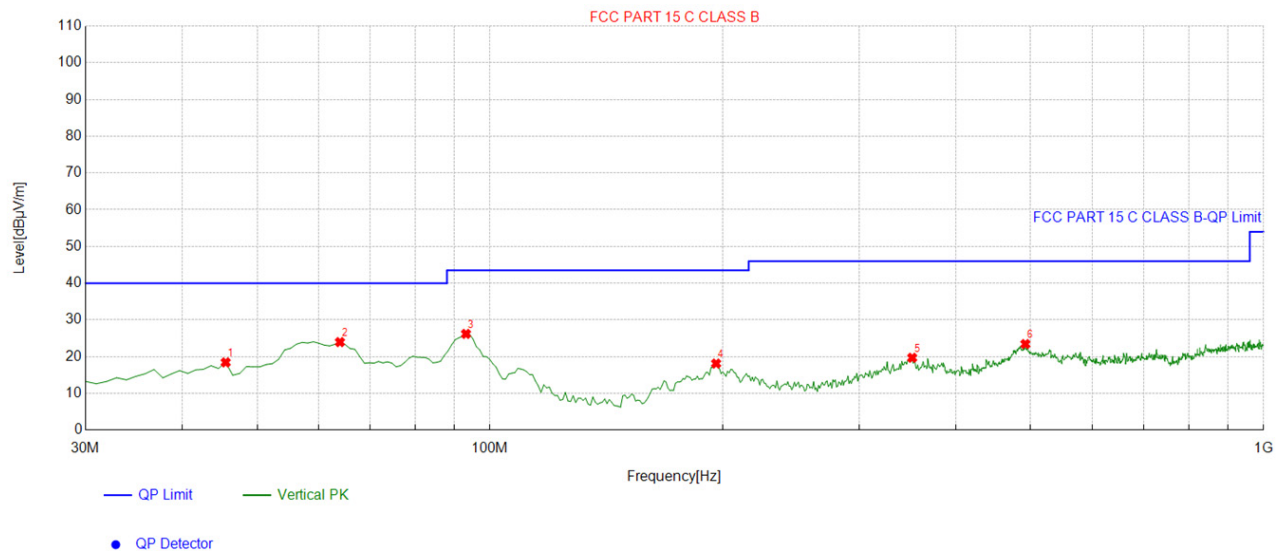


Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	45.535536	-13.92	32.35	18.43	40.00	21.57	100	261	Vertical
2	63.983984	-14.38	38.34	23.96	40.00	16.04	100	184	Vertical
3	93.113113	-15.92	42.12	26.20	43.50	17.30	100	233	Vertical
4	196.03603	-14.99	33.12	18.13	43.50	25.37	100	2	Vertical
5	351.39139	-10.10	29.80	19.70	46.00	26.30	100	224	Vertical
6	492.18218	-7.87	31.31	23.44	46.00	22.56	100	292	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

Series Model No.: E50 Ultra

Horizontal

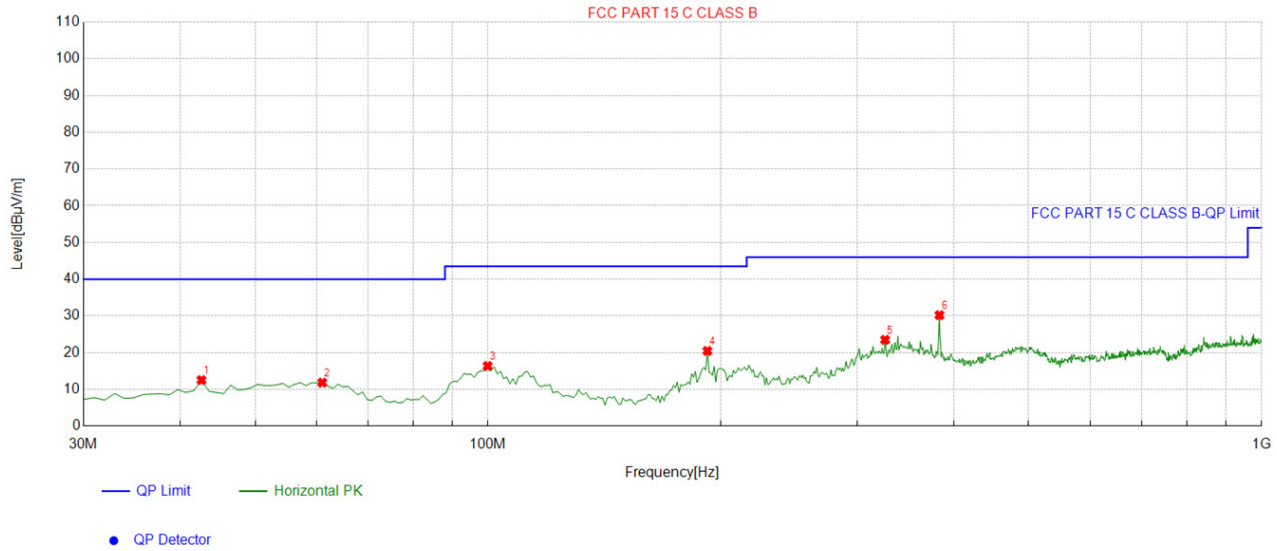


Suspected List

NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	42.622623	-13.31	25.85	12.54	40.00	27.46	100	335	Horizontal
2	61.071071	-13.82	25.66	11.84	40.00	28.16	100	235	Horizontal
3	99.90991	-14.70	31.06	16.36	43.50	27.14	100	349	Horizontal
4	192.15215	-15.74	36.21	20.47	43.50	23.03	100	80	Horizontal
5	326.14614	-10.98	34.47	23.49	46.00	22.51	100	267	Horizontal
6	383.43343	-9.11	39.32	30.21	46.00	15.79	100	204	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

Vertical

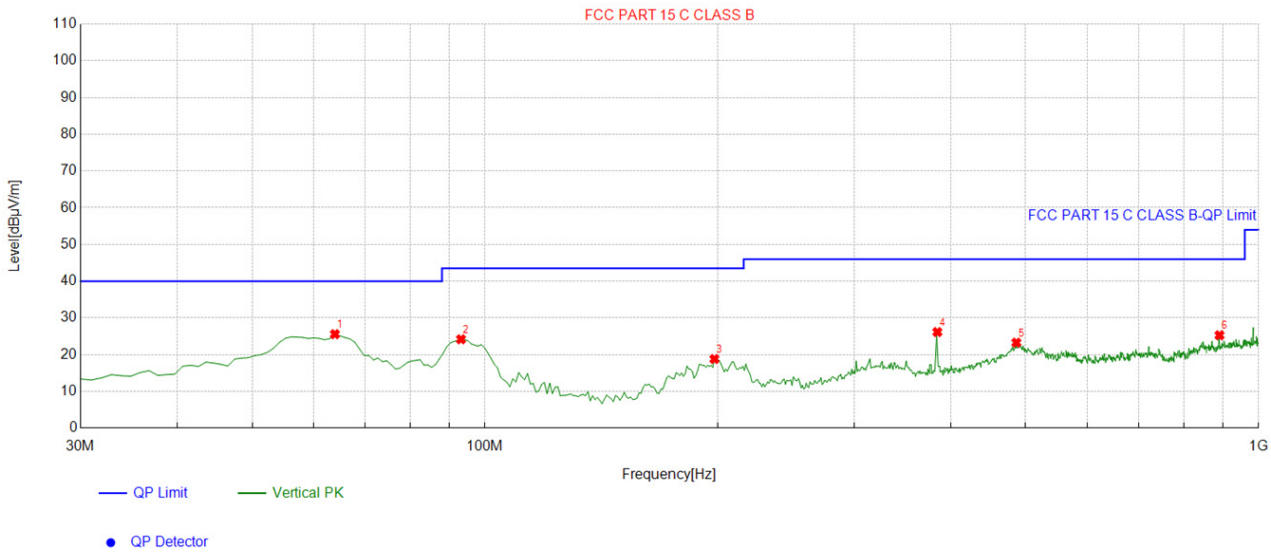


Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	63.983984	-14.38	39.96	25.58	40.00	14.42	100	244	Vertical
2	93.113113	-15.92	40.10	24.18	43.50	19.32	100	238	Vertical
3	197.97797	-14.86	33.67	18.81	43.50	24.69	100	353	Vertical
4	384.40440	-9.06	35.21	26.15	46.00	19.85	100	113	Vertical
5	486.35635	-7.92	31.19	23.27	46.00	22.73	100	122	Vertical
6	890.28028	-1.59	26.87	25.28	46.00	20.72	100	156	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

Series Model No.: I16 pro max


Horizontal

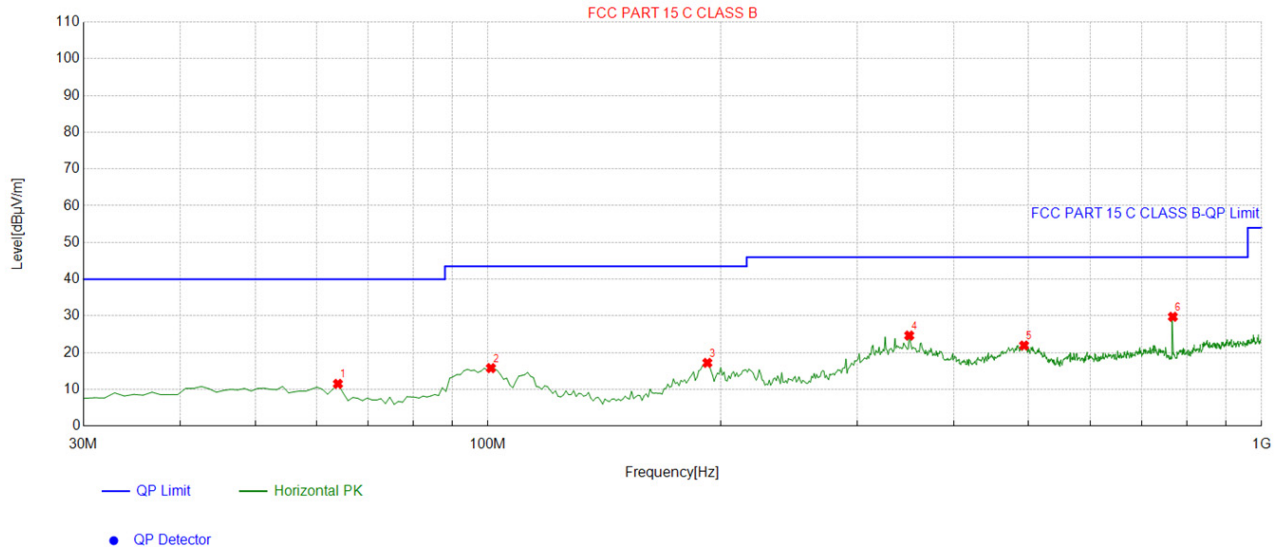

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	63.983984	-14.38	25.89	11.51	40.00	28.49	100	19	Horizontal
2	100.88088	-14.60	30.39	15.79	43.50	27.71	100	346	Horizontal
3	192.15215	-15.74	32.96	17.22	43.50	26.28	100	82	Horizontal
4	350.42042	-10.05	34.71	24.66	46.00	21.34	100	96	Horizontal
5	493.15315	-7.86	29.81	21.95	46.00	24.05	100	122	Horizontal
6	767.93793	-4.54	34.31	29.77	46.00	16.23	100	303	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

Vertical

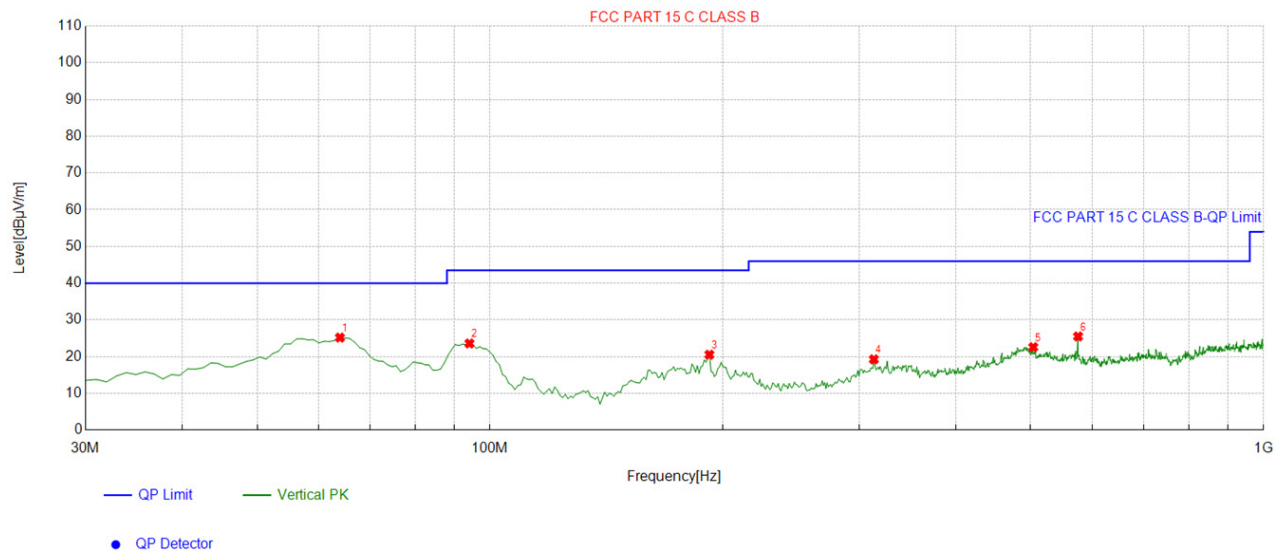


Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	63.983984	-14.38	39.57	25.19	40.00	14.81	100	292	Vertical
2	94.084084	-15.78	39.37	23.59	43.50	19.91	100	192	Vertical
3	192.15215	-15.74	36.28	20.54	43.50	22.96	100	61	Vertical
4	313.52352	-11.54	30.81	19.27	46.00	26.73	100	360	Vertical
5	503.83383	-8.20	30.79	22.59	46.00	23.41	100	321	Vertical
6	575.68568	-5.53	31.03	25.50	46.00	20.50	100	87	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Pre-amplifier; Level = Reading + Factor; Margin = Limit – Level;

Series Model No.: P6 pro

Horizontal

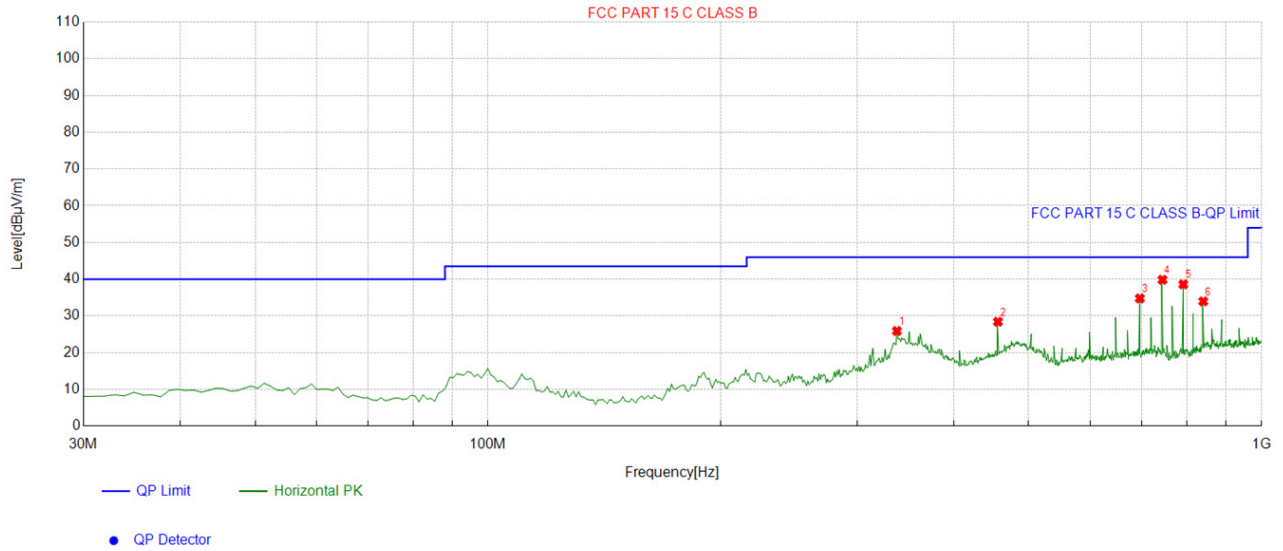


Suspected List

NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	337.79779	-10.46	36.36	25.90	46.00	20.10	100	101	Horizontal
2	456.25625	-8.87	37.27	28.40	46.00	17.60	100	276	Horizontal
3	696.08608	-4.24	39.00	34.76	46.00	11.24	100	46	Horizontal
4	744.63463	-3.42	43.26	39.84	46.00	6.16	100	227	Horizontal
5	792.21221	-3.25	41.86	38.61	46.00	7.39	100	236	Horizontal
6	840.76076	-2.05	36.02	33.97	46.00	12.03	100	241	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

Vertical

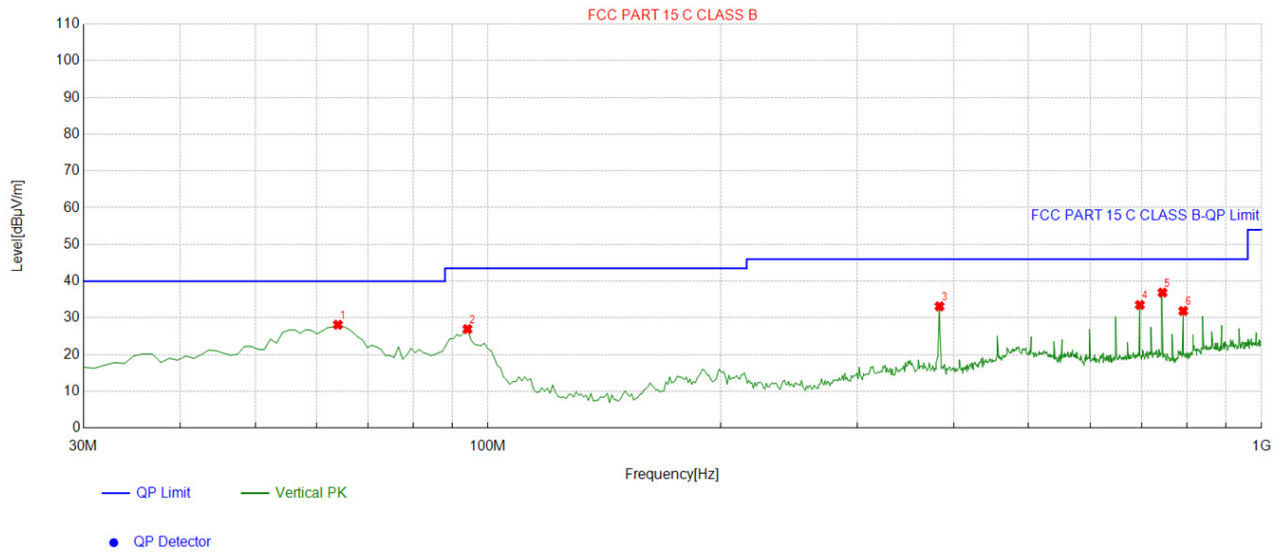


Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	63.983984	-14.38	42.52	28.14	40.00	11.86	100	275	Vertical
2	94.084084	-15.78	42.74	26.96	43.50	16.54	100	189	Vertical
3	383.43343	-9.11	42.25	33.14	46.00	12.86	100	316	Vertical
4	696.08608	-4.24	37.77	33.53	46.00	12.47	100	192	Vertical
5	744.63463	-3.42	40.31	36.89	46.00	9.11	100	210	Vertical
6	792.21221	-3.25	35.15	31.90	46.00	14.10	100	224	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Pre-amplifier; Level = Reading + Factor; Margin = Limit – Level;

Series Model No.: Sp20 Pro

Horizontal

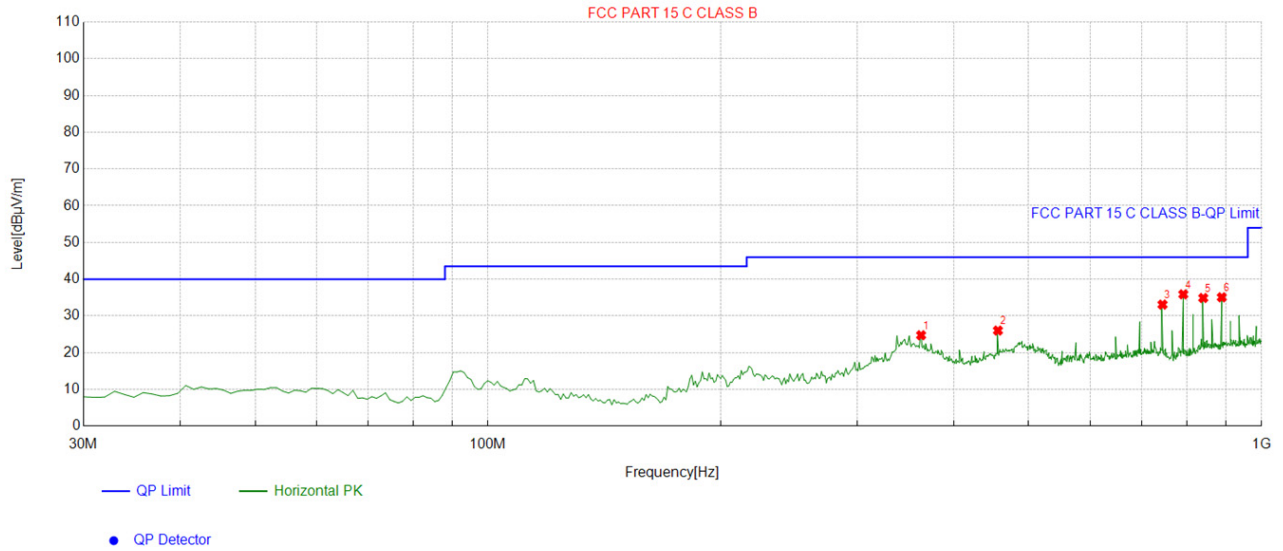


Suspected List

NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	363.04304	-9.68	34.42	24.74	46.00	21.26	100	71	Horizontal
2	456.25625	-8.87	34.89	26.02	46.00	19.98	100	279	Horizontal
3	744.63463	-3.42	36.50	33.08	46.00	12.92	100	222	Horizontal
4	792.21221	-3.25	39.12	35.87	46.00	10.13	100	233	Horizontal
5	840.76076	-2.05	36.93	34.88	46.00	11.12	100	239	Horizontal
6	888.33833	-1.63	36.70	35.07	46.00	10.93	100	39	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

Vertical

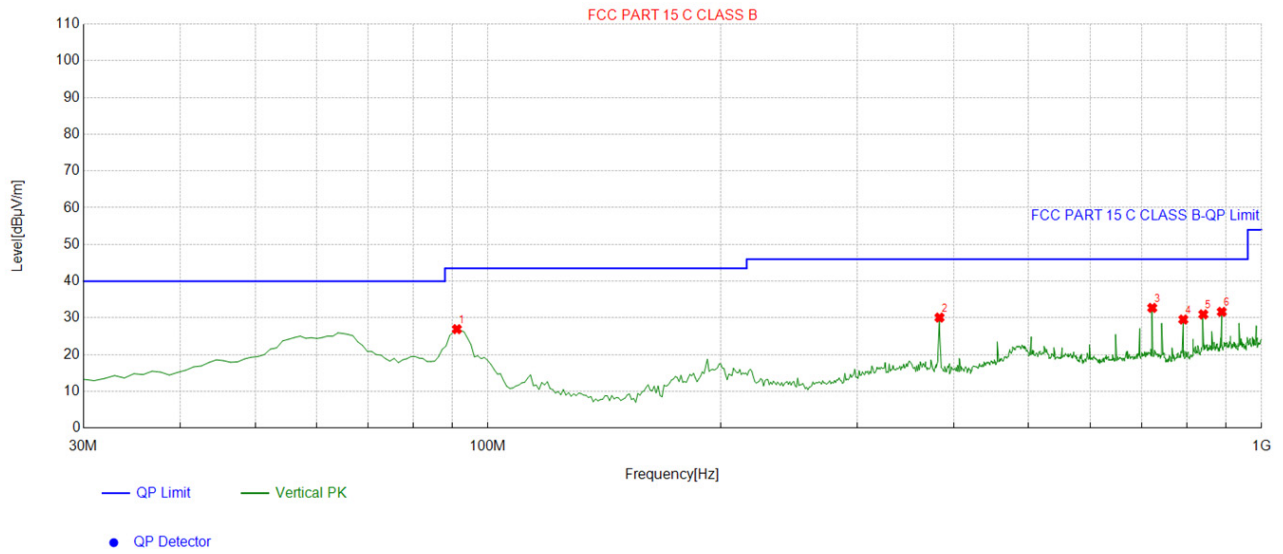


Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	91.171171	-16.91	43.85	26.94	43.50	16.56	100	209	Vertical
2	383.43343	-9.11	39.20	30.09	46.00	15.91	100	261	Vertical
3	722.30230	-4.17	36.90	32.73	46.00	13.27	100	88	Vertical
4	792.21221	-3.25	32.81	29.56	46.00	16.44	100	227	Vertical
5	840.76076	-2.05	33.01	30.96	46.00	15.04	100	238	Vertical
6	888.33833	-1.63	33.28	31.65	46.00	14.35	100	236	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

Series Model No.: OP12 pro


Horizontal

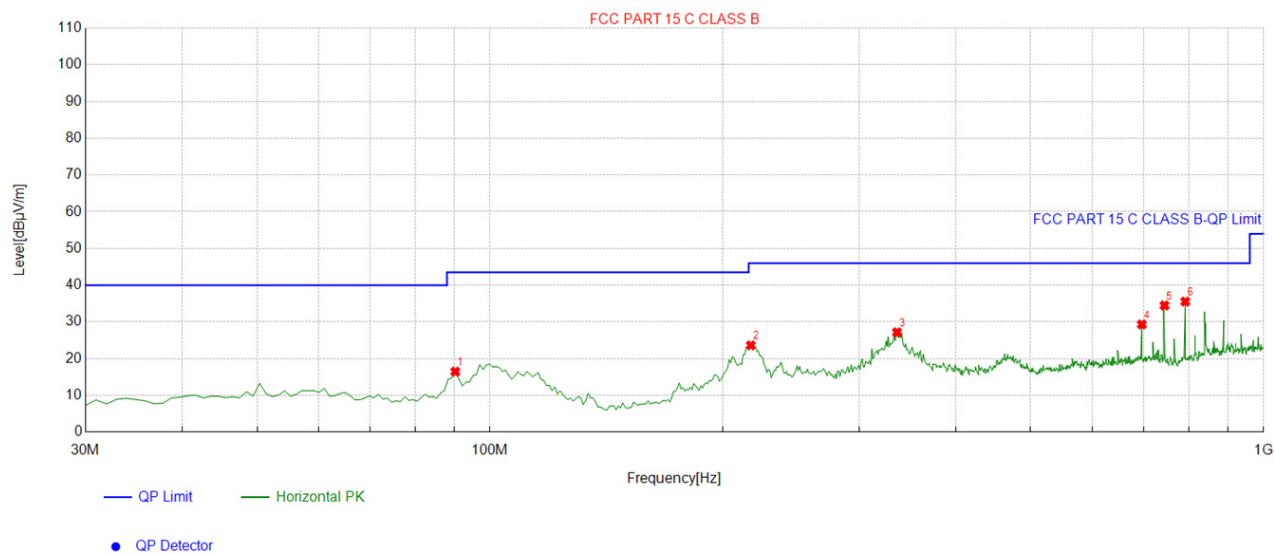

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	90.2002	-16.68	33.14	16.46	43.50	27.04	100	24	Horizontal
2	217.39739	-14.66	38.28	23.62	46.00	22.38	100	81	Horizontal
3	335.85585	-10.57	37.74	27.17	46.00	18.83	100	64	Horizontal
4	696.08608	-4.24	33.56	29.32	46.00	16.68	100	52	Horizontal
5	744.63463	-3.42	37.89	34.47	46.00	11.53	100	38	Horizontal
6	792.21221	-3.25	38.80	35.55	46.00	10.45	100	278	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

Vertical

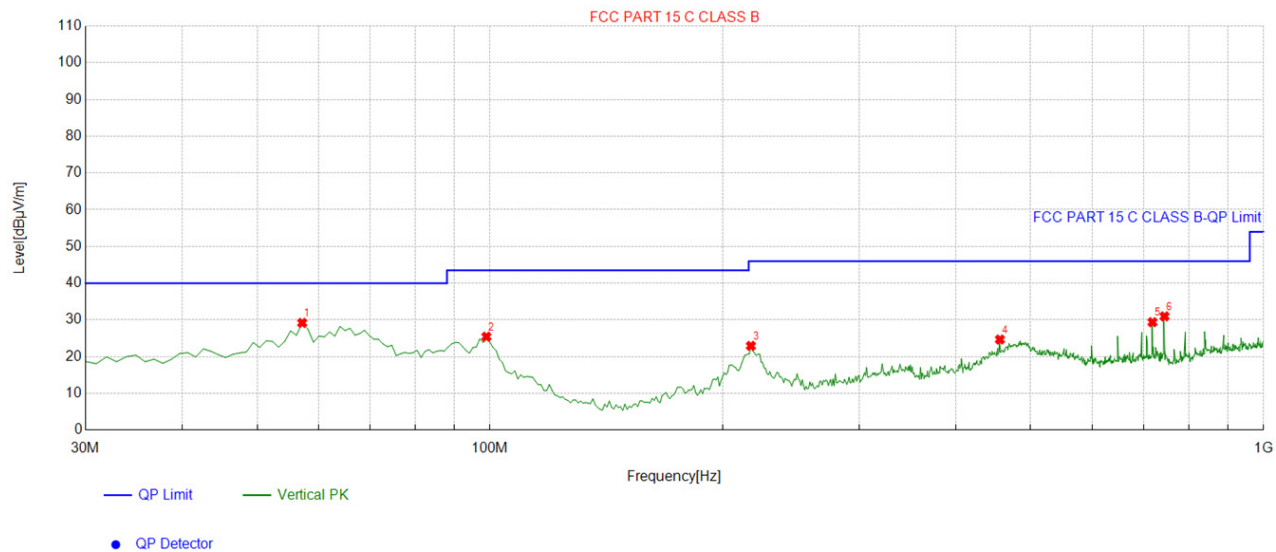


Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	57.187187	-13.76	42.95	29.19	40.00	10.81	100	78	Vertical
2	98.938939	-14.83	40.26	25.43	43.50	18.07	100	61	Vertical
3	217.39739	-14.66	37.60	22.94	46.00	23.06	100	29	Vertical
4	456.25625	-8.87	33.54	24.67	46.00	21.33	100	241	Vertical
5	718.41841	-4.24	33.63	29.39	46.00	16.61	100	93	Vertical
6	744.63463	-3.42	34.38	30.96	46.00	15.04	100	205	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Pre-amplifier; Level = Reading + Factor; Margin = Limit – Level;

Series Model No.: T3 Pro

Horizontal

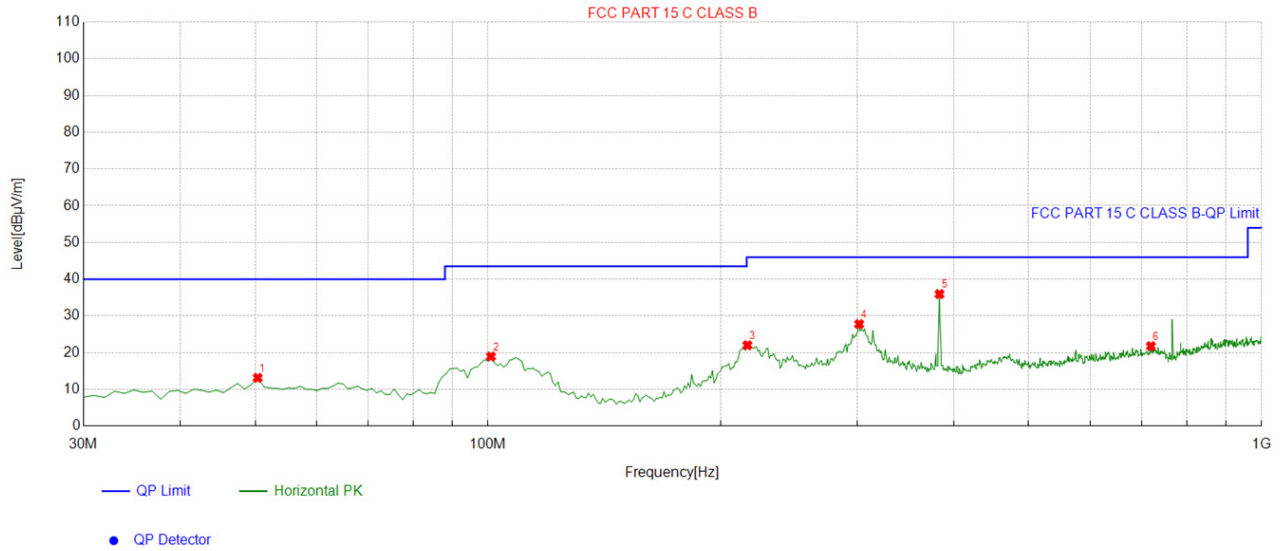


Suspected List

NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	50.39039	-13.15	26.29	13.14	40.00	26.86	100	0	Horizontal
2	100.88088	-14.60	33.55	18.95	43.50	24.55	100	5	Horizontal
3	216.42642	-14.69	36.71	22.02	46.00	23.98	100	68	Horizontal
4	301.87187	-11.78	39.55	27.77	46.00	18.23	100	265	Horizontal
5	383.43343	-9.11	45.05	35.94	46.00	10.06	100	48	Horizontal
6	719.38938	-4.26	26.03	21.77	46.00	24.23	100	277	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

Vertical

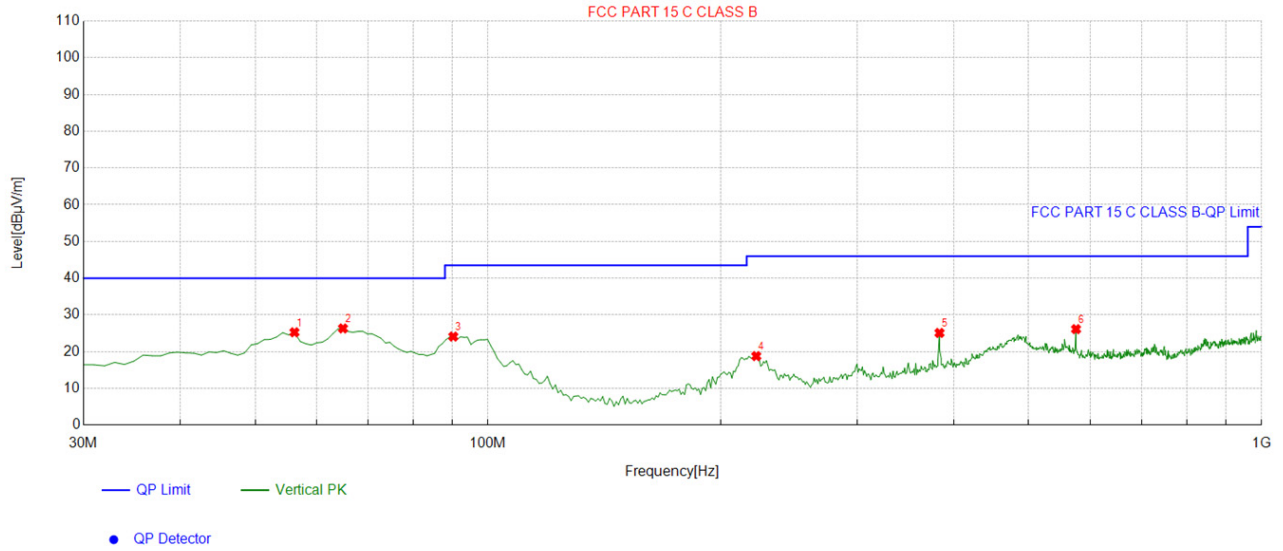


Suspected List

NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	56.216216	-13.94	39.21	25.27	40.00	14.73	100	63	Vertical
2	64.954955	-15.33	41.65	26.32	40.00	13.68	100	55	Vertical
3	90.2002	-16.68	40.79	24.11	43.50	19.39	100	182	Vertical
4	222.25225	-14.27	33.06	18.79	46.00	27.21	100	118	Vertical
5	383.43343	-9.11	34.21	25.10	46.00	20.90	100	9	Vertical
6	575.68568	-5.53	31.66	26.13	46.00	19.87	100	210	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

Series Model No.: P8 Pro

Horizontal

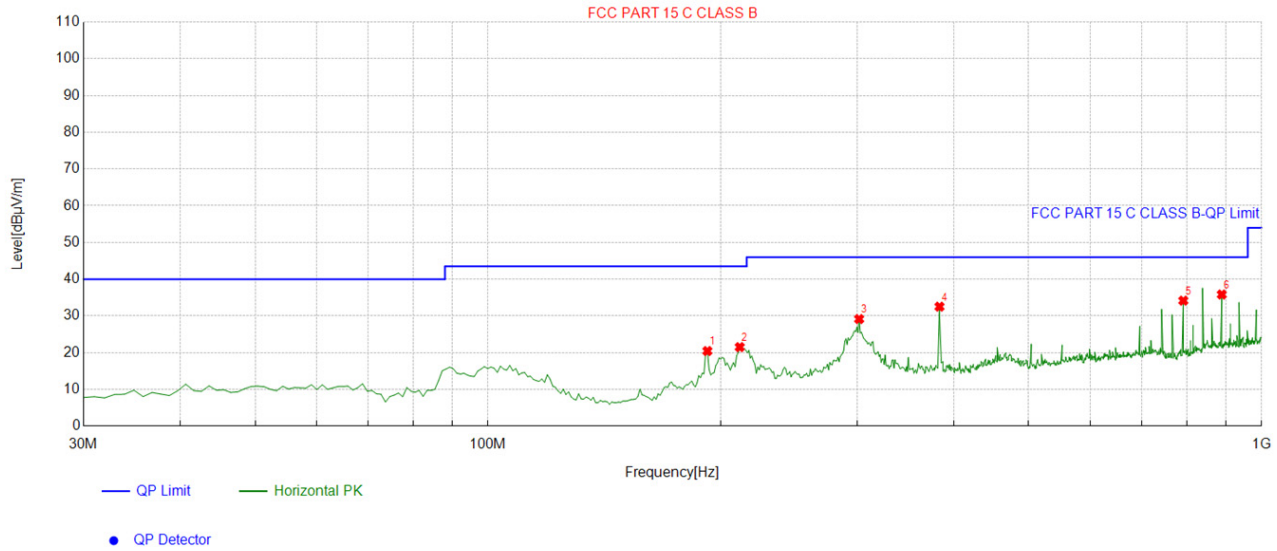

Suspected List

NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	192.15215	-15.74	36.19	20.45	43.50	23.05	100	118	Horizontal
2	211.57157	-14.85	36.36	21.51	43.50	21.99	100	62	Horizontal
3	301.87187	-11.78	40.93	29.15	46.00	16.85	100	253	Horizontal
4	383.43343	-9.11	41.63	32.52	46.00	13.48	100	148	Horizontal
5	792.21221	-3.25	37.40	34.15	46.00	11.85	100	103	Horizontal
6	888.33833	-1.63	37.46	35.83	46.00	10.17	100	100	Horizontal

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

Vertical



Suspected List

NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	57.187187	-13.76	42.70	28.94	40.00	11.06	100	318	Vertical
2	64.954955	-15.33	44.03	28.70	40.00	11.30	100	130	Vertical
3	90.2002	-16.68	44.41	27.73	43.50	15.77	100	231	Vertical
4	212.54254	-14.82	34.78	19.96	43.50	23.54	100	110	Vertical
5	383.43343	-9.11	33.32	24.21	46.00	21.79	100	228	Vertical
6	792.21221	-3.25	34.11	30.86	46.00	15.14	100	182	Vertical

Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

Harmonics and Spurious Emissions

Frequency Range (9kHz-30MHz)

Frequency (MHz)	Level@3m (dBμV/m)	Limit@3m (dBμV/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note:1. Emission Level=Reading+ Cable loss+ Antenna factor-Amp factor.

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement.

For 1GHz to 25GHz

CH Low (2402MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804.00	52.10	-3.65	48.45	74.00	-25.55	peak
4804.00	43.95	-3.65	40.30	54.00	-13.70	AVG
7206.00	50.41	-0.95	49.46	74.00	-24.54	peak
7206.00	42.58	-0.95	41.63	54.00	-12.37	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	52.20	-3.65	48.55	74.00	-25.45	peak
4804	44.52	-3.65	40.87	54.00	-13.13	AVG
7206	52.31	-0.95	51.36	74.00	-22.64	peak
7206	41.59	-0.95	40.64	54.00	-13.36	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

CH Middle (2440MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4880.00	52.45	-3.54	48.91	74.00	-25.09	peak
4880.00	44.42	-3.54	40.88	54.00	-13.12	AVG
7320.00	50.35	-0.81	49.54	74.00	-24.46	peak
7320.00	41.63	-0.81	40.82	54.00	-13.18	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4880.00	52.99	-3.54	49.45	74.00	-24.55	peak
4880.00	43.81	-3.54	40.27	54.00	-13.73	AVG
7320.00	51.85	-0.81	51.04	74.00	-22.96	peak
7320.00	41.79	-0.81	40.98	54.00	-13.02	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

CH High (2480MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	53.38	-3.43	49.95	74.00	-24.05	peak
4960	44.86	-3.44	41.42	54.00	-12.58	AVG
7440	52.31	-0.77	51.54	74.00	-22.46	peak
7440	41.45	-0.77	40.68	54.00	-13.32	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	53.60	-3.43	50.17	74.00	-23.83	peak
4960	43.91	-3.44	40.47	54.00	-13.53	AVG
7440	52.21	-0.77	51.44	74.00	-22.56	peak
7440	42.71	-0.77	41.94	54.00	-12.06	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Series Model No.: R12 pro

CH High (2480MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	52.12	-3.43	48.69	74.00	-25.31	peak
4960	44.30	-3.44	40.86	54.00	-13.14	AVG
7440	51.89	-0.77	51.12	74.00	-22.88	peak
7440	41.54	-0.77	40.77	54.00	-13.23	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	53.14	-3.43	49.71	74.00	-24.29	peak
4960	43.44	-3.44	40.00	54.00	-14.00	AVG
7440	51.83	-0.77	51.06	74.00	-22.94	peak
7440	40.96	-0.77	40.19	54.00	-13.81	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Series Model No.: P5 pro

CH High (2480MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	51.80	-3.43	48.37	74.00	-25.63	peak
4960	43.91	-3.44	40.47	54.00	-13.53	AVG
7440	51.39	-0.77	50.62	74.00	-23.38	peak
7440	42.60	-0.77	41.83	54.00	-12.17	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	52.50	-3.43	49.07	74.00	-24.93	peak
4960	43.20	-3.44	39.76	54.00	-14.24	AVG
7440	50.36	-0.77	49.59	74.00	-24.41	peak
7440	42.34	-0.77	41.57	54.00	-12.43	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Series Model No.: E50 Ultra

CH High (2480MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	52.80	-3.43	49.37	74.00	-24.63	peak
4960	44.62	-3.44	41.18	54.00	-12.82	AVG
7440	51.43	-0.77	50.66	74.00	-23.34	peak
7440	42.31	-0.77	41.54	54.00	-12.46	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	52.88	-3.43	49.45	74.00	-24.55	peak
4960	44.83	-3.44	41.39	54.00	-12.61	AVG
7440	50.72	-0.77	49.95	74.00	-24.05	peak
7440	40.83	-0.77	40.06	54.00	-13.94	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Series Model No.: I16 pro max

CH High (2480MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	53.48	-3.43	50.05	74.00	-23.95	peak
4960	43.55	-3.44	40.11	54.00	-13.89	AVG
7440	50.47	-0.77	49.70	74.00	-24.30	peak
7440	42.52	-0.77	41.75	54.00	-12.25	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	52.44	-3.43	49.01	74.00	-24.99	peak
4960	44.54	-3.44	41.10	54.00	-12.90	AVG
7440	52.26	-0.77	51.49	74.00	-22.51	peak
7440	42.60	-0.77	41.83	54.00	-12.17	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Series Model No.: P6 pro

CH High (2480MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	52.95	-3.43	49.52	74.00	-24.48	peak
4960	44.33	-3.44	40.89	54.00	-13.11	AVG
7440	51.86	-0.77	51.09	74.00	-22.91	peak
7440	42.11	-0.77	41.34	54.00	-12.66	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	53.25	-3.43	49.82	74.00	-24.18	peak
4960	45.01	-3.44	41.57	54.00	-12.43	AVG
7440	52.19	-0.77	51.42	74.00	-22.58	peak
7440	41.19	-0.77	40.42	54.00	-13.58	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Series Model No.: Sp20 Pro

CH High (2480MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	52.03	-3.43	48.60	74.00	-25.40	peak
4960	44.46	-3.44	41.02	54.00	-12.98	AVG
7440	50.89	-0.77	50.12	74.00	-23.88	peak
7440	41.13	-0.77	40.36	54.00	-13.64	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	52.92	-3.43	49.49	74.00	-24.51	peak
4960	43.84	-3.44	40.40	54.00	-13.60	AVG
7440	51.28	-0.77	50.51	74.00	-23.49	peak
7440	41.88	-0.77	41.11	54.00	-12.89	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Series Model No.: OP12 pro

CH High (2480MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	53.62	-3.43	50.19	74.00	-23.81	peak
4960	43.80	-3.44	40.36	54.00	-13.64	AVG
7440	51.52	-0.77	50.75	74.00	-23.25	peak
7440	42.04	-0.77	41.27	54.00	-12.73	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	52.61	-3.43	49.18	74.00	-24.82	peak
4960	44.75	-3.44	41.31	54.00	-12.69	AVG
7440	51.72	-0.77	50.95	74.00	-23.05	peak
7440	41.18	-0.77	40.41	54.00	-13.59	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Series Model No.: T3 Pro

CH High (2480MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	53.52	-3.43	50.09	74.00	-23.91	peak
4960	43.20	-3.44	39.76	54.00	-14.24	AVG
7440	51.47	-0.77	50.70	74.00	-23.30	peak
7440	42.33	-0.77	41.56	54.00	-12.44	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	53.21	-3.43	49.78	74.00	-24.22	peak
4960	43.47	-3.44	40.03	54.00	-13.97	AVG
7440	51.64	-0.77	50.87	74.00	-23.13	peak
7440	42.56	-0.77	41.79	54.00	-12.21	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Series Model No.: P8 Pro

CH High (2480MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	52.61	-3.43	49.18	74.00	-24.82	peak
4960	44.26	-3.44	40.82	54.00	-13.18	AVG
7440	51.21	-0.77	50.44	74.00	-23.56	peak
7440	42.74	-0.77	41.97	54.00	-12.03	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	52.58	-3.43	49.15	74.00	-24.85	peak
4960	43.34	-3.44	39.90	54.00	-14.10	AVG
7440	51.21	-0.77	50.44	74.00	-23.56	peak
7440	40.82	-0.77	40.05	54.00	-13.95	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) “F” denotes fundamental frequency; “H” denotes spurious frequency; “E” denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.
- (7) All modes of operation were investigated and the worst-case emissions are reported.

Radiated Band Edge Test:

Operation Mode: TX CH Low (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.29	-5.81	49.48	74	-24.52	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	54.12	-5.84	48.28	74	-25.72	peak
2390.00	/	-5.84	/	54	/	AVG
2400.00	52.66	-5.84	46.82	74	-27.18	peak
2400.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.37	-5.81	49.56	74	-24.44	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	54.18	-5.84	48.34	74	-25.66	peak
2390.00	/	-5.84	/	54	/	AVG
2400.00	51.71	-5.84	45.87	74	-28.13	peak
2400.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Operation Mode: TX CH High (2480MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.98	-5.81	50.17	74	-23.83	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	54.12	-6.06	48.06	74	-25.94	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	53.09	-5.81	47.28	74	-26.72	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	51.25	-6.06	45.19	74	-28.81	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

All modes have been tested, and the report only reflects the worst mode:
Series Model No.: R12 pro

Operation Mode: TX CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	55.63	-5.81	49.82	74	-24.18	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	54.72	-5.84	48.88	74	-25.12	peak
2390.00	/	-5.84	/	54	/	AVG
2400.00	52.92	-5.84	47.08	74	-26.92	peak
2400.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	55.32	-5.81	49.51	74	-24.49	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	54.09	-5.84	48.25	74	-25.75	peak
2390.00	/	-5.84	/	54	/	AVG
2400.00	51.75	-5.84	45.91	74	-28.09	peak
2400.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Operation Mode: TX CH High (2480MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.04	-5.81	48.23	74	-25.77	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	52.31	-6.06	46.25	74	-27.75	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.78	-5.81	50.97	74	-23.03	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	52.32	-6.06	46.26	74	-27.74	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Series Model No.: P5 pro

Operation Mode: TX CH Low (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.69	-5.81	49.88	74	-24.12	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	54.05	-5.84	48.21	74	-25.79	peak
2390.00	/	-5.84	/	54	/	AVG
2400.00	52.21	-5.84	46.37	74	-27.63	peak
2400.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.36	-5.81	49.55	74	-24.45	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	53.21	-5.84	47.37	74	-26.63	peak
2390.00	/	-5.84	/	54	/	AVG
2400.00	52.79	-5.84	46.95	74	-27.05	peak
2400.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Operation Mode: TX CH High (2480MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.27	-5.81	48.46	74	-25.54	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	52.98	-6.06	46.92	74	-27.08	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.33	-5.81	50.52	74	-23.48	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	52.41	-6.06	46.35	74	-27.65	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Series Model No.: E50 Ultra

Operation Mode: TX CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	54.98	-5.81	49.17	74	-24.83	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	53.26	-5.84	47.42	74	-26.58	peak
2390.00	/	-5.84	/	54	/	AVG
2400.00	52.42	-5.84	46.58	74	-27.42	peak
2400.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	55.23	-5.81	49.42	74	-24.58	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	54.27	-5.84	48.43	74	-25.57	peak
2390.00	/	-5.84	/	54	/	AVG
2400.00	51.49	-5.84	45.65	74	-28.35	peak
2400.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Operation Mode: TX CH High (2480MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.26	-5.81	48.45	74	-25.55	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	52.38	-6.06	46.32	74	-27.68	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.38	-5.81	50.57	74	-23.43	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	52.14	-6.06	46.08	74	-27.92	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Series Model No.: I16 pro max

Operation Mode: TX CH Low (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.36	-5.81	49.55	74	-24.45	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	54.19	-5.84	48.35	74	-25.65	peak
2390.00	/	-5.84	/	54	/	AVG
2400.00	52.98	-5.84	47.14	74	-26.86	peak
2400.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	54.33	-5.81	48.52	74	-25.48	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	53.36	-5.84	47.52	74	-26.48	peak
2390.00	/	-5.84	/	54	/	AVG
2400.00	52.09	-5.84	46.25	74	-27.75	peak
2400.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Operation Mode: TX CH High (2480MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.29	-5.81	48.48	74	-25.52	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	52.33	-6.06	46.27	74	-27.73	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.78	-5.81	49.97	74	-24.03	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	53.12	-6.06	47.06	74	-26.94	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Series Model No.: P6 pro

Operation Mode: TX CH Low (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.39	-5.81	49.58	74	-24.42	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	54.87	-5.84	49.03	74	-24.97	peak
2390.00	/	-5.84	/	54	/	AVG
2400.00	53.16	-5.84	47.32	74	-26.68	peak
2400.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.27	-5.81	49.46	74	-24.54	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	54.18	-5.84	48.34	74	-25.66	peak
2390.00	/	-5.84	/	54	/	AVG
2400.00	52.29	-5.84	46.45	74	-27.55	peak
2400.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Operation Mode: TX CH High (2480MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.36	-5.81	48.55	74	-25.45	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	51.88	-6.06	45.82	74	-28.18	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.38	-5.81	50.57	74	-23.43	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	52.09	-6.06	46.03	74	-27.97	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Series Model No.: Sp20 Pro

Operation Mode: TX CH Low (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	54.98	-5.81	49.17	74	-24.83	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	55.36	-5.84	49.52	74	-24.48	peak
2390.00	/	-5.84	/	54	/	AVG
2400.00	53.78	-5.84	47.94	74	-26.06	peak
2400.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.36	-5.81	49.55	74	-24.45	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	54.93	-5.84	49.09	74	-24.91	peak
2390.00	/	-5.84	/	54	/	AVG
2400.00	52.11	-5.84	46.27	74	-27.73	peak
2400.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Operation Mode: TX CH High (2480MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.25	-5.81	48.44	74	-25.56	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	55.82	-6.06	49.76	74	-24.24	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.39	-5.81	49.58	74	-24.42	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	54.22	-6.06	48.16	74	-25.84	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Series Model No.: OP12 pro

Operation Mode: TX CH Low (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.32	-5.81	49.51	74	-24.49	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	54.59	-5.84	48.75	74	-25.25	peak
2390.00	/	-5.84	/	54	/	AVG
2400.00	52.48	-5.84	46.64	74	-27.36	peak
2400.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	54.36	-5.81	48.55	74	-25.45	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	52.98	-5.84	47.14	74	-26.86	peak
2390.00	/	-5.84	/	54	/	AVG
2400.00	54.39	-5.84	48.55	74	-25.45	peak
2400.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Operation Mode: TX CH High (2480MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.32	-5.81	48.51	74	-25.49	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	55.25	-6.06	49.19	74	-24.81	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	55.39	-5.81	49.58	74	-24.42	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	56.18	-6.06	50.12	74	-23.88	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Series Model No.: T3 Pro

Operation Mode: TX CH Low (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.36	-5.81	49.55	74	-24.45	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	54.22	-5.84	48.38	74	-25.62	peak
2390.00	/	-5.84	/	54	/	AVG
2400.00	52.39	-5.84	46.55	74	-27.45	peak
2400.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	54.65	-5.81	48.84	74	-25.16	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	54.81	-5.84	48.97	74	-25.03	peak
2390.00	/	-5.84	/	54	/	AVG
2400.00	52.22	-5.84	46.38	74	-27.62	peak
2400.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Operation Mode: TX CH High (2480MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	52.89	-5.81	47.08	74	-26.92	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	51.87	-6.06	45.81	74	-28.19	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.84	-5.81	51.03	74	-22.97	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	53.29	-6.06	47.23	74	-26.77	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Series Model No.: P8 Pro

Operation Mode: TX CH Low (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.36	-5.81	49.55	74	-24.45	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	54.18	-5.84	48.34	74	-25.66	peak
2390.00	/	-5.84	/	54	/	AVG
2400.00	53.07	-5.84	47.23	74	-26.77	peak
2400.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.24	-5.81	49.43	74	-24.57	peak
2310.00	/	-5.81	/	54	/	AVG
2390.00	54.17	-5.84	48.33	74	-25.67	peak
2390.00	/	-5.84	/	54	/	AVG
2400.00	52.13	-5.84	46.29	74	-27.71	peak
2400.00	/	-5.84	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Operation Mode: TX CH High (2480MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	54.27	-5.81	48.46	74	-25.54	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	52.99	-6.06	46.93	74	-27.07	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.32	-5.81	50.51	74	-23.49	peak
2483.50	/	-5.81	/	54	/	AVG
2500.00	52.98	-6.06	46.92	74	-27.08	peak
2500.00	/	-6.06	/	54	/	AVG
Remark: Factor = Cable loss + Antenna factor + Attenuator – Preamplifier; Level = Reading + Factor; Margin = Level-Limit.						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Remark:

1. If the PK measured levels comply with average limit, then the average level were deemed to comply with a verage limit.
2. In restricted bands of operation, the spurious emissions below the permissible value more than 20dB.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4.4 Maximum Output Power Measurement

4.4.1 Limit

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 Test Procedure


The maximum peak conducted output power may be measured using a broadband peak RF automatic control unit. The RF automatic control unit shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The maximum Average conducted output power may be measured using a wideband RF automatic control unit with a thermocouple detector or equivalent. The RF automatic control unit shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

4.4.3 Deviation From Standard

No deviation.

4.4.4 Test Setup

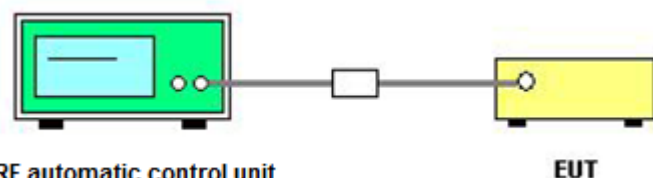

4.4.5 Test Results

Channel	Channel Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
Low	2402	-5.04	30	Pass
Middle	2440	-4.51		Pass
High	2480	-4.84		Pass

Note: 1.The test results including the cable lose.

4.5 Power Spectral Density

4.5.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.5.2 Test Procedure

Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.

Set the RBW =10 kHz.

Set the VBW =30 KHz.

Set the span to 1.5 times the DTS channel bandwidth.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum power level.


If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

The resulting peak PSD level must be 8 dBm.

4.5.3 Deviation from Standard

No deviation.

4.5.4 Test Setup



4.5.5 Test Results

Channel	Channel frequency (MHz)	Result (dBm/10kHz)	10log (3/10)	Test Result (dBm/3kHz)
Low	2402	-15.75	-5.23	-20.98
Middle	2440	-15.26	-5.23	-20.49
High	2480	-15.46	-5.23	-20.69
Limit : 8dBm/3KHz				
Test Result (dBm/3kHz)= Result (dBm/10kHz)+10log (3/10)				
Test Result	PASS			

CH 00



CH 19



CH 39



4.6 6dB Bandwidth

4.6.1 Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.6.2 Test Procedure


The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=100 KHz and VBW=300 KHz. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.6.3 Deviation From Standard

No deviation.

4.6.4 Test Setup



4.6.5 Test Result

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Limit (KHz)	Result
Low	2402	0.720	≥ 500	Pass
Middle	2440	0.740		Pass
High	2480	0.704		Pass

CH 39



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

4.7 Occupied Bandwidth

4.7.1 Test Procedure

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

RBW=1% to 5% of the OBW

VBW=approximately 3 X RBW

Detector=Peak

Trace Mode: Max Hold

Use the 99% power bandwidth function of the instrument to measure the Occupied Bandwidth and recorded.

4.7.2 Deviation from Standard

No deviation.

4.7.3 Test Setup



4.7.4 Test Result

N/A

4.8 Band Edge

4.8.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under FCC rules in section 5.8.1, the attenuation required shall be 30 dB instead of 20 dB.


4.8.2 Test Procedure

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation, $RBW \geq 1\%$ of the span, $VBW \geq RBW$, Sweep = auto, Detector function = peak, Trace = max hold.

4.8.3 Deviation from Standard


No deviation.

4.8.4 Test Setup




4.8.5 Test Results

PASS

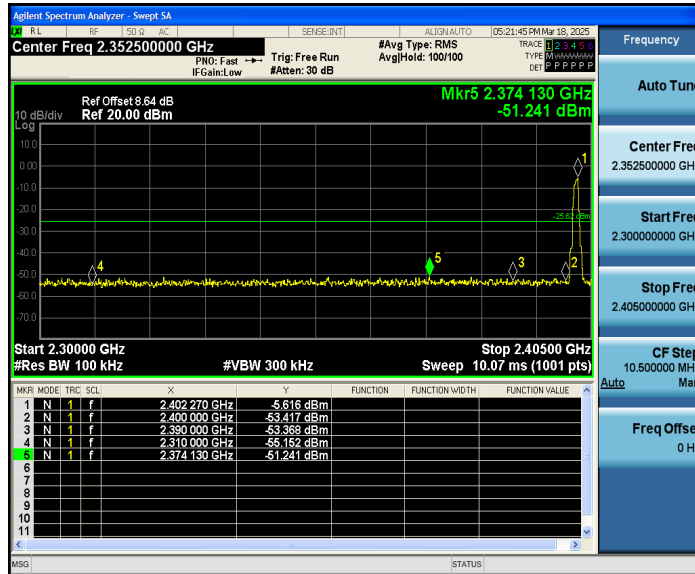

2402

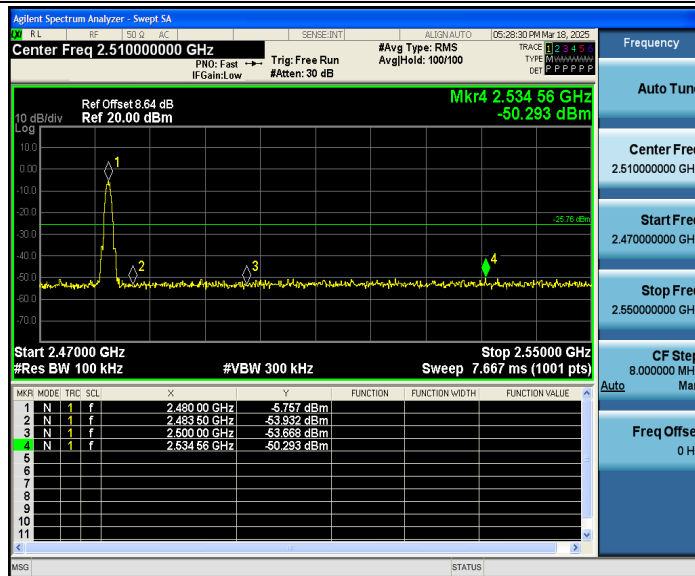

2480

4.9 Conducted Spurious Emissions

4.9.1 Applied Procedures / Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section (b)(3) of RSS 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. For below 30MHz, For 9KHz-150kHz, 150K-10MHz, We use the RBW 1KHz, 10KHz, So the limit need to be calculated by " $10\lg(BW1/BW2)$ ". For example For 9KHz-150kHz, RBW 1KHz, The Limit= the highest emission level-20-10log(100/1)= the highest emission level-40.

4.9.2 Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation, $RBW \geq 1\%$ of the span, $VBW \geq RBW$, Sweep = auto, Detector function = peak, Trace = max hold.

4.9.3 Deviation from Standard


No deviation.

4.9.4 Test Setup




4.9.5 Test Results

CH 00

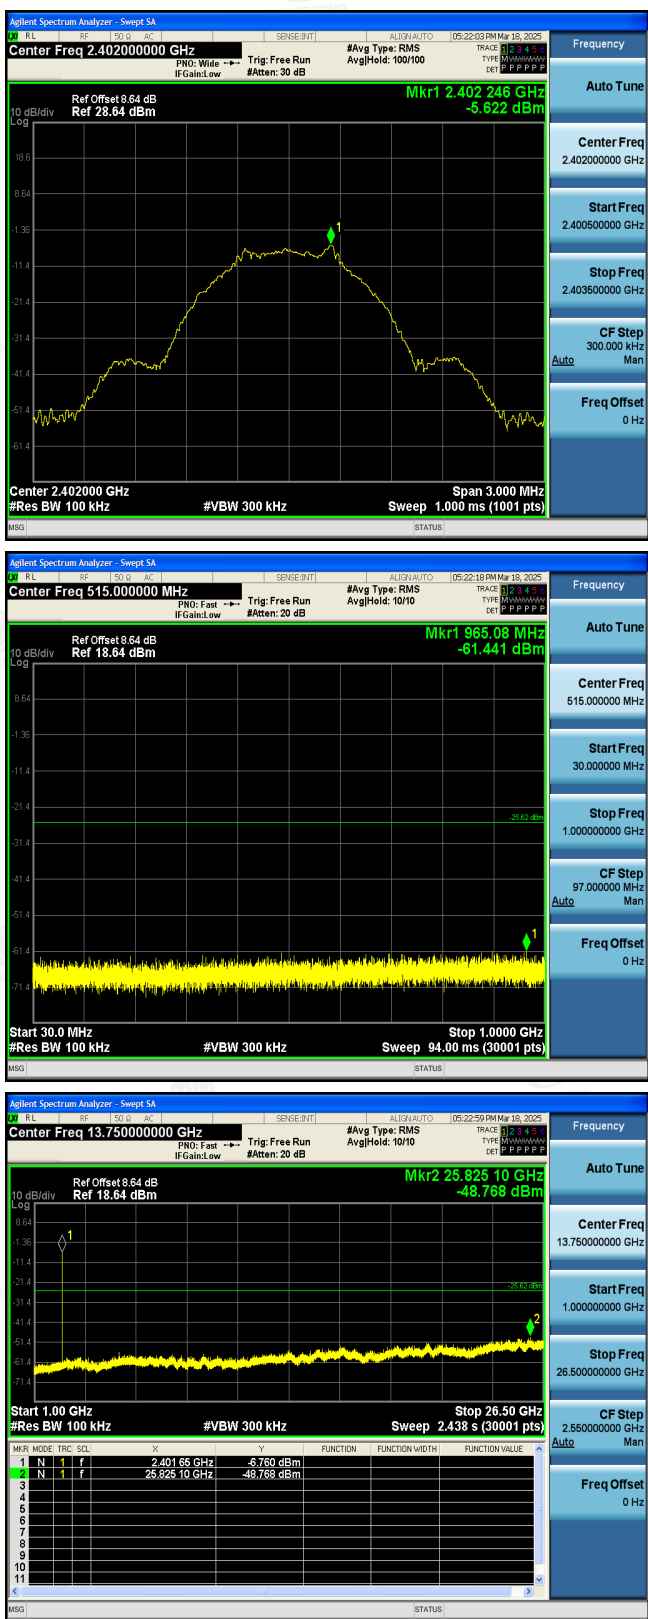

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.



CH 19

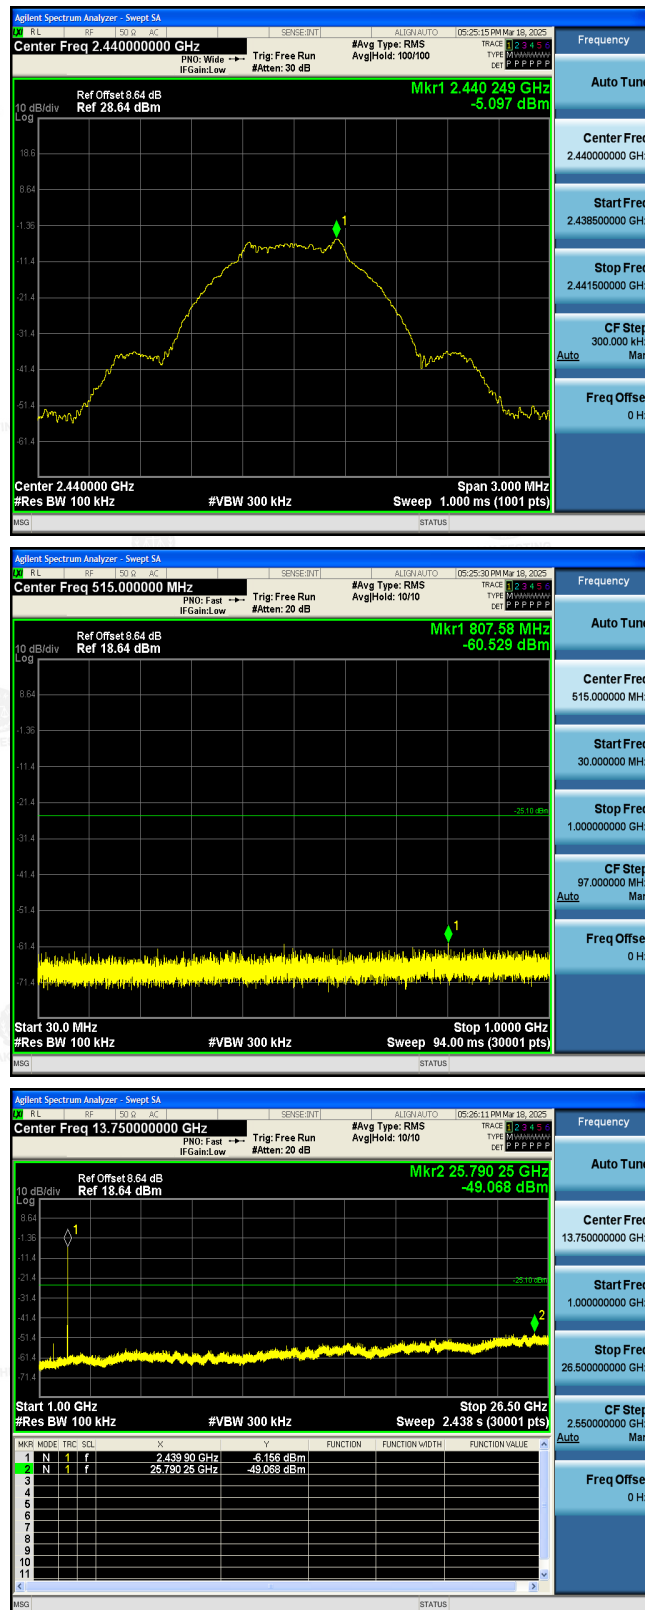

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

CH 39

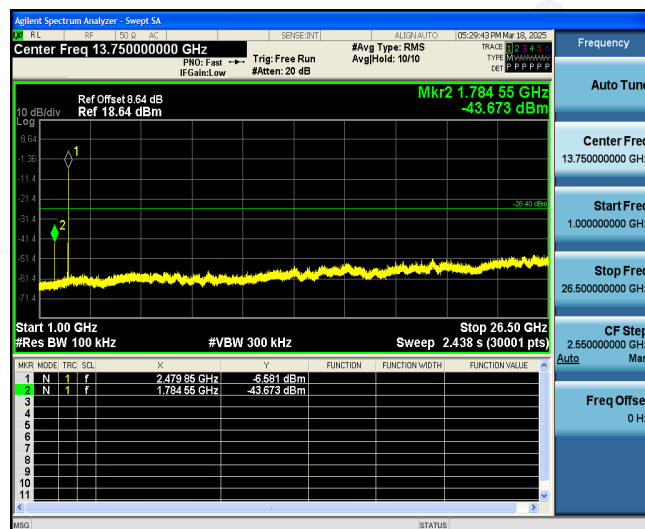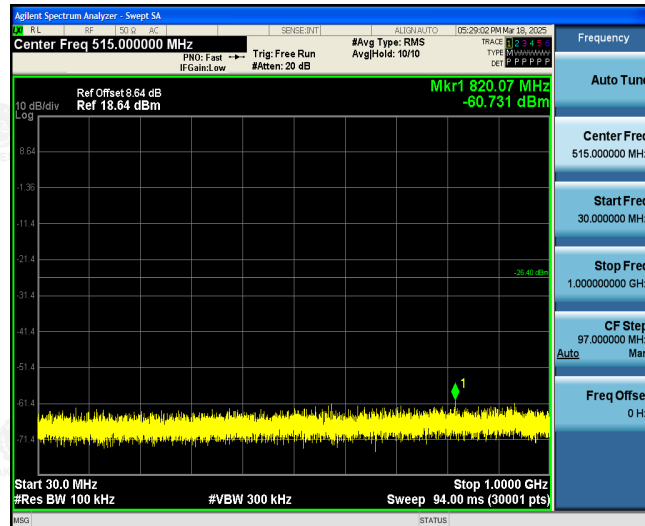

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 15 days only. The document is issued by Shenzhen HUAKE Testing Technology Co., Ltd., this document cannot be reproduced except in full with our prior written permission.

Shenzhen HUAKE Testing Technology Co., Ltd. Tel.: +86-0755-2302 9901 E-mail: info@huak.com Web.: www.huak.com
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China