

EMC Test Report

Applicant : InnoXings CO., LTD.
Product Name : Wi-Fi 6, 2x2 5GHz band PCIe M.2 adapter card
Trade Name : INNOXINGS
Model Number : IXMQ6102-L5X2-1
Applicable Standard : FCC 47 CFR PART 15 SUBPART B
ANSI C63.4: 2014
ANSI C63.4a: 2017
Received Date : Oct. 02, 2023
Test Period : Dec. 25, 2023 ~ Mar. 05, 2024
Issued Date : Mar. 18, 2024

Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
Test Firm MRA designation number: TW1062 (Bade test site)
TW1138 (Wugu test site)
Test Firm registration number: 510205 (Bade test site)
472531 (Wugu test site)
Certified Scope: 9 kHz ~ 40 GHz

Note:

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Revision History

| Rev. | Issued Date | Description | Revised By |
|------|---------------|---------------|------------|
| 00 | Mar. 18, 2024 | Initial Issue | Snow Wang |
| | | | |
| | | | |
| | | | |

Verification of Compliance

Applicant : InnoXings CO., LTD.

Product Name : Wi-Fi 6, 2x2 5GHz band PCIe M.2 adapter card

Trade Name : INNOXINGS

Model Number : IXMQ6102-L5X2-1

Applicable Standard : FCC 47 CFR PART 15 SUBPART B
ANSI C63.4: 2014
ANSI C63.4a: 2017

Test Result : Complied

Performing Lab. : Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330



The above equipment has been tested by Eurofins E&E Wireless Taiwan Co., Ltd., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved By : _____

TABLE OF CONTENTS

| | |
|---|-----------|
| 1 General Information | 5 |
| 1.1. Summary of Test Result | 5 |
| 1.2. Testing Location | 5 |
| 1.3. Measurement Uncertainty | 6 |
| 1.4. Test Site Environment | 7 |
| 2 EUT Description..... | 8 |
| 3 Test Methodology..... | 9 |
| 3.1. Decision of Test Mode | 9 |
| 3.2. EUT Test Step | 9 |
| 3.3. Configuration of Test System Details | 10 |
| 3.4. Test Instruments..... | 12 |
| 4 Measurement Procedure..... | 14 |
| 4.1. Conducted Emission | 14 |
| 4.2. Radiated Emission | 16 |
| 5 Requirements and Performance Criteria..... | 19 |
| 5.1. Conducted Emission | 19 |
| 5.2. Radiated Emission | 20 |
| 6 Test Result..... | 21 |
| 6.1. Conducted Emission | 21 |
| 6.2. Radiated Emission | 23 |

Appendix A. Test Setup Photographs

1 General Information

1.1. Summary of Test Result

| Emission | | | |
|---|-------------------------------|---------|--|
| Standard | Item | Verdict | Remark |
| FCC 47 CFR PART 15 SUBPART B ANSI C63.4 ANSI C63.4a | Conducted Emission | PASS | Meet Class B limit Minimum margin is -9.79 dB at 0.5190 MHz |
| | Radiated Emission below 1 GHz | PASS | Meet Class B limit Minimum margin is -4.67 dB at 38.7300 MHz |
| | Radiated Emission above 1 GHz | PASS | Meet Class B limit Minimum margin is -16.20 dB at 18000.000 MHz |

Decision Rule

- Uncertainty is not included.
- Uncertainty is included.

1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.

Site Address: No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.)

Site Address: No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

1.3. Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2

| Test Item | | Test Site | Frequency Range | Uncertainty (dB) |
|--------------------|---------------|-----------------|------------------|------------------|
| Conducted Emission | AC Power Port | Conduction01-BD | 9 kHz ~ 150 kHz | ± 3.7 |
| | | | 150 kHz ~ 30 MHz | ± 2.8 |
| | | Conduction01-WG | 9 kHz ~ 150 kHz | ± 3.6 |
| | | | 150 kHz ~ 30 MHz | ± 2.9 |

| Test Item | Test Site | Frequency Range | Uncertainty (dB) | |
|-------------------|-----------|-----------------------|------------------|-------|
| Radiated Emission | 10M-BD | 30 MHz ~ 1000 MHz | Horizontal | ± 5.0 |
| | | | Vertical | ± 5.2 |
| | 96601-BD | 30 MHz ~ 1000 MHz | | ± 5.1 |
| | | 1000 MHz ~ 6000 MHz | | ± 4.8 |
| | | 6000 MHz ~ 18000 MHz | | ± 5.0 |
| | | 18000 MHz ~ 26500 MHz | | ± 4.9 |
| | | 26500 MHz ~ 40000 MHz | | ± 4.8 |
| | 96602-BD | 30 MHz ~ 1000 MHz | | ± 4.9 |
| | | 1000 MHz ~ 6000 MHz | | ± 4.7 |
| | | 6000 MHz ~ 18000 MHz | | ± 4.8 |
| | | 18000 MHz ~ 26500 MHz | | ± 4.7 |
| | | 26500 MHz ~ 40000 MHz | | ± 4.7 |
| | 96601-WG | 30 MHz ~ 1000 MHz | | ± 4.9 |
| | | 1000 MHz ~ 6000 MHz | | ± 4.2 |
| | | 6000 MHz ~ 18000 MHz | | ± 4.3 |
| | | 18000 MHz ~ 26500 MHz | | ± 4.0 |
| | | 26500 MHz ~ 40000 MHz | | ± 4.4 |

1.4. Test Site Environment

| Test Item | Items | Required (IEC 60068-1) | Interval(*) |
|--------------------|----------------------------|------------------------|-------------|
| Conducted Emission | Temperature (°C) | 15-35 | 15-30 |
| | Humidity (%RH) | 25-75 | 45-75 |
| | Barometric pressure (mbar) | 860-1060 | 990-1005 |
| Radiated Emission | Temperature (°C) | 15-35 | 15-30 |
| | Humidity (%RH) | 25-75 | 45-75 |
| | Barometric pressure (mbar) | 860-1060 | 990-1005 |

(*)The measurement ambient temperature is within this range.

2 EUT Description

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

| | |
|-----------------------------|--|
| Applicant | InnoXings CO., LTD. 13 F.-5, No. 155, Sec. 1, Keelung Rd., Xinyi Dist., Taipei City 110058, Taiwan (R.O.C.) |
| Product Name | Wi-Fi 6, 2x2 5GHz band PCIe M.2 adapter card |
| Trade Name | INNOXINGS |
| Model Number | IXMQ6102-L5X2-1 |
| FCC ID | 2BDIDQCN6102-XPA-01 |
| I/O Ports | Refer to the user manual provided by clients. |
| Highest Operating Frequency | 5.825 GHz |
| EUT Power Rating | 3.3 V |

3 Test Methodology

3.1. Decision of Test Mode

3.1.1. The following test mode(s) were scanned during the preliminary test:

| Pre-Test Mode |
|-------------------------------|
| Mode 1: Wi-Fi (5 G) link mode |

3.1.2. After the preliminary scan, the following test mode was final mode and found to produce the highest emission level.

| Final Test Mode | | | |
|-----------------|--------------------|-------------|--------|
| Emission | Conducted Emission | | Mode 1 |
| | Radiated Emission | Below 1 GHz | Mode 1 |
| | | Above 1 GHz | Mode 1 |

3.2. EUT Test Step

1. Setup the EUT and simulators as shown on 3.3.
2. Turn on the power all equipment.
3. The EUT link to AP by Wi-Fi.
4. Start to test till get the worst reading.

3.3. Configuration of Test System Details

| Test Setup | | | |
|------------|-------------------|----------------------|-----------|
| No. | Setup Peripherals | Connection type | Test Mode |
| | | | 1 |
| A1 | Motherboard | Connected w/o Cable | V |
| A1-1 | Adapter | DC power Cable to A1 | V |
| B1 | Notebook | USB Cable to A1 | V |
| B1 | Notebook | LAN Cable to A1 | V |
| B2 | Antenna*2 | Antenna Cable*2 | V |
| C1 | AP | Wi-Fi | V |

| Support Unit used in test configuration and system | | | | | | |
|--|-------------|-----------------|----------------|---------------|-----------------------------------|---------------------|
| Product | | Trade Name | Model Number | Serial Number | Data Cable | Power Cord |
| (1) | Adapter | Audio Authority | XH1200-5000 | N/A | N/A | Non-Shielded, 1.5 m |
| (2) | Motherboard | N/A | MQ5018-1 | N/A | N/A | Non-Shielded, 1.0 m |
| (3) | AP | TP-Link | Archer AX50 | 221B330002592 | N/A | Non-Shielded, 1.2 m |
| (4) | Notebook | ASUS | PU401L | 0601A4210U | Non-Shielded, 0.9 m with one core | Non-Shielded, 1.0 m |
| (5) | Antenna | M.gear | C2108-510001-A | N/A | Non-Shielded, 0.1 m | N/A |
| (6) | Antenna | M.gear | C2108-510001-A | N/A | Non-Shielded, 0.1 m | N/A |

3.4. Test Instruments

Test Period: Dec. 25, 2023 ~ Mar. 05, 2024

Testing Engineer: Yang Wang

| Conducted Emission test site | | | | | |
|------------------------------|--------------|----------------------|-----------------|---------------|-------------|
| Equipment | Manufacturer | Model Number | Serial Number | Cal. Date | Cal. Period |
| Test Receiver | R&S | ESR3 | 102919 | Nov. 30, 2023 | 1 year |
| LISN | R&S | ENV216 | 101139 | Apr. 12, 2023 | 1 year |
| Cable | EMCI | EMCCFD300-BM-NM-4000 | 220402 | Jun. 08, 2023 | 1 year |
| Software | ELEKTRA | 5.01.0 | ----- | ----- | ----- |
| Test Site | Eurofins | Conduction01-WG | Conduction01-WG | N.C.R. | ----- |

Test Period: Dec. 29, 2023 ~ Feb. 04, 2024

Testing Engineer: David Hsu

| 3 Meter Chamber | | | | | |
|------------------------------------|--------------|----------------------|---------------|--------------------------------|-------------|
| Equipment | Manufacturer | Model Number | Serial Number | Cal. Date | Cal. Period |
| Receiver | R & S | ESR26 | 101775 | Nov. 22, 2023 | 1 year |
| Amplifier (30-1000 MHz) | EMCI | EMC001330 | 980721 | Dec. 15, 2023 | 1 year |
| Broadband Antenna (30-1000 MHz) | Schwarzbeck | VULB9168 | 01276 | Dec. 15, 2023 | 1 year |
| Cable (30-1000 MHz) | EMCI | EMCCFD400-NM-NM-2000 | 211005 | Apr. 06, 2023 | 1 year |
| Cable (30-1000 MHz) | EMCI | EMCCFD400-NM-NM-2000 | 211013 | Apr. 06, 2023 | 1 year |
| Cable (30-1000 MHz) | EMCI | EMCCFD400-NM-NM-6000 | 211016 | Apr. 06, 2023 | 1 year |
| Software | EZ EMC | 1.1.4.4 | ----- | ----- | ----- |
| Test Site(NSA) | Eurofins | 96601-WG | 96601-WG | Jan. 11, 2023 Jan. 11, 2024 | 1 year |

Note: N.C.R. = No Calibration Request.

Test Period: Dec. 29, 2023 ~ Mar. 04, 2024

Testing Engineer: David Hsu



| 3 Meter Chamber | | | | | |
|--|--------------------------------|--------------------|-----------------|--------------------------------|-------------|
| Equipment | Manufacturer | Model Number | Serial Number | Cal. Date | Cal. Period |
| Spectrum Analyzer | Keysight | N9010A | MY5222131 2 | Jan. 07, 2023 Jan. 03, 2024 | 1 year |
| Receiver | R & S | ESR26 | 101775 | Nov. 22, 2023 | 1 year |
| Preamplifier (1-18 GHz) | EMCI | EMC118A45SE | 980823 | Nov. 23, 2023 | 1 year |
| Broadband Horn Antenna (1-18 GHz) | RF SPIN | DRH18-E | 210304A18 ES | Nov. 21, 2023 | 1 year |
| Preamplifier (15-40 GHz) | EMCI | EMC184045SE | 980861 | Dec. 23, 2023 | 1 year |
| Broadband Horn Antenna (15-40 GHz) | Schwarzbeck Mess-Elektronik | BBHA9170 | 01133 | Feb. 13, 2023 Jan. 18, 2024 | 1 year |
| Cable | EMCI | EMC101G-KM-KM-600 | 211211 | Jan. 17, 2023 Jan. 14, 2024 | 1 year |
| Cable | EMCI | EMC101G-KM-KM-2000 | 211210 | Jan. 17, 2023 Jan. 14, 2024 | 1 year |
| Cable | EMCI | EMC101G-KM-KM-6000 | 211209 | Jan. 17, 2023 Jan. 14, 2024 | 1 year |
| Cable | EMCI | EMC104-SM-SM-1000 | 211030 | Apr. 06, 2023 | 1 year |
| Cable | EMCI | EMC104-SM-SM-2000 | 211032 | Apr. 06, 2023 | 1 year |
| Cable | EMCI | EMC104-SM-SM-8000 | 211040 | Apr. 06, 2023 | 1 year |
| Software | EZ EMC | 1.1.4.4 | ----- | ----- | ----- |
| Test Site(VSWR) | Eurofins | 96601-WG | 96601-WG | Jan. 10, 2023 Jan. 10, 2024 | 1 year |

Note: N.C.R. = No Calibration Request.

4 Measurement Procedure

4.1. Conducted Emission

■ Test Setup

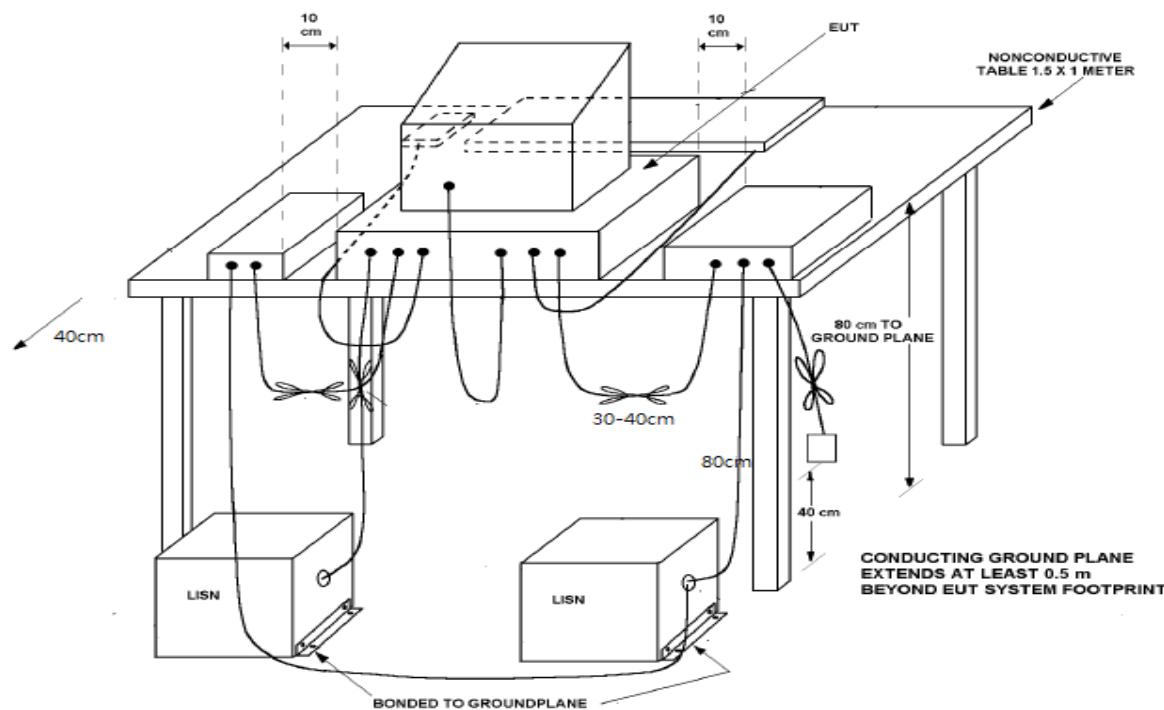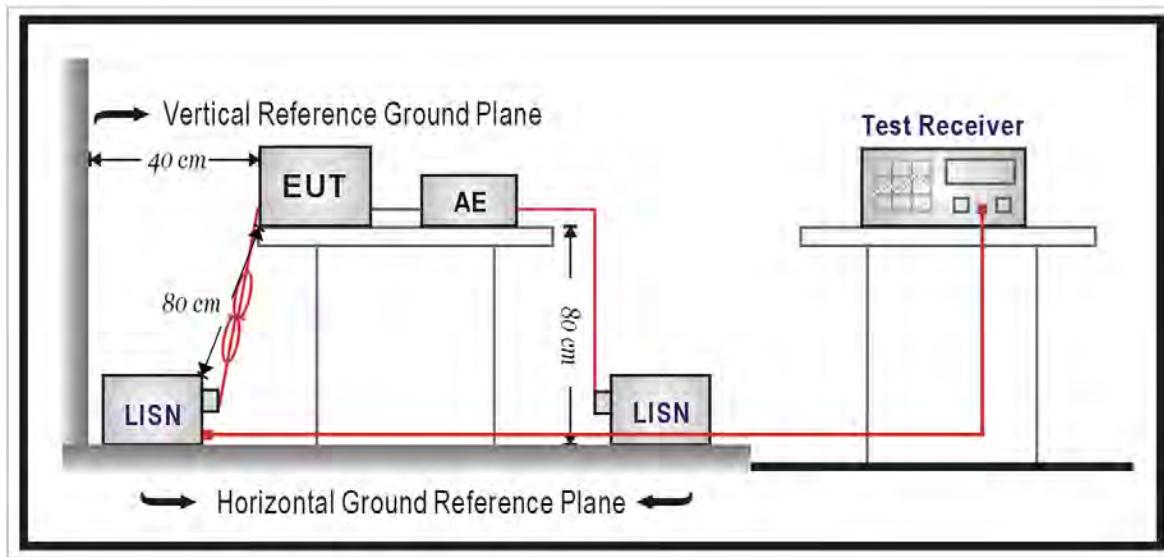

■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a $50\ \Omega$ // $50\ \mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\ \Omega$ // $50\ \mu\text{H}$ coupling impedance with 50ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.


The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All $50\ \Omega$ ports of the LISN shall be resistively terminated into $50\ \Omega$ loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.


4.2. Radiated Emission

■ Test Setup


Below 1 GHz

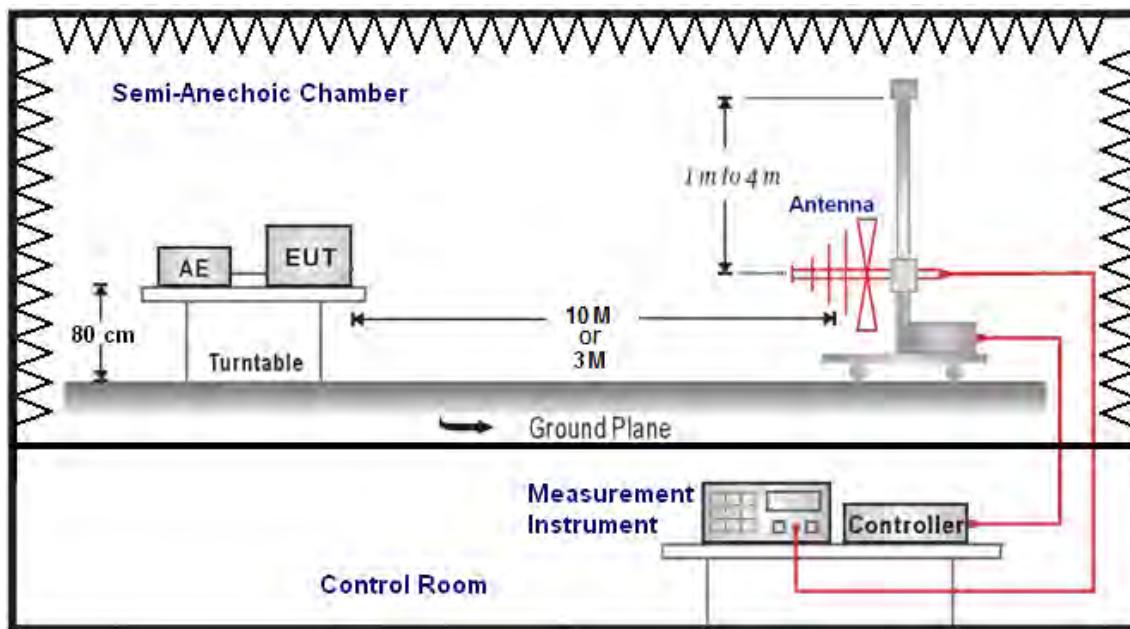

Above 1 GHz

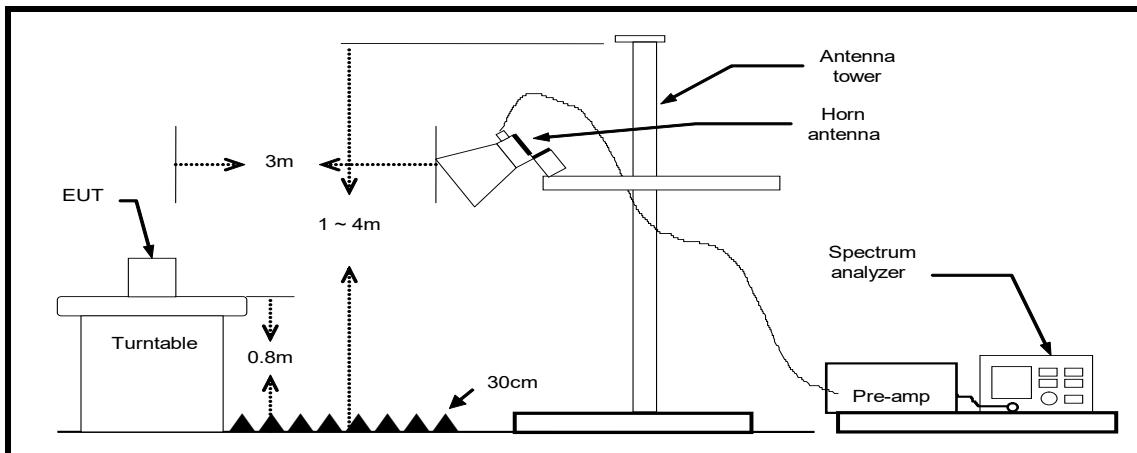

Test arrangement for radiated emissions of tabletop equipment.

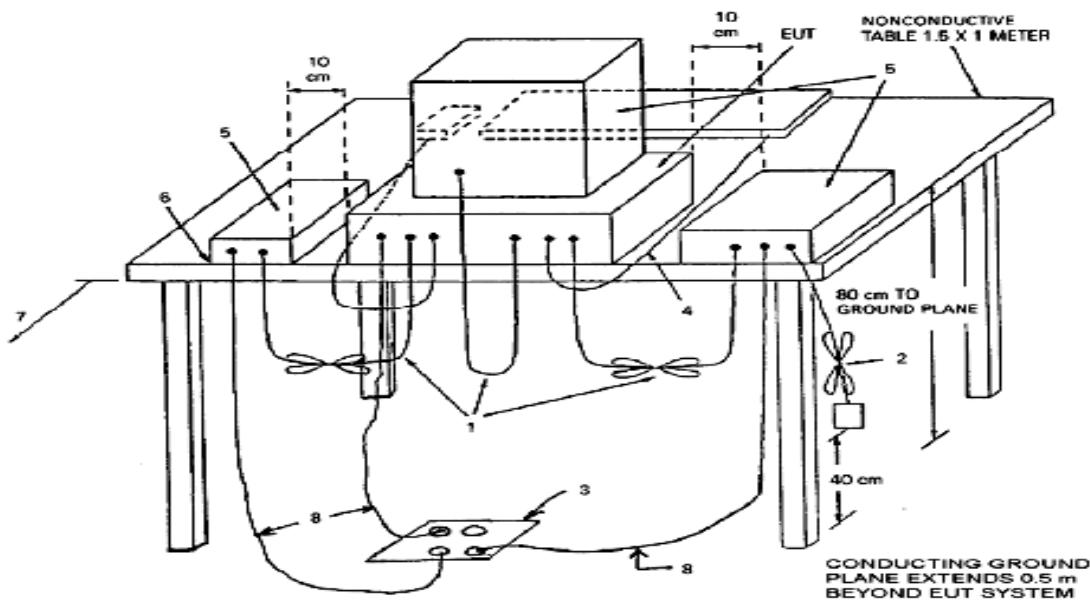

■ Test Procedure

Below 1 GHz

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. When the EUT is floor-standing equipment, it is placed on the ground plane which has a 12 mm non-conductive covering to insulate the EUT from the ground plane.

The turn table is 0.8 m height and 2.0 m wide x 1.0 m deep size. It can rotate 360 degrees to determine the position of the maximum emission level. The spacing between the each equipment was 10 cm. The mains cables are dropped to floor and are round to receptacle. Interconnecting cables of table top equipment that hang closer than 0.4 m to the ground plane are folded back and forth forming a bundle 0.3 m to 0.4 m long, hanging approximately in the middle between ground plane and table. The EUT was positioned such that the distance from antenna to the EUT was 10 or 3 meters and the receive antenna was moved from 1 m to 4 m to investigate maximum highest emission at least 6 points over the frequency range from 30 MHz to 1 GHz using a resolution bandwidth of 120 kHz and measured by the quasi-peak detector.

According to this standard paragraph 15.109, as an alternative to the radiated emission limits, digital devices may be shown to comply with the standards contained in Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment - Radio Disturbance Characteristics - Limits and Methods of Measurement".

Above 1 GHz

The Setup is same as Below 1 GHz placement. The turn table is 0.8 m height and 1.8 m wide x 1.0 m deep size. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meter for above 1 GHz, the highest frequency performed according to internal source frequency of the EUT, the specification was below:

| Highest frequency generated or used in the device or on which the device operates or tunes (MHz) | Upper frequency of measurement range (MHz) |
|--|---|
| Below 1.705 | 30 |
| 1.705 - 108 | 1000 |
| 108 - 500 | 2000 |
| 500 - 1000 | 5000 |
| Above 1000 | 5th harmonic of the highest frequency or 40 GHz, whichever is lower |

Absorber shall be spread between floor of a turn table and a receive antenna shown in 4.2.3. The antenna used boresight antenna master from 1 meter and 4 meters to find out the maximum emission level and find the highest emission at least 6 points. Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated on radiated measurement.

Radiated emissions were applied to above 1 GHz using a resolution bandwidth of 1 MHz and measured by the peak and average detector which antenna to the EUT distance was 3 meters. If the EUT was meet both limits and measurement with the average detector receiver is unnecessary.

5 Requirements and Performance Criteria

5.1. Conducted Emission

■ Limit

| Frequency (MHz) | Class A (dBuV) | | Class B (dBuV) | |
|-----------------|----------------|---------|----------------|---------|
| | Quasi-peak | Average | Quasi-peak | Average |
| 0.15 - 0.5 | 79 | 66 | 66 - 56 | 56 - 46 |
| 0.50 - 5.0 | 73 | 60 | 56 | 46 |
| 5.0 - 30.0 | 73 | 60 | 60 | 50 |

Note: (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases in line with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

5.2. Radiated Emission

■ Limit

Under 1 GHz test shall not exceed following value

| FCC 47 CFR PART 15 SUBPART B | | | | | | | | |
|------------------------------|--------------|--------|--------------|--------|--------------|--------|--------------|--------|
| Frequency range (MHz) | Class A | | | | Class B | | | |
| | Distance (m) | dBuV/m |
| 30 to 88 | 10 | 39 | 3 | 49.5 | 10 | 29.5 | 3 | 40 |
| 88 to 216 | 10 | 43.5 | 3 | 54 | 10 | 33.1 | 3 | 43.5 |
| 216 to 960 | 10 | 46.4 | 3 | 56.9 | 10 | 35.6 | 3 | 46 |
| Above 960 | 10 | 49.5 | 3 | 60 | 10 | 43.5 | 3 | 54 |

| CISPR 22 | | | | |
|-----------------------|--------------|--------|--------------|--------|
| Frequency range (MHz) | Class A | | Class B | |
| | Distance (m) | dBuV/m | Distance (m) | dBuV/m |
| 30 to 230 | 10 | 40 | 10 | 30 |
| 230 to 1000 | 10 | 47 | 10 | 37 |

Above 1 GHz test shall not exceed following value

| Frequency (MHz) | dBuV/m (Distance 3 m) | | | |
|-----------------|-----------------------|------|---------|------|
| | Class A | | Class B | |
| | Average | Peak | Average | Peak |
| 1000 ~ 40000 | 60 | 80 | 54 | 74 |

Remark:

1. The tighter limit shall apply at the edge between two frequency bands.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
3. RF Voltage (dBuV/m) = $20 \log \text{RF Voltage (uV/m)}$
4. Peak detector limit is corresponding to 20 dB above the maximum permitted average limit.

According to FCC Part 15.33 (b), for an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:


| Highest frequency generated or used in the device or in which the device operated or tunes (MHz) | Upper frequency of measurement range (MHz) |
|--|---|
| Below 1.705 | 30 |
| 1.705-108 | 1000 |
| 108-500 | 2000 |
| 500-1000 | 5000 |
| Above 1000 | 5th harmonic of the highest frequency or 40 GHz, whichever is lower |

6 Test Result

6.1. Conducted Emission


■ Test Result

| | | | |
|----------------|--------------|-------------|------------------|
| Test Standard: | FCC Part 15B | Power Line: | L1 |
| Test Mode: | Mode 1 | Test Power: | AC 120 V / 60 Hz |
| Description: | | | |

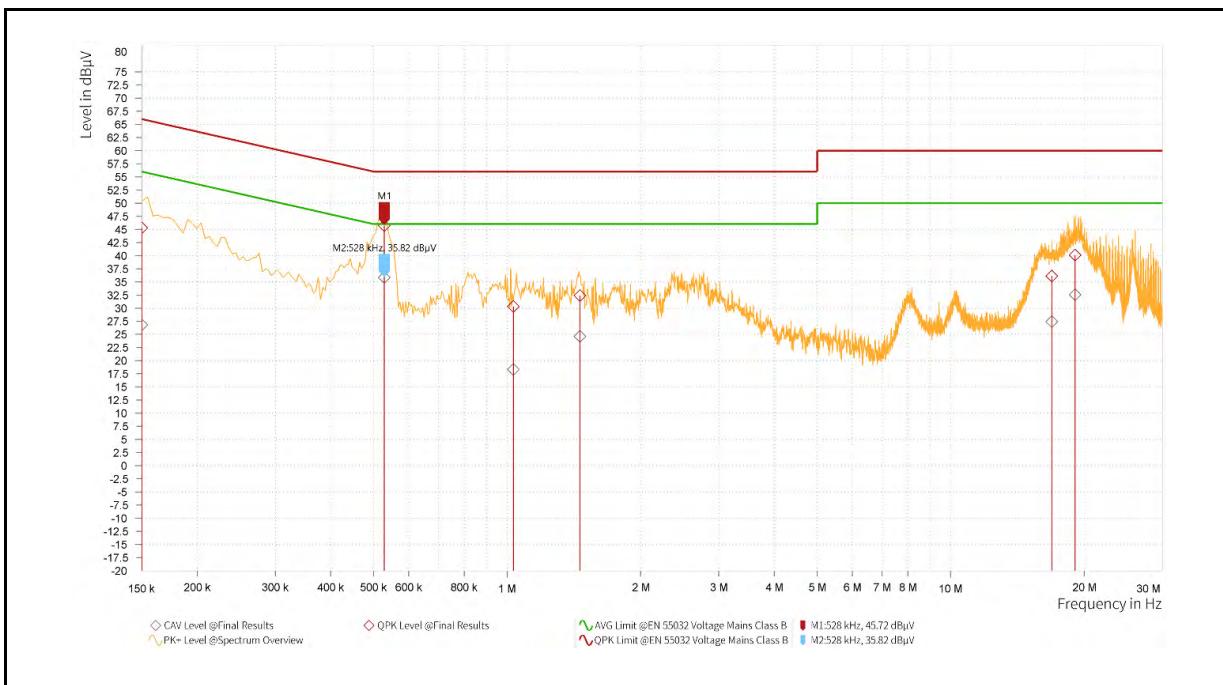

| Rg | Frequency [MHz] | QP Result [dB μ V] | QP Limit [dB μ V] | QP Margin [dB] | QP Reading [dB μ V] | AV Result [dB μ V] | AV Limit [dB μ V] | AV Margin [dB] | AV Reading [dB μ V] | Correction factor [dB] | Line |
|----|-----------------|------------------------|-----------------------|----------------|-------------------------|------------------------|-----------------------|----------------|-------------------------|------------------------|------|
| 1 | 0.150 | 45.28 | 66.00 | -20.72 | 35.63 | 26.83 | 56.00 | -29.17 | 17.18 | 9.65 | L1 |
| 2 | 0.528 | 45.72 | 56.00 | -10.28 | 36.07 | 35.82 | 46.00 | -10.18 | 26.17 | 9.65 | L1 |
| 3 | 1.032 | 30.33 | 56.00 | -25.67 | 20.65 | 18.32 | 46.00 | -27.68 | 8.64 | 9.68 | L1 |
| 4 | 1.460 | 32.41 | 56.00 | -23.59 | 22.71 | 24.62 | 46.00 | -21.38 | 14.91 | 9.70 | L1 |
| 5 | 16.908 | 36.11 | 60.00 | -23.89 | 26.06 | 27.45 | 50.00 | -22.55 | 17.40 | 10.05 | L1 |
| 6 | 19.077 | 40.10 | 60.00 | -19.90 | 30.02 | 32.57 | 50.00 | -17.43 | 22.49 | 10.08 | L1 |

| | | | |
|----------------|--------------|-------------|------------------|
| Test Standard: | FCC Part 15B | Power Line: | N |
| Test Mode: | Mode 1 | Test Power: | AC 120 V / 60 Hz |
| Description: | | | |

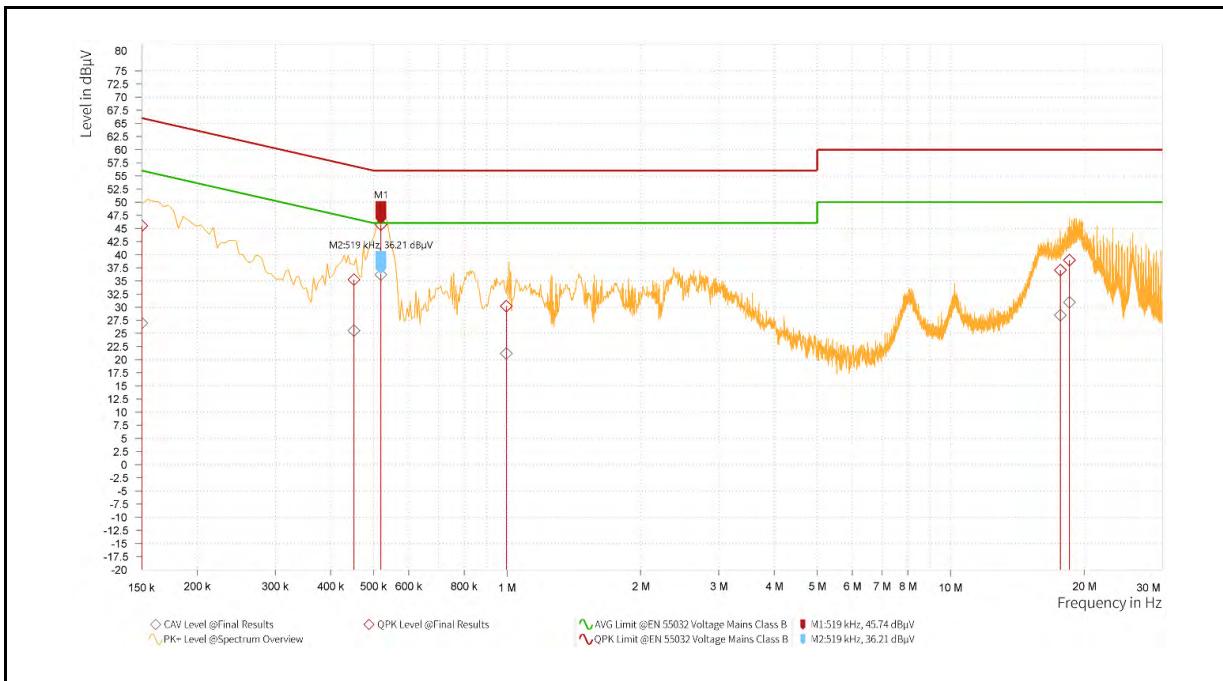


| Rg | Frequency [MHz] | QP Result [dBµV] | QP Limit [dBµV] | QP Margin [dB] | QP Reading [dBµV] | AV Result [dBµV] | AV Limit [dBµV] | AV Margin [dB] | AV Reading [dBµV] | Correction factor [dB] | Line |
|----|-----------------|------------------|-----------------|----------------|-------------------|------------------|-----------------|----------------|-------------------|------------------------|------|
| 1 | 0.150 | 45.50 | 66.00 | -20.50 | 35.86 | 26.94 | 56.00 | -29.06 | 17.30 | 9.64 | N |
| 2 | 0.452 | 35.24 | 56.85 | -21.61 | 25.59 | 25.54 | 46.85 | -21.31 | 15.89 | 9.65 | N |
| 3 | 0.519 | 45.74 | 56.00 | -10.26 | 36.08 | 36.21 | 46.00 | -9.79 | 26.56 | 9.65 | N |
| 4 | 0.996 | 30.20 | 56.00 | -25.80 | 20.52 | 21.20 | 46.00 | -24.80 | 11.52 | 9.68 | N |
| 5 | 17.673 | 37.05 | 60.00 | -22.95 | 26.88 | 28.46 | 50.00 | -21.54 | 18.29 | 10.16 | N |
| 6 | 18.533 | 38.94 | 60.00 | -21.06 | 28.76 | 30.94 | 50.00 | -19.06 | 20.75 | 10.18 | N |

6.2. Radiated Emission

■ Test Result

| | | | |
|--------------------|--------------|----------------|------------|
| Test Standard: | FCC Part 15B | Test Distance: | 3 m |
| Test Mode: | Mode 1 | Test Power: | DC 3.3 V |
| Measurement Range: | 30 MHz~1 GHz | Ant.Polar.: | Horizontal |

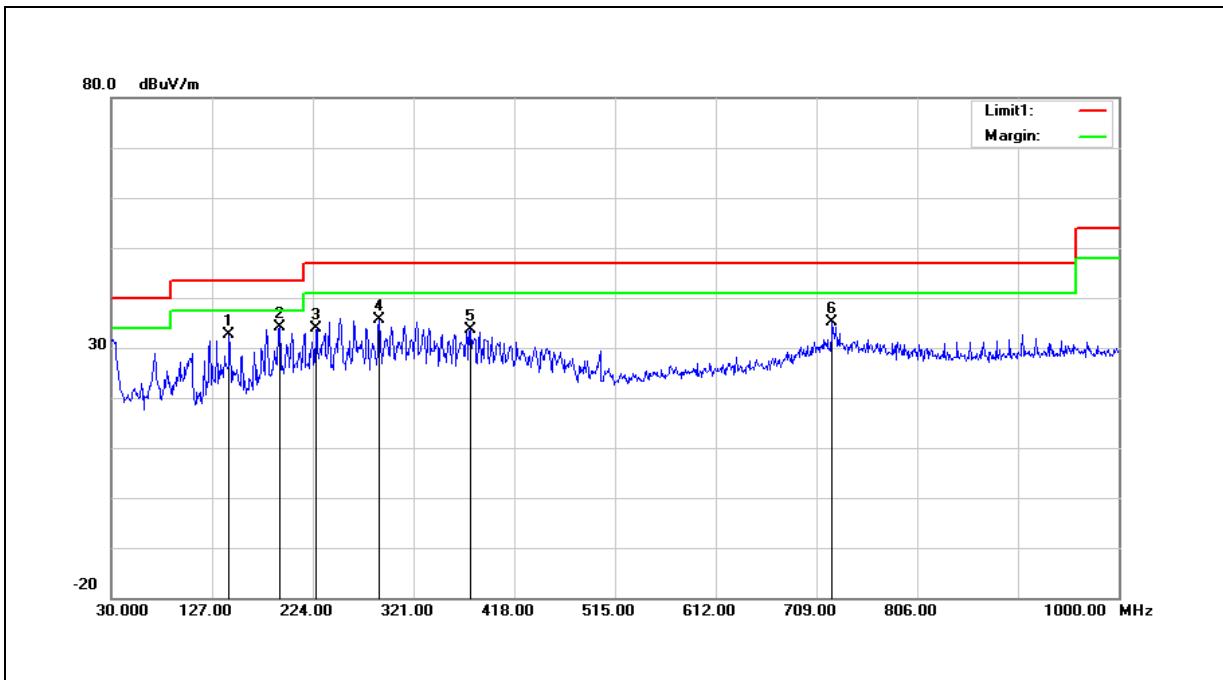


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (°) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|-------------|------------|--------|
| 1 | 143.4900 | 45.09 | -12.41 | 32.68 | 43.50 | -10.82 | 200 | 0 | QP |
| 2 | 191.9900 | 48.86 | -14.81 | 34.05 | 43.50 | -9.45 | 100 | 118 | QP |
| 3 | 227.8800 | 48.95 | -15.07 | 33.88 | 47.00 | -13.12 | 100 | 106 | QP |
| 4 | 288.0200 | 47.41 | -11.80 | 35.61 | 47.00 | -11.39 | 100 | 126 | QP |
| 5 | 375.3200 | 43.42 | -9.75 | 33.67 | 47.00 | -13.33 | 100 | 148 | QP |
| 6 | 723.5500 | 38.31 | -3.30 | 35.01 | 47.00 | -11.99 | 100 | 339 | QP |

Note: 1. Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

| | | | |
|--------------------|--------------|----------------|----------|
| Test Standard: | FCC Part 15B | Test Distance: | 3 m |
| Test Mode: | Mode 1 | Test Power: | DC 3.3 V |
| Measurement Range: | 30 MHz~1 GHz | Ant.Polar.: | Vertical |

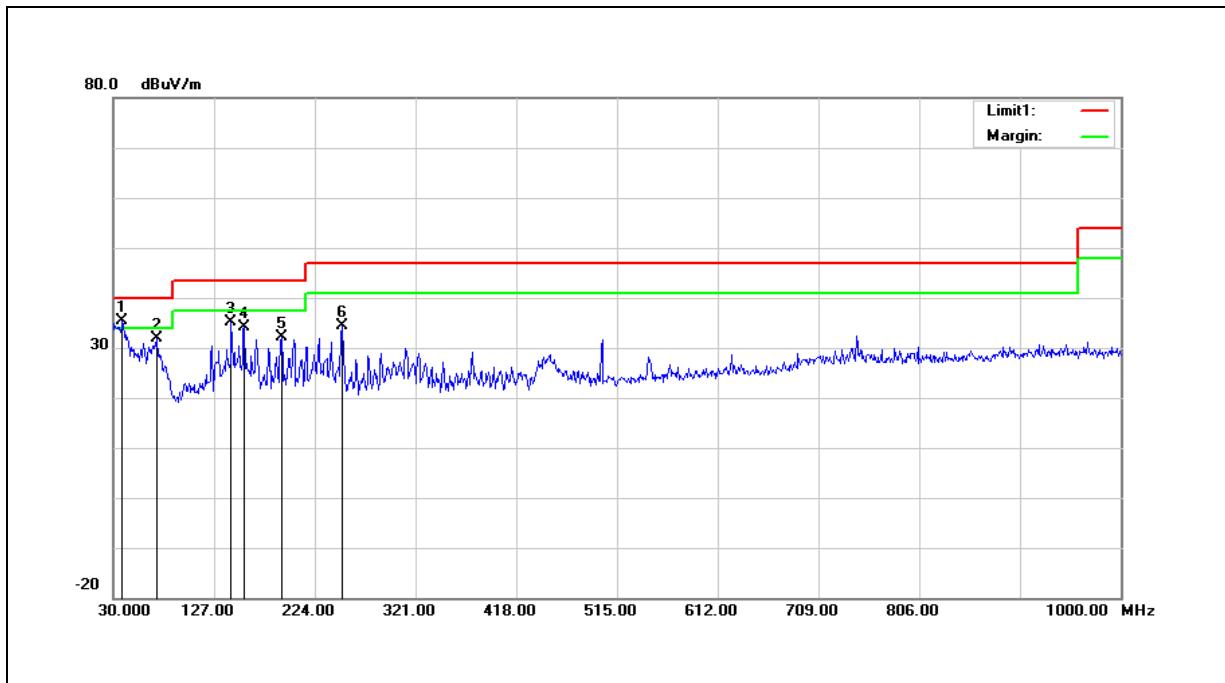


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (°) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|-------------|------------|--------|
| 1 | 38.7300 | 48.22 | -12.89 | 35.33 | 40.00 | -4.67 | 114 | 0 | QP |
| 2 | 71.7100 | 46.38 | -14.42 | 31.96 | 40.00 | -8.04 | 100 | 79 | QP |
| 3 | 143.4900 | 47.45 | -12.41 | 35.04 | 43.50 | -8.46 | 100 | 358 | QP |
| 4 | 156.1000 | 45.96 | -11.94 | 34.02 | 43.50 | -9.48 | 100 | 333 | QP |
| 5 | 191.9900 | 47.03 | -14.81 | 32.22 | 43.50 | -11.28 | 100 | 352 | QP |
| 6 | 250.1900 | 47.71 | -13.26 | 34.45 | 47.00 | -12.55 | 100 | 345 | QP |

Note: 1. Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

| | | | |
|--------------------|--------------|----------------|------------|
| Test Standard: | FCC Part 15B | Test Distance: | 3 m |
| Test Mode: | Mode 1 | Test Power: | DC 3.3 V |
| Measurement Range: | 1 GHz~40 GHz | Ant.Polar.: | Horizontal |

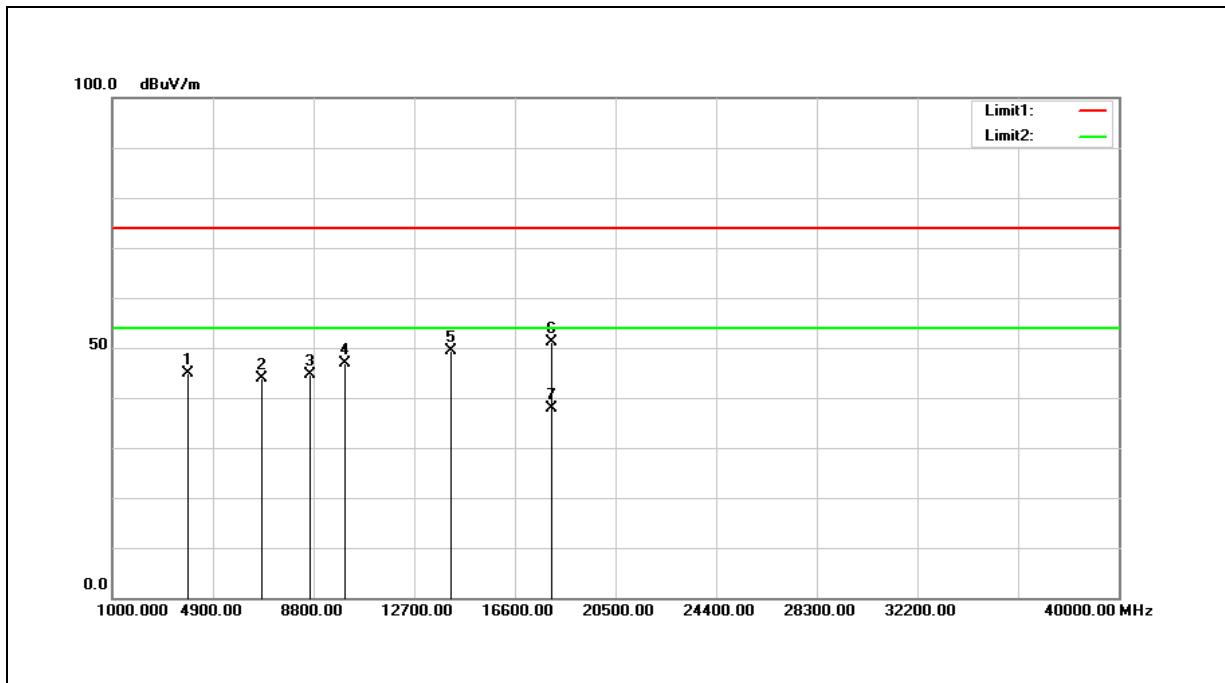


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (°) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|-------------|------------|--------|
| 1 | 3907.000 | 56.20 | -11.27 | 44.93 | 74.00 | -29.07 | 100 | 117 | peak |
| 2 | 6797.000 | 48.34 | -4.39 | 43.95 | 74.00 | -30.05 | 100 | 210 | peak |
| 3 | 8616.000 | 47.36 | -2.70 | 44.66 | 74.00 | -29.34 | 100 | 141 | peak |
| 4 | 9993.000 | 49.07 | -2.19 | 46.88 | 74.00 | -27.12 | 100 | 73 | peak |
| 5 | 14107.000 | 46.10 | 3.29 | 49.39 | 74.00 | -24.61 | 100 | 135 | peak |
| 6 | 18000.000 | 43.95 | 7.18 | 51.13 | 74.00 | -22.87 | 100 | 360 | peak |
| 7 | 18000.000 | 30.62 | 7.18 | 37.80 | 54.00 | -16.20 | 100 | 360 | AVG |

Note: 1. Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

| | | | |
|--------------------|--------------|----------------|----------|
| Test Standard: | FCC Part 15B | Test Distance: | 3 m |
| Test Mode: | Mode 1 | Test Power: | DC 3.3 V |
| Measurement Range: | 1 GHz~40 GHz | Ant.Polar.: | Vertical |

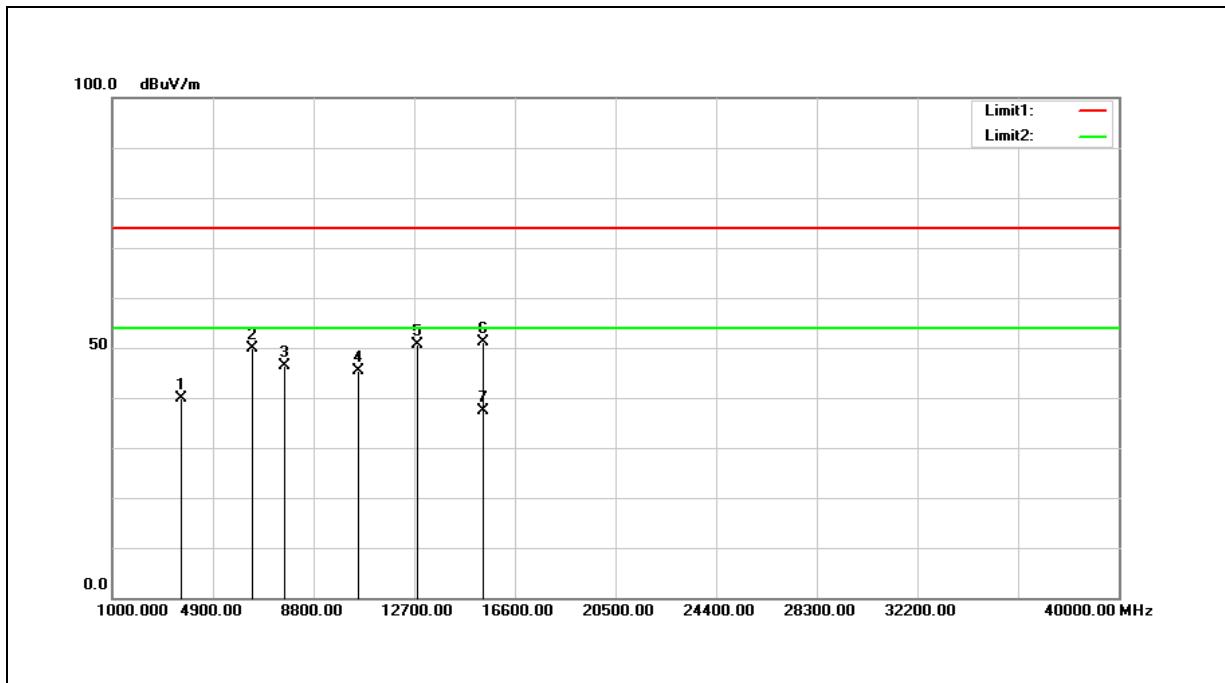

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (°) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|-------------|------------|--------|
| 1 | 3618.000 | 53.02 | -13.04 | 39.98 | 74.00 | -34.02 | 100 | 86 | peak |
| 2 | 6389.000 | 54.60 | -4.72 | 49.88 | 74.00 | -24.12 | 100 | 0 | peak |
| 3 | 7647.000 | 50.95 | -4.51 | 46.44 | 74.00 | -27.56 | 100 | 86 | peak |
| 4 | 10554.000 | 48.49 | -3.10 | 45.39 | 74.00 | -28.61 | 100 | 36 | peak |
| 5 | 12798.000 | 50.64 | -0.05 | 50.59 | 74.00 | -23.41 | 100 | 0 | peak |
| 6 | 15314.000 | 47.17 | 3.84 | 51.01 | 74.00 | -22.99 | 100 | 245 | peak |
| 7 | 15314.000 | 33.46 | 3.84 | 37.30 | 54.00 | -16.70 | 100 | 245 | AVG |

Note: 1. Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

--- END ---