



FCC TEST REPORT

FCC ID: 2BDIP-DR158W

Product	:	Portable display DR158W
Model Name	:	DR158W
Brand	:	N/A
Report No.	:	PTC23080209102E-FC02
Prepared for		
Shenzhen Yuko Technology Co., Ltd		
4F, 6F A Building A9, 6F, 4F A, 4F B Building A4, Tianrui Industrial Park, No. 35, Fuyuan 1st Road, Zhancheng Community, Fuhai Street, Baoan District, Shenzhen, Guangdong		
Prepared by		
Precise Testing & Certification Co., Ltd		
Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China		



1 TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Yuko Technology Co., Ltd
Address : 4F, 6F A Building A9, 6F, 4F A, 4F B Building A4, Tianrui Industrial Park, No. 35, Fuyuan 1st Road, Zhancheng Community, Fuhai Street, Baoan District, Shenzhen, Guangdong
Manufacture's name : Shenzhen Yuko Technology Co., Ltd
Address : 4F, 6F A Building A9, 6F, 4F A, 4F B Building A4, Tianrui Industrial Park, No. 35, Fuyuan 1st Road, Zhancheng Community, Fuhai Street, Baoan District, Shenzhen, Guangdong
Product name : Portable display DR158W
Model name : DR158W
Standards : FCC CFR47 Part 15 Section 15.247
Test procedure : ANSI C63.10:2013
Test Date : Oct. 15, 2023 to Oct. 27, 2023
Date of Issue : Dec. 05, 2023
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

A handwritten signature in black ink, appearing to read 'Jack Zhou'.

Jack Zhou / Engineer

Technical Manager:

A handwritten signature in black ink, appearing to read 'Simon Pu'.

Simon Pu/ Manager



Contents

	Page
1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF E.U.T.	6
3.2 CHANNEL LIST	7
3.3 TEST SITE	14
4 EQUIPMENT DURING TEST	15
4.1 EQUIPMENTS LIST	15
4.2 MEASUREMENT UNCERTAINTY	17
4.3 DESCRIPTION OF SUPPORT UNITS	18
5 CONDUCTED EMISSION	19
5.1 E.U.T. OPERATION	19
5.2 EUT SETUP	19
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	20
5.4 MEASUREMENT PROCEDURE	20
5.5 CONDUCTED EMISSION LIMIT	20
5.6 MEASUREMENT DESCRIPTION	20
5.7 CONDUCTED EMISSION TEST RESULT	20
6 RADIATED SPURIOUS EMISSIONS	23
6.1 EUT OPERATION	23
6.2 TEST SETUP	24
6.3 SPECTRUM ANALYZER SETUP	25
6.4 TEST PROCEDURE	26
6.5 SUMMARY OF TEST RESULTS	27
7 CONDUCTED SPURIOUS EMISSION	34
7.1 TEST PROCEDURE	34
7.2 TEST SETUP	34
7.3 TEST RESULT	34
8 BAND EDGE MEASUREMENT	54



8.1 TEST PROCEDURE	54
8.2 TEST SETUP	54
8.3 TEST RESULT	55
9 6DB BANDWIDTH MEASUREMENT	60
9.1 TEST PROCEDURE	60
9.2 TEST SETUP	60
9.3 TEST RESULT	60
10 MAXIMUM PEAK OUTPUT POWER	67
10.1 TEST PROCEDURE	67
10.2 TEST SETUP	67
10.3 TEST RESULT	67
11 POWER SPECTRAL DENSITY	68
11.1 TEST PROCEDURE	68
11.2 TEST SETUP	68
11.3 TEST RESULT	68
12 ANTENNA APPLICATION	75
12.1 ANTENNA REQUIREMENT	75
12.2 RESULT	75
13 TEST SETUP	76
14 EUT EXTERNAL PHOTOGRAPH	78
15 EUT INTERNAL PHOTOGRAPH	82



2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	N/A
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious Emission	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3)	PASS
Power Spectral Density	15.247(e)	PASS
Antenna Requirement	15.203	PASS
Remark: N/A: Not Applicable		



3 General Information

3.1 General Description of E.U.T.

Product Name	:	Portable display DR158W
Model Number	:	DR158W
Additional model	:	DR138, DR138W, DR139, DR139W, DR1461, DR1461W, DR148, DR148W, DR149, DR149W, DR1561, DR1561P, DR1561PRO, DR1561Q, DR158, DR159, DR159W
Model difference	:	The difference between each model is only the model name and appearance size are different, the other are the same.
Specification	:	802.11b/g/ n(HT20/HT40)
Operating frequency	:	2412-2462MHz for 802.11b/g/ n(HT20/HT40)
Numbers of Channel	:	11 channels
Antenna Type	:	PIFA Antenna
Antenna Gain	:	1.96 dBi
Type of Modulation	:	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Power supply	:	Input: DC 20V/2.25A Battery Capacity: 11.4Vdc, 4300mAh
Hardware Version/HMN	:	DR158W_MB_V1.1
Software Version/FVIN	:	DR158W-20230421
Test Sample No.	:	PTC23080209102E-1/2, PTC23080209102E-2/2



3.2 Channel List

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): MCS0;) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11 b/g/n (HT20/HT40)


Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

The maximum duty cycle as following table:


Test Mode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Factor
11B	Ant1	2412	27.00	27.00	100.00	0.00
11B	Ant1	2437	27.00	27.00	100.00	0.00
11B	Ant1	2462	27.00	27.00	100.00	0.00
11G	Ant1	2412	27.00	27.00	100.00	0.00
11G	Ant1	2437	27.00	27.00	100.00	0.00
11G	Ant1	2462	27.00	27.00	100.00	0.00
11N20SISO	Ant1	2412	27.00	27.00	100.00	0.00
11N20SISO	Ant1	2437	27.00	27.00	100.00	0.00
11N20SISO	Ant1	2462	27.00	27.00	100.00	0.00
11N40SISO	Ant1	2422	27.00	27.00	100.00	0.00
11N40SISO	Ant1	2437	27.00	27.00	100.00	0.00
11N40SISO	Ant1	2452	27.00	27.00	100.00	0.00




Test Graphs

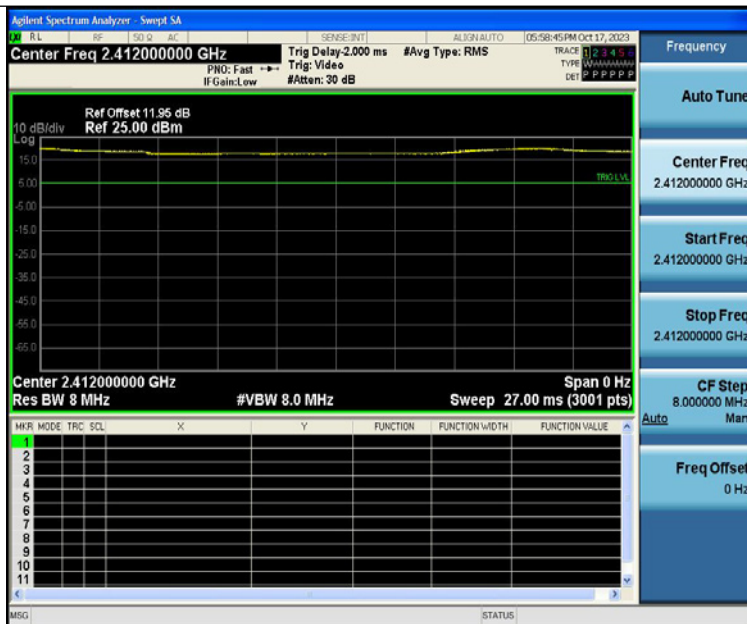


NTNV-11B-Ant1-2412

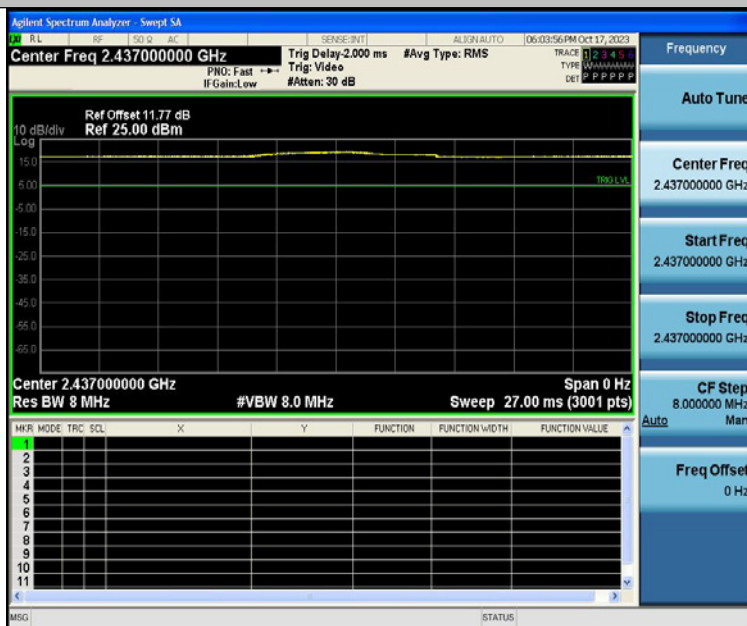


NTNV-11B-Ant1-2437

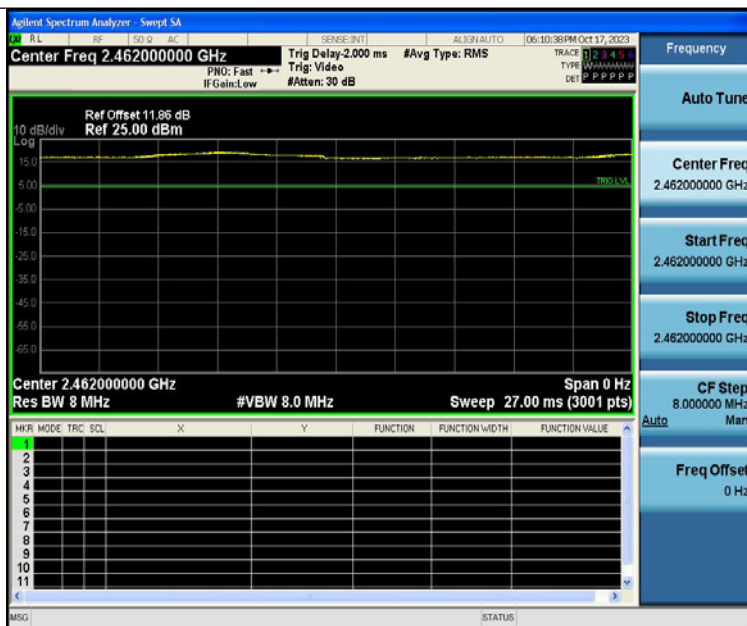


NTNV-11B-Ant1-2462

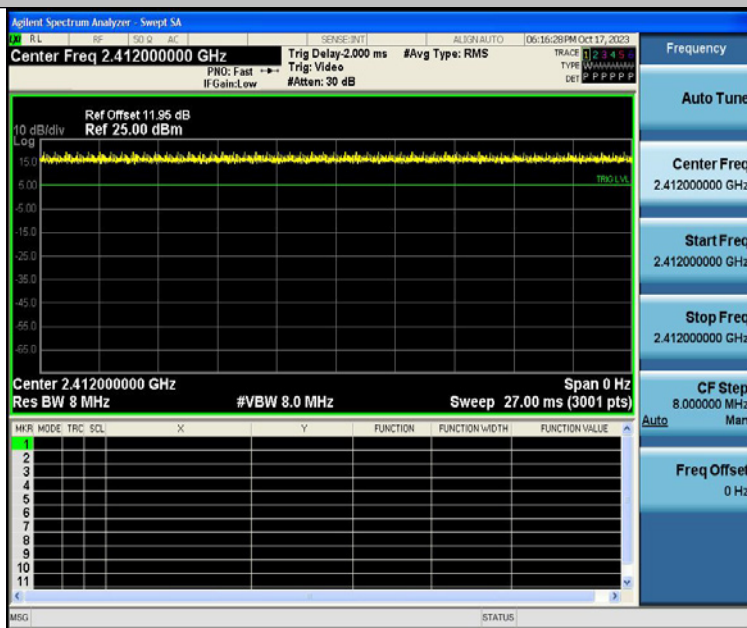


NTNV-11G-Ant1-2412

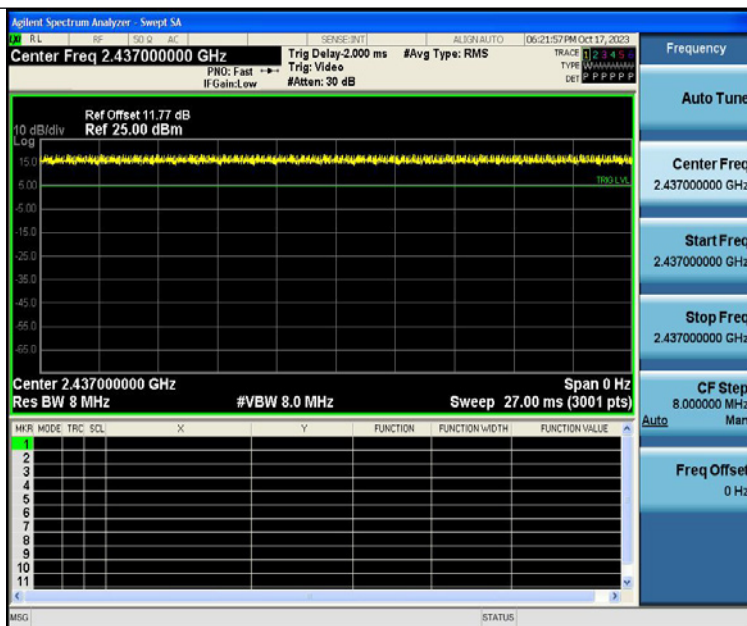


NTNV-11G-Ant1-2437

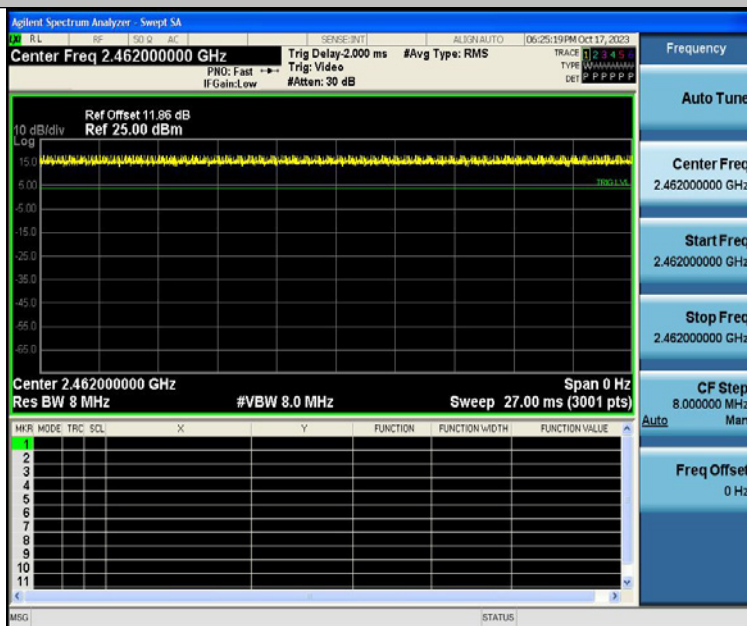


NTNV-11G-Ant1-2462

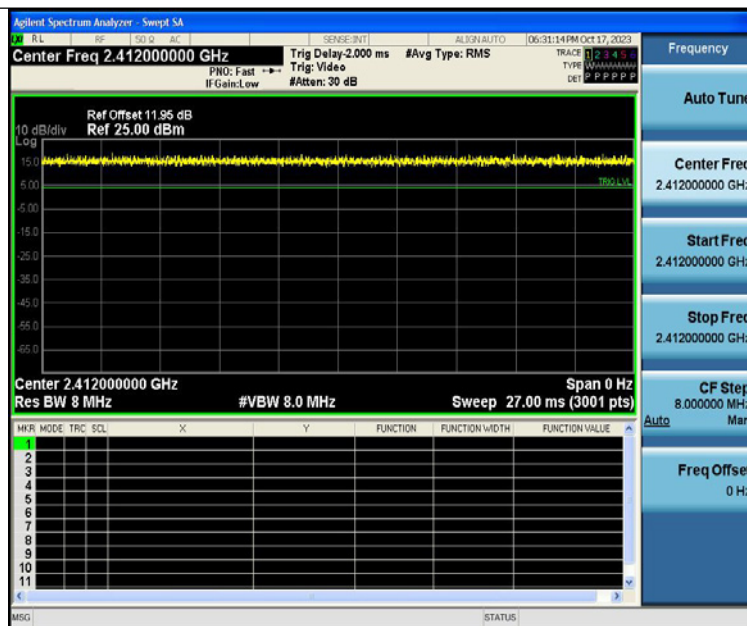


NTNV-11N20SISO-Ant1-2412

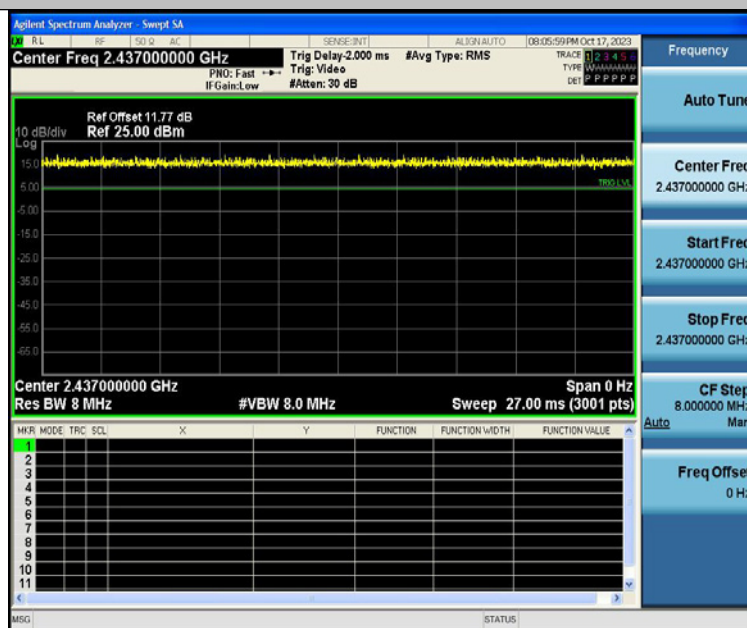


NTNV-11N20SISO-Ant1-2437

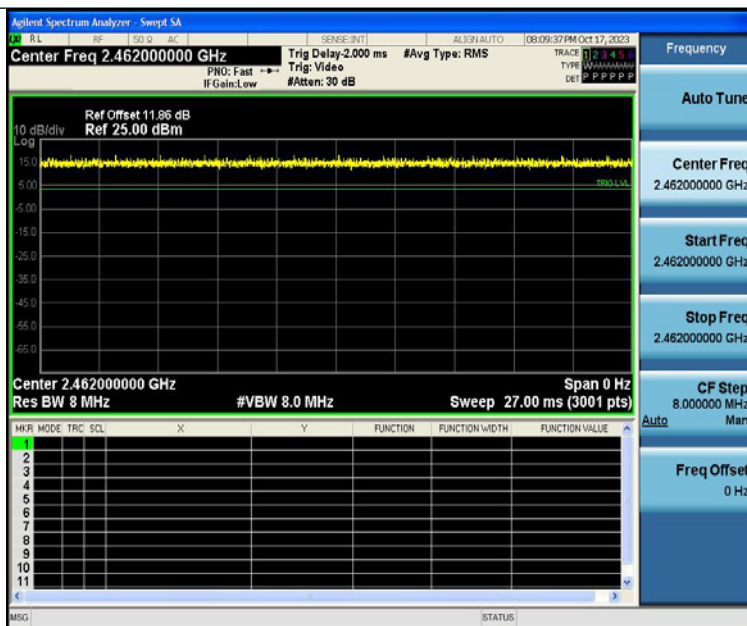


NTNV-11N20SISO-Ant1-2462

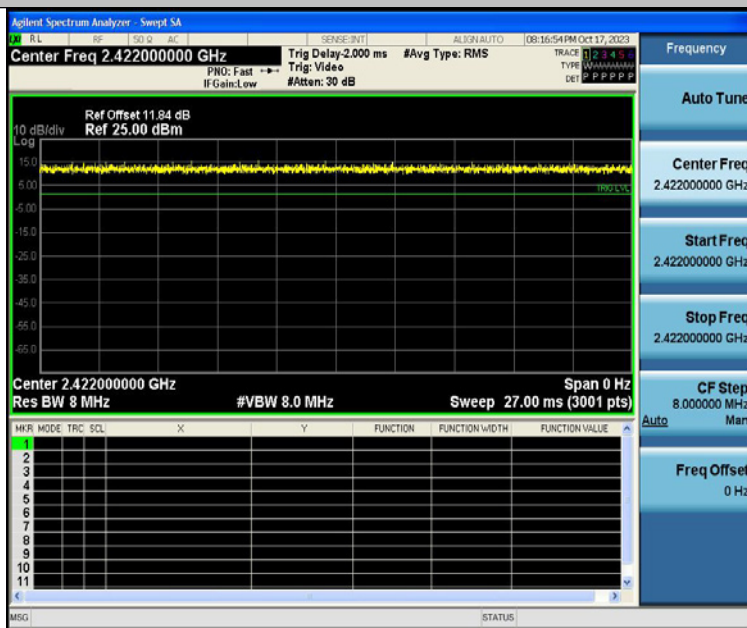

NTNV-11N40SISO-Ant1-2422

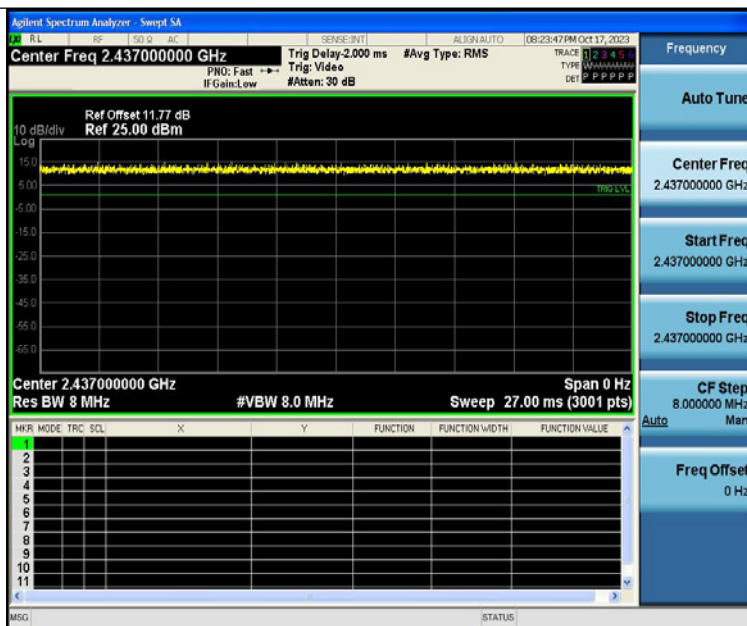

NTNV-11N40SISO-Ant1-2437

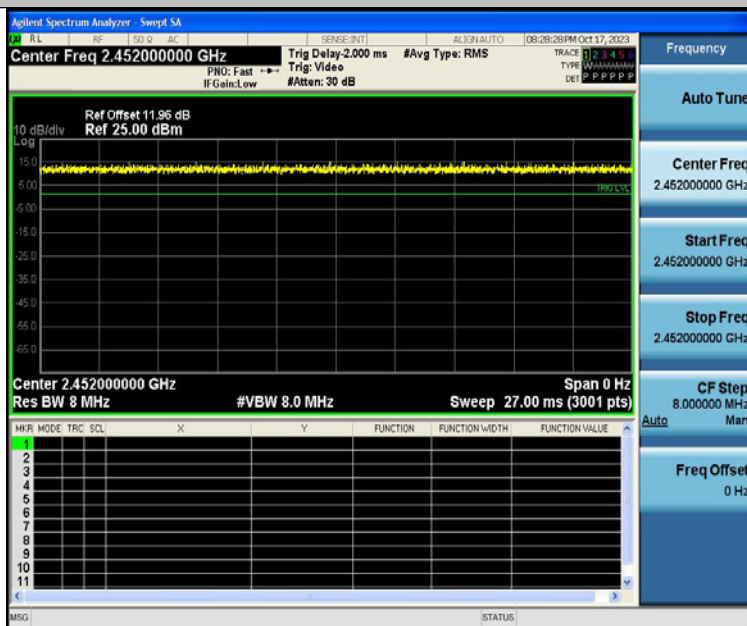

NTNV-11N40SISO-Ant1-2452



Report No.:PTC23080209102E-FC02

3.3 Test Site

Precise Testing & Certification Co., Ltd.

Address: Building 1, No.6 Tongxin Road, Dongcheng Street, Dongguan,China

FCC Registration Number: 790290

Designation Number: CN1219

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A

CAB identifier: CN0080



4 Equipment During Test

4.1 Equipments List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Date	Calibration period
MXG Signal Analyzer	Agilent	N9020A	MY56070279	10Hz-30GHz	Aug. 21, 2023	1 year
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Aug. 21, 2023	1 year
Antenna Connector	Florida RF Labs	N/A	RF01#	N/A	Aug. 21, 2023	1 year
Scope	Tektronix	TDS3032B	B014131	300MHz BW; 2 way scope	Aug. 21, 2023	1 year
DC power	eTOMENS	eTM-1560	--	15V 60A	Aug. 21, 2023	1 year
Power Meter	Anritsu	ML2495A	0949003	300MHz-40GHz	Aug. 21, 2023	1 year
Power Sensor	Anritsu	MA2411B	0917017	300MHz-40GHz	Aug. 21, 2023	1 year

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Radiated Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Date	Calibration period
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 21, 2023	1 year
Loop Antenna	Schwarzbeck	FMZB 1519	012	9 KHz -30MHz	Aug. 21, 2023	1 year
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	25MHz-2GHz	Aug. 21, 2023	1 year
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	1MHz-1GHz	Aug. 21, 2023	1 year
Cable	Schwarzbeck	PLF-100	549489	9KHz-3GHz	Aug. 21, 2023	1 year
Spectrum Analyzer	Agilent	E4407B	MY45109572	9KHz-26.5GHz	Aug. 21, 2023	1 year
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	1GHz-18GHz	Aug. 21, 2023	1 year
High NOISE AMPLIFIER	ZHINAN	ZN3380C	15002	10KHz-18GHz	Aug. 21, 2023	1 year



Report No.:PTC23080209102E-FC02

Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	Aug. 21, 2023	1 year
Spectrum Analyzer	Rohde&Schwarz	FSVR40	101003	10Hz-40GHz	Aug. 21, 2023	1 year
Horn Antenna	SCHWARZBECK	BBHA9170	01066	15GHZ-40GHZ	Aug. 21, 2023	1 year
Preamplifier	SCHWARZBECK	BBV-9721	81	18GHZ-40GHZ	Aug. 21, 2023	1 year
Test S/W	Tonscend	JS32-RE/4.0.0.0				

Conducted Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Date	Calibration period
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 21, 2023	1 year
Artificial Mains Network	Rohde&Schwarz	BS ENV216	102453	9KHz-300MHz	Aug. 21, 2023	1 year
Artificial Mains Network	Rohde&Schwarz	L2-16B	000WX31025	9KHz-300MHz	Aug. 21, 2023	1 year
Test S/W	Tonscend	JS32-CE/4.0.0.3				



4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	$\pm 1.0\text{dB}$
Power Spectral Density, conducted	$\pm 2.2\text{dB}$
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
Time	$\pm 2\%$
Duty Cycle	$\pm 2\%$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 3\%$
Conducted Emissions (150kHz~30MHz)	$\pm 3.64\text{dB}$
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$
Radiated Emission(1GHz~25GHz)	$\pm 4.74\text{dB}$
Radiated Emission(25GHz~40GHz)	$\pm 4.14\text{dB}$
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%	



Report No.:PTC23080209102E-FC02

4.3 Description of Support Units

Equipment	Model No.	Series No.
N/A	N/A	N/A

5 Conducted Emission

Test Requirement:	: FCC CFR 47 Part 15 Section 15.207
Test Method	: ANSI C63.10: 2013
Test Result	: PASS
Frequency Range	: 150kHz to 30MHz
Class/Severity	: Class B


5.1 E.U.T. Operation

Operating Environment :


Temperature	: 23.9 °C
Humidity	: 51.4 % RH
Atmospheric Pressure	: 101.21kPa

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

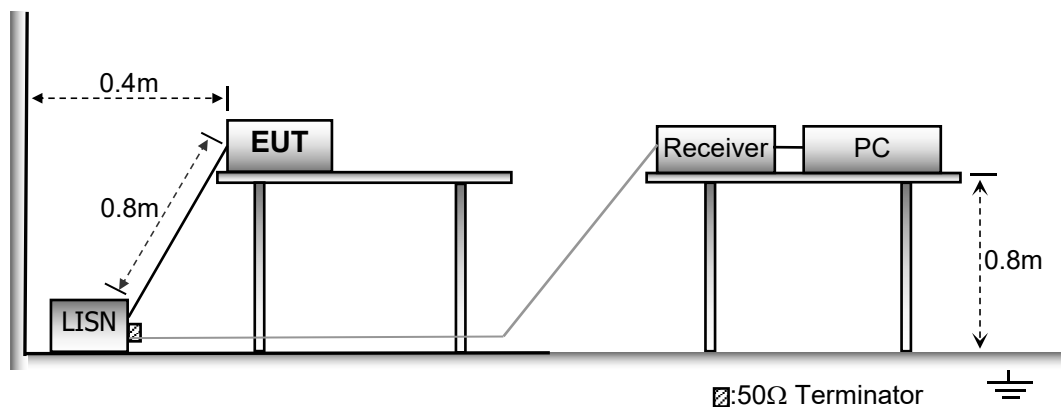

5.3 Test SET-UP (Block Diagram of Configuration)

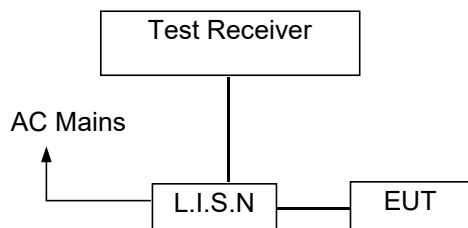

5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.


5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

5.7 Conducted Emission Test Result

Pass.


Line-AC 120V/60Hz

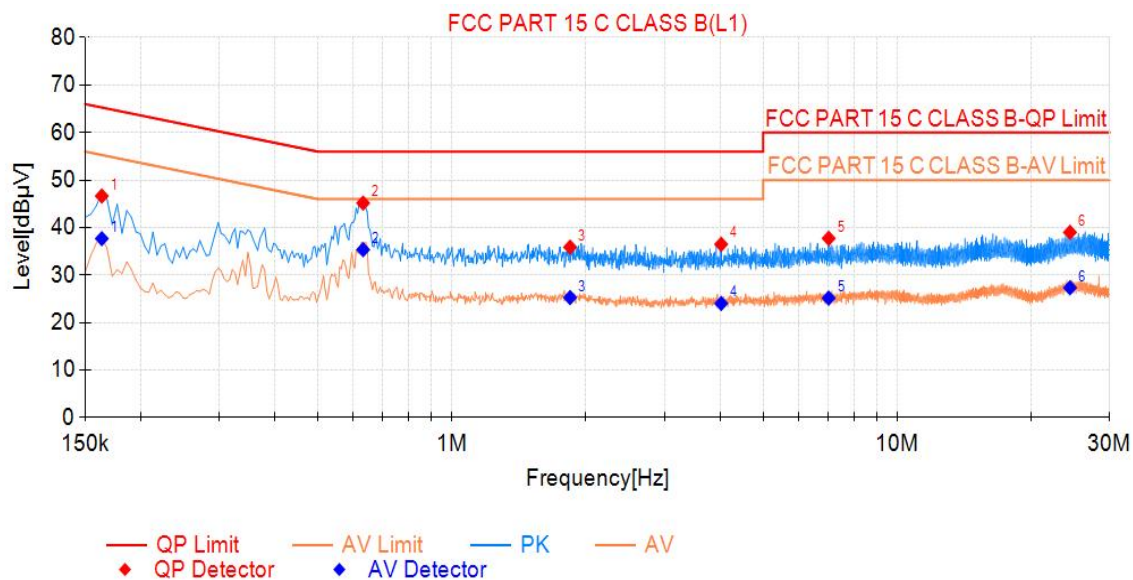

Final Data List

NO.	Freq.	QP			AV			Verdict
	[MHz]	Value	Limit	Margin	Value	Limit	Margin	
1	0.164	46.65	65.28	18.63	37.68	55.28	17.60	PASS
2	0.632	45.16	56.00	10.84	35.36	46.00	10.64	PASS
3	1.842	35.89	56.00	20.11	25.27	46.00	20.73	PASS
4	4.025	36.49	56.00	19.51	24.03	46.00	21.97	PASS
5	7.017	37.74	60.00	22.26	25.16	50.00	24.84	PASS
6	24.446	39.01	60.00	20.99	27.34	50.00	22.66	PASS

Neutral-AC 120V/60Hz

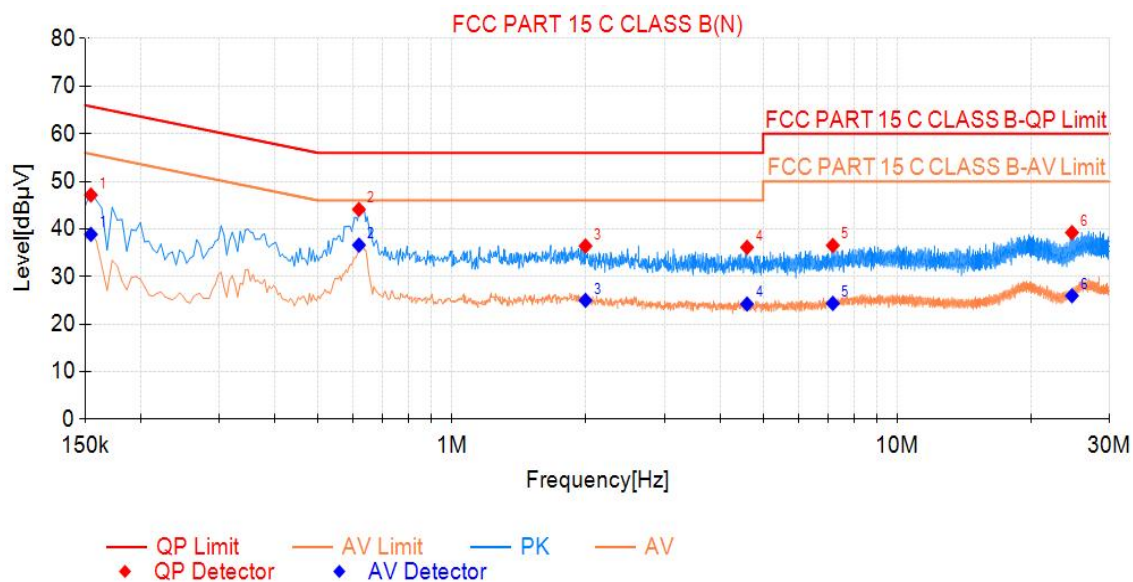

Final Data List

NO.	Freq. [MHz]	QP Value	QP Limit	QP Margin	AV Value	AV Limit	AV Margin	Verdict
1	0.155	47.15	65.75	18.60	38.87	55.75	16.88	PASS
2	0.618	44.10	56.00	11.90	36.62	46.00	9.38	PASS
3	1.995	36.43	56.00	19.57	25.00	46.00	21.00	PASS
4	4.601	36.15	56.00	19.85	24.24	46.00	21.76	PASS
5	7.170	36.54	60.00	23.46	24.37	50.00	25.63	PASS
6	24.693	39.24	60.00	20.76	25.96	50.00	24.04	PASS



6 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method : ANSI C63.10:2013
 Test Result : PASS
 Measurement Distance : 3m
 Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

6.1 EUT Operation


Operating Environment :

Temperature: : 24.5 °C
 Humidity: : 52 % RH
 Atmospheric Pressure: : 101.3kPa
 Test Voltage : DC 5V


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

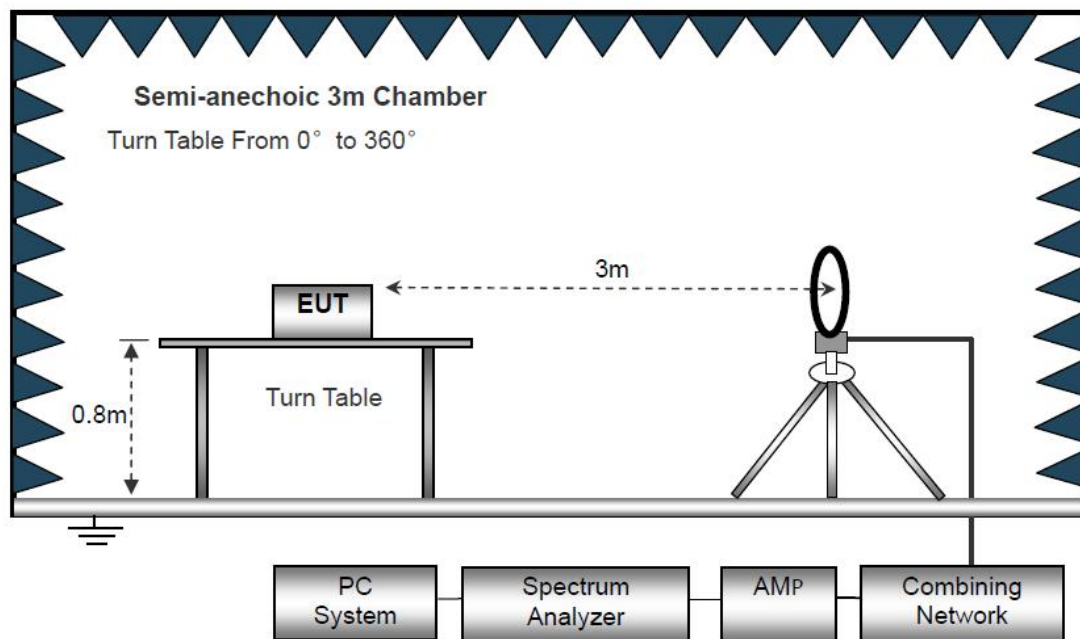

The test setup for emission measurement from 30 MHz to 1 GHz.

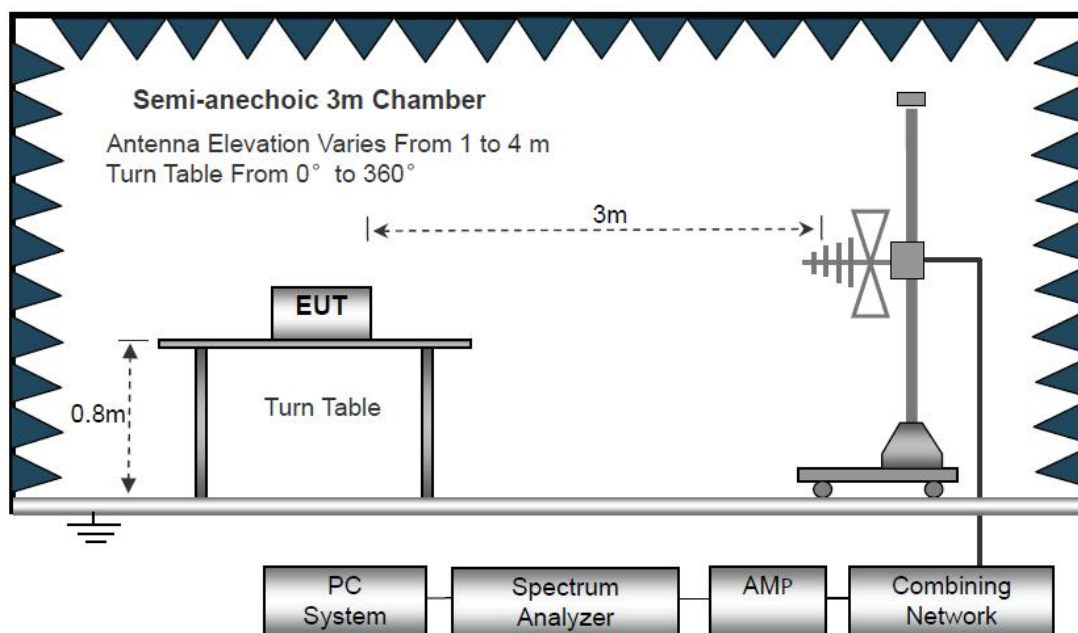

The test setup for emission measurement above 1 GHz

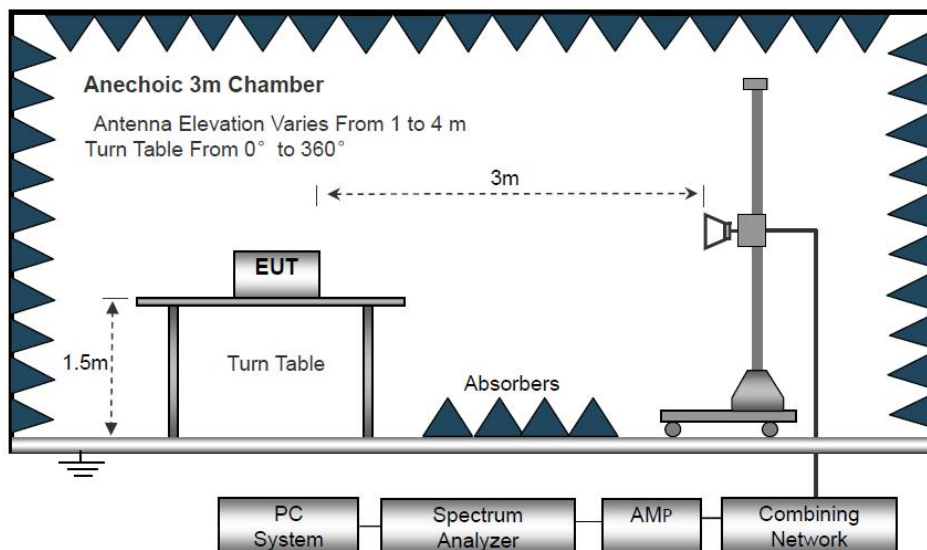

6.3 Spectrum Analyzer Setup

	Frequency	Detector	RBW	VBW	Remark
Receiver Setup	Below 30MHz	--	10kHz	10kHz	--
	30MHz ~ 1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value



6.4 Test Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room



6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ (dB);

Limit line = Specific limits (dBuV) + distance extrapolation factor.


Test Frequency: 30MHz ~ 1GHz

All the modulation modes were tested the data of the worst mode (TX 802.11b Low Channel) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following test plots:



Antenna Polarization: Horizontal

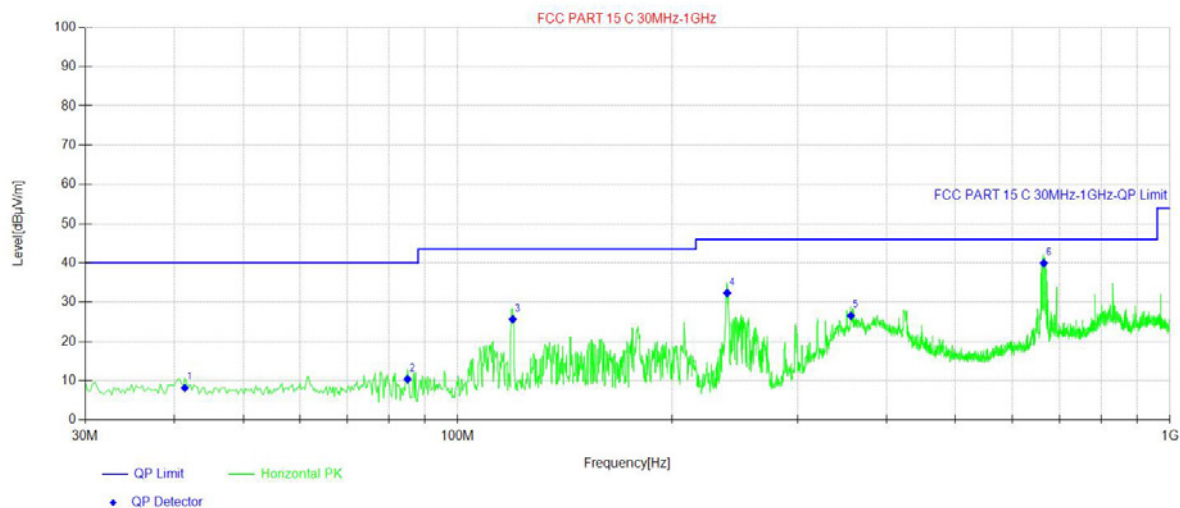


Final Data List[QP]

NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity	Verdict
1	41.40	25.97	-17.79	8.18	40.00	31.82	Horizontal	PASS
2	85.05	31.32	-20.91	10.41	40.00	29.59	Horizontal	PASS
3	119.48	43.7	-18.08	25.62	43.50	17.88	Horizontal	PASS
4	239.04	49.88	-17.52	32.36	46.00	13.64	Horizontal	PASS
5	356.41	40.76	-14.21	26.55	46.00	19.45	Horizontal	PASS
6	665.11	46.46	-6.52	39.94	46.00	6.06	Horizontal	PASS

Remark:Emission Level=Reading+Cable Loss+ANT Factor-AMP Factor



Antenna Polarization: Vertical

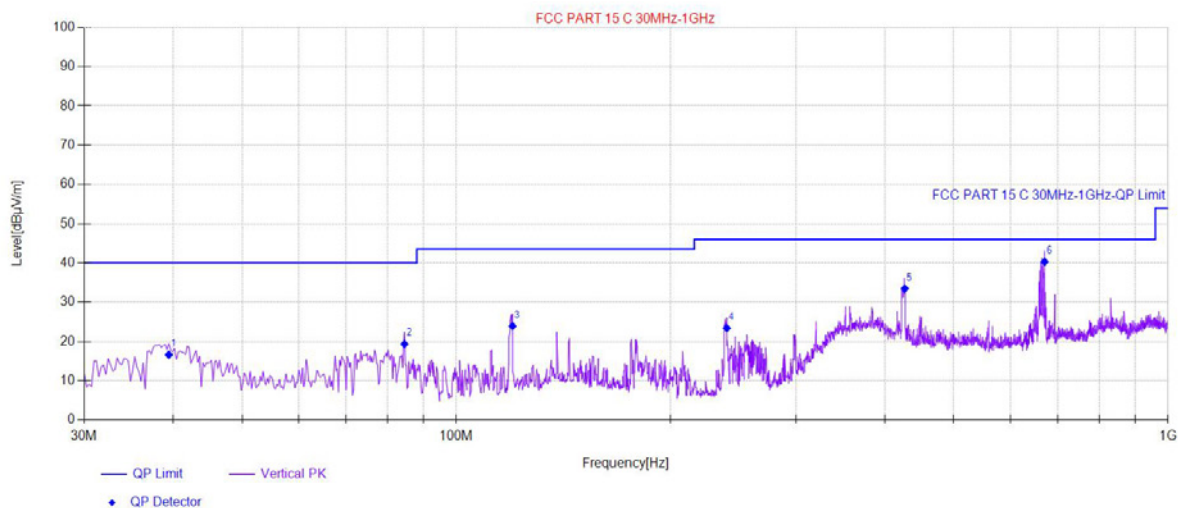

Final Data List[QP]

NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity	Verdict
1	39.46	34.4	-17.74	16.66	40.00	23.34	Vertical	PASS
2	84.56	40.31	-20.96	19.35	40.00	20.65	Vertical	PASS
3	119.97	41.97	-18.03	23.94	43.50	19.56	Vertical	PASS
4	240.01	40.88	-17.48	23.40	46.00	22.60	Vertical	PASS
5	426.73	45.47	-12.03	33.44	46.00	12.56	Vertical	PASS
6	670.69	46.69	-6.40	40.29	46.00	5.71	Vertical	PASS

Remark:Emission Level=Reading+Cable Loss+ANT Factor-AMP Factor



Test Frequency: From 1GHz to 25GHz

Worst case 802.11b

Test Mode: 2412					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824	46.75	32.29	4.10	28.45	54.69	74	-19.31	V
7236	39.61	35.99	6.22	27.83	53.99	74	-20.01	V
9648	36.42	38.11	7.83	25.10	57.26	74	-16.74	V
4824	44.13	32.29	4.10	28.45	52.07	74	-21.93	H
7236	39.54	35.99	6.22	27.83	53.92	74	-20.08	H
9648	32.57	38.11	7.83	25.10	53.41	74	-20.59	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824	31.92	32.29	4.10	28.45	39.86	54	-14.14	V
7236	23.98	35.99	6.22	27.83	38.36	54	-15.64	V
9648	16.41	38.11	7.83	25.10	37.25	54	-16.75	V
4824	32.55	32.29	4.10	28.45	40.49	54	-13.51	H
7236	27.89	35.99	6.22	27.83	42.27	54	-11.73	H
9648	20.22	38.11	7.83	25.10	41.06	54	-12.94	H



Worst case 802.11b

Test Mode: 2437					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874	47.79	32.35	4.12	28.44	55.82	74	-18.18	V
7311	38.74	36.08	6.3	27.74	53.38	74	-20.62	V
9748	37.24	38.25	7.91	24.65	58.75	74	-15.25	V
4874	45.58	32.35	4.12	28.44	53.61	74	-20.39	H
7311	38.11	36.08	6.30	27.74	52.75	74	-21.25	H
9748	36.12	38.25	7.91	24.65	57.63	74	-16.37	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874	31.26	32.35	4.12	28.44	39.29	54	-14.71	V
7311	26.22	36.08	6.3	27.74	40.86	54	-13.14	V
9748	20.07	38.25	7.91	24.65	41.58	54	-12.42	V
4874	30.33	32.35	4.12	28.44	38.36	54	-15.64	H
7311	25.93	36.08	6.30	27.74	40.57	54	-13.43	H
9748	20.34	38.25	7.91	24.65	41.85	54	-12.15	H



Worst case 802.11b

Test Mode: 2462					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924	46.72	32.41	4.14	28.42	54.85	74	-19.15	V
7386	39.91	36.15	6.36	27.68	54.74	74	-19.26	V
9848	36.17	38.35	7.97	24.33	58.16	74	-15.84	V
4924	44.05	32.41	4.14	28.42	52.18	74	-21.82	H
7386	38.73	36.15	6.36	27.68	53.56	74	-20.44	H
9848	34.14	38.35	7.97	24.33	56.13	74	-17.87	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924	31.25	32.41	4.14	28.42	39.38	54	-14.62	V
7386	25.64	36.15	6.36	27.68	40.47	54	-13.53	V
9848	19.83	38.35	7.97	24.33	41.82	54	-12.18	V
4924	29.42	32.41	4.14	28.42	37.55	54	-16.45	H
7386	26.69	36.15	6.36	27.68	41.52	54	-12.48	H
9848	18.63	38.35	7.97	24.33	40.62	54	-13.38	H

Note:

1. The testing has been conformed to 10*2462MHz=24620MHz.
2. All other emissions more than 30dB below the limit.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Emission Level = Reading + Factor
Margin=Emission Level-Limit
4. X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz
2.4G WiFi (802.11b/g/n)mode have been tested, and the worst result(802.11g) was report as below



Test Mode: Worst case 802.11g Low Channel 2412MHz

Test Mode: 802.11g Low Channel 2412MHz									Test Value
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	
2390	50.96	27.39	2.77	34.01	47.11	74	-26.89	H	Peak
2400	60.23	27.42	2.78	34.01	56.42	74	-17.58	H	
2390	52.57	27.39	2.77	34.01	48.72	74	-25.28	V	
2400	56.32	27.42	2.78	34.01	52.51	74	-21.49	V	
2390	40.37	27.39	2.77	34.01	36.52	54	-17.48	H	Average
2400	43.46	27.42	2.78	34.01	39.65	54	-14.35	H	
2390	39.99	27.39	2.77	34.01	36.14	54	-17.86	V	
2400	45.52	27.42	2.78	34.01	41.71	54	-12.29	V	

Test Mode: Worst case 802.11g High Channel 2462MHz

Test Mode: 802.11g High Channel 2462MHz									Test Value
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	
2483.5	59.57	27.7	2.84	34.03	56.08	74	-17.92	H	Peak
2500	51.93	27.75	2.86	34.03	48.51	74	-25.49	H	
2483.5	59.55	27.70	2.84	34.03	56.06	74	-17.94	V	
2500	53.78	27.75	2.86	34.03	50.36	74	-23.64	V	
2483.5	41.56	27.70	2.84	34.03	38.07	54	-15.93	H	Average
2500	39.89	27.75	2.86	34.03	36.47	54	-17.53	H	
2483.5	43.73	27.70	2.84	34.03	40.24	54	-13.76	V	
2500	40.04	27.75	2.86	34.03	36.62	54	-17.38	V	


7 Conducted Spurious Emission

Test Requirement : FCC CFR47 Part 15 Section 15.247
Test Method : ANSI C63.10:2013
Test Limit : Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

7.2 Test Setup



7.3 Test Result

Test Mode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	0~Reference	3.93	3.93	---	PASS
11B	Ant1	2412	30~1000	3.93	-57.85	≤-16.07	PASS
11B	Ant1	2412	1000~26500	3.93	-41.48	≤-16.07	PASS
11B	Ant1	2437	0~Reference	3.58	3.58	---	PASS
11B	Ant1	2437	30~1000	3.58	-58.36	≤-16.42	PASS
11B	Ant1	2437	1000~26500	3.58	-41.95	≤-16.42	PASS
11B	Ant1	2462	0~Reference	3.74	3.74	---	PASS
11B	Ant1	2462	30~1000	3.74	-58.18	≤-16.26	PASS




11B	Ant1	2462	1000~26500	3.74	-41.26	≤ -16.26	PASS
11G	Ant1	2412	0~Reference	-1.08	-1.08	---	PASS
11G	Ant1	2412	30~1000	-1.08	-58.2	≤ -21.08	PASS
11G	Ant1	2412	1000~26500	-1.08	-40.61	≤ -21.08	PASS
11G	Ant1	2437	0~Reference	-1.56	-1.56	---	PASS
11G	Ant1	2437	30~1000	-1.56	-58.23	≤ -21.56	PASS
11G	Ant1	2437	1000~26500	-1.56	-41.65	≤ -21.56	PASS
11G	Ant1	2462	0~Reference	-2.23	-2.23	---	PASS
11G	Ant1	2462	30~1000	-2.23	-58.72	≤ -22.23	PASS
11G	Ant1	2462	1000~26500	-2.23	-41.83	≤ -22.23	PASS
11N20SISO	Ant1	2412	0~Reference	-1.87	-1.87	---	PASS
11N20SISO	Ant1	2412	30~1000	-1.87	-57.25	≤ -21.87	PASS
11N20SISO	Ant1	2412	1000~26500	-1.87	-41.08	≤ -21.87	PASS
11N20SISO	Ant1	2437	0~Reference	-2.78	-2.78	---	PASS
11N20SISO	Ant1	2437	30~1000	-2.78	-58.1	≤ -22.78	PASS
11N20SISO	Ant1	2437	1000~26500	-2.78	-41.69	≤ -22.78	PASS
11N20SISO	Ant1	2462	0~Reference	-3.73	-3.73	---	PASS
11N20SISO	Ant1	2462	30~1000	-3.73	-57.92	≤ -23.73	PASS
11N20SISO	Ant1	2462	1000~26500	-3.73	-41.47	≤ -23.73	PASS
11N40SISO	Ant1	2422	0~Reference	-5.52	-5.52	---	PASS
11N40SISO	Ant1	2422	30~1000	-5.52	-58.33	≤ -25.52	PASS
11N40SISO	Ant1	2422	1000~26500	-5.52	-41.67	≤ -25.52	PASS
11N40SISO	Ant1	2437	0~Reference	-5.78	-5.78	---	PASS
11N40SISO	Ant1	2437	30~1000	-5.78	-57.78	≤ -25.78	PASS
11N40SISO	Ant1	2437	1000~26500	-5.78	-41.82	≤ -25.78	PASS
11N40SISO	Ant1	2452	0~Reference	-5.87	-5.87	---	PASS
11N40SISO	Ant1	2452	30~1000	-5.87	-57.77	≤ -25.87	PASS
11N40SISO	Ant1	2452	1000~26500	-5.87	-41.79	≤ -25.87	PASS




Test Graphs



11B-Ant1-2412-0~Reference-PASS

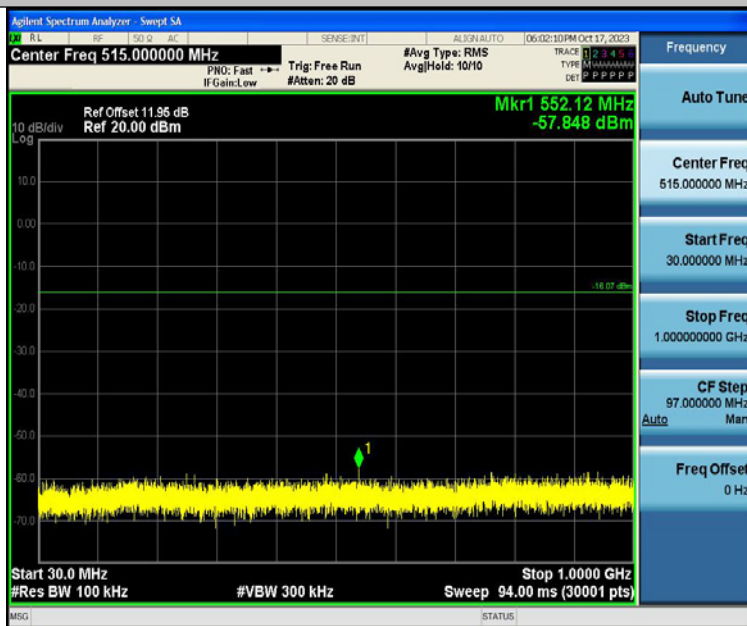


11B-Ant1-2412-30~1000-PASS

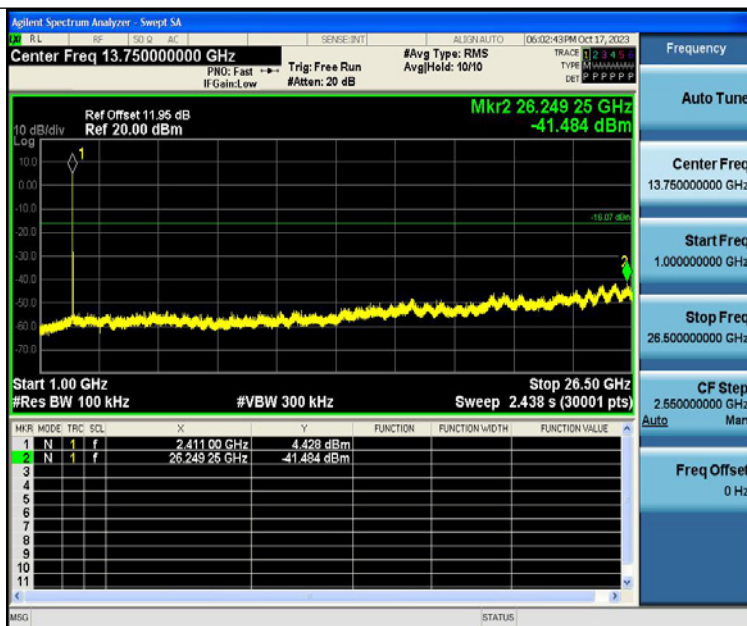


11B-Ant1-2412-1000~26500-PASS



11B-Ant1-2437-0~Reference-PASS

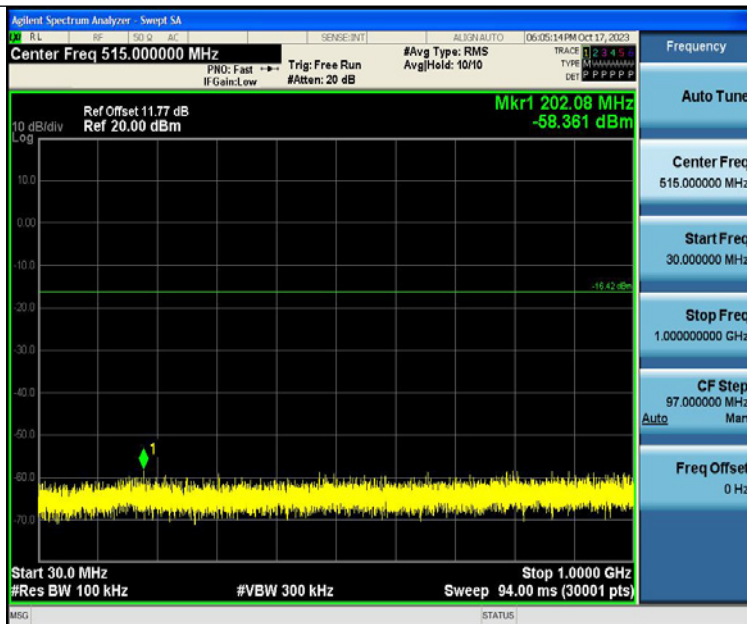


11B-Ant1-2437-30~1000-PASS

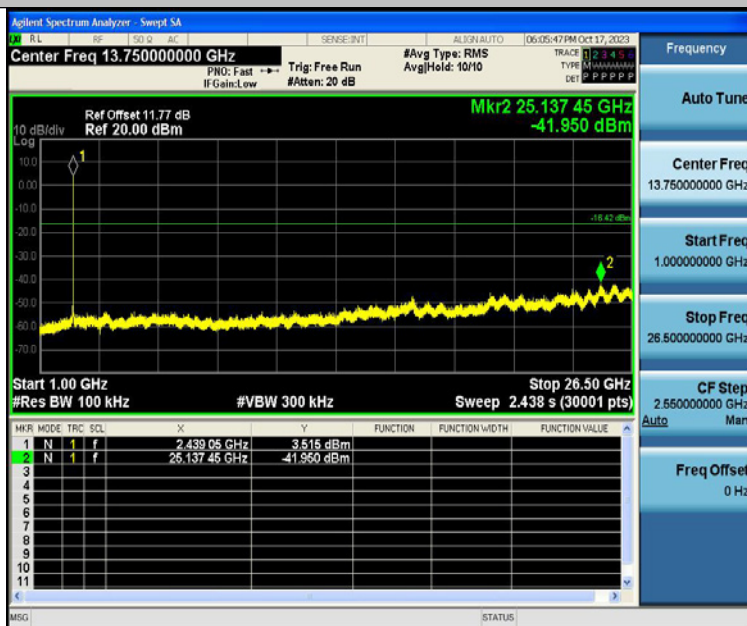


11B-Ant1-2437-1000~26500-PASS




11B-Ant1-2462-0~Reference-PASS

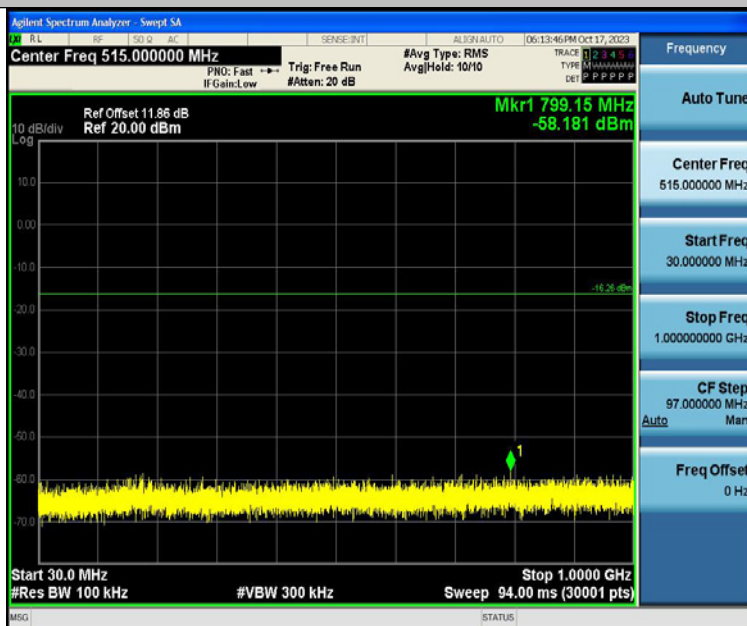

11B-Ant1-2462-30~1000-PASS

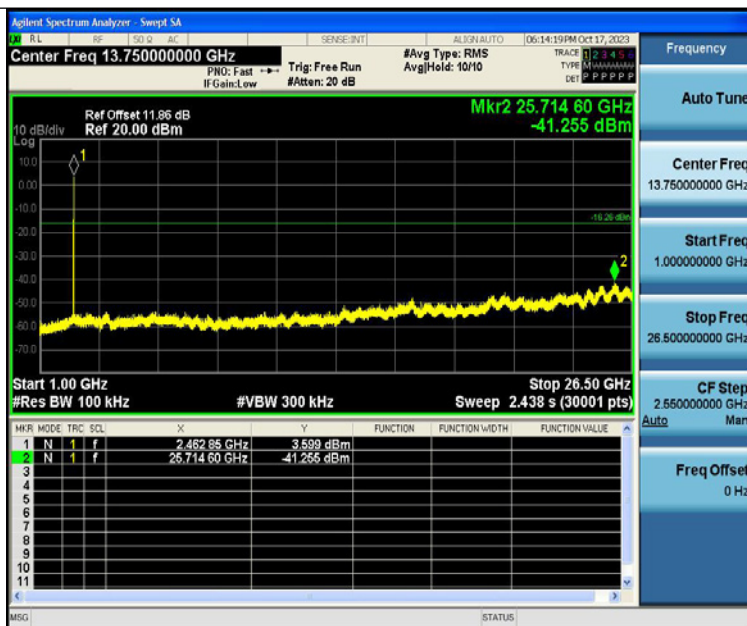

11B-Ant1-2462-1000~26500-PASS

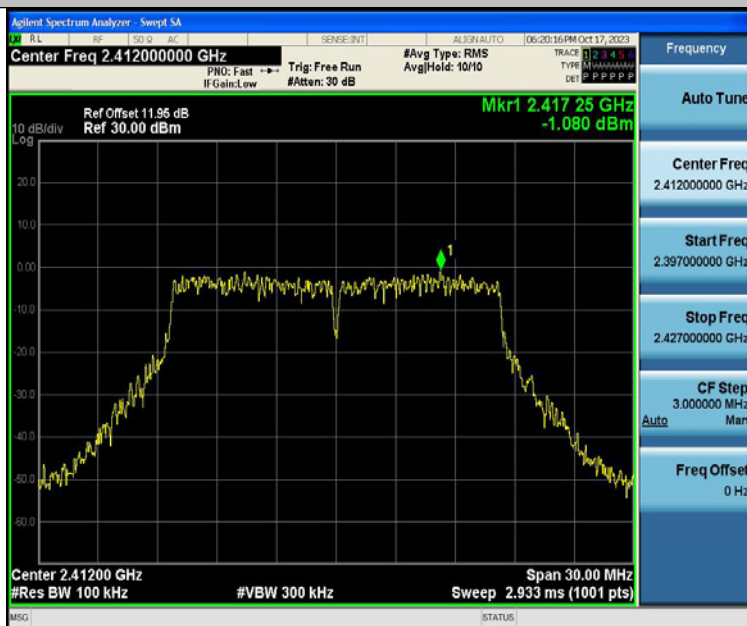

11G-Ant1-2412-0~Reference-PASS




11G-Ant1-2412-30~1000-PASS



11G-Ant1-2412-1000~26500-PASS



11G-Ant1-2437-0~Reference-PASS

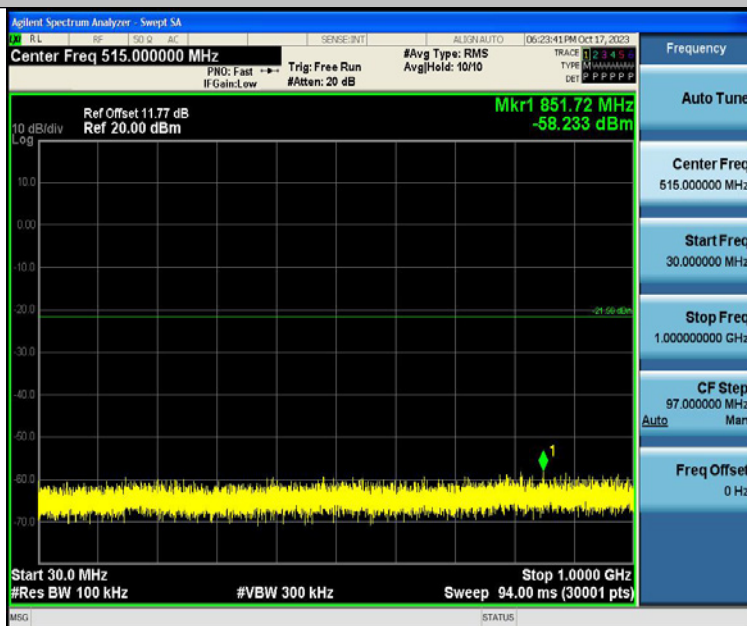


11G-Ant1-2437-30~1000-PASS




11G-Ant1-2437-1000~26500-PASS




11G-Ant1-2462-0~Reference-PASS

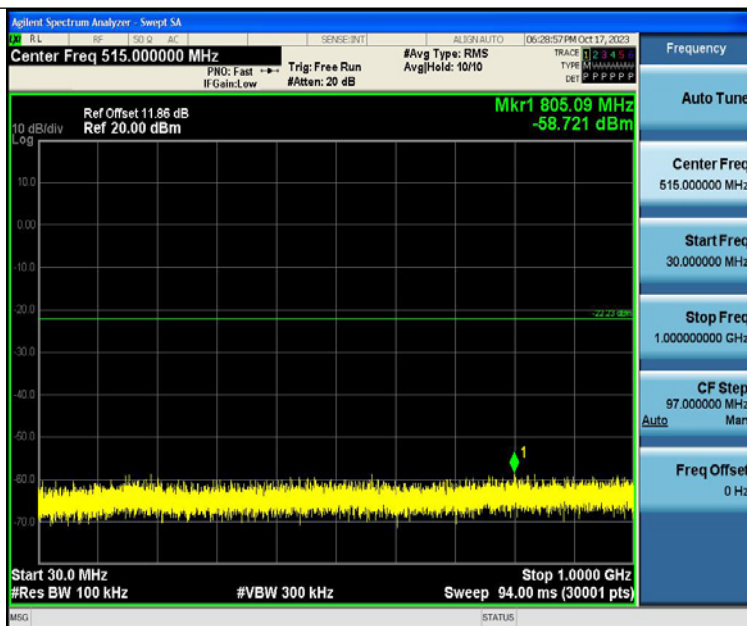


11G-Ant1-2462-30~1000-PASS

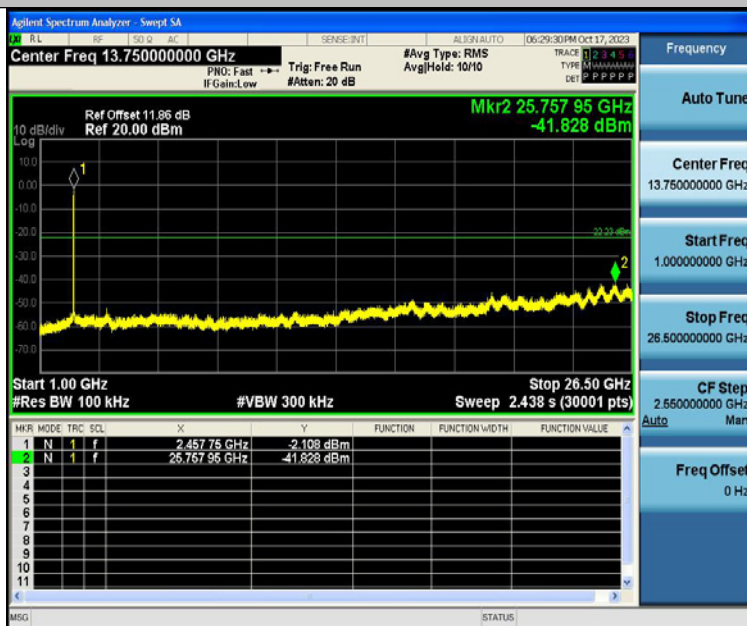

11G-Ant1-2462-1000~26500-PASS

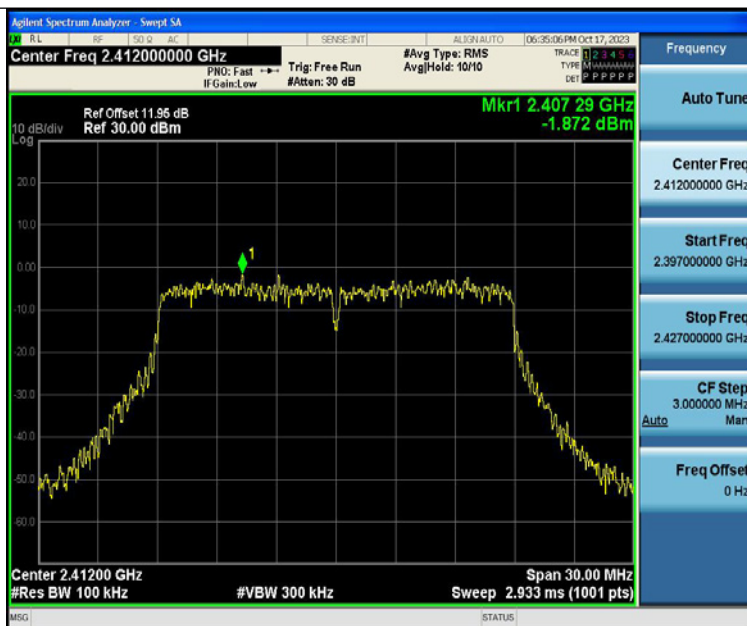

11N20SISO-Ant1-2412-0~Reference-PASS

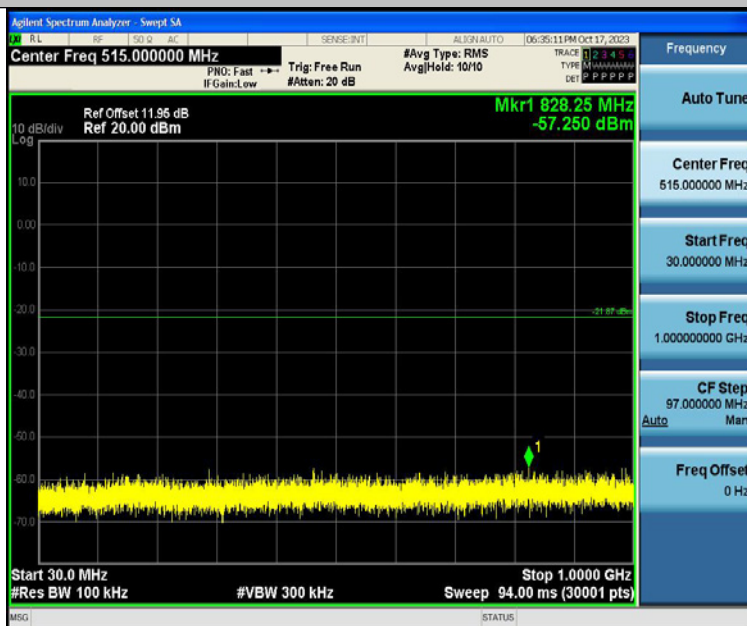


11N20SISO-Ant1-2412-30~1000-PASS




11N20SISO-Ant1-2412-1000~26500-PASS



11N20SISO-Ant1-2437-0~Reference-PASS

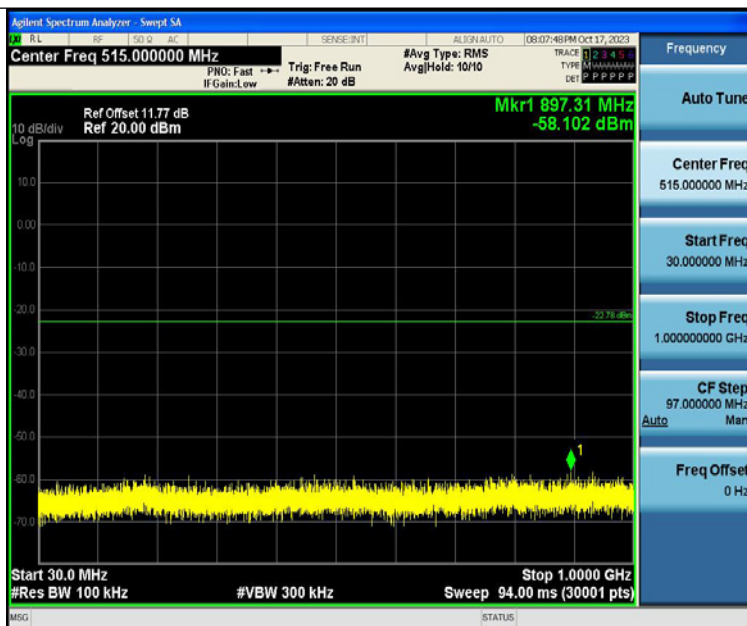


11N20SISO-Ant1-2437-30~1000-PASS

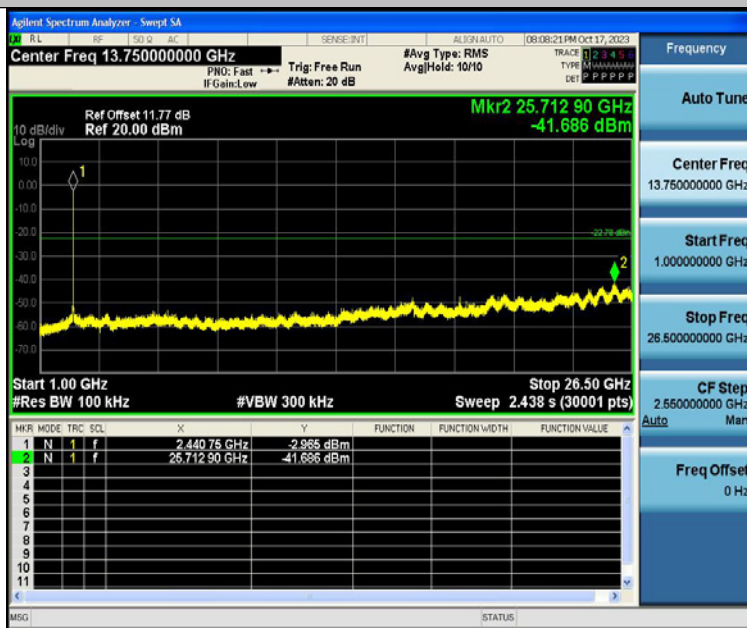


11N20SISO-Ant1-2437-1000~26500-PASS




11N20SISO-Ant1-2462-0~Reference-PASS

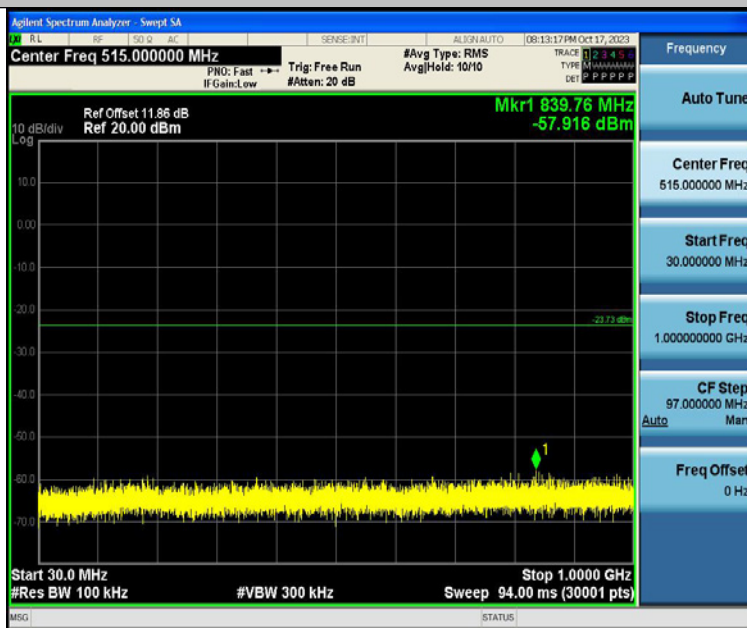


11N20SISO-Ant1-2462-30~1000-PASS

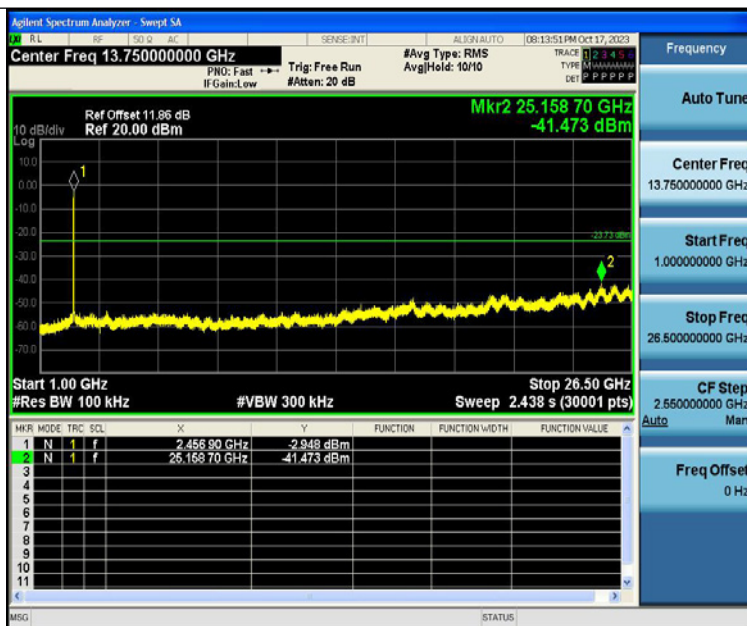


11N20SISO-Ant1-2462-1000~26500-PASS

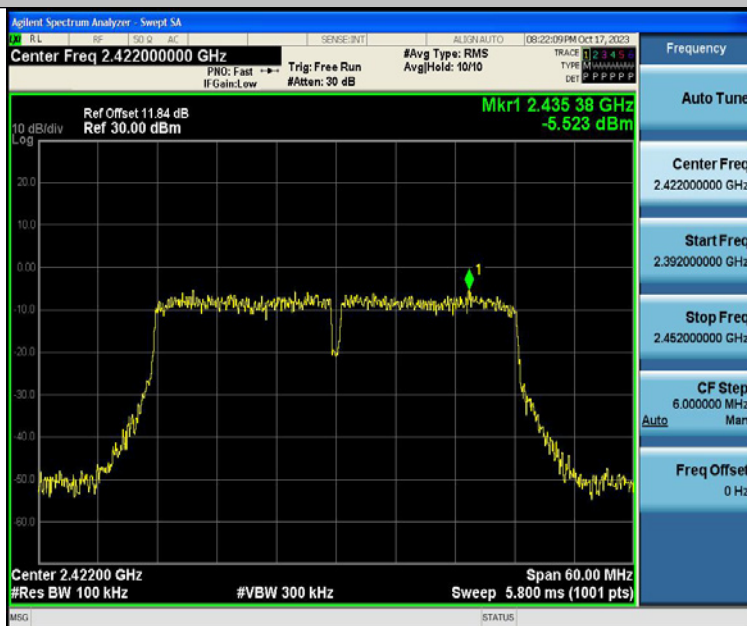


11N40SISO-Ant1-2422-0~Reference-PASS

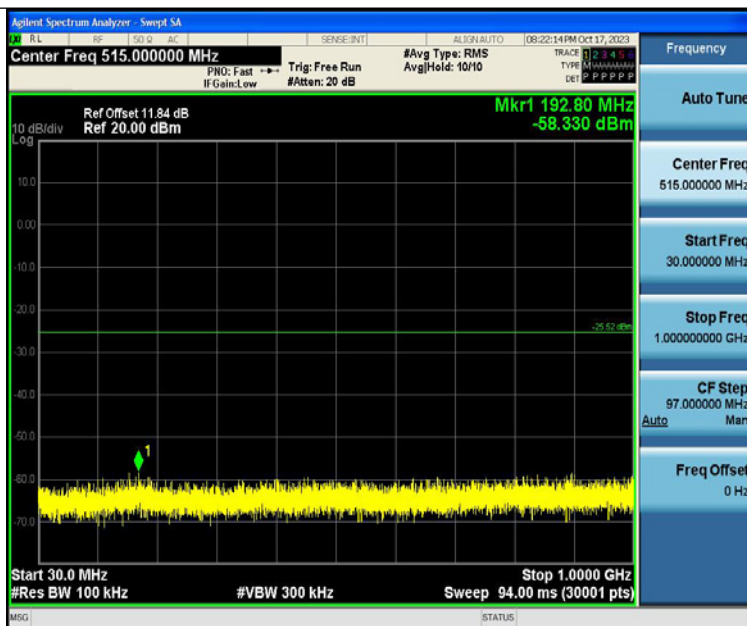


11N40SISO-Ant1-2422-30~1000-PASS

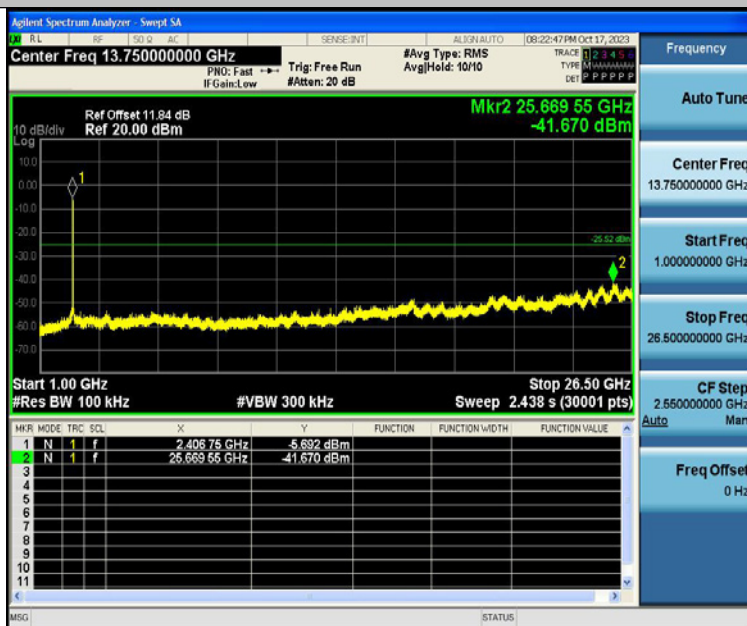


11N40SISO-Ant1-2422-1000~26500-PASS

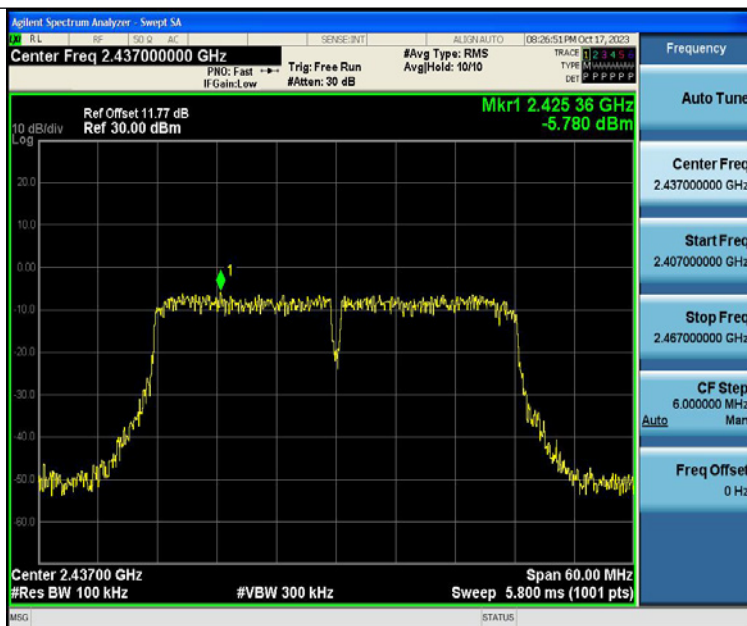


11N40SISO-Ant1-2437-0~Reference-PASS

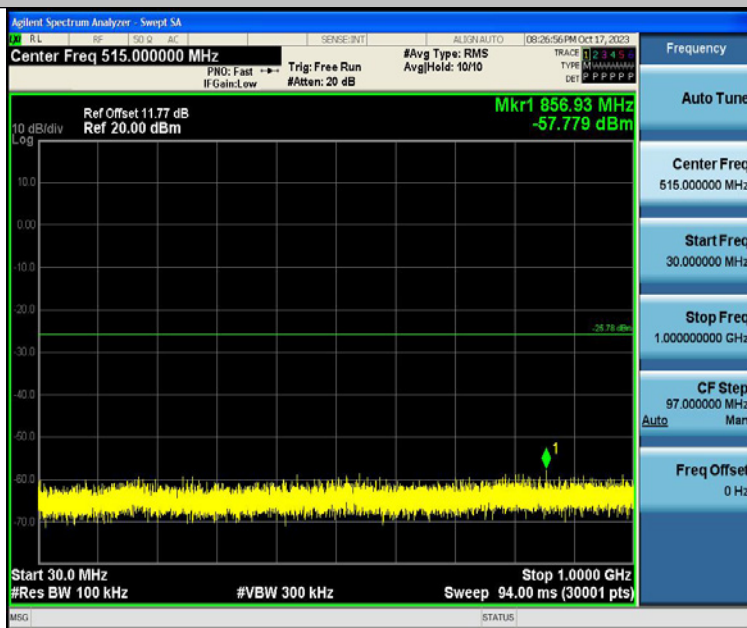


11N40SISO-Ant1-2437-30~1000-PASS

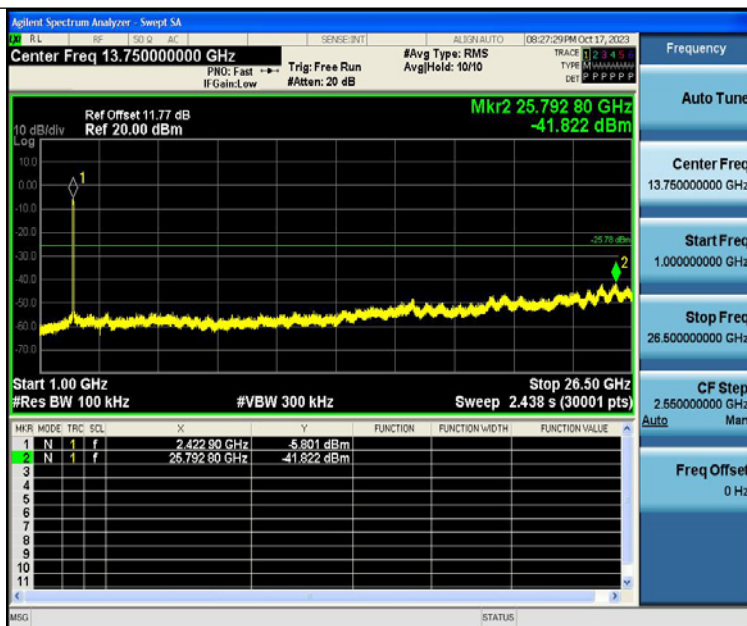


11N40SISO-Ant1-2437-1000~26500-PASS

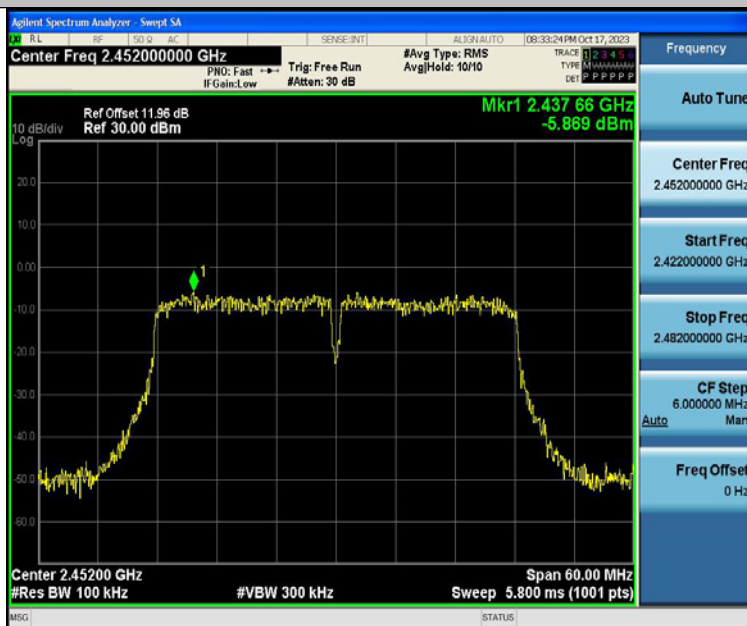

11N40SISO-Ant1-2452-0~Reference-PASS

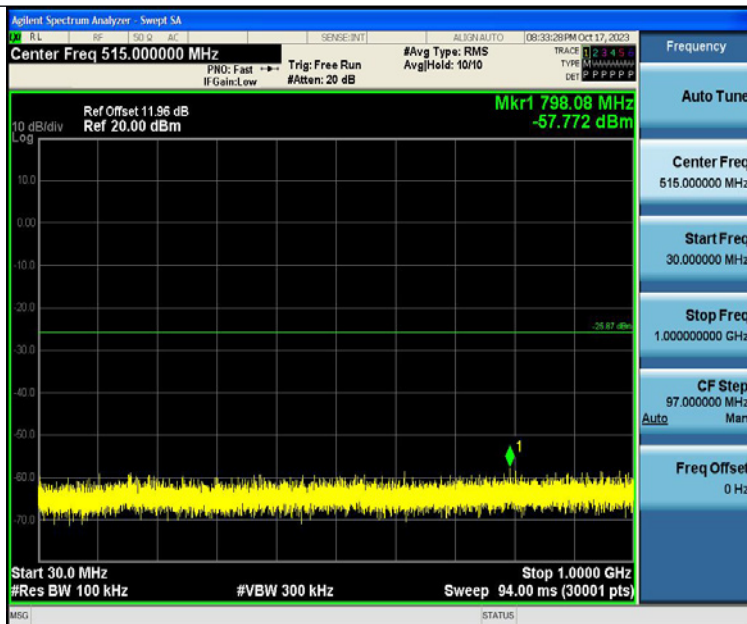

11N40SISO-Ant1-2452-30~1000-PASS

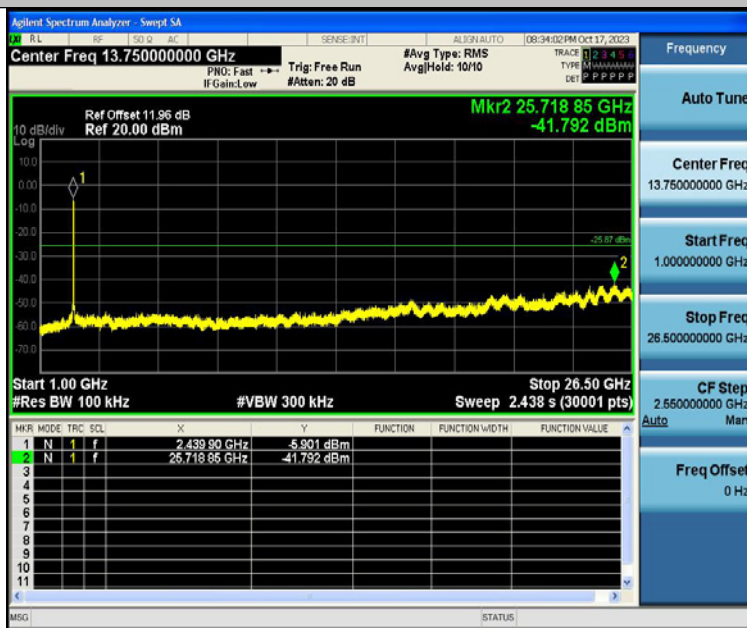

11N40SISO-Ant1-2452-1000~26500-PASS


8 Band Edge Measurement

Test Requirement	: Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method	: ANSI C63.10:2013
Test Limit	: Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

8.2 Test Setup







8.3 Test Result

Test Mode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	4.72	-39.28	≤ -15.28	PASS
11B	Ant1	High	2462	3.72	-46.16	≤ -16.28	PASS
11G	Ant1	Low	2412	-0.79	-37.79	≤ -20.79	PASS
11G	Ant1	High	2462	-2.04	-45.53	≤ -22.04	PASS
11N20SISO	Ant1	Low	2412	-2.02	-38.08	≤ -22.02	PASS
11N20SISO	Ant1	High	2462	-3.14	-46.07	≤ -23.14	PASS
11N40SISO	Ant1	Low	2422	-5.46	-40.65	≤ -25.46	PASS
11N40SISO	Ant1	High	2452	-5.66	-45.56	≤ -25.66	PASS


Test Graphs

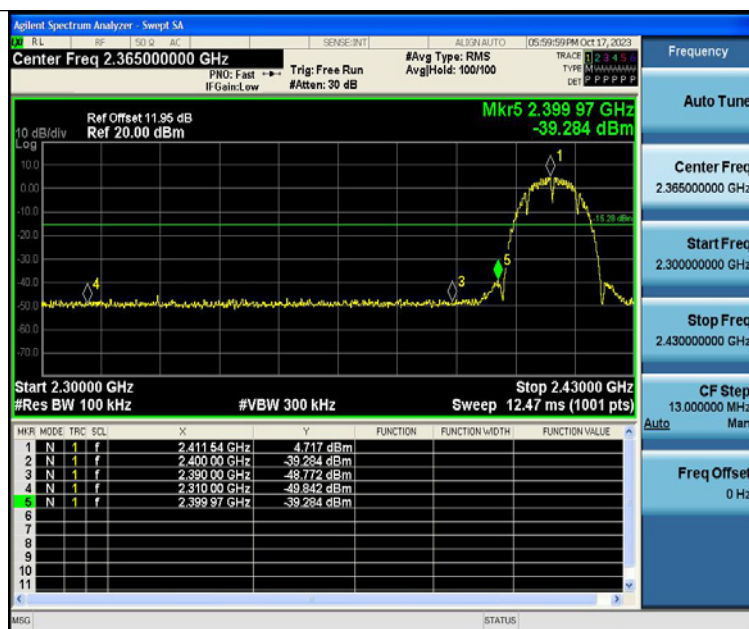

11B-Ant1-2412-PASS

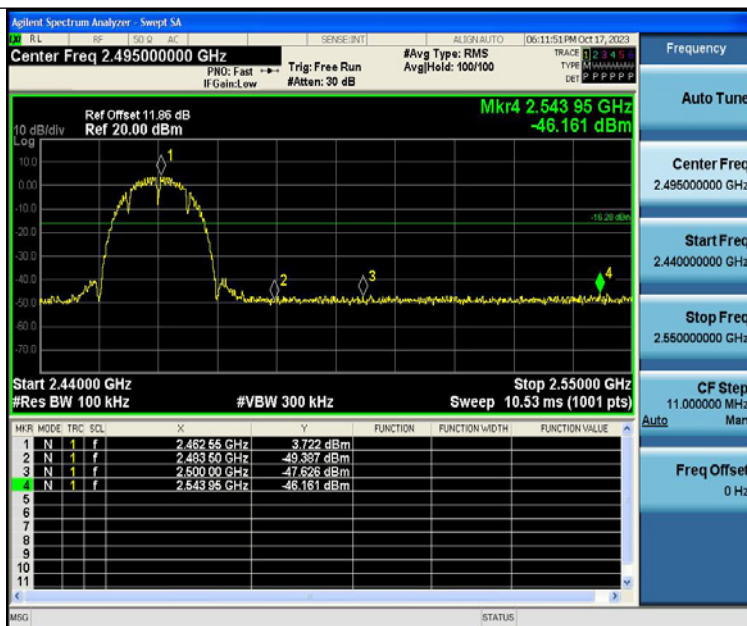

11B-Ant1-2462-PASS

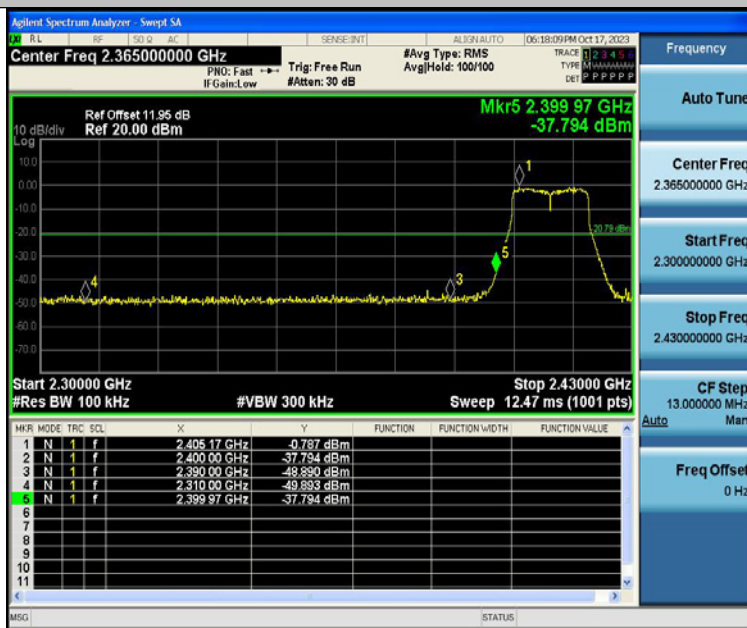

11G-Ant1-2412-PASS