



SPECIFICATIONS FOR APPROVAL

The specification data is the sample antenna data. Due to factors such as the product not being glued to the shell, there may be differences between the trial production machine and the specification data. However, after correction with the trial production machine, the data can remain consistent with the specification data

Antenna manufacturer: Shenzhen Lejin radio frequency technology Co., LTD
Company Address: 3rd Floor, Building A4, No. 176 Chongqing Road, Fuhai Street, Bao'an District, Shenzhen, Guangdong Province. (Phone number: 13603098741)

Customer Name:	JXX
Product Name:	LJF02-240617002A-R0A
Product Model:	M1563(6221C) WIFI M ANT
Part Number:	
Write By :	Li_Star
Issued Date:	2024/6/17


CUSTOMER				
ENGINEER R&D DEPT	BUSSINESS DEPT	APPROVED BY	DATE	Edition/Part number

LEJIN				
R&D DEPT	ENGINEER R&D DEPT	APPROVAL	DATE	Edition/Part number

ECN/ECR			

目录 Index

- 1、 (Cover)
- 2、 (Index)
- 3、 (Product Specification)
- 4、 (Test Equipment & Conditions)
- 5、 (Test Report)
- 6、 (Antenna Picture)

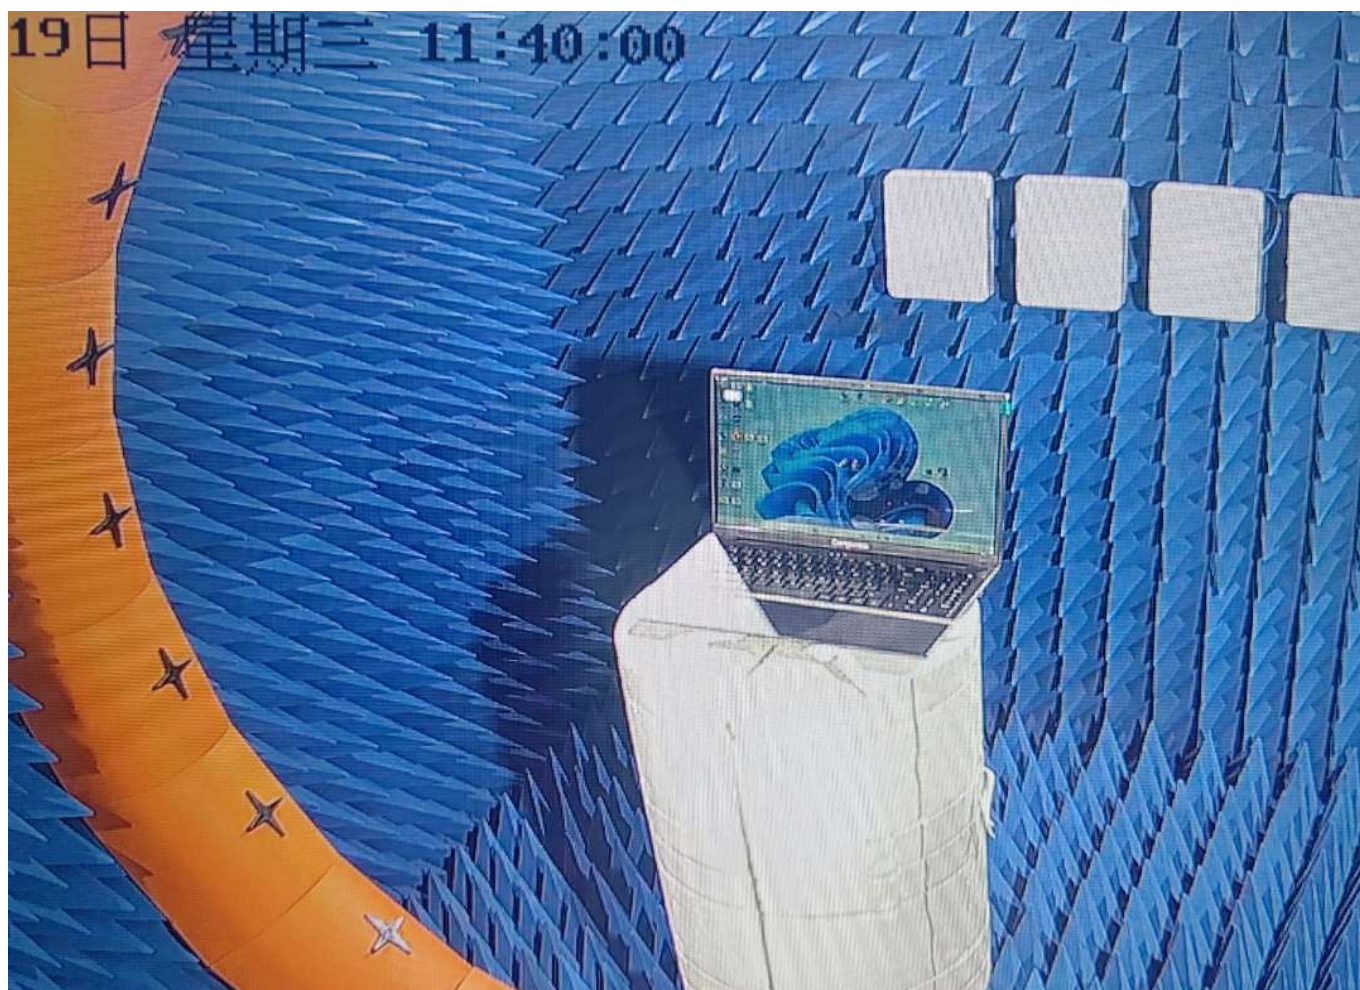

Electrical Characteristics

Frequency	VSWR	Efficiency	Impedance	Polarization	Gain
2400 MHz ~2500 MHz	<1.5	>40%	50 Ohm	Linear	≥ 0 DB
5100MHZ--5900 MHZ	<2.5	>45%	50 Ohm	Linear	≥ 0 DB


Material & Mechanical Characteristics

Environmental


Material of Radiator	Cable Type	Connector Type	Dimension	Operation Temperature	Storage Temperature
BL	1.13 Gray	KCC451-320		- 20 °C ~ + 50 °C	- 30 °C ~ + 80 °C

Test Equipment & Conditions

1. Network Analyzers :Agilent 5071C
2. Communications Test Set:Agilent E5515C/CMW500/AT8826
3. 3D Chamber Test System(ETS743)/STM23+1

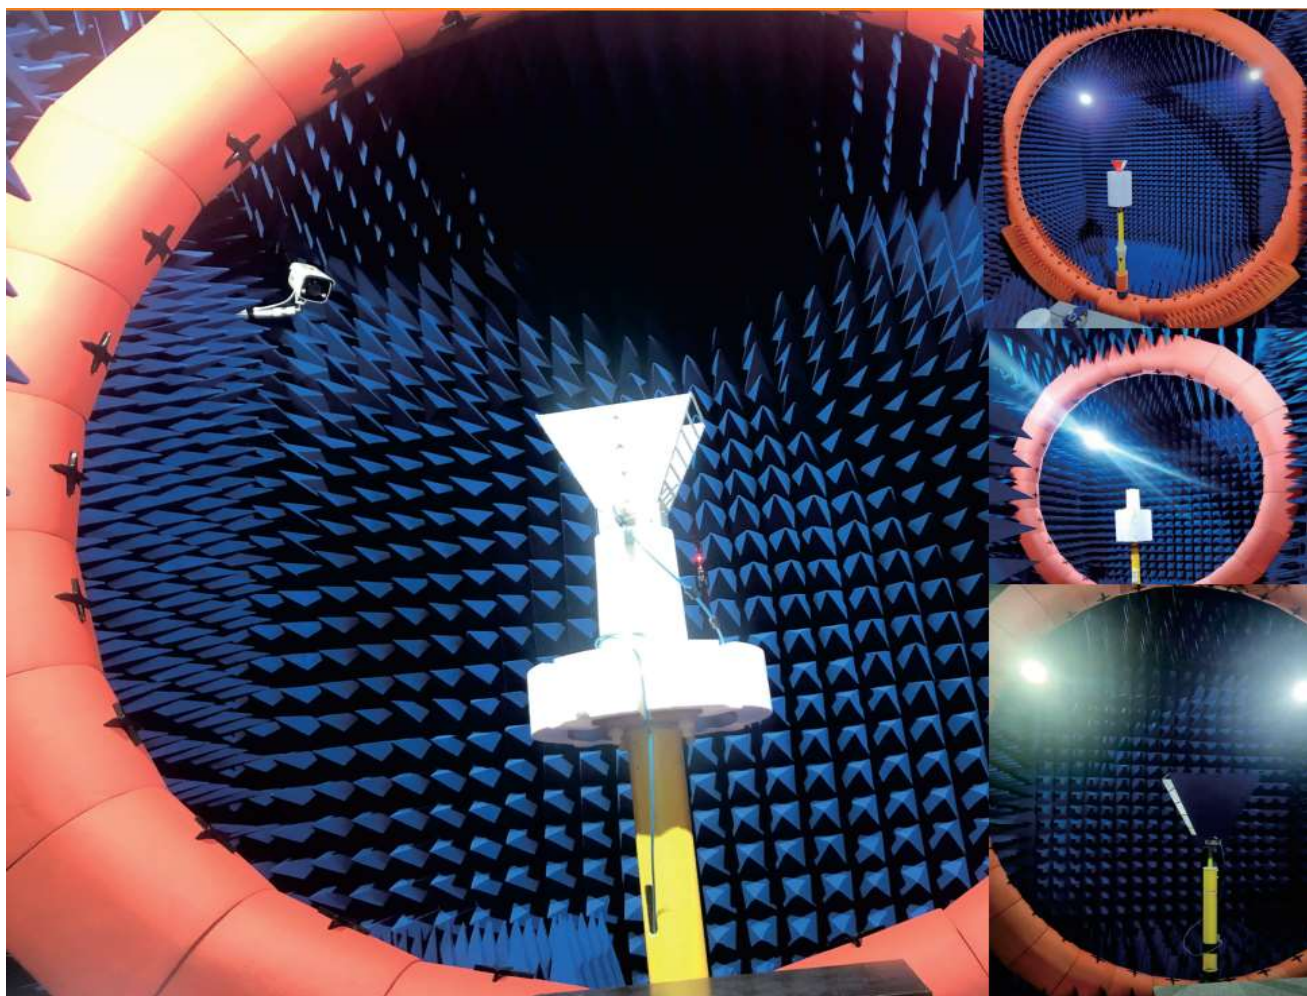


Antenna Impedance: WIFI ANT M:

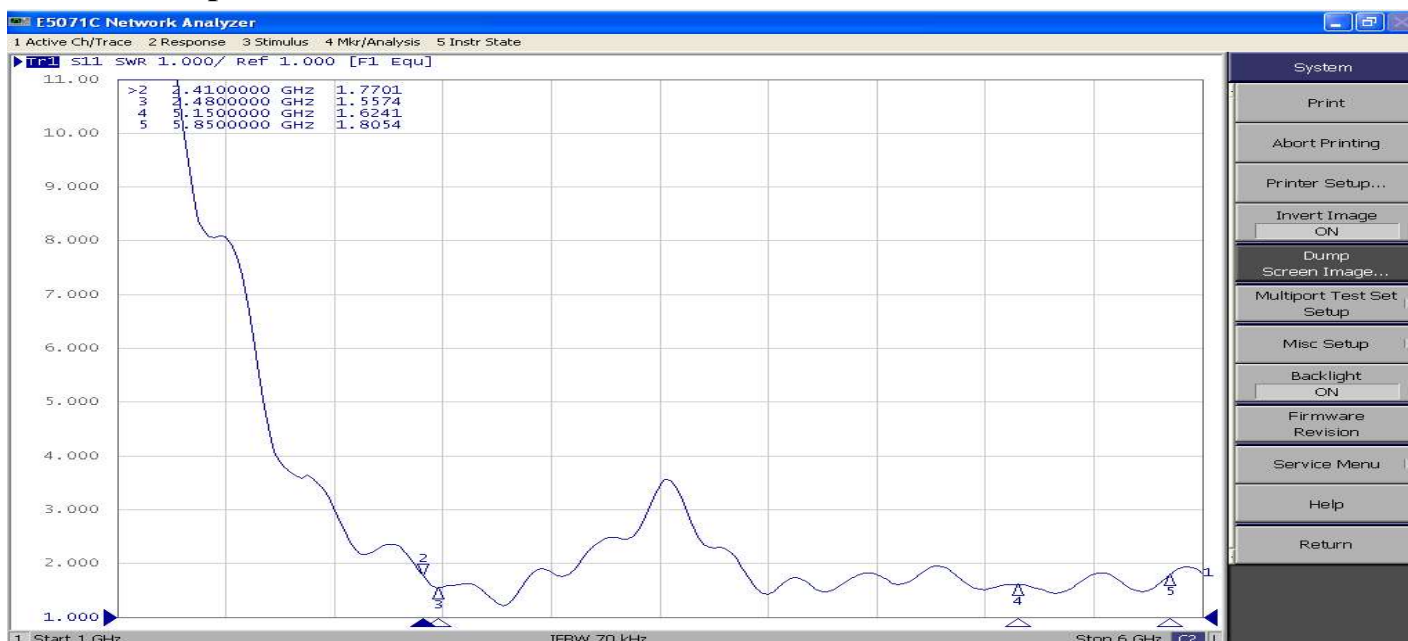


2.4G (Wifi/BT)	Freq (MHz)	2400	2410	2420	2430	2450	2460	2470	2480	2490	2500	ANTM
	Effi (%)	43.27	45.46	41.32	48.74	42.33	46.56	43.44	45.78	44.12	39.35	
	Gain (dBi)	1.98	2.07	1.35	1.11	1.08	1.14	1.27	1.05	2.31	2.66	
5G WIFI	Freq (MHz)	5150	5250	5350	5450	5550	5650	5750	5850	5950	6000	
	Effi (%)	50.51	52.21	48.75	45.54	42.33	45.25	40.18	47.54	46.35	48.22	
	Gain (dBi)	1.96	1.99	2.07	2.11	2.18	2.08	2.03	2.11	2.51	2.54	


2400.000MHz




2450.000MHz




2500.000MHz




5150.000MHz



5550.000MHz




5850.000MHz



Active OTA combined with MAIN ANT measurement is composite data:





WIFI Antenna Performance Table										
TRP /TIS(dBm)			<u>13.50</u>	-76.13	TRP /TIS(dBm)			<u>13.45</u>	-69.32	2.4G WIFI
802.11 B	Channel No.	Freq. (MHz)	TRP (dBm)	TIS (dBm)	802.11 G	Channel No.	Freq. (MHz)	TRP (dBm)	TIS (dBm)	
Tx_11M / Rx_11M	1	2412	13. 55	-75.47	Tx_54M / Rx_54M	1	2412	13. 23	-69.89	
	6	2437	13. 27	-76.56		6	2437	13. 96	-68.75	
	11	2462	13. 69	-76.35		11	2462	13. 17	-69.32	
WIFI Antenna Performance Table										
IFI Whole Band TRP /TIS(dB)			<u>13.08</u>	-69.14	IFI Whole Band TRP /TIS(dB)			<u>12.61</u>	-66.91	5.8G WIFI
802.11 A	Channel No.	Freq. (MHz)	TRP (dBm)	TIS (dBm)	802.11 AC	Channel No.	Freq. (MHz)	TRP (dBm)	TIS (dBm)	
Tx_6M / Rx_54M	36	5180	13. 75	-68.11	Tx_MCS 7 / Rx_MCS 7	36	5180	12. 34	-66.11	
	149	5745	12. 96	-69.45		149	5745	12. 51	-67.15	
	165	5825	12. 53	-69.87		165	5825	12. 98	-67.47	

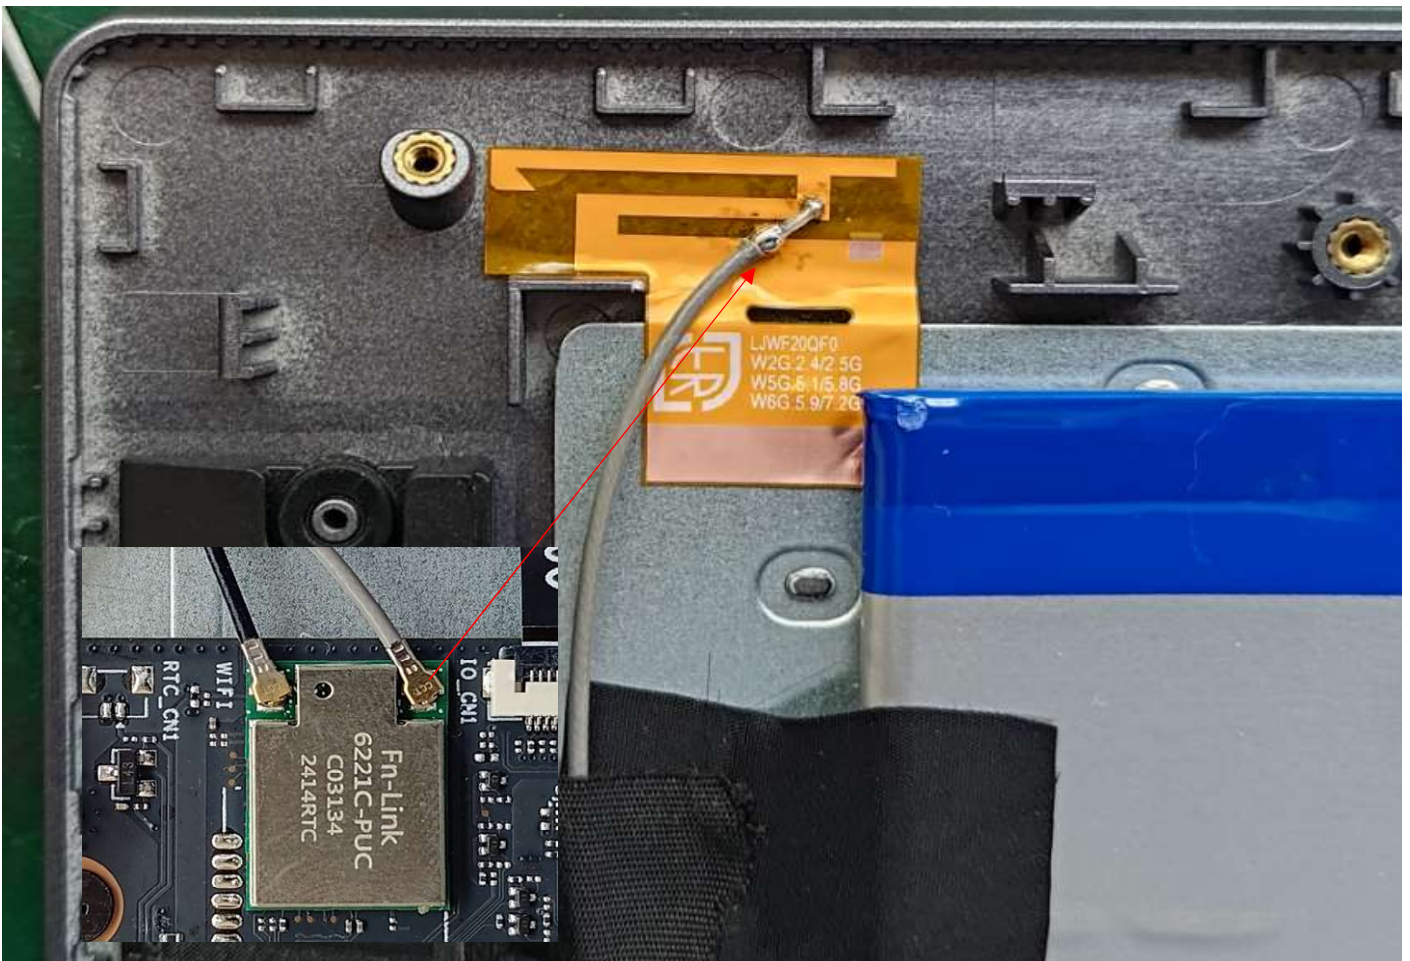



Drawing:

A

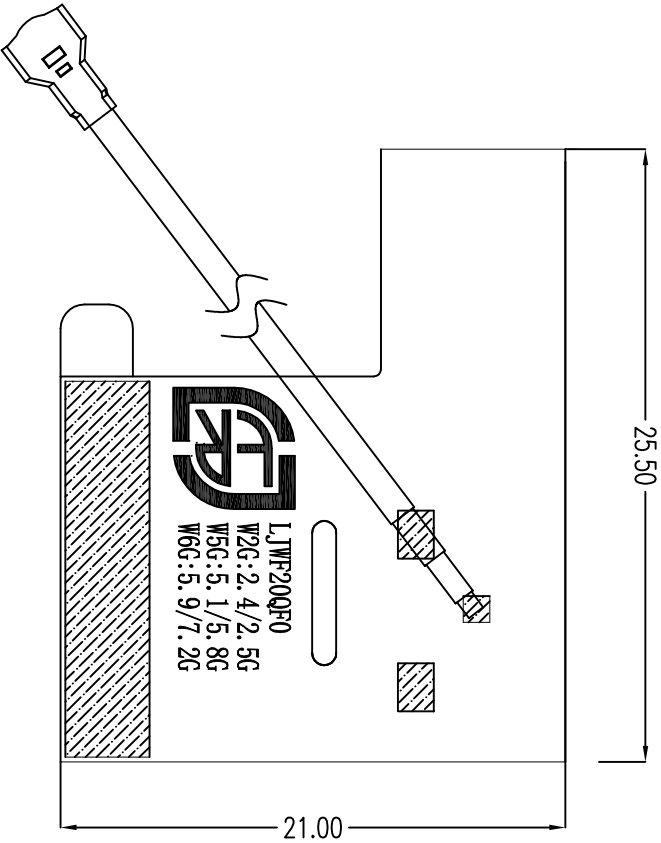

深圳乐进射频科技有限公司
SHEN ZHEN LEJIN RADIO FREQUENCY CO., LTD

Project JXX_R1563 Date 2024-06-17

Part Name WIFI AUX ANT Designed by

Part No. LJWF20QXX Checked by MD

Material RF

Location 40~ ±0.15 Angle ±0.5° Treatment LJF02-240617002A-R0A Approved by

Unit mm Scale FIT Rev A

D

Rev	Description	Date	Remark
1	New drawing		
2			
3			

Rev	Description	Date	Remark
1	New drawing		
2			
3			

Autodesk 教育版产品制作