

ANNEX D TEST DATA

For

Project No.:	8134EU011504W
Client:	Guangzhou Zaozhongwan E-Commerce Co., Ltd.
Product Description:	Soundbar
Model No.:	KM-Midnight40
FCC ID:	2BDKK-KM-LAV02-BAT
Technology:	Bluetooth BLE
Test Engineer:	<i>Mikoy zhu</i>
Test Date:	2023-12-06

Test Summary

Item	Result
Duty Cycle	Pass
Bandwidth	Pass
Maximum Conducted Output Power	Pass
Maximum Power Spectral Density	Pass
Unwanted Emissions In Non-restricted Frequency Bands	Pass
Unwanted Emissions In Restricted Frequency Bands	Pass


1. Duty Cycle


1.1 Ant1

1.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	2.095	3.125	67.04	1.74	16.78
		2440	2.094	3.125	67.01	1.74	16.78
		2480	2.095	3.125	67.04	1.74	16.78

1.1.2 Test Graph

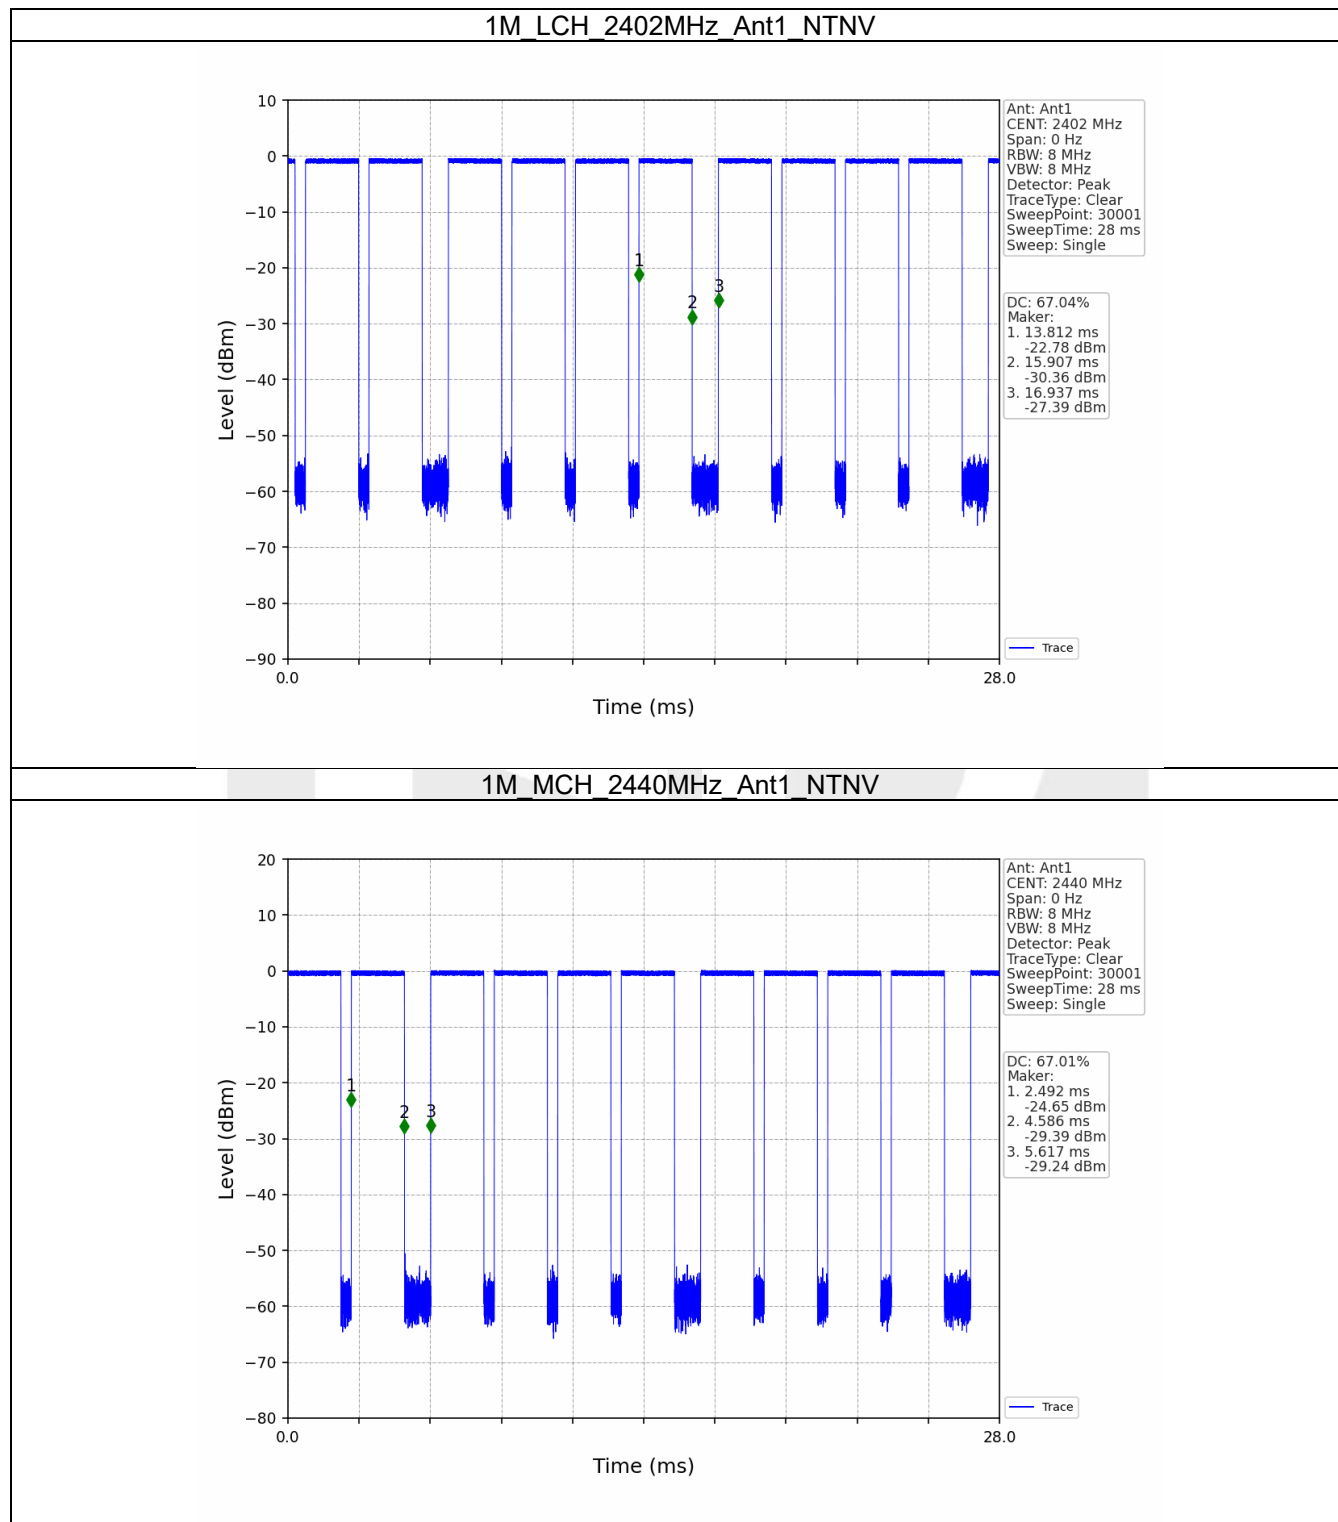

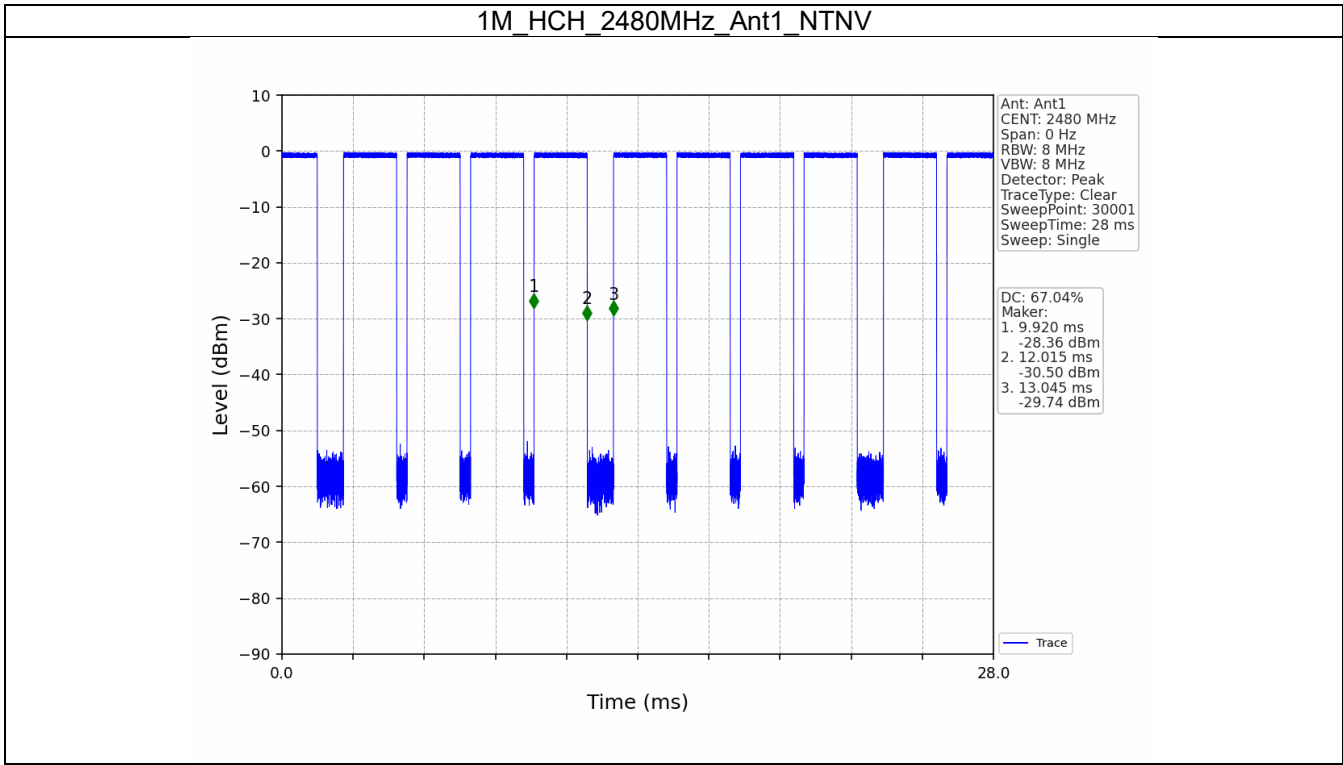


2. Bandwidth


2.1 OBW

2.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)	Verdict
				Result	
1M	SISO	2402	1	1.015	Pass
		2440	1	1.014	Pass
		2480	1	1.016	Pass

2.1.2 Test Graph

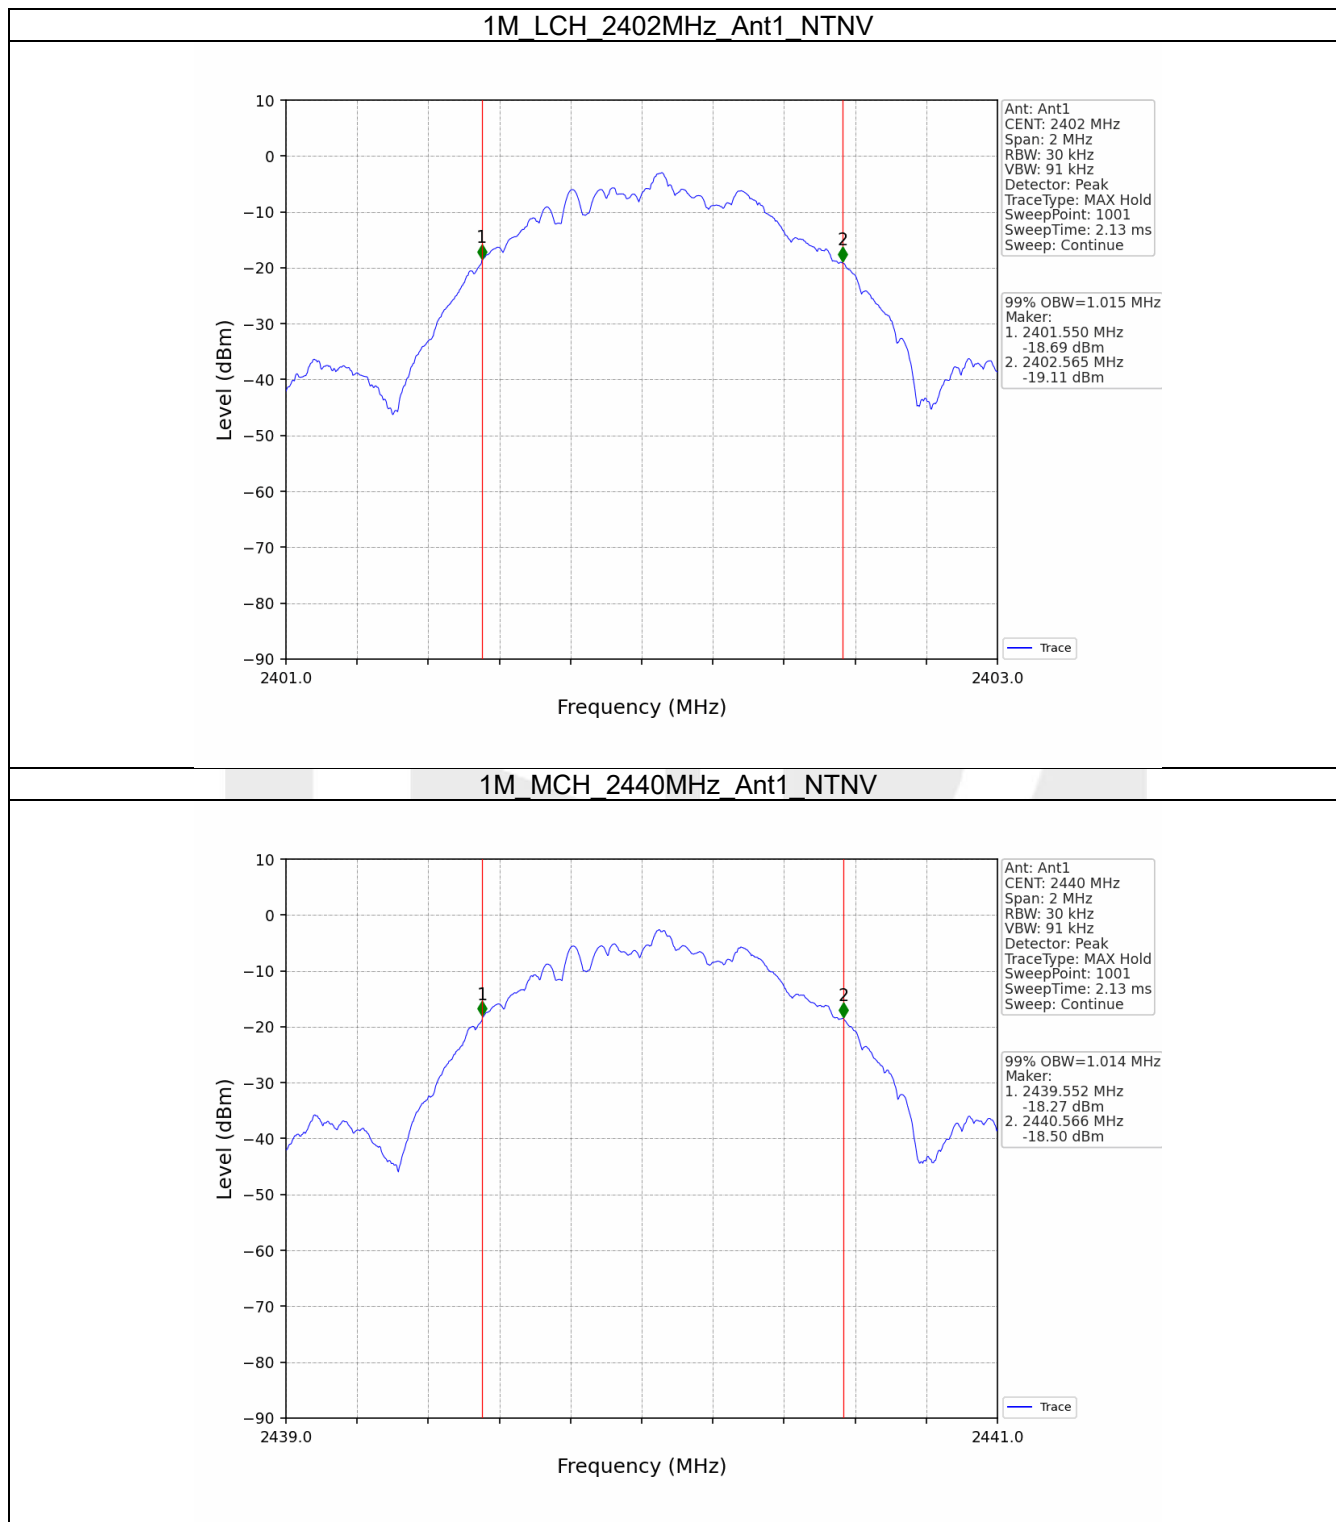

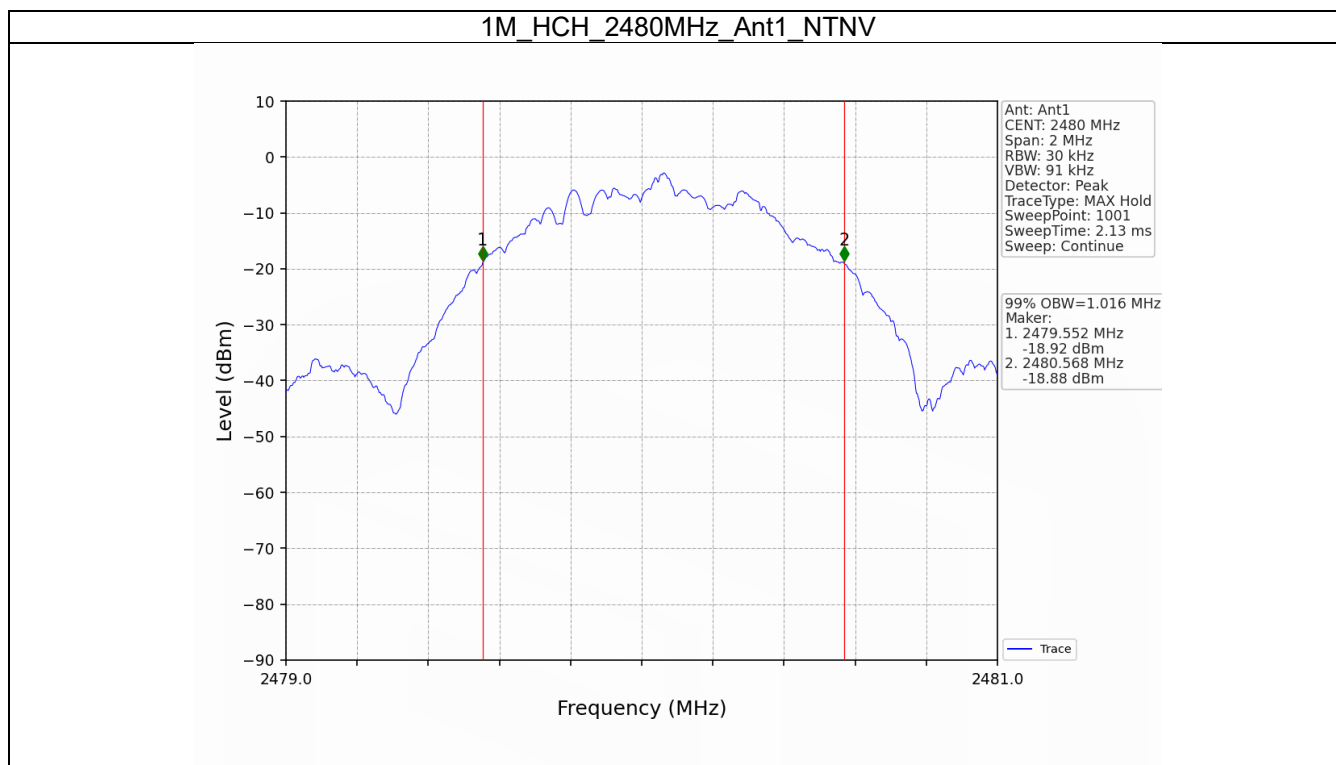



2.2 6dB BW

2.2.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.642	≥ 0.5	Pass
		2440	1	0.641	≥ 0.5	Pass
		2480	1	0.641	≥ 0.5	Pass

2.2.2 Test Graph

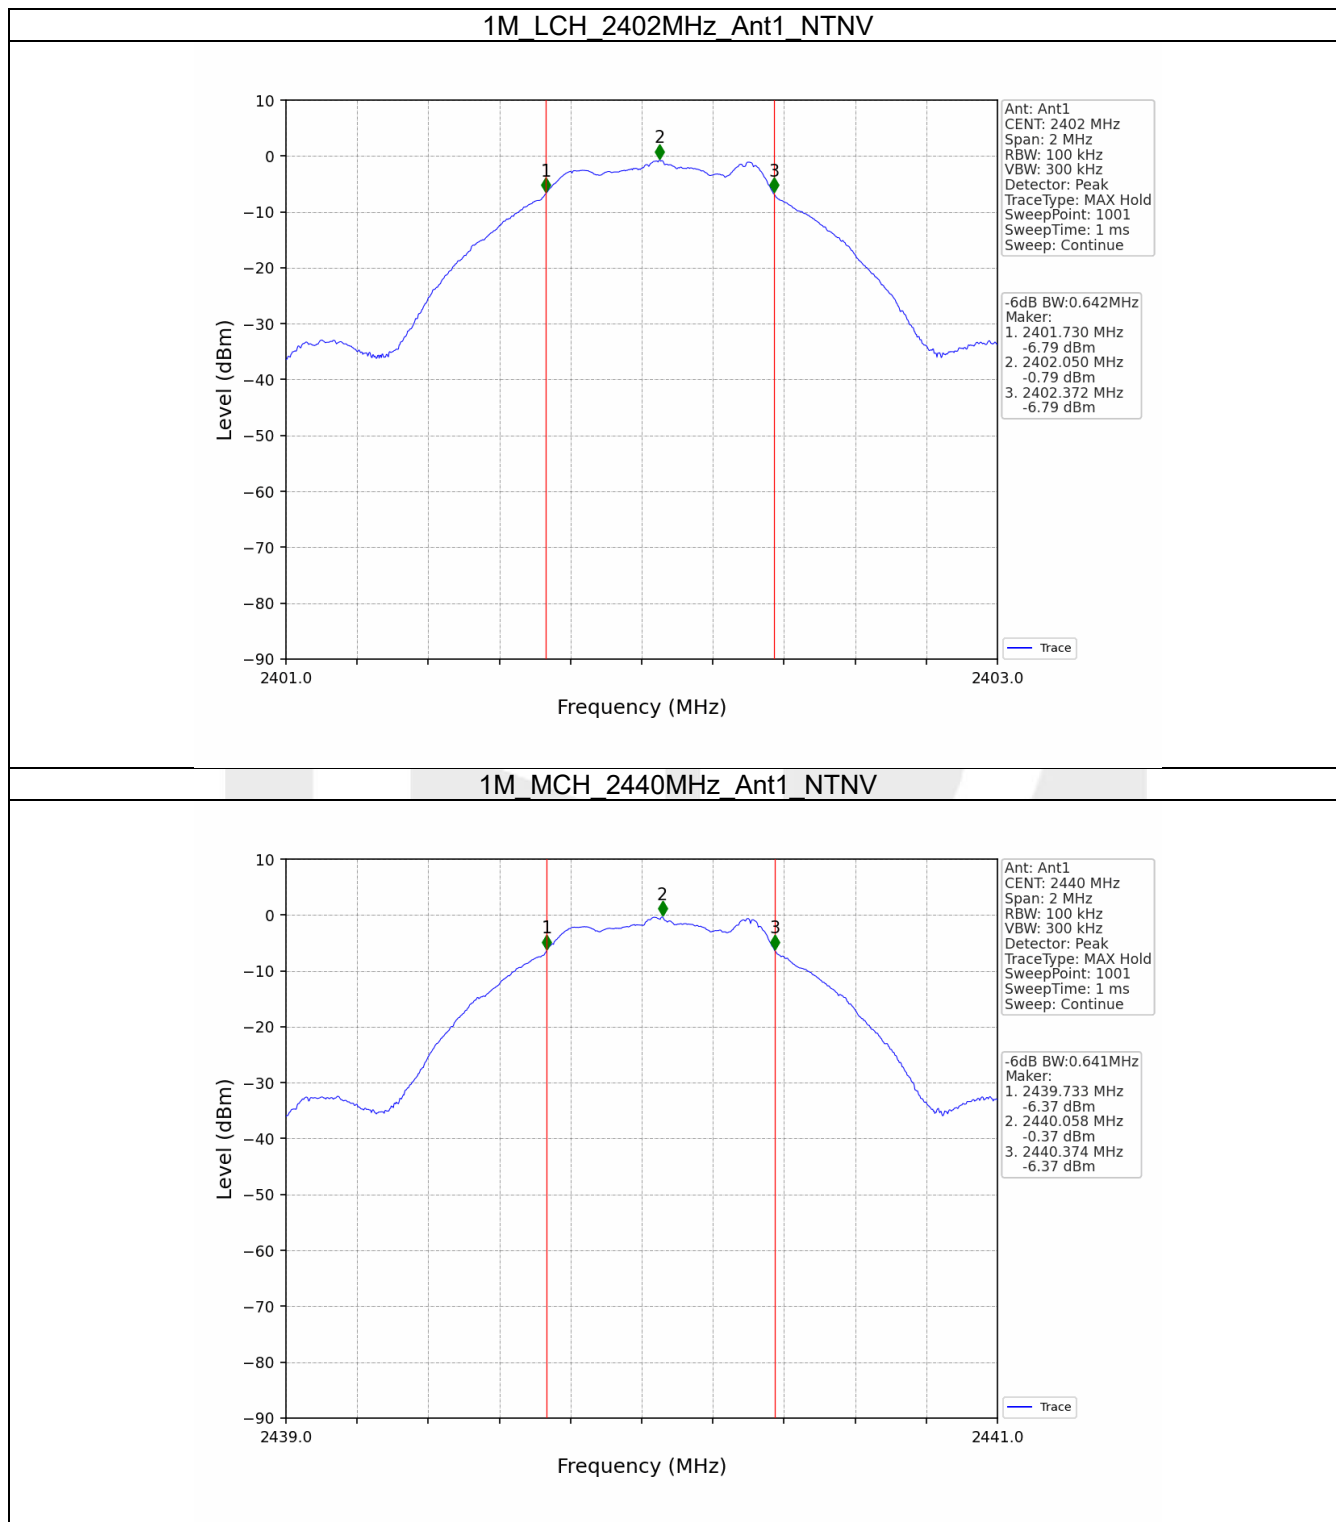

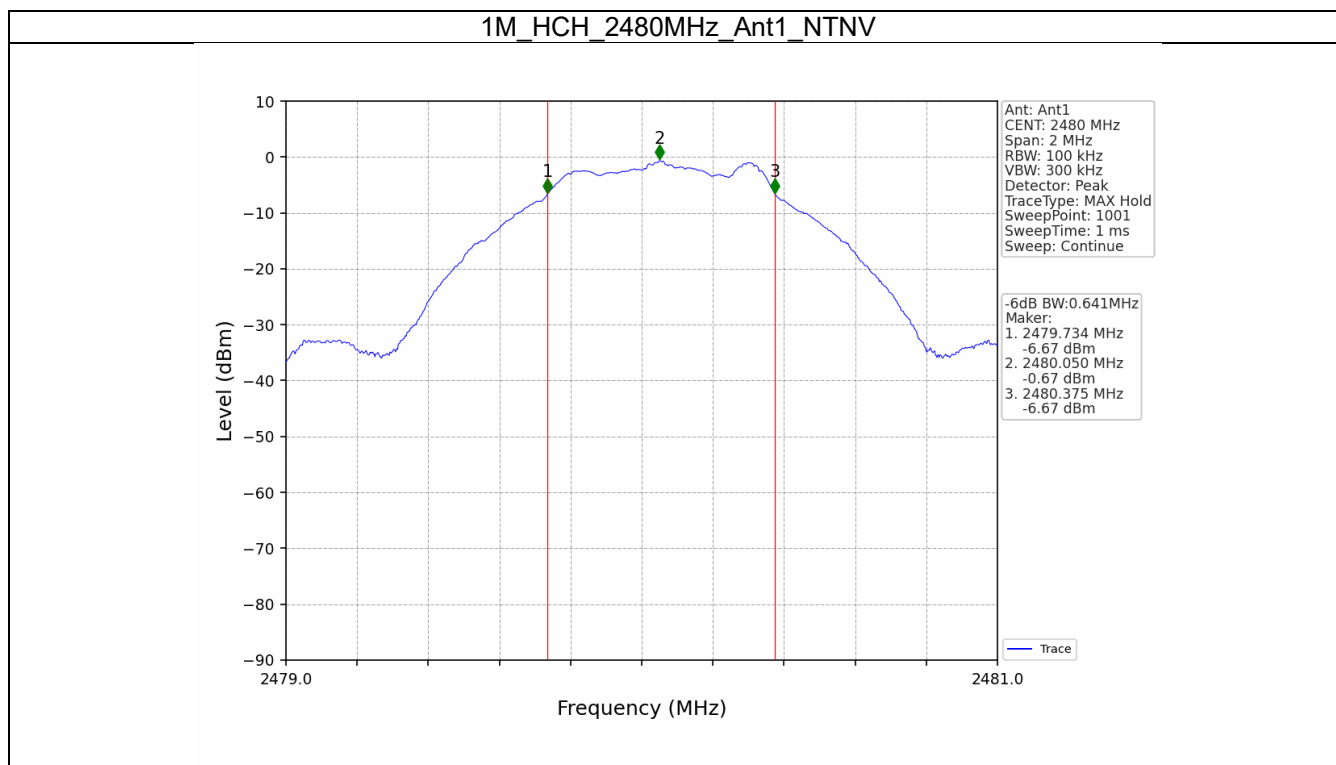


3. Maximum Conducted Output Power


3.1 Power

3.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-0.45	<=30	Pass
		2440	0.07	<=30	Pass
		2480	-0.30	<=30	Pass

3.1.2 Test Graph

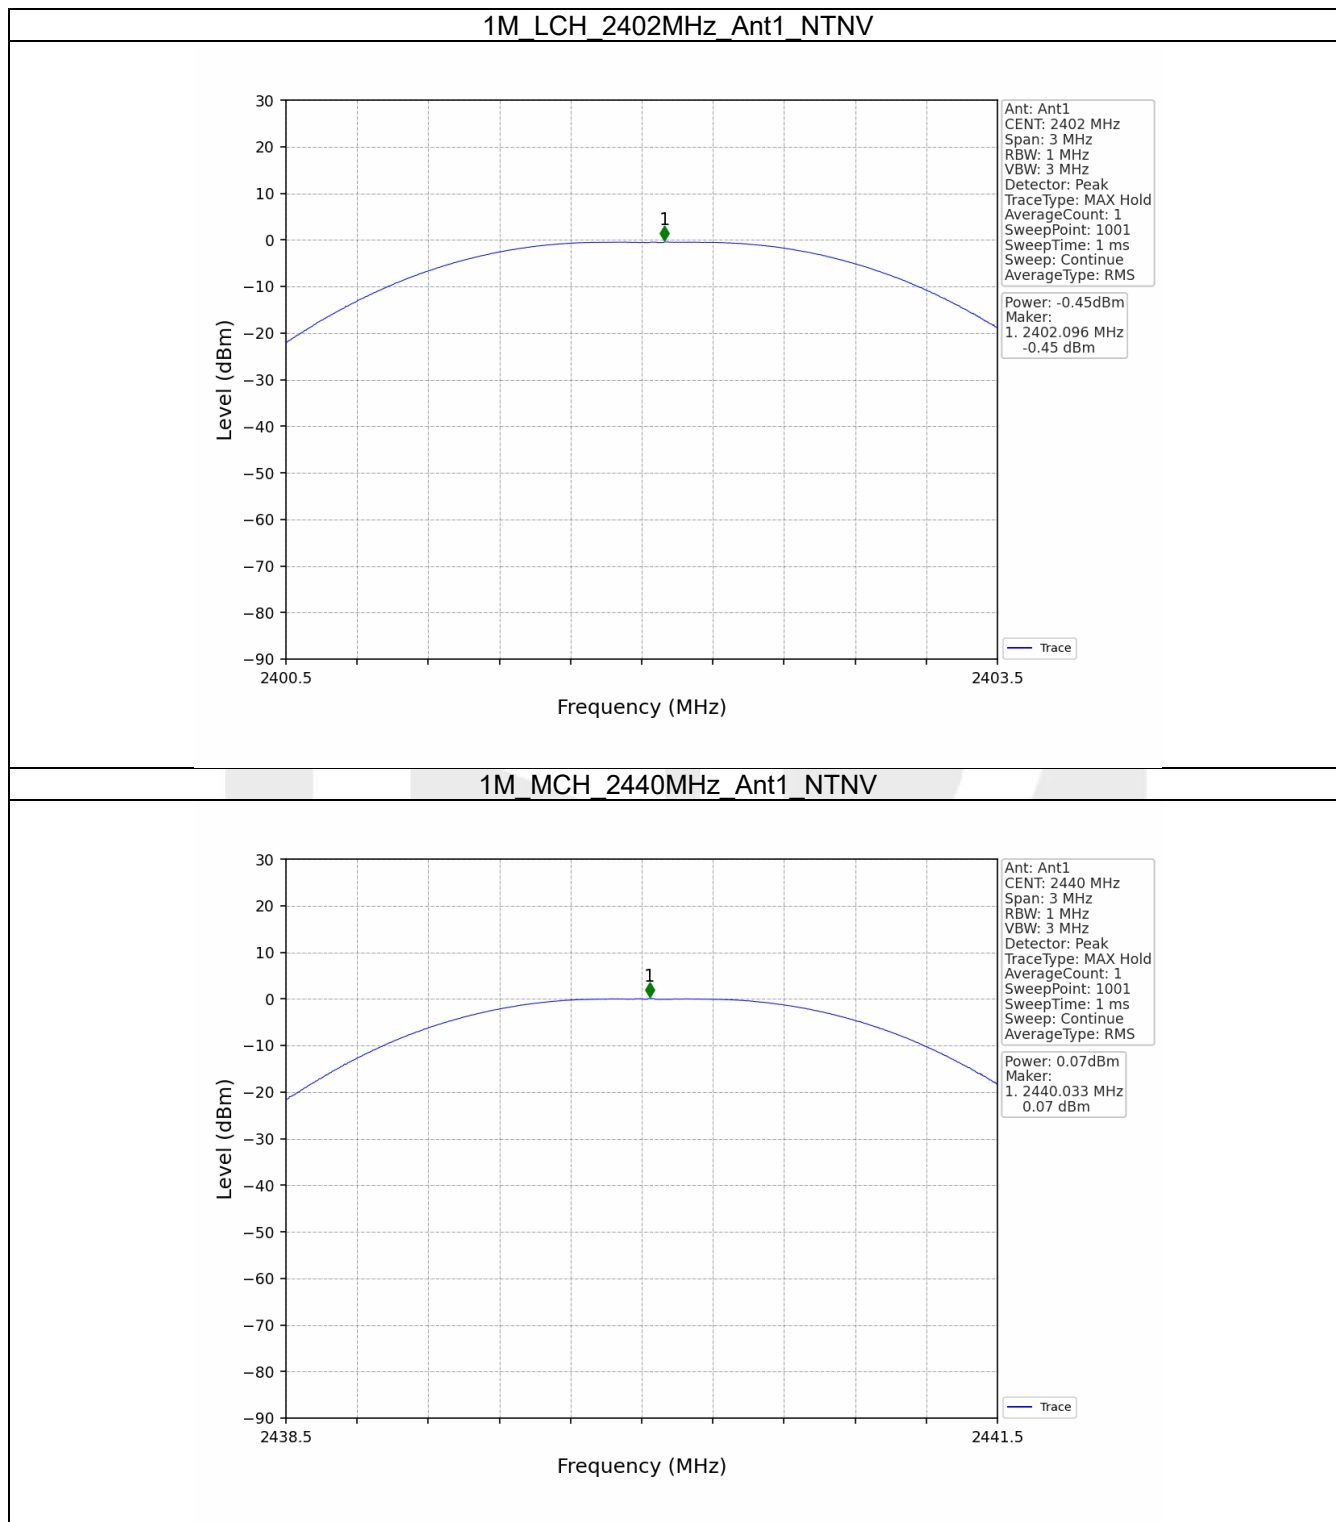

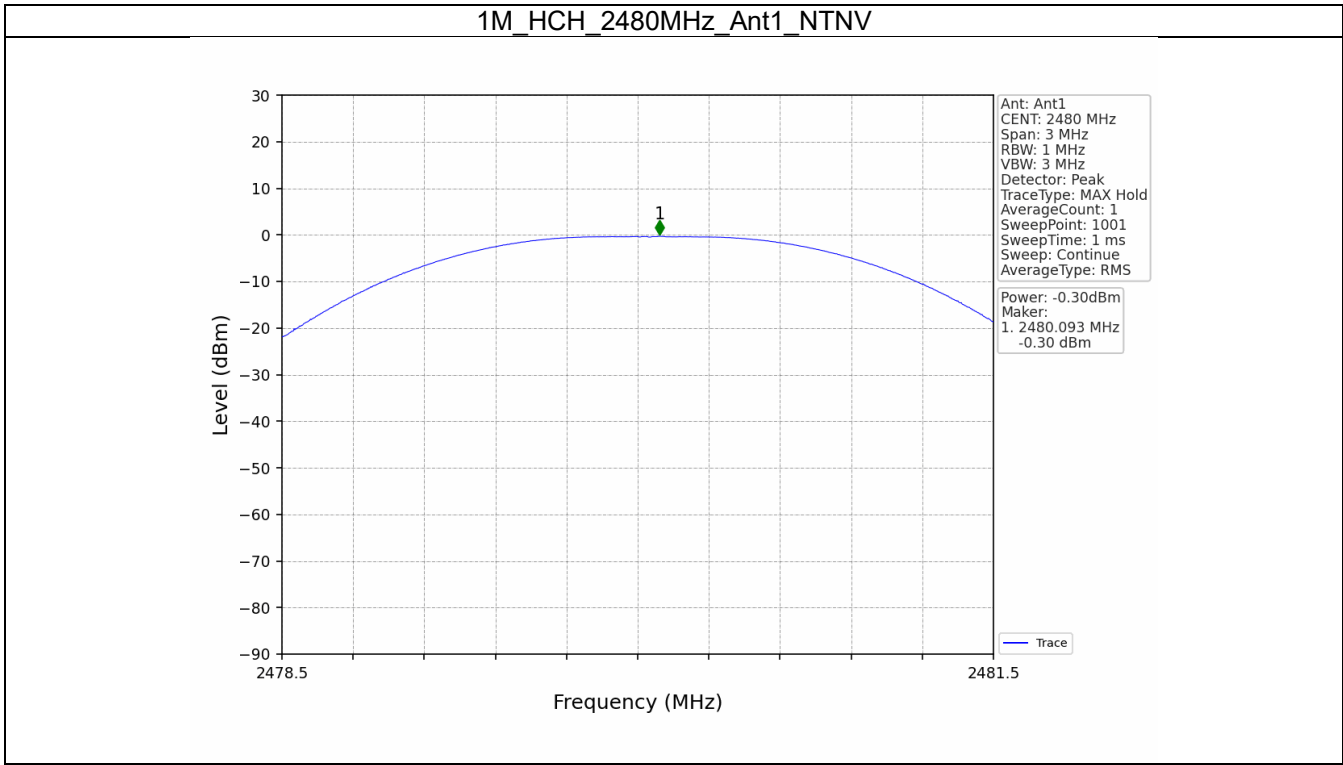


4. Maximum Power Spectral Density


4.1 PSD

4.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-15.76	<=8	Pass
		2440	-14.71	<=8	Pass
		2480	-15.39	<=8	Pass
Note1: Antenna Gain: Ant1: 0.11dBi;					

4.1.2 Test Graph

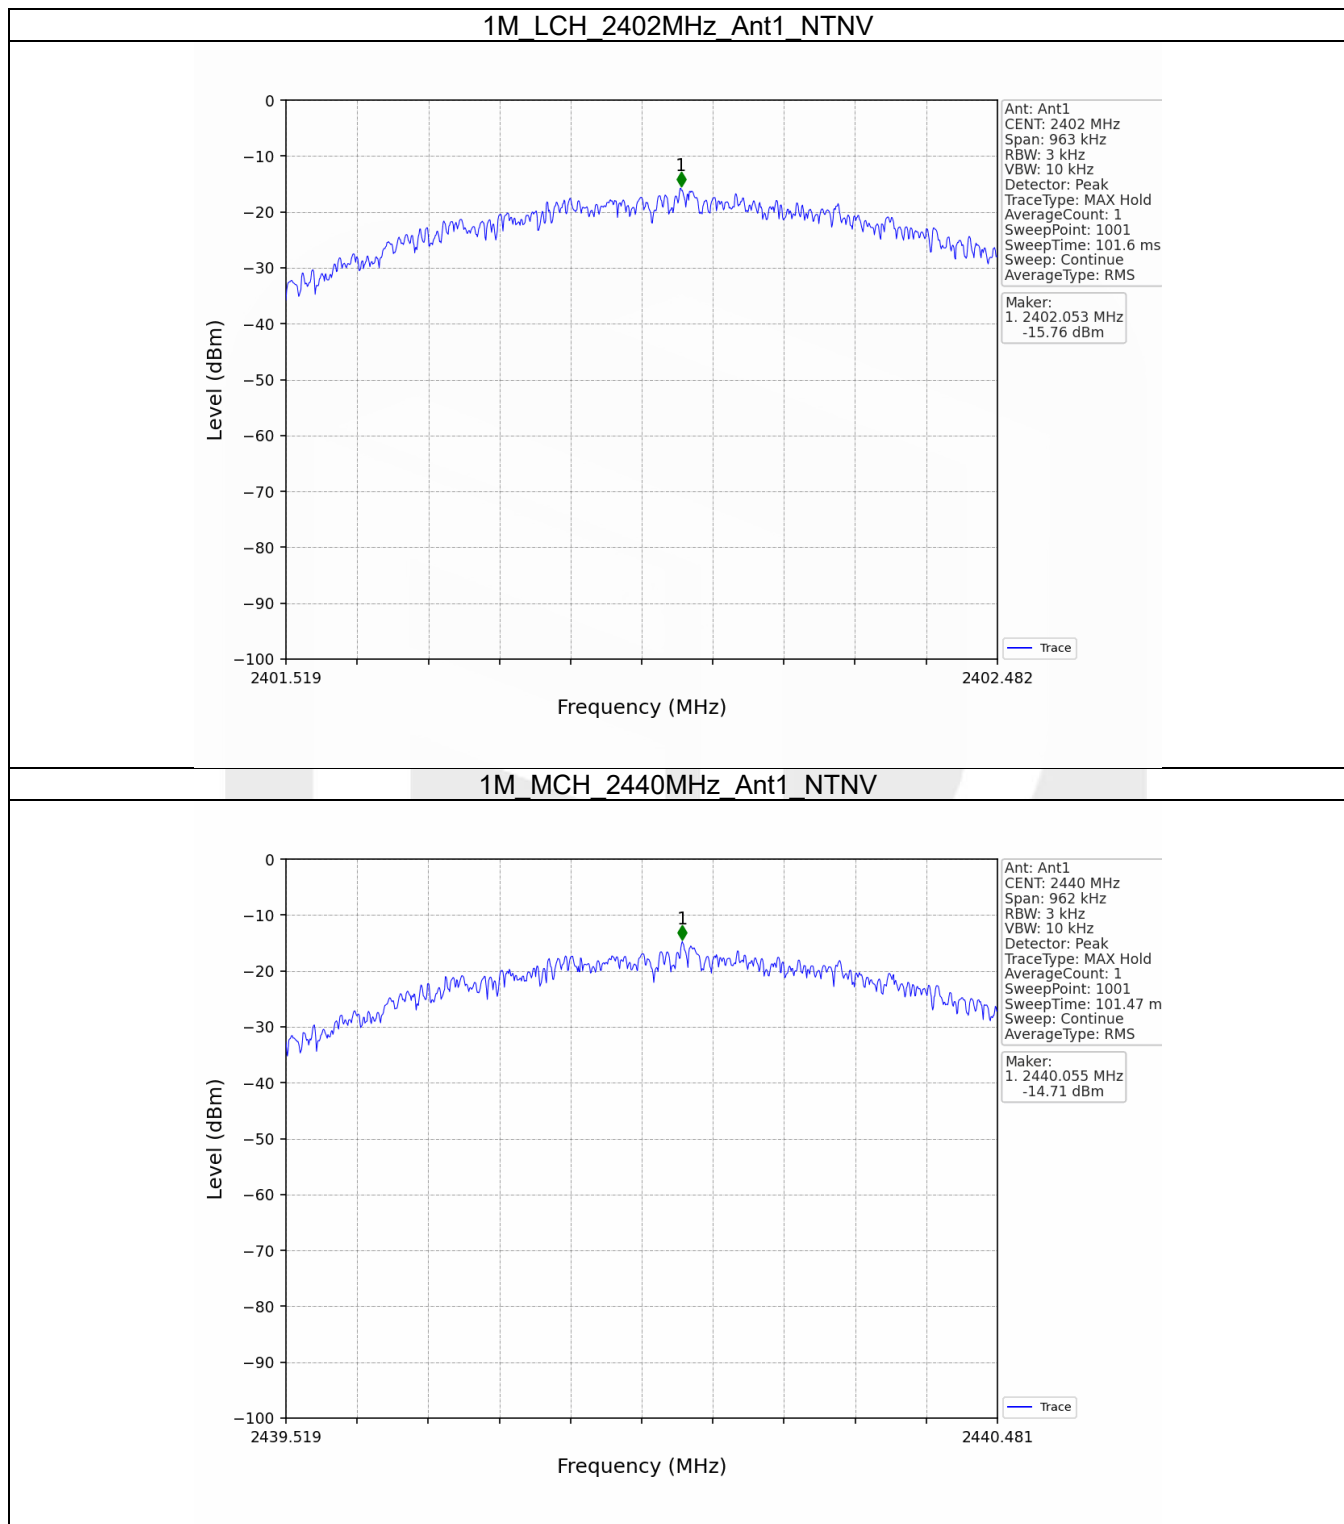

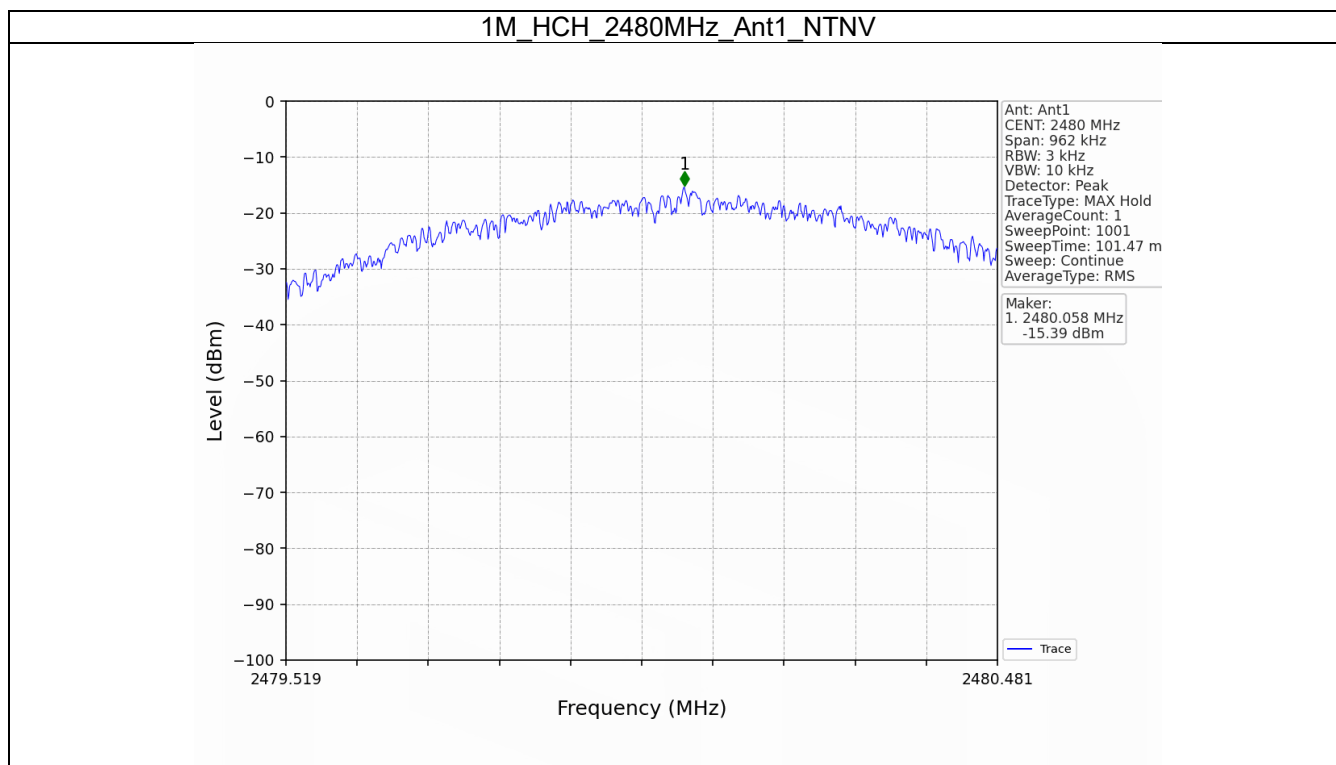


5. Unwanted Emissions In Non-restricted Frequency Bands


5.1 Ref

5.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	-0.86
		2440	1	-0.25
		2480	1	-0.62
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.				

5.1.2 Test Graph

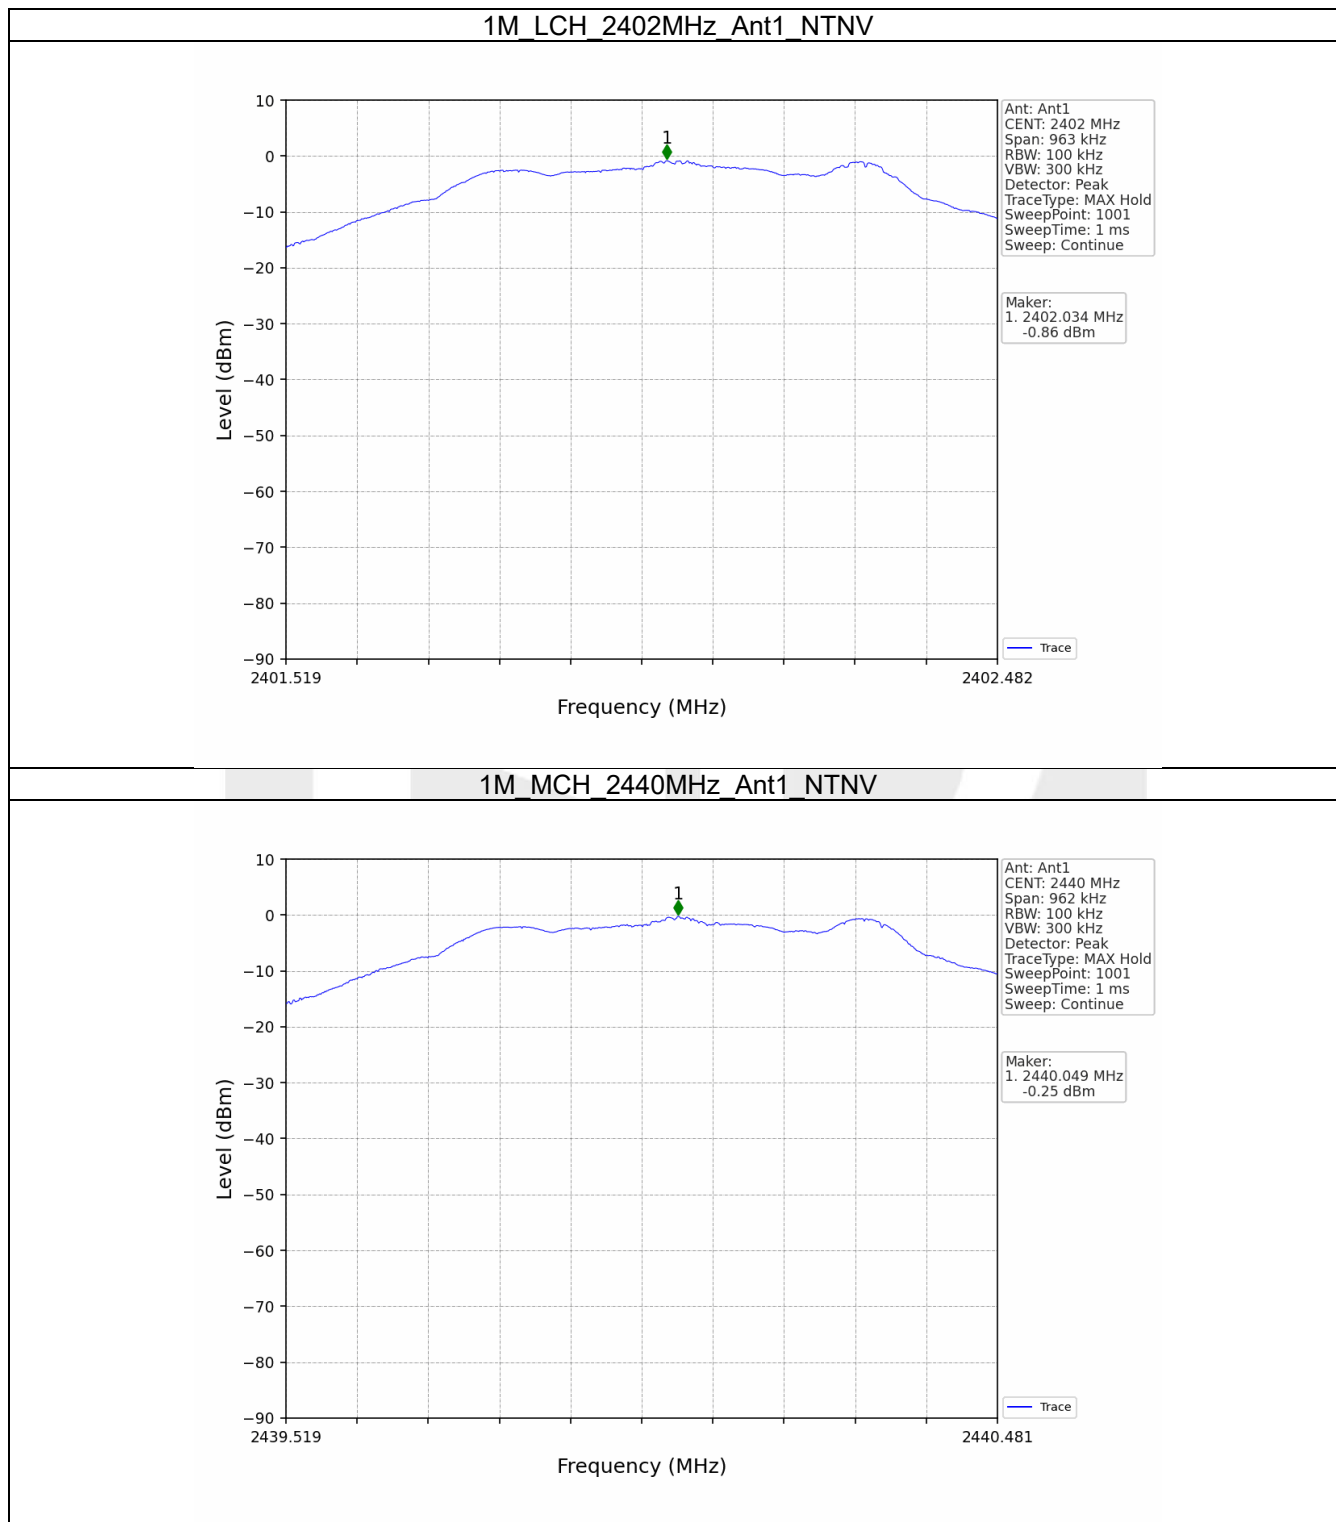

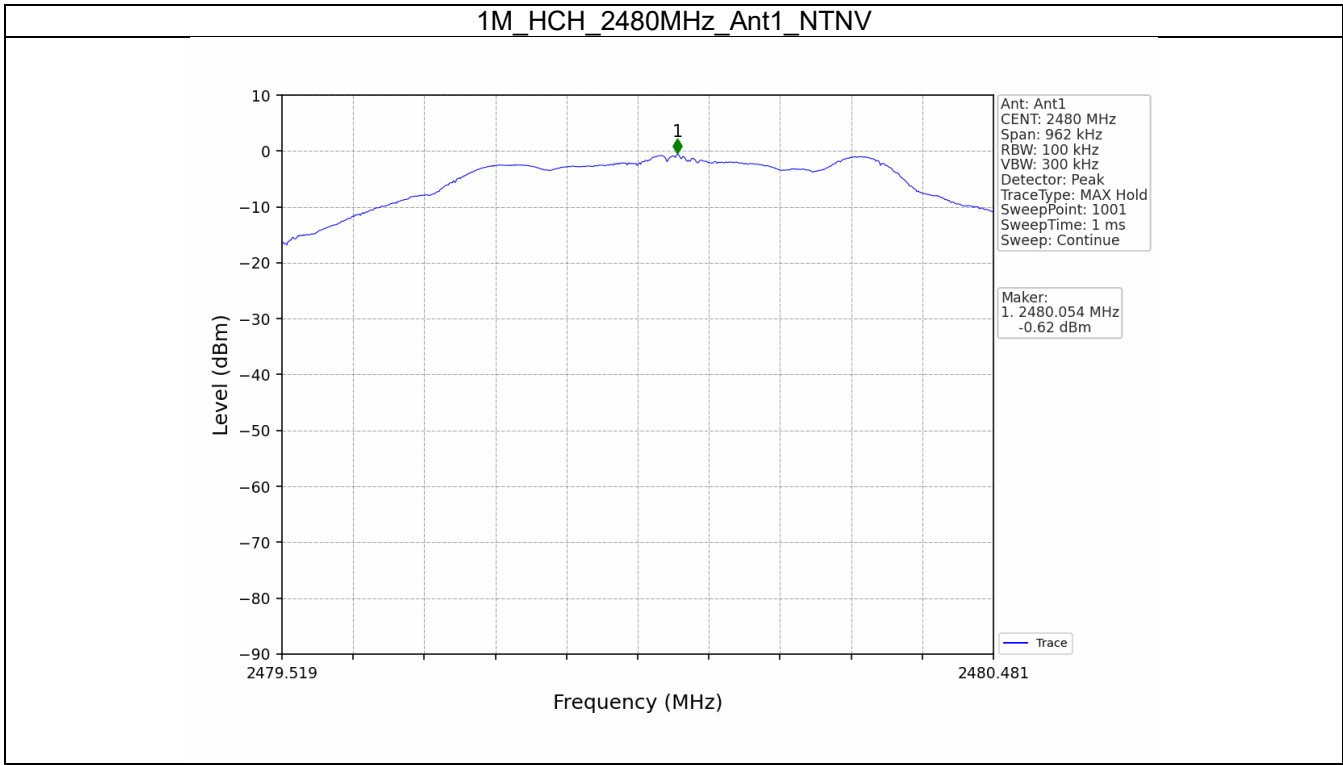



5.2 CSE


5.2.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	-0.25	-20.25	Pass
		2440	1	-0.25	-20.25	Pass
		2480	1	-0.25	-20.25	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.						

5.2.2 Test Graph

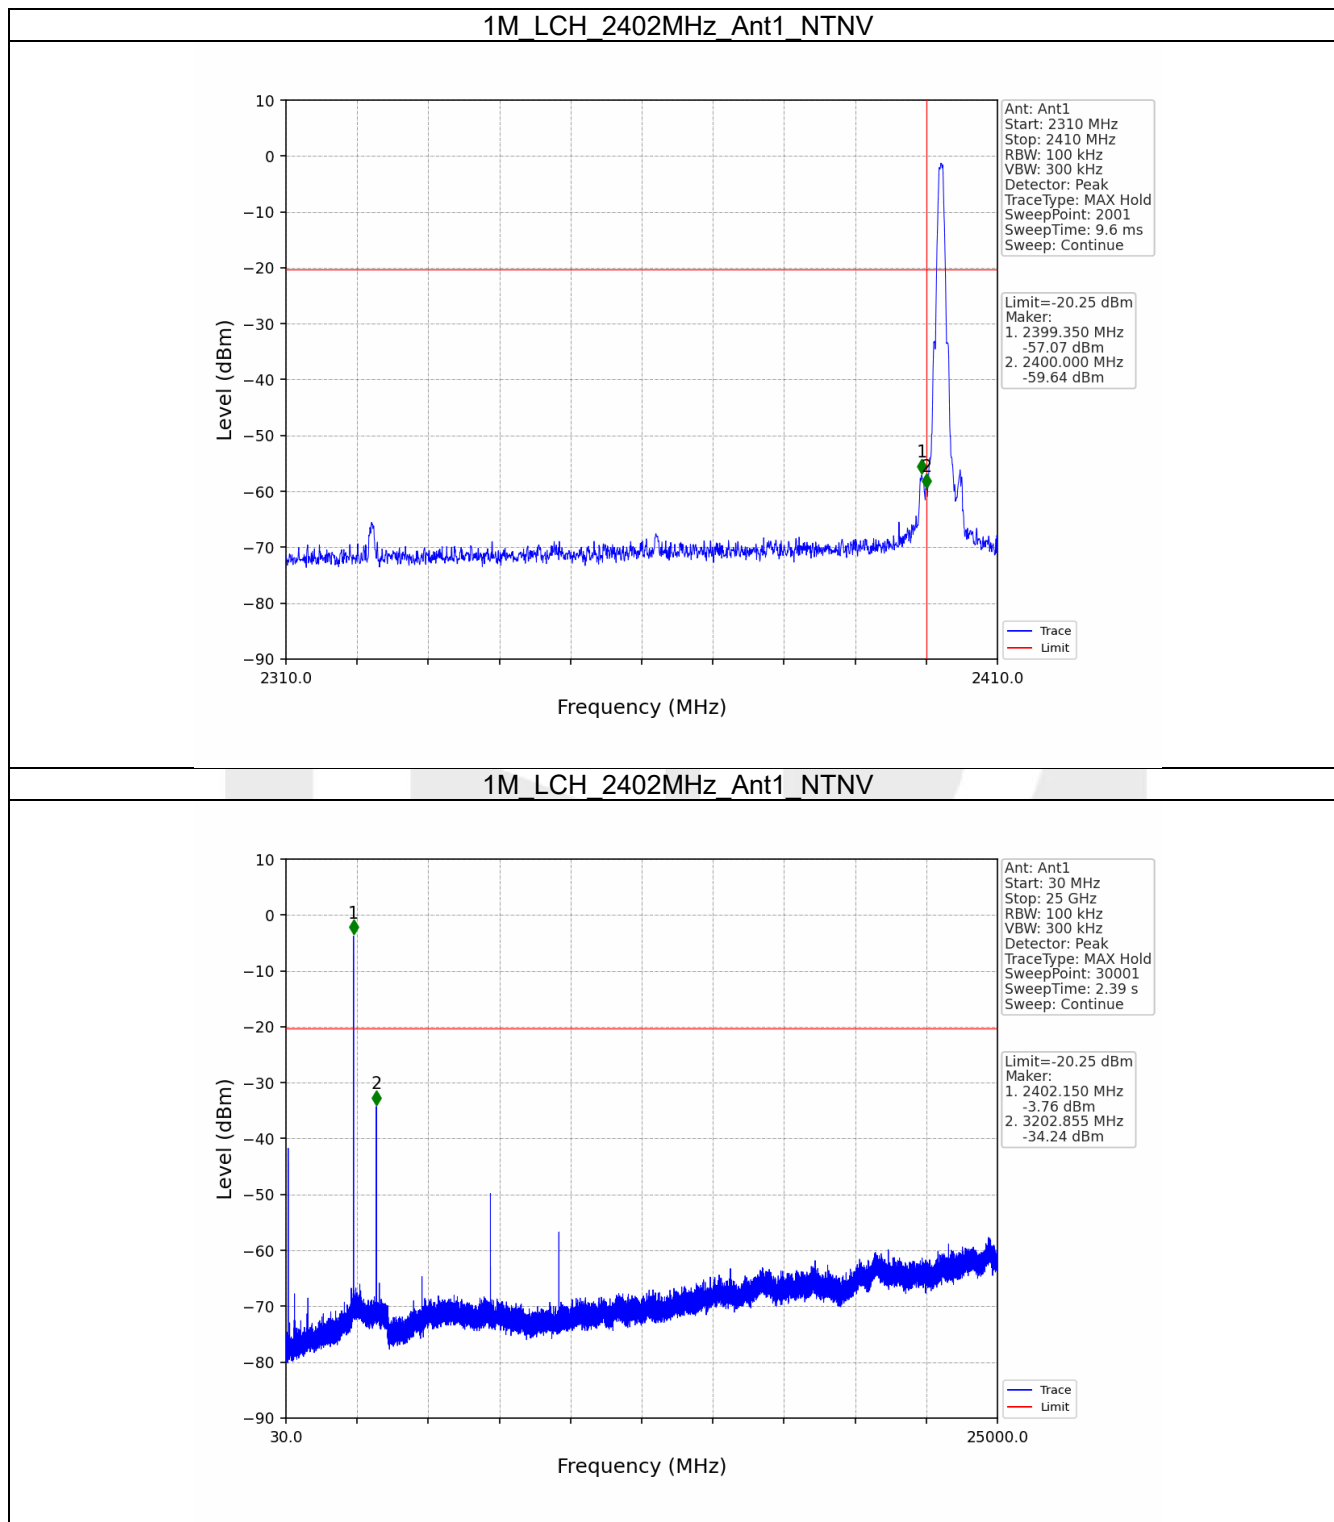

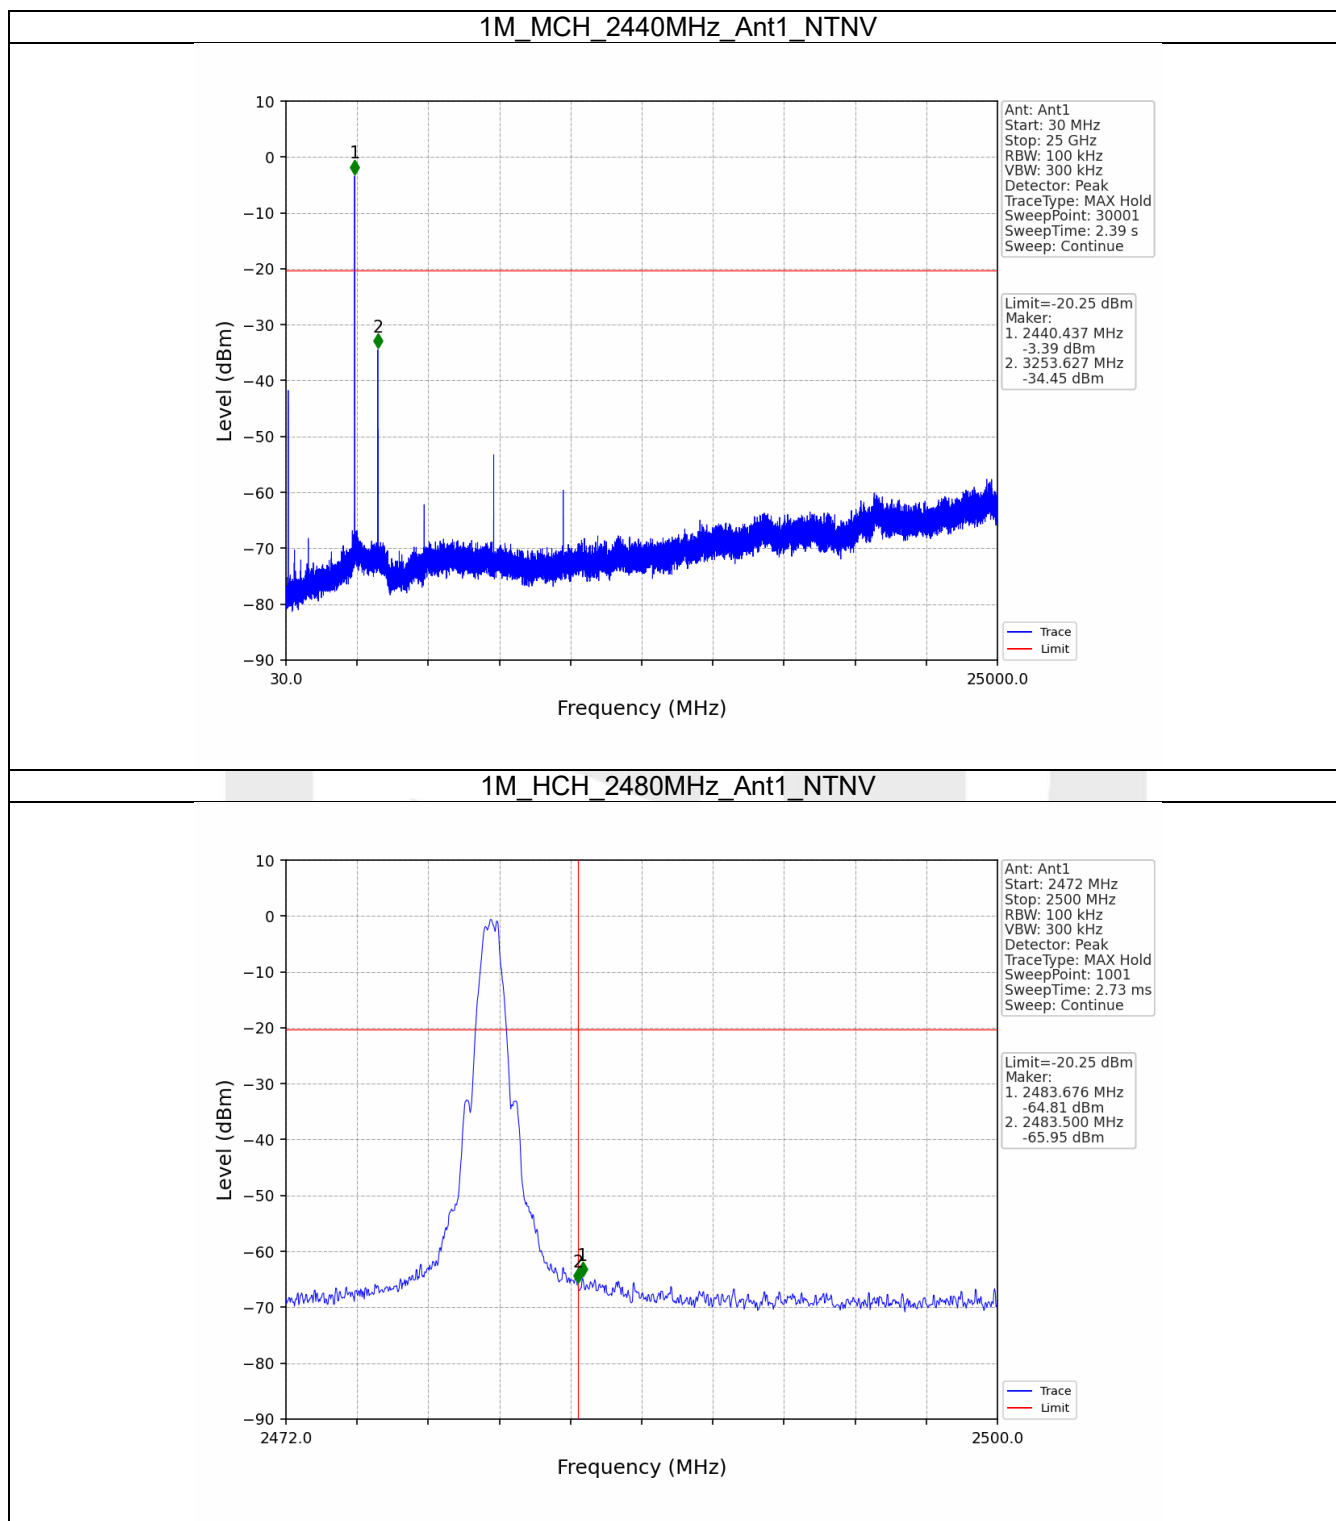

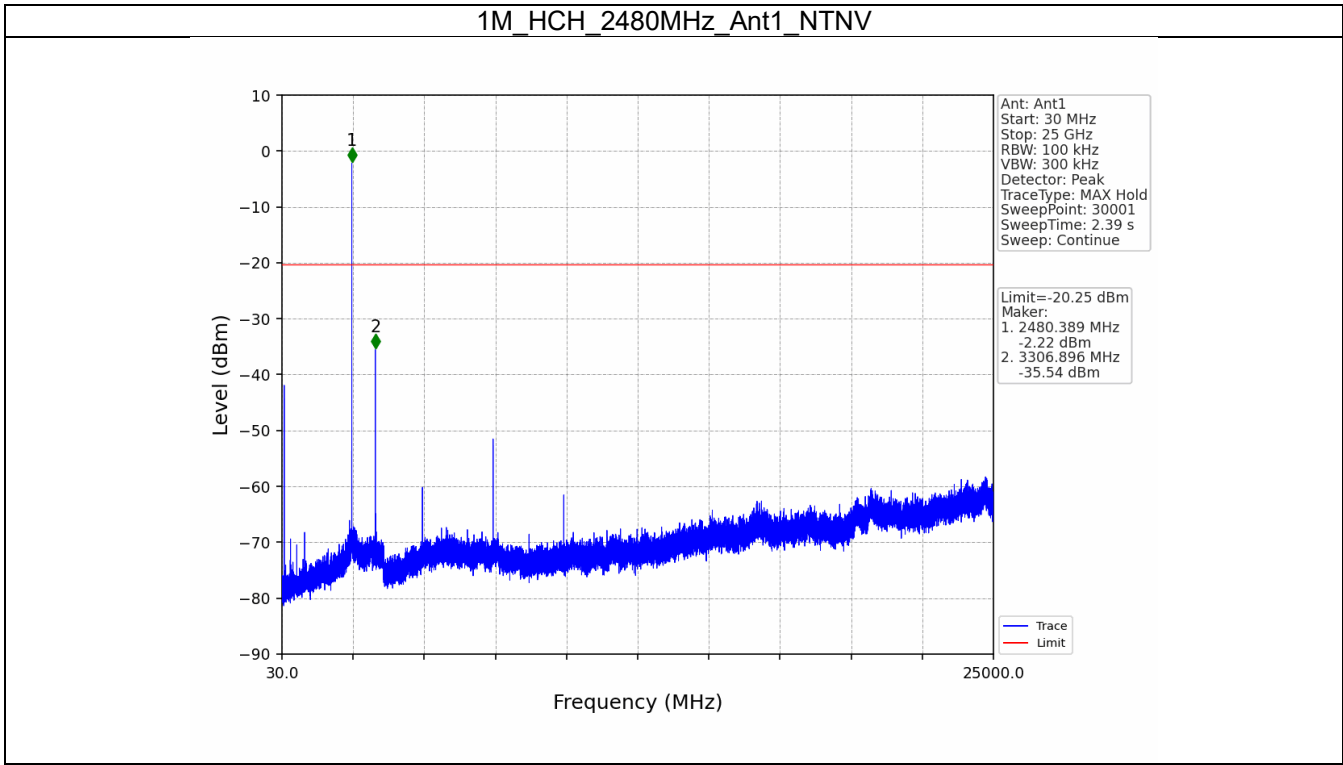

----- End of Report -----