

TEST REPORT

Report Number.....	90763-24-72-24-PP002			
Date of issue	2024-07-04			
Prepared by (+signature).....	Pale			
Reviewer (+signature).....	Duke			
Approved by (+signature)	Jason			
Testing Laboratory name.....	SLG-CPC Testlaboratory Co., Ltd.			
Address.....	No. 11, Wu Song Road, Dongcheng District, Dongguan, Guangdong Province, China 523117			
Applicant's name	Dongguan Yunyang Innovation Electronics Co., Ltd			
Address.....	Room 504, No. 63 Tanglong East Road, Tangxia Town, Dongguan City, Guangdong Province, China			
Manufacturer's name	Dongguan Yunyang Innovation Electronics Co., Ltd			
Address.....	Room 504, No. 63 Tanglong East Road, Tangxia Town, Dongguan City, Guangdong Province, China			
Factory's name	Dongguan Yunyang Innovation Electronics Co., Ltd			
Address.....	Room 504, No. 63 Tanglong East Road, Tangxia Town, Dongguan City, Guangdong Province, China			
Standard(s)	FCC Part 1(1.1310) and Part 2(2.1093)			
Test item description.....	Magnetic Mobile Power			
Trade Mark				
Model/Type reference	Y207			
FCC ID	2BDND-Y207			
Date of receipt of test item ..	2024-03-04			
Date (s) of performance of test.....	2024-03-05 to 2024-03-12			
Summary of Test Results.....	Pass			
The Summary of Test Results based on a technical opinion belongs to the standard(s).				
General disclaimer: This report shall not be reproduced except in full, without the written approval of SLG-CPC Testlaboratory Co., Ltd. The test results in the report only apply to the tested sample.				

TABLE OF CONTENT

1. SUMMARY OF TEST RESULT	4
2. GENERAL INFORMATION	5
2.1. DESCRIPTION OF DEVICE (EUT).....	5
2.2. DESCRIPTION OF TEST MODES.....	6
2.3. DESCRIPTION OF SUPPORT DEVICE	6
2.4. DESCRIPTION OF TEST FACILITY	6
2.5. MEASUREMENT UNCERTAINTY	7
3. MEASURING DEVICE AND TEST EQUIPMENT	8
3.1. FOR MPE MEASUREMENT	8
4. RF EXPOSURE	9
4.1. MEASURING STANDARD	9
4.2. REQUIREMENTS.....	9
4.3. TEST CONFIGURATION	10
4.4. BLOCK DIAGRAM OF TEST SETUP	11
4.5. LIMITS	13
4.6. MEASURING RESULTS	14

Modified Information

Report No.	Revision Data	Summary
90763-24-72-24-PP002	2024-07-04	Original Version

1. SUMMARY OF TEST RESULT

EMISSION		
Description of Test Item	Standard & Limits	Results
MPE	FCC Part 1(1.1310) and Part 2(2.1093) KDB680106 D01 Wireless Power Transfer v04	Pass
Note: N/A is an abbreviation for Not Applicable.		

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Product Name	Magnetic Mobile Power
Trade Name	
Model Name	Y207
Series Model	/
Output	7.5W for Phone
Operation frequency	110-205kHz for Phone
Modulation Type	FSK
Antenna Type	Inductive Loop Antenna with 0dBi
Power Supply	USB-C input: DC 5V 3A or 9V 2A Battery capacity: 5000mAh/19.25Wh, 3.85VDC
Hardware version number	1.1
Software version number	BFFD
Connecting I/O Port(s)	Please refer to the User's Manual

Method(s) of shielding	Passive shielding
Location(s)- col to theouter surface of theenclosure(s)	Transmitter to Top: 7.5264mm Transmitter to Bottom: 46.5264mm Transmitter to Left: 10.5265mm Transmitter to Right: 10.5264mm Transmitter to Front: 1.9000mm Transmitter to Rear: 10.8000mm

2.2. Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

2.3. Description of Support Device

No.	Equipment	Trade name	Model	S/N	Power Cord
1.	Cellphone	Apple	IPhone12pro max		
2	Power adapter	/	A2244		

2.4. Description of Test Facility

Site Description

EMC Lab. : Accredited by ISED, October 31 2023
CAB identifier: CN0126
Company Number: 27767

Accredited by A2LA, October 31 2023
The Certificate Registration Number is 6325.01

Accredited by FCC
Designation Number: CN1287
Test Firm Registration Number: 394054

Name of Firm : SLG-CPC Testlaboratory Co., Ltd.
Site Location : No. 11, Wu Song Road, Dongcheng District, Dongguan, Guangdong Province, China 523117

2.5. Measurement Uncertainty

Test Item	Uncertainty
Magnetic field measurements(9kHz~30MHz)	±2.3%
Electric field measurements(9kHz~30MHz)	±2.1%

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. MEASURING DEVICE AND TEST EQUIPMENT

3.1. For MPE Measurement

Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
<input checked="" type="checkbox"/>	EMF Electromagnetic Field Probe	Narda	EHP-200A	1802X11012	Jun. 01, 2023	3 Year

4. RF EXPOSURE

4.1. Measuring Standard

FCC Part 1(1.1310) and Part 2(2.1091)
Portable rule section part 2.1093.

4.2. Requirements

Three different categories of transmitters are defined by the FCC in OET Bulletin 65. These categories are fixed installation, mobile, and portable and are defined as follows:

- o Fixed Installations: fixed location means that the device, including its antenna, is physically secured at a permanent location and is not able to be easily moved to another location. Additionally, distance to humans from the antenna is maintained to at least 2 meters.
- o Mobile Devices: a mobile device is defined as a transmitting device designed to be used in other than fixed locations and to be generally used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structures and the body of the user or nearby persons. Transmitters designed to be used by consumers or workers that can be easily re-located, such as a wireless modem operating in a laptop computer, are considered mobile devices if they meet the 20 centimeter separation requirement. The FCC rules for evaluating mobile devices for RF compliance are found in 47 CFR §2.1091.
- o Portable Devices: a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user. Portable device requirements are found in Section 2.1093 of the FCC's Rules (47 CFR§2.1093). The FCC also categorizes the use of the device as based upon the user's awareness and ability to exercise control over his or her exposure. The two categories defined are Occupational/ Controlled Exposure and General Population/Uncontrolled Exposure. These two categories are defined as follows:


Occupational/Controlled Exposure: In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means. Awareness of the potential for RF exposure in a workplace or similar environment can be provided through specific training as part of a RF safety program. If appropriate, warning signs and labels can also be used to establish such awareness by providing prominent information on the risk of potential exposure and instructions on methods to minimize such exposure risks.

General Population/Uncontrolled Exposure: The general population / uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity. Warning labels placed on low-power consumer devices such as cellular telephones are not considered sufficient to allow the device to be considered under the occupational/controlled category, and the general population/uncontrolled exposure limits apply to these devices.

4.3. Test configuration

For portable exposure conditions:

- 1 The RF exposure test was performed in anechoic chamber.
- 2 Perform H-field/E-field measurements are taken along all three axes the device from 0cm~20cm in 2cm minimum increment for each edge surface of the host/client pair. If the center of the probe sensing element is more than 5mm from the probe outer edge, the field strengths need to be estimated for the positions that are not reachable.

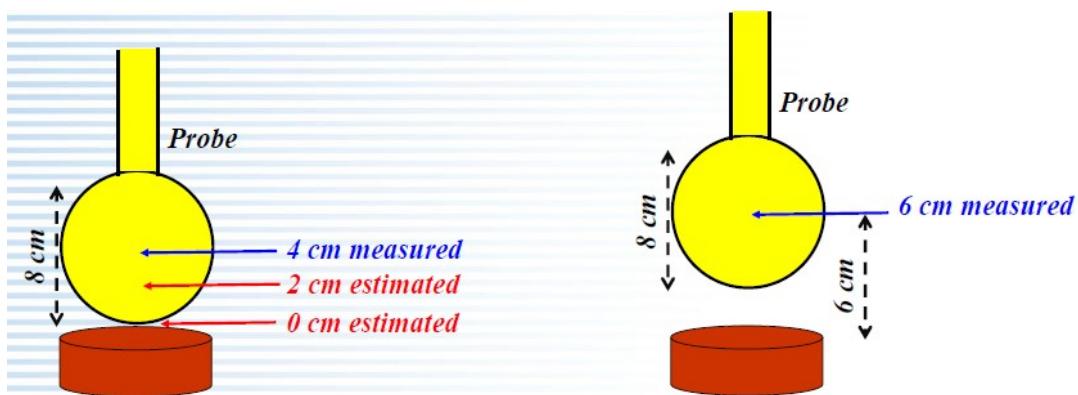

*Example of probe measurements in points close to the device surface:
estimates compared with measurements at 4 and 6 cm provide validation*


- 3 The highest emission level was recorded and compared with limit.
- 4 EUT is a loop/coil emitting structure, so E-field not required.
- 5 According to Calibration information and specification about EHP-200A, The Probe EHP-200A's sensitive elements center is located in the probe's center, and the dimensions is 92x92x109mm. so the actual 0cm, 2cm, 4cm field strengths need to be estimated for the positions that are not reachable. The Extrapolated Value Calculation Method please see the page 13. And the result of test distance 6cm~20cm was measured value.

For mobile exposure conditions:


- 1 The RF exposure test was performed in anechoic chamber.
- 2 The field strength of both E-field and H-field was measured at 20cm (the 20 cm measured from the center of the probe(s) to the edge of the device) using the equipment list above for determining compliance with the MPE requirements of FCC Part 1.1310.
- 3 The RF power density was measured at 3 different charge conditions: min load, mid load, max load.
- 4 Maximum E-field and H-field measurements were made 20cm from each side of the EUT. Along the side of the EUT and still 20cm away from the edge of the EUT, the field probes were positioned at the location where there is maximum field strength. The maximum E-field and H-field is reported below.
- 5 The highest emission level was recorded and compared with limit.
- 6 The EUT were measured according to the dictates of KDB680106 D01 Wireless Power Transfer v04

4.4. Block Diagram of Test Setup


For portable exposure conditions

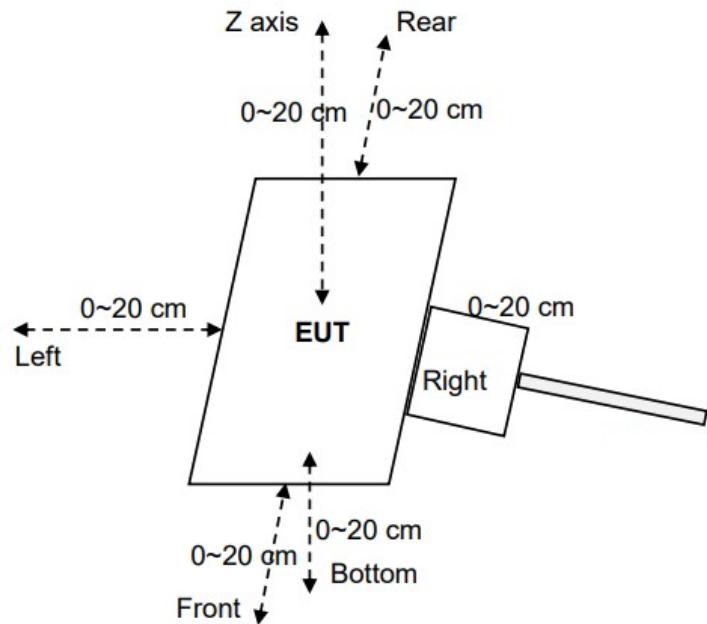

For mobile exposure conditions:

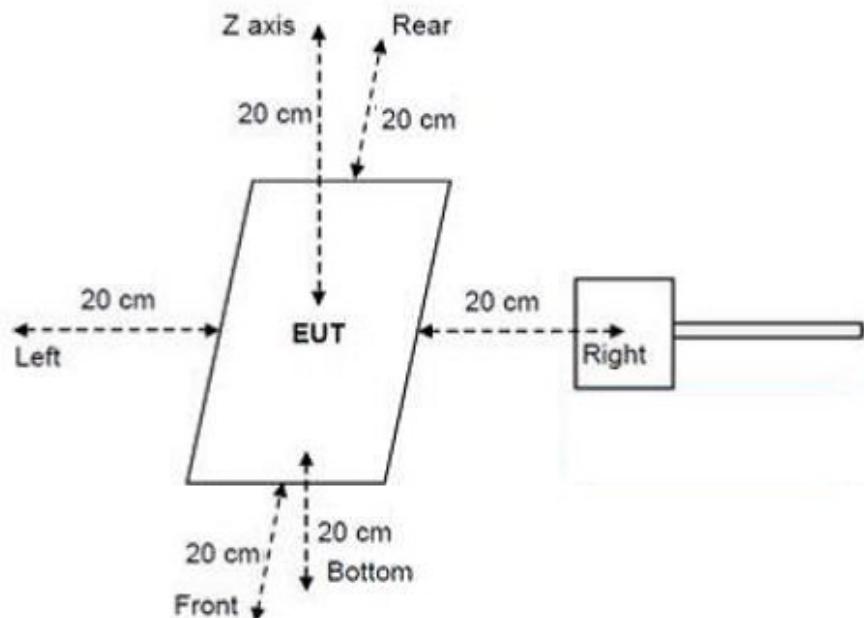

Coli to the outer surface of the enclosure(s)

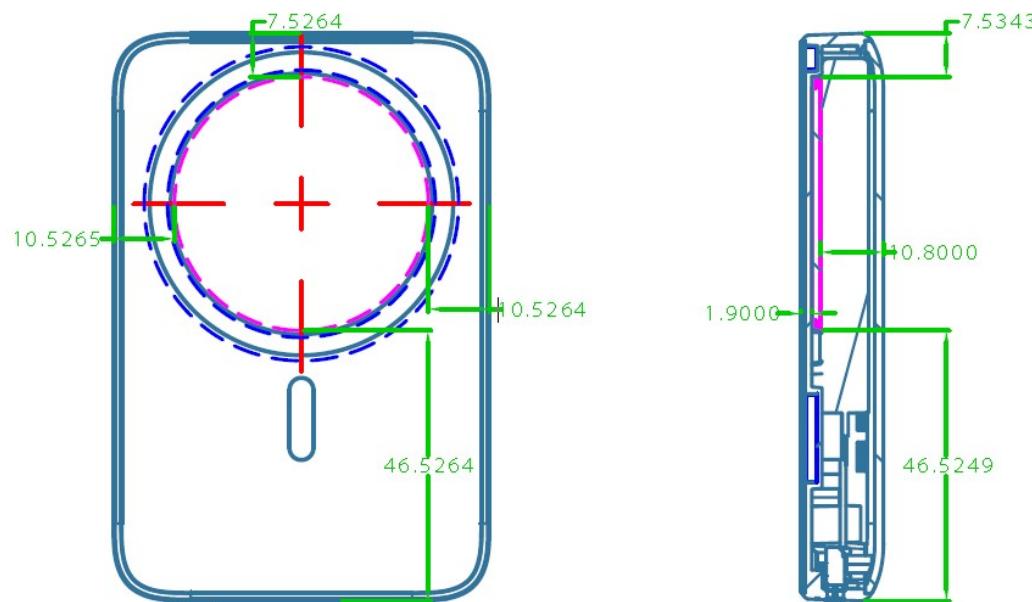

4.5. Limits

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30


Note: f = frequency in MHz ; *Plane-wave equivalent power density

4.6. Measuring Results

TEST Data:

■ Duty cycle measure


■

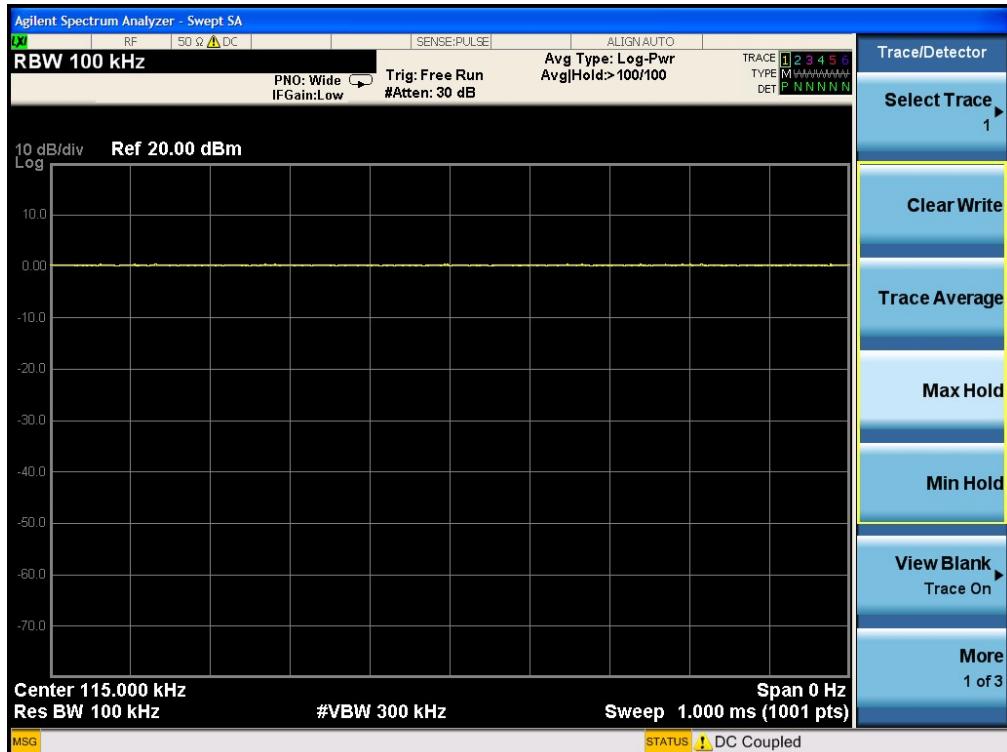


Duty cycle=100%
Duty cycle factor=20log (duty cycle) =0

For portable exposure conditions:

We use Biot-Savart formula theory to estimate the strength of the magnetic field that the measuring instrument cannot measure. According to Biot-Savart formula:

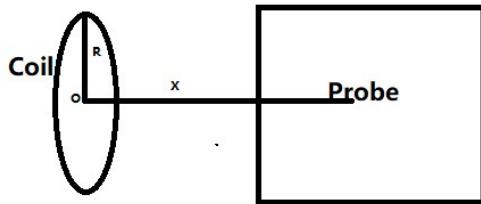Top & Bottom Side:


$$B = \frac{\mu_0 * I * N * R^2}{2 * (R^2 + x^2)^{3/2}}$$

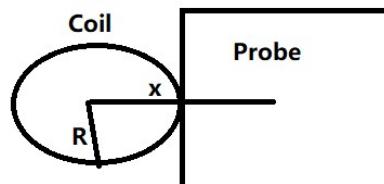Front, left, right & rear Side:


$$B = \frac{\mu_0 * I * N}{2 * x}$$

B: means H-field value;

μ_0 is space permeability; $\mu_0=4 \pi * 10^{-7}$;

I: A current element passing through a coil;

R: means the Radius of coil(According to provided Antenna specification: We can get the minimum R=39/2=19.5mm=0.0195m);

x: means the evaluated point to the coil center.(For top & bottom side: x=test distance; For other side: x=test distance+R)

N: Number of turns, According to provided "Antenna specification" files: N=10.

For validation purposes: If the value to show a 30% agreement between the mode and the (E- and/or H-field) probe measurements for the two closest points to the device surface, and with 2cm increments. Then this extrapolation method is reasonable.

Note: The percent ratio of agreement is the difference between the estimated and measured values divided by the average of the estimated and measured values.

Test Mode: Mode 1(100% Load)

Magnetic Field Emissions

Test Distance(cm)	Top	Left	Right	Rear	Front	Bottom	Limit(A/m)
	Measure Value (A/m)						
0(estimated)	0.0220	0.0872	0.0872	0.0157	0.0897	0.1366	1.63
2(estimated)	0.0303	0.0358	0.0358	0.0064	0.0369	0.1880	1.63
4(estimated)	0.0213	0.0250	0.0250	0.0045	0.0257	0.1325	1.63
6	0.0778	0.0789	0.0793	0.0786	0.0790	0.0791	1.63
8	0.0712	0.0732	0.0743	0.0728	0.0765	0.0729	1.63
10	0.0699	0.0691	0.0681	0.0675	0.0683	0.0695	1.63
12	0.0645	0.0672	0.0664	0.0634	0.0622	0.0612	1.63
14	0.0572	0.0631	0.0567	0.0589	0.0601	0.0574	1.63
16	0.0521	0.0555	0.0500	0.0512	0.0543	0.0508	1.63
18	0.0438	0.0510	0.0477	0.0432	0.0445	0.0468	1.63
20	0.0371	0.0364	0.0373	0.0365	0.0374	0.0366	1.63

Validation:

Magnetic Field Emissions							
Test Distance(cm)	Top	Left	Right	Rear	Front	Bottom	Conclusion
	Unit: Agreement (%); H-field (A/m)						
Agreement -6cm	-5.68	-2.78	-9.09	-3.12	-3.54	-12.05	Compliance
6(estimated)	0.01667	0.020585	0.020585	0.003724	0.021173	0.103384	
6(measured)	0.01765	0.021165	0.022546	0.003843	0.0219354	0.116643	
Agreement -8cm	-20.49	-19.70	-25.67	-12.84	-24.51	-9.27	
8(estimated)	0.014207	0.01819	0.01819	0.003291	0.0187093	0.088084	
8(measured)	0.01745	0.022165	0.023546	0.003743	0.0239354	0.096643	

Test Mode: Mode 1(50% Load)

Magnetic Field Emissions

Test Distance(cm)	Top	Left	Right	Rear	Front	Bottom	Limit(A/m)
	Measure Value (A/m)						
0(estimated)	0.0220	0.0872	0.0872	0.0157	0.0897	0.1366	1.63
2(estimated)	0.0303	0.0358	0.0358	0.0064	0.0369	0.1880	1.63
4(estimated)	0.0213	0.0250	0.0250	0.0045	0.0257	0.1325	1.63
6	0.0696	0.0684	0.0691	0.0674	0.0695	0.0688	1.63
8	0.0636	0.0662	0.0635	0.0617	0.0650	0.0636	1.63
10	0.0596	0.0622	0.0589	0.0580	0.0611	0.0595	1.63
12	0.0541	0.0601	0.0567	0.0531	0.0584	0.0532	1.63
14	0.0532	0.0554	0.0501	0.0498	0.0513	0.0499	1.63
16	0.0477	0.0500	0.0462	0.0484	0.0476	0.0451	1.63
18	0.0415	0.0455	0.0399	0.0421	0.0433	0.0398	1.63
20	0.0322	0.0401	0.0351	0.0323	0.0321	0.0334	1.63

Validation:

Test Distance(cm)	Top	Left	Right	Rear	Front	Bottom	Conclusion
	Unit: Agreement (%); H-field (A/m)						
Agreement -6cm	-5.71	-25.35	-13.86	-3.20	-12.46	6.93	Compliance
6(estimated)	0.0166	0.0205	0.0205	0.0037	0.0211	0.1033	
6(measured)	0.0176	0.0265	0.0236	0.0038	0.0239	0.0964	
Agreement -8cm	-22.17	-27.87	-26.10	-1.63	-23.19	-6.77	
8(estimated)	0.0142	0.0181	0.0181	0.0032	0.0187	0.0880	
8(measured)	0.0177	0.0240	0.0236	0.0033	0.0236	0.0942	

*Test Mode: Mode 1(1% Load)***Magnetic Field Emissions**

Test Distance(cm)	Top	Left	Right	Rear	Front	Bottom	Limit(A/m)
	Measure Value (A/m)						
0(estimated)	0.0220	0.0872	0.0872	0.0157	0.0897	0.1366	1.63
2(estimated)	0.0303	0.0358	0.0358	0.0064	0.0369	0.1880	1.63
4(estimated)	0.0213	0.0250	0.0250	0.0045	0.0257	0.1325	1.63
6	0.0453	0.0437	0.0457	0.0426	0.0434	0.0446	1.63
8	0.0386	0.0399	0.0378	0.0382	0.0381	0.0392	1.63
10	0.0326	0.0358	0.0336	0.0342	0.0343	0.0337	1.63
12	0.0276	0.0312	0.0269	0.0280	0.0301	0.0294	1.63
14	0.0233	0.0281	0.0224	0.0225	0.0247	0.0230	1.63
16	0.0163	0.0197	0.0167	0.0155	0.0171	0.0159	1.63
18	0.0085	0.0173	0.0085	0.0092	0.0101	0.0098	1.63
20	0.0056	0.0131	0.0039	0.0058	0.0048	0.0046	1.63

Validation:

Test Distance(cm)	Top	Left	Right	Rear	Front	Bottom	Conclusion
	Unit: Agreement (%); H-field (A/m)						
Agreement -6cm	14.19	-25.35	-9.55	4.93	-6.02	15.56	Compliance
6(estimated)	0.0166	0.0206	0.0206	0.0037	0.0212	0.1034	
6(measured)	0.0144	0.0266	0.0227	0.0035	0.0225	0.0885	
Agreement -8cm	-12.18	-25.81	-19.63	-20.56	-18.03	-0.20	
8(estimated)	0.0142	0.0182	0.0182	0.0033	0.0187	0.0881	
8(measured)	0.0161	0.0236	0.0222	0.0040	0.0224	0.0883	

For mobile exposure conditions:**Test Mode: Mode 1(100% Load)**

Electric Field Emissions		
Test Position	Measure Value (V/m)	Limit(V/m)
Top	2.67	614
Left	2.53	614
Right	2.76	614
Rear	2.67	614
Front	2.66	614
Bottom	2.57	614

Magnetic Field Emissions

Test Position	Measure Value (A/m)	Limit(A/m)
Top	0.0764	1.63
Left	0.0865	1.63
Right	0.0811	1.63
Rear	0.0764	1.63
Front	0.0831	1.63
Bottom	0.0749	1.63

Test Mode: Mode 1(50% Load)

Electric Field Emissions		
Test Position	Measure Value (V/m)	Limit(V/m)
Top	2.22	614
Left	2.48	614
Right	2.27	614
Rear	2.33	614
Front	2.15	614
Bottom	2.28	614

Magnetic Field Emissions

Test Position	Measure Value (A/m)	Limit(A/m)
Top	0.0579	1.63
Left	0.0696	1.63
Right	0.0672	1.63
Rear	0.0658	1.63
Front	0.0662	1.63
Bottom	0.0508	1.63

*Test Mode: Mode 1(1% Load)***Electric Field Emissions**

Test Position	Measure Value (V/m)	Limit(V/m)
Top	1.91	614
Left	1.66	614
Right	1.77	614
Rear	1.93	614
Front	1.63	614
Bottom	1.81	614

Magnetic Field Emissions

Test Position	Measure Value (A/m)	Limit(A/m)
Top	0.0122	1.63
Left	0.0200	1.63
Right	0.0139	1.63
Rear	0.0172	1.63
Front	0.0189	1.63
Bottom	0.0233	1.63

THE END

声 明

Statement

1. 本报告无授权批准人签字无效；

This report will be void without authorized signature for testing report.

2. 未经许可本报告不得部分复制；

This report shall not be copied partly without authorization.

3. 本报告的检测结果仅对送测样品有效，委托方对样品的代表性和资料的真实性负责；

The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.

4. 本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内，仅作为客户委托、科研、教学或内部质量控制等目的使用；

The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.

5. 本检测报告以实测值进行符合性判定，未考虑不确定度所带来的风险，本实验室不承担相关责任，特别约定、标准或规范中有明确规定的除外；

The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, SLG-CPC shall not assume any responsibility.

6. 对本检测报告若有异议，请于收到报告之日起 20 日内提出；

Objections shall be raised within 20 days from the date receiving the report.