



Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street,
Bao'an District, Shenzhen, China

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No.: CTA25081501301

FCC ID.: 2BDQV-TAD-AK3820S

Compiled by

(position+printed name+signature): File administrators Zoey Cao

Supervised by

(position+printed name+signature): Project Engineer Ace Chai

Approved by

(position+printed name+signature): RF Manager Eric Wang

Date of issue: Aug. 22, 2025

Testing Laboratory Name: Shenzhen CTA Testing Technology Co., Ltd.

Address: Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community,
Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name: Shenzhen Tenganda Intelligent Equipment Co., Ltd

Address: Second floor, building B, No. 1, Bantian shangxue science and
Technology Park, Longgang District, Shenzhen, Guangdong, China

Test specification.....:

Standard: FCC Part 15.247

TRF Originator: Shenzhen CTA Testing Technology Co., Ltd.

Shenzhen CTA Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: Surveillance camera

Trade Mark.....: WJG

Manufacturer: Shenzhen Tenganda Intelligent Equipment Co., Ltd

Model/Type reference: AK-3820S

Listed Models: AK-3120SZ, AK-3820, AK-3120, AK-3120-H, AK-5020

Modulation Type: CCK/DSSS/OFDM

Operation Frequency: From 2412 - 2462MHz

Rating.....: DC 5.0V From external circuit

Result.....: PASS

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

TEST REPORT

Equipment under Test : Surveillance camera

Model /Type : AK-3820S

Listed Models : AK-3120SZ, AK-3820, AK-3120, AK-3120-H, AK-5020

Model difference : The PCB board, circuit, structure and internal of these models are the same,
For external appearance color and shell shape and LED lamp group number and power supply interface are different(AK-3120-H model was use a Type-C interface,other models was use a micro USB interface, For internal all models LED PCB are different.

Applicant : Shenzhen Tenganda Intelligent Equipment Co., Ltd

Address : Second floor, building B, No. 1, Bantian shangxue science and Technology Park, Longgang District, Shenzhen, Guangdong, China

Manufacturer : Shenzhen Tenganda Intelligent Equipment Co., Ltd

Address : Second floor, building B, No. 1, Bantian shangxue science and Technology Park, Longgang District, Shenzhen, Guangdong, China

Test Result:	PASS
--------------	------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1	TEST STANDARDS.....	4
2	SUMMARY.....	5
2.1	General Remarks	5
2.2	Product Description	5
2.3	Equipment Under Test.....	5
2.4	Short description of the Equipment under Test (EUT)	5
2.5	EUT configuration.....	6
2.6	EUT operation mode	6
2.7	Block Diagram of Test Setup.....	6
2.8	Related Submittal(s) / Grant (s).....	6
2.9	Modifications.....	6
3	TEST ENVIRONMENT	7
3.1	Address of the test laboratory	7
3.2	Test Facility.....	7
3.3	Environmental conditions	7
3.4	Test Description.....	8
3.5	Statement of the measurement uncertainty	8
3.6	Equipments Used during the Test	10
4	TEST CONDITIONS AND RESULTS	11
4.1	AC Power Conducted Emission	11
4.2	Radiated Emission.....	22
4.3	Maximum Peak Conducted Output Power	43
4.4	Power Spectral Density	44
4.5	6dB Bandwidth	45
4.6	Out-of-band Emissions	46
4.7	Antenna Requirement.....	47
4.8	On Time and Duty Cycle	48
5	Test Setup Photos of the EUT	49
6	Photos of the EUT.....	49

1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2020+Cor.1-2023](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 v05r02](#): Guidance for Compliance Measurements on Digital Transmission Systems (DTS) ,Frequency Hopping Spread Spectrum System(HFSS), and Hybrid System Devices Operating Under §15.247 of The FCC rules.

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	Aug. 15, 2025
Testing commenced on	:	Aug. 15, 2025
Testing concluded on	:	Aug. 22, 2025

2.2 Product Description

Product Name:	Surveillance camera
Model/Type reference:	AK-3820S
Power supply:	DC 5.0V From external circuit
testing sample ID:	V1.0
Hardware version:	V1.0
Software version:	CTA250815013-1# (Engineer sample) CTA250815013-2# (Normal sample)
WIFI :	
Supported type:	802.11b/802.11g/802.11n(HT20)/ 802.11n(HT40)
Modulation:	802.11b: DSSS 802.11g/802.11n(HT20)/ 802.11n(HT40): OFDM
Operation frequency:	802.11b/802.11g/802.11n(HT20): 2412MHz~2462MHz 802.11n(HT40): 2422MHz~2452MHz
Channel number:	802.11b/802.11g/802.11n(HT20): 11 802.11n(HT40):7
Channel separation:	5MHz
Antenna type:	PCB antenna
Antenna gain:	0.95 dBi

2.3 Equipment Under Test

Power supply system utilised

Refer to section 2.2

2.4 Short description of the Equipment under Test (EUT)

This is a Surveillance camera.

For more details, refer to the user's manual of the EUT.

Test Software Version	Tools software(ADB command)		
Frequency	2412 MHz	2437MHz	2462 MHz
802.11b	15	15	15
802.11g	16	16	16
802.11n20	16	16	16
Frequency	2422 MHz	2437MHz	2452 MHz
802.11n40	16	16	16

2.5 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

● Adapter information (Auxiliary test supplied by test Lab)	Model: EP-TA20CBC Input: AC 100-240V 50/60Hz Output: DC 5V 2A
--	---


2.6 EUT operation mode

The application provider specific test software to control sample in continuous TX and RX for testing meet KDB558074 test requirement.

IEEE 802.11b/g/n: Thirteen channels are provided to the EUT.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

2.7 Block Diagram of Test Setup

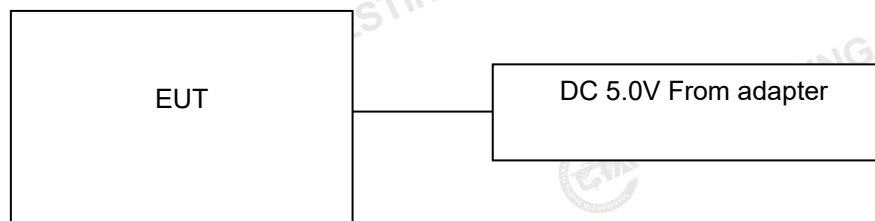

2.8 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.9 Modifications

No modifications were implemented to meet testing criteria.

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 517856 Designation Number: CN1318

Shenzhen CTA Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6534.01

Shenzhen CTA Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

ISED#: 27890 CAB identifier: CN0127

Shenzhen CTA Testing Technology Co., Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

Temperature:	25 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

Conducted testing:

Temperature:	25 ° C
Humidity:	44 %
Atmospheric pressure:	950-1050mbar

AC Power Conducted Emission

Temperature:	24 ° C
Humidity:	44 %
Atmospheric pressure:	950-1050mbar

3.4 Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Peak Conducted Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

Remark:

1. The measurement uncertainty is not included in the test result.
2. We tested all test mode and recorded worst case in report
3. RF Conducted test Offset= cable loss, For conducted spurious emission test, cable loss is the maximum value in the range of test.

Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Maximum Peak Conducted Output Power	11b/DSSS	1 Mbps	1/6/11
Power Spectral Density	11g/OFDM	6 Mbps	1/6/11
6dB Bandwidth	11n(20MHz)/OFDM	MCS0	1/6/11
Spurious RF conducted emission	11n(40MHz)/OFDM	MCS0	3/6/9
Radiated Emission 9KHz~1GHz&	11b/DSSS	1 Mbps	1/11
Radiated Emission 1GHz~10 th Harmonic	11g/OFDM	6 Mbps	1/11
Band Edge	11n(20MHz)/OFDM	MCS0	1/11
	11n(40MHz)/OFDM	MCS0	3/9

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the Shenzhen CTA Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen CTA Testing Technology Co., Ltd. :

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	9KHz~30MHz	3.02 dB	(1)
Radiated Emission	30~1000MHz	4.06 dB	(1)
Radiated Emission	1~18GHz	5.14 dB	(1)
Radiated Emission	18-40GHz	5.38 dB	(1)
Conducted Disturbance	0.15~30MHz	2.14 dB	(1)

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China
Tel: +86-755 2322 5875 E-mail: cta@cta-test.cn Web: http://www.cta-test.cn

Output Peak power	30MHz~18GHz	0.55 dB	(1)
Power spectral density	/	0.57 dB	(1)
Spectrum bandwidth	/	1.1%	(1)
Radiated spurious emission (30MHz-1GHz)	30~1000MHz	4.10 dB	(1)
Radiated spurious emission (1GHz-18GHz)	1~18GHz	4.32 dB	(1)
Radiated spurious emission (18GHz-40GHz)	18-40GHz	5.54 dB	(1)
Time	/	±2%	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Equipment No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	CTA-308	2025/08/04	2026/08/03
LISN	R&S	ENV216	CTA-314	2025/07/30	2026/07/29
EMI Test Receiver	R&S	ESPI	CTA-307	2025/07/30	2026/07/29
EMI Test Receiver	R&S	ESCI	CTA-306	2025/07/30	2026/07/29
Spectrum Analyzer	Agilent	N9020A	CTA-301	2025/07/30	2026/07/29
Vector Signal generator	Agilent	N5182A	CTA-305	2025/07/30	2026/07/29
Analog Signal Generator	R&S	E4421B	CTA-304	2025/07/30	2026/07/29
WIDEBAND RADIO COMMUNICATION TESTER	CMW500	R&S	CTA-302	2025/07/30	2026/07/29
Temperature and humidity meter	Chigo	ZG-7020	CTA-326	2025/07/31	2026/07/30
Ultra-Broadband Antenna	Schwarzbeck	VULB9163	CTA-310	2023/10/17	2026/10/16
Horn Antenna	Schwarzbeck	BBHA 9120D	CTA-309	2023/10/13	2026/10/12
Loop Antenna	Zhinan	ZN30900C	CTA-311	2023/10/17	2026/10/16
Horn Antenna	Schwarzbeck	BBHA 9170	CTA-346	2025/05/18	2028/05/17
Amplifier	Schwarzbeck	BBV9745	CTA-312	2025/07/30	2026/07/29
Amplifier	Tonscend	TAP-011840	CTA-313	2025/07/30	2026/07/29
High-Pass Filter	XingBo	XBLBQ-GTA18	CTA-402	2025/07/30	2026/07/29
High-Pass Filter	XingBo	XBLBQ-GTA27	CTA-403	2025/07/30	2026/07/29
Automatic control unit	Tonscend	JS0806-2	CTA-404	2025/07/30	2026/07/29
Power Sensor	Agilent	U2021XA	CTA-405	2025/07/30	2026/07/29
Amplifier	SKET	LNPA 1840G-50	CTA-345	2025/05/17	2026/05/16
Spectrum analyzer	R&S	FSV40-N	CTA-344	2025/05/17	2026/05/16
Power Meter	R&S	NRVS	CTA-354	2025/07/30	2026/07/29

Test Equipment	Manufacturer	Model No.	Version number	Calibration Date	Calibration Due Date
EMI Test Software	Tonscend	TS@JS32-RE	5.0.0.2	N/A	N/A
EMI Test Software	Tonscend	TS@JS32-CE	5.0.0.1	N/A	N/A
RF Test Software	Tonscend	TS@JS1120-3	3.1.65	N/A	N/A
RF Test Software	Tonscend	TS@JS1120	3.1.46	N/A	N/A

4 TEST CONDITIONS AND RESULTS

4.1 AC Power Conducted Emission

TEST CONFIGURATION



TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2020+Cor.1-2023.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2020+Cor.1-2023
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2020+Cor.1-2023
- 4 The EUT received power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


* Decreases with the logarithm of the frequency.

TEST RESULTS


Remark:

1. All modes of 802.11b/g/n were tested at Low, Middle, and High channel; only the worst result of 802.11b CH11 was reported as below:
2. Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:

Model: AK-3820S

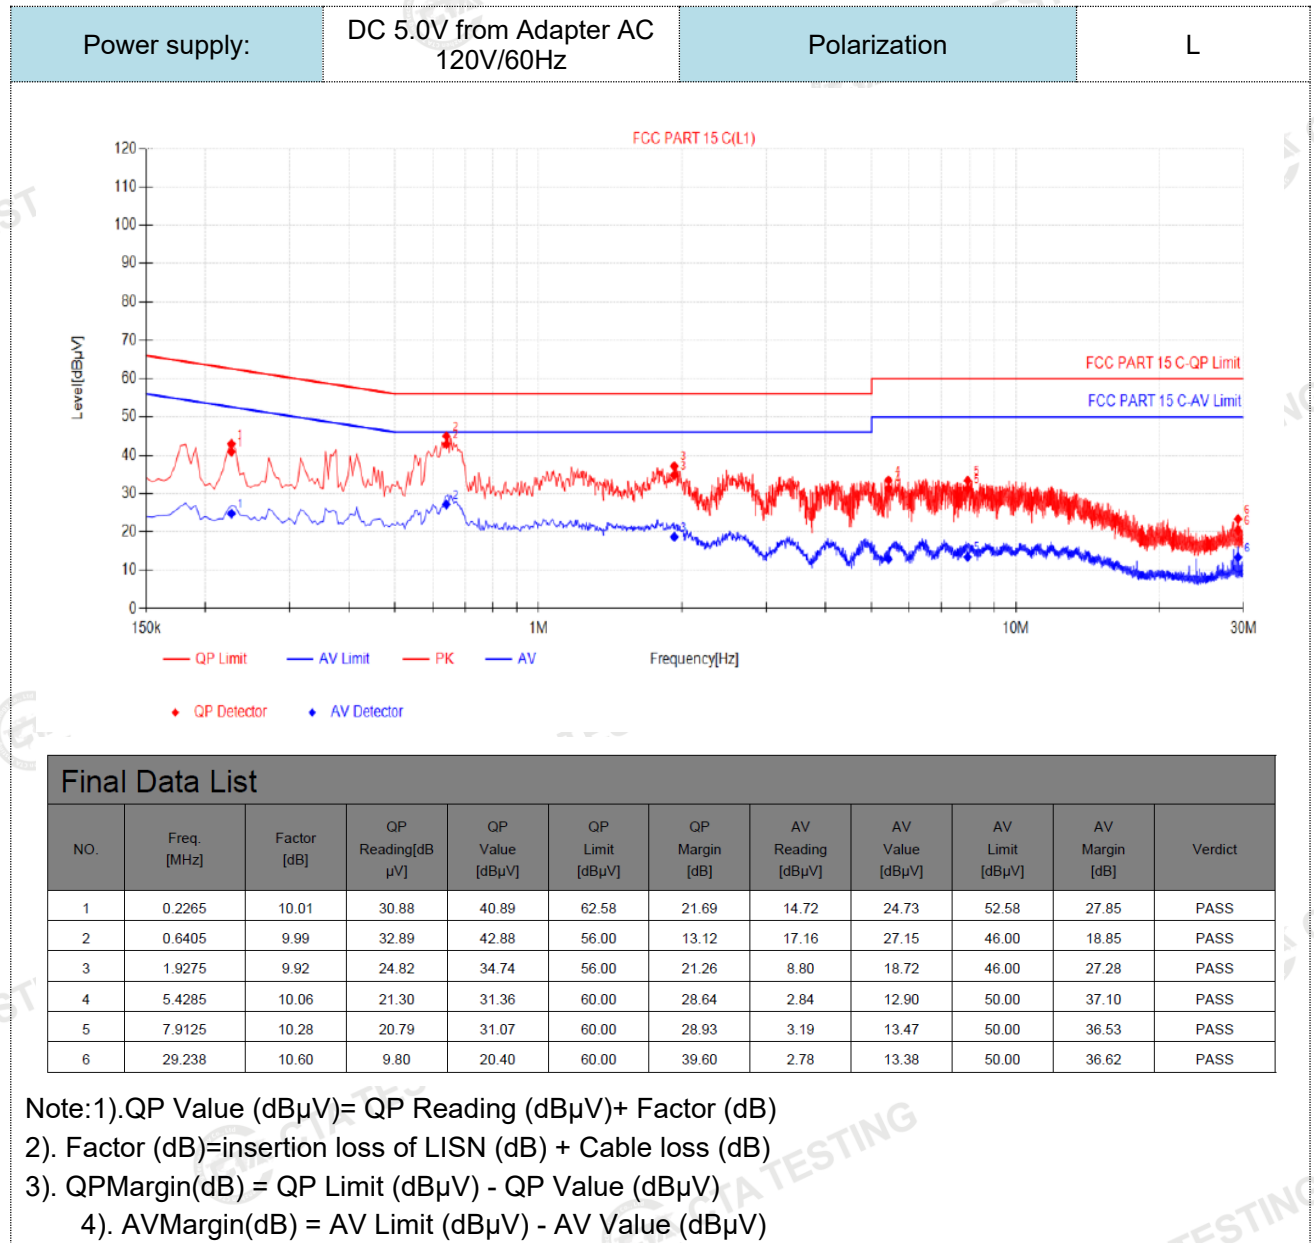

Power supply:	DC 5.0V from Adapter AC 120V/60Hz	Polarization	N
---------------	--------------------------------------	--------------	---

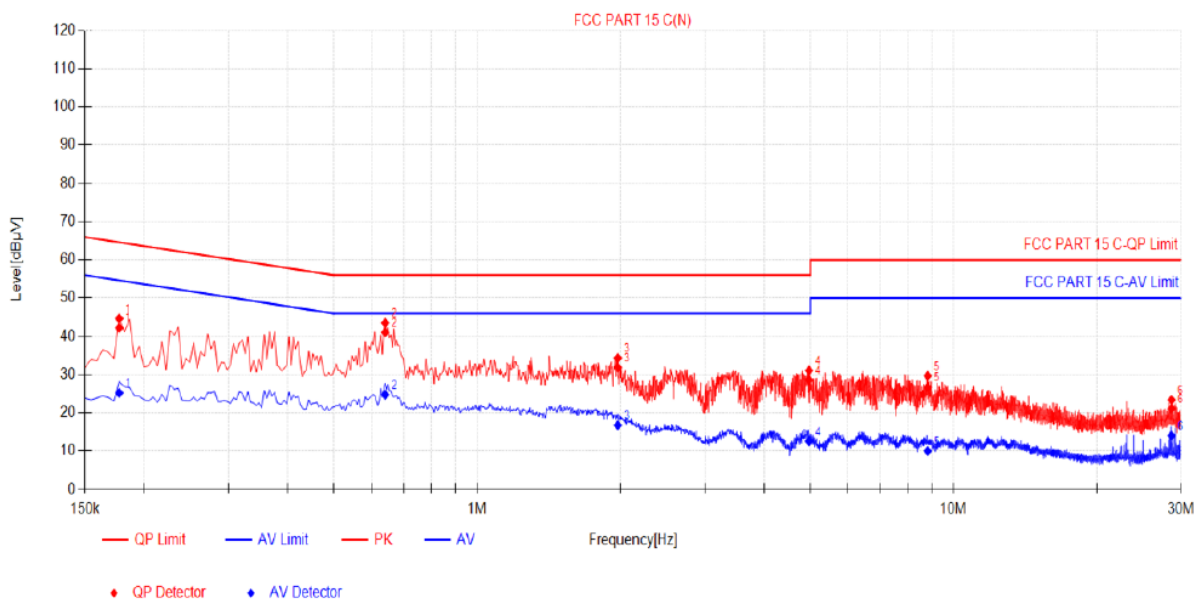

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Reading[dB μV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.177	10.05	32.18	42.23	64.63	22.40	15.20	25.25	54.63	29.38	PASS
2	0.6405	10.12	30.95	41.07	56.00	14.93	14.65	24.77	46.00	21.23	PASS
3	1.9725	10.19	21.65	31.84	56.00	24.16	6.57	16.76	46.00	29.24	PASS
4	4.9695	10.08	18.50	28.58	56.00	27.42	2.47	12.55	46.00	33.45	PASS
5	8.826	10.41	16.27	26.68	60.00	33.32	-0.42	9.99	50.00	40.01	PASS
6	28.6845	10.81	10.30	21.11	60.00	38.89	3.22	14.03	50.00	35.97	PASS

Note: 1). QP Value (dBμV) = QP Reading (dBμV) + Factor (dB)


2). Factor (dB) = insertion loss of LISN (dB) + Cable loss (dB)

3). QPMargin (dB) = QP Limit (dBμV) - QP Value (dBμV)

4). AVMargin (dB) = AV Limit (dBμV) - AV Value (dBμV)

Model: AK-3820

Power supply:	DC 5.0V from Adapter AC 120V/60Hz	Polarization	L
---------------	--------------------------------------	--------------	---

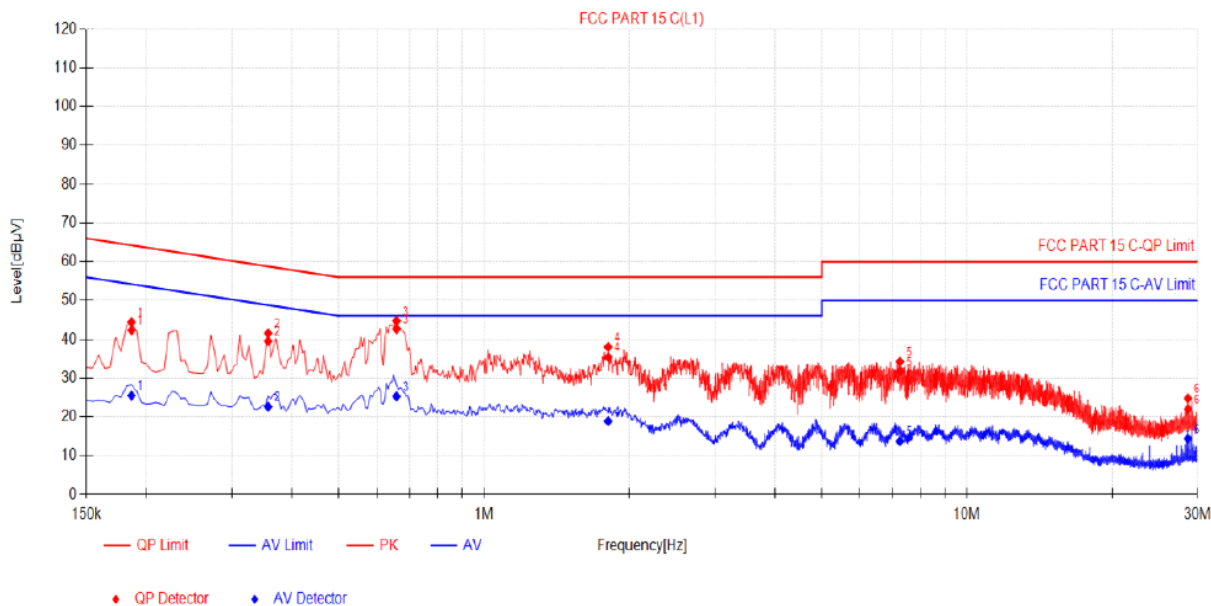

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.186	10.03	32.33	42.36	64.21	21.85	15.46	25.49	54.21	28.72	PASS
2	0.357	9.87	29.64	39.51	58.80	19.29	12.73	22.60	48.80	26.20	PASS
3	0.6585	9.96	32.71	42.67	56.00	13.33	15.32	25.28	46.00	20.72	PASS
4	1.806	9.91	25.48	35.39	56.00	20.61	8.98	18.89	46.00	27.11	PASS
5	7.26	10.29	21.39	31.68	60.00	28.32	3.39	13.68	50.00	36.32	PASS
6	28.6845	10.59	11.34	21.93	60.00	38.07	3.75	14.34	50.00	35.66	PASS


Note: 1). QP Value (dBμV) = QP Reading (dBμV) + Factor (dB)

2). Factor (dB) = insertion loss of LISN (dB) + Cable loss (dB)

3). QPMargin (dB) = QP Limit (dBμV) - QP Value (dBμV)

4). AVMargin (dB) = AV Limit (dBμV) - AV Value (dBμV)

Power supply:	DC 5.0V from Adapter AC 120V/60Hz	Polarization	N
---------------	--------------------------------------	--------------	---

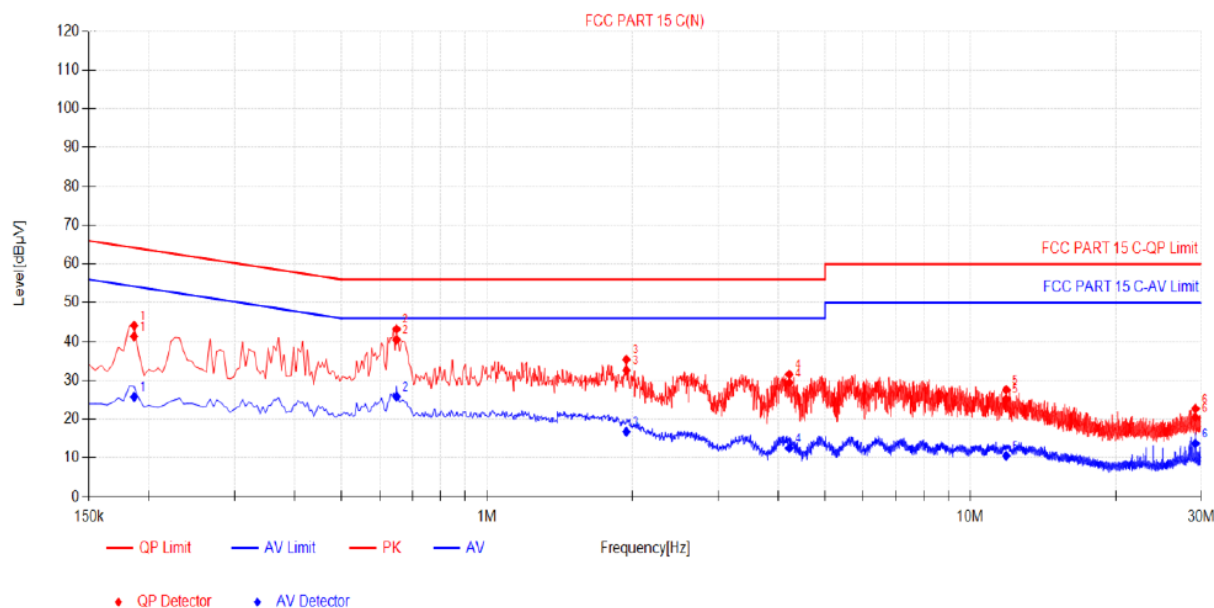

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Reading[dB μV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.186	10.01	31.34	41.35	64.21	22.86	15.74	25.75	54.21	28.46	PASS
2	0.6495	10.11	30.34	40.45	56.00	15.55	15.73	25.84	46.00	20.16	PASS
3	1.941	10.19	22.37	32.56	56.00	23.44	6.57	16.76	46.00	29.24	PASS
4	4.218	10.11	19.31	29.42	56.00	26.58	2.39	12.50	46.00	33.50	PASS
5	11.8635	10.41	14.84	25.25	60.00	34.75	0.13	10.54	50.00	39.46	PASS
6	29.238	10.82	9.69	20.51	60.00	39.49	2.89	13.71	50.00	36.29	PASS

Note:1). QP Value (dBμV) = QP Reading (dBμV) + Factor (dB)


2). Factor (dB) = insertion loss of LISN (dB) + Cable loss (dB)

3). QPMargin(dB) = QP Limit (dBμV) - QP Value (dBμV)

4). AVMargin(dB) = AV Limit (dBμV) - AV Value (dBμV)

Model: AK-3120

Power supply:	DC 5.0V from Adapter AC 120V/60Hz	Polarization	L
---------------	--------------------------------------	--------------	---

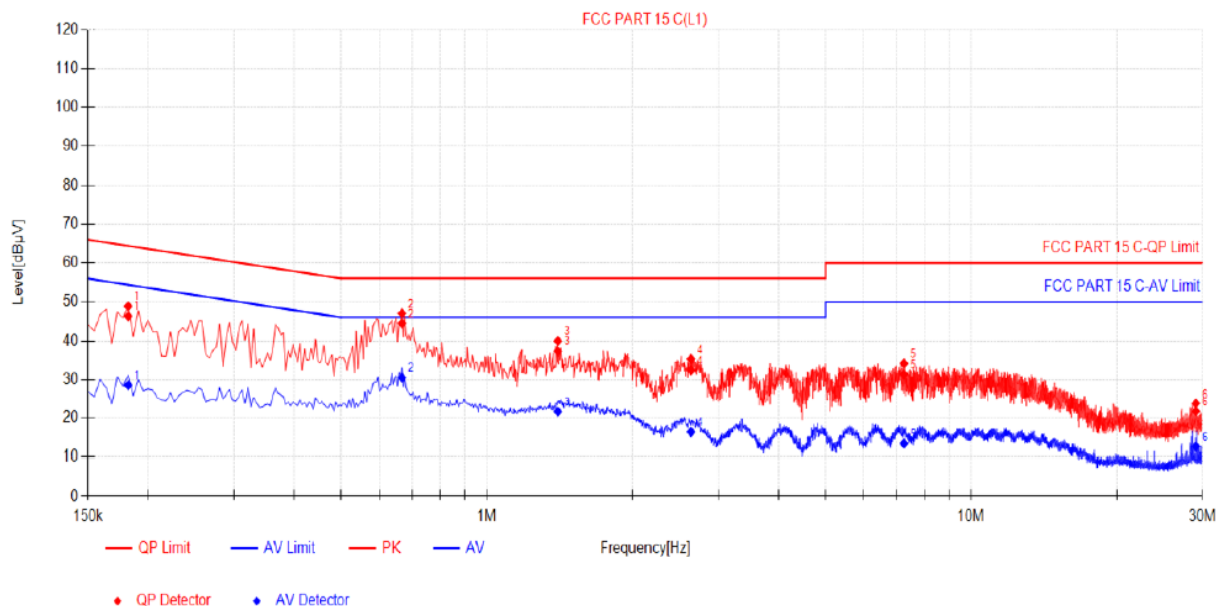

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Reading[dB μV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.1815	10.01	36.29	46.30	64.42	18.12	18.56	28.57	54.42	25.85	PASS
2	0.6675	9.95	34.52	44.47	56.00	11.53	20.56	30.51	46.00	15.49	PASS
3	1.401	9.90	27.46	37.36	56.00	18.64	11.66	21.56	46.00	24.44	PASS
4	2.6385	10.08	22.35	32.43	56.00	23.57	6.25	16.33	46.00	29.67	PASS
5	7.2645	10.29	21.10	31.39	60.00	28.61	3.05	13.34	50.00	36.66	PASS
6	29.112	10.59	11.03	21.62	60.00	38.38	1.98	12.57	50.00	37.43	PASS


Note: 1). QP Value (dBμV) = QP Reading (dBμV) + Factor (dB)

2). Factor (dB) = insertion loss of LISN (dB) + Cable loss (dB)

3). QPMargin(dB) = QP Limit (dBμV) - QP Value (dBμV)

4). AVMargin(dB) = AV Limit (dBμV) - AV Value (dBμV)

Power supply:	DC 5.0V from Adapter AC 120V/60Hz	Polarization	N
---------------	--------------------------------------	--------------	---

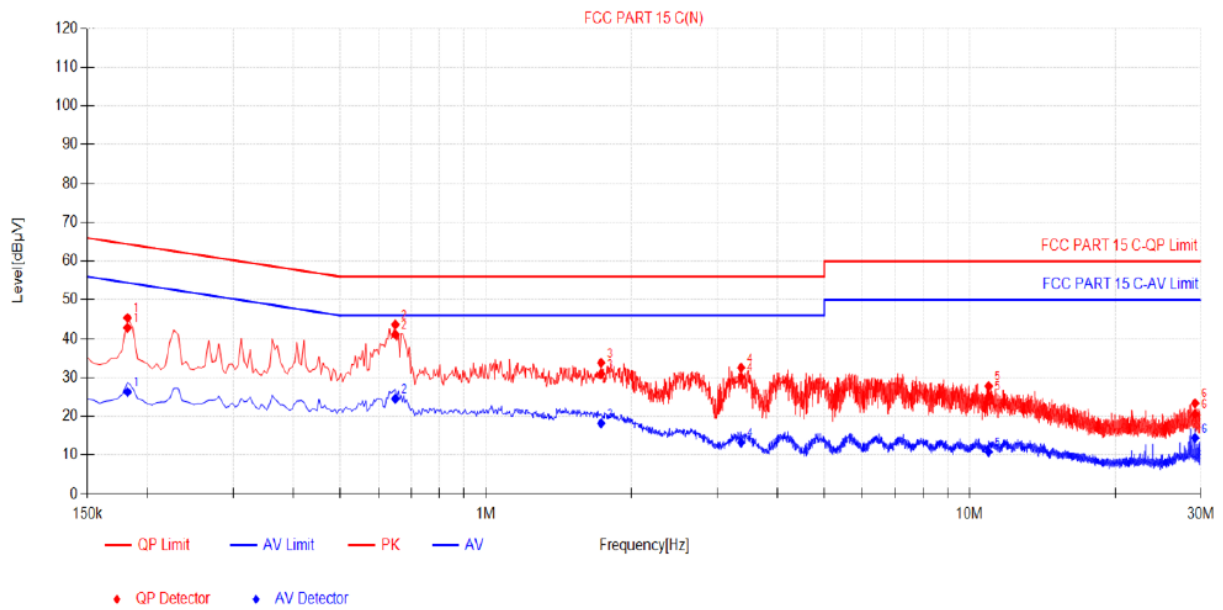

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Reading[dB μV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.1815	10.03	32.80	42.83	64.42	21.59	16.26	26.29	54.42	28.13	PASS
2	0.6495	10.11	31.03	41.14	56.00	14.86	14.43	24.54	46.00	21.46	PASS
3	1.7295	10.16	20.78	30.94	56.00	25.06	8.05	18.21	46.00	27.79	PASS
4	3.3675	10.20	19.86	30.06	56.00	25.94	3.03	13.23	46.00	32.77	PASS
5	10.9365	10.40	14.84	25.24	60.00	34.76	0.41	10.81	50.00	39.19	PASS
6	29.238	10.82	9.79	20.61	60.00	39.39	3.60	14.42	50.00	35.58	PASS

Note:1). QP Value (dBμV) = QP Reading (dBμV) + Factor (dB)


2). Factor (dB) = insertion loss of LISN (dB) + Cable loss (dB)

3). QPMargin(dB) = QP Limit (dBμV) - QP Value (dBμV)

4). AVMargin(dB) = AV Limit (dBμV) - AV Value (dBμV)

Model: AK-5020

Power supply:	DC 5.0V from Adapter AC 120V/60Hz	Polarization	L
---------------	--------------------------------------	--------------	---

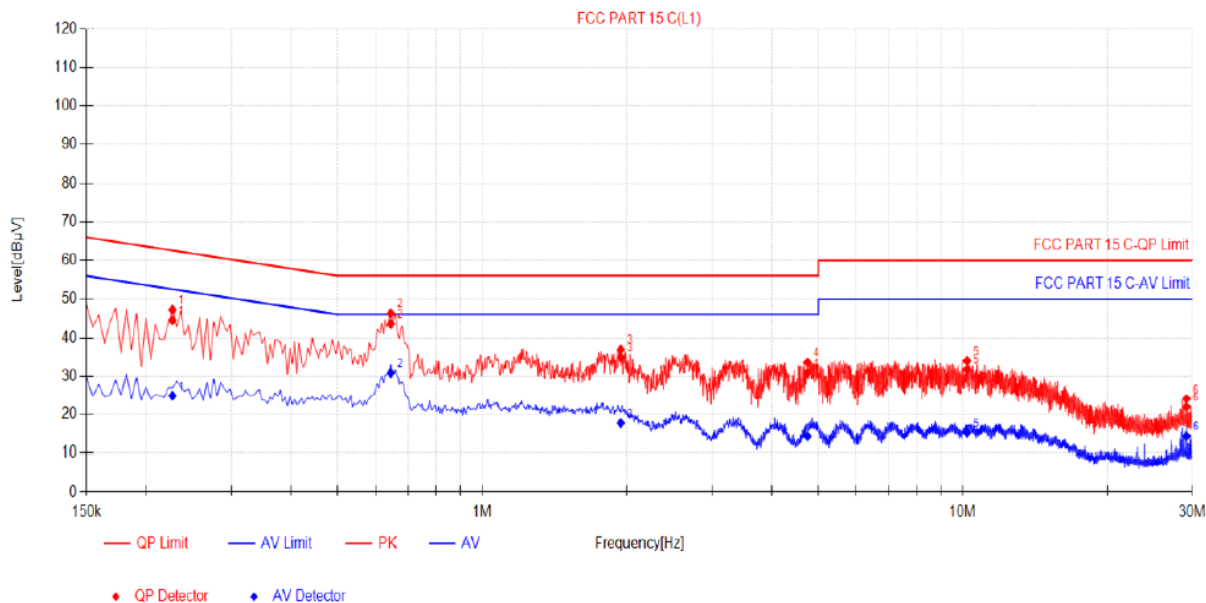

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Reading[dB μV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.2265	10.01	34.48	44.49	62.58	18.09	14.85	24.86	52.58	27.72	PASS
2	0.645	9.98	33.60	43.58	56.00	12.42	20.85	30.83	46.00	15.17	PASS
3	1.941	9.92	25.00	34.92	56.00	21.08	7.73	17.65	46.00	28.35	PASS
4	4.749	9.97	20.92	30.89	56.00	25.11	4.23	14.20	46.00	31.80	PASS
5	10.1985	10.25	21.56	31.81	60.00	28.19	4.85	15.10	50.00	34.90	PASS
6	29.2335	10.60	11.27	21.87	60.00	38.13	3.62	14.22	50.00	35.78	PASS


Note:1). QP Value (dBμV) = QP Reading (dBμV) + Factor (dB)

2). Factor (dB) = insertion loss of LISN (dB) + Cable loss (dB)

3). QPMargin(dB) = QP Limit (dBμV) - QP Value (dBμV)

4). AVMargin(dB) = AV Limit (dBμV) - AV Value (dBμV)

Power supply:	DC 5.0V from Adapter AC 120V/60Hz	Polarization	N
---------------	--------------------------------------	--------------	---

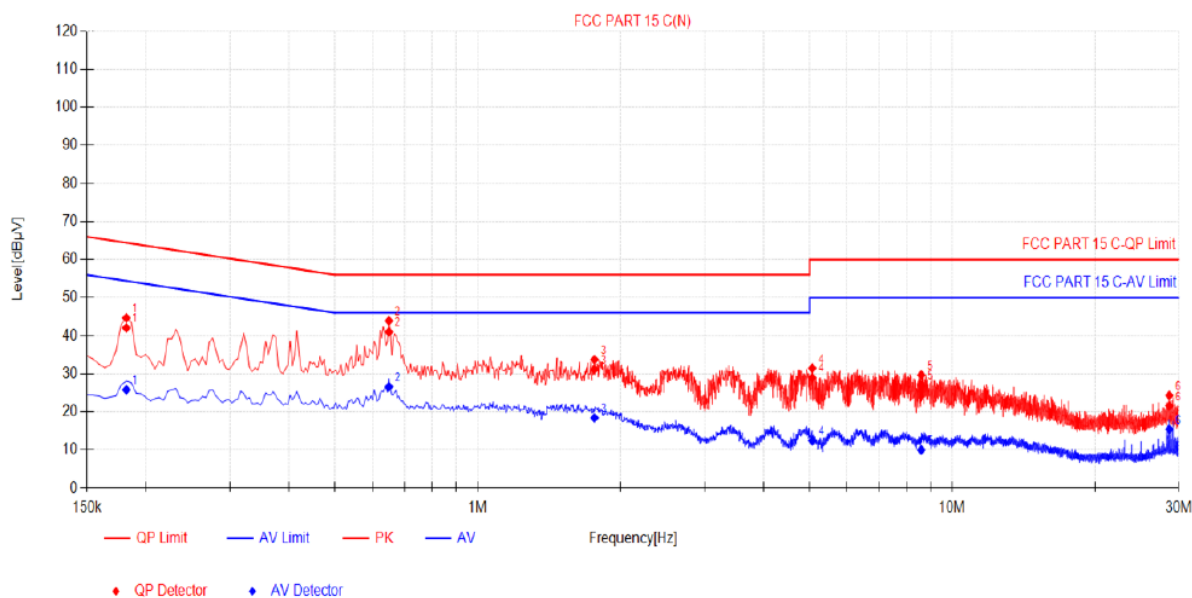

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Reading[dB μV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.1815	10.03	32.01	42.04	64.42	22.38	15.75	25.78	54.42	28.64	PASS
2	0.6495	10.11	30.87	40.98	56.00	15.02	16.51	26.62	46.00	19.38	PASS
3	1.761	10.16	20.95	31.11	56.00	24.89	8.28	18.44	46.00	27.56	PASS
4	5.0685	10.09	18.86	28.95	60.00	31.05	2.33	12.42	50.00	37.58	PASS
5	8.601	10.41	16.53	26.94	60.00	33.06	-0.43	9.98	50.00	40.02	PASS
6	28.6845	10.81	10.74	21.55	60.00	38.45	4.62	15.43	50.00	34.57	PASS


Note: 1). QP Value (dBμV) = QP Reading (dBμV) + Factor (dB)

2). Factor (dB) = insertion loss of LISN (dB) + Cable loss (dB)


3). QPMargin(dB) = QP Limit (dBμV) - QP Value (dBμV)

4). AVMargin(dB) = AV Limit (dBμV) - AV Value (dBμV)

Model: AK-3120-H

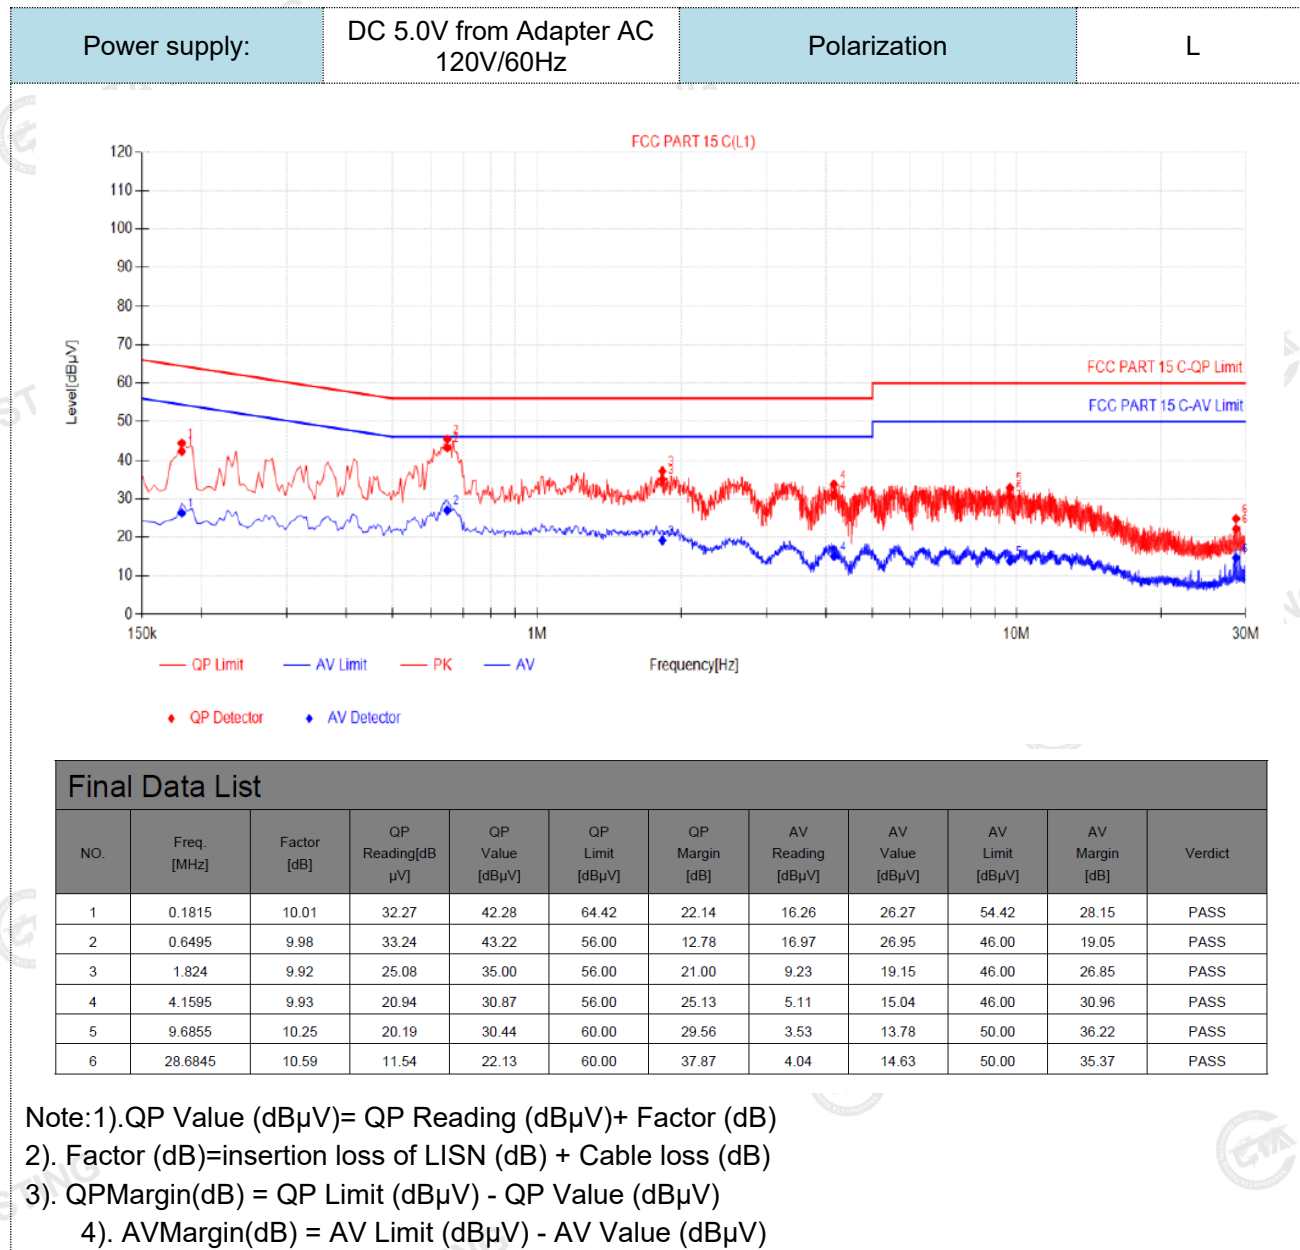

Power supply:	DC 5.0V from Adapter AC 120V/60Hz	Polarization	N
---------------	--------------------------------------	--------------	---

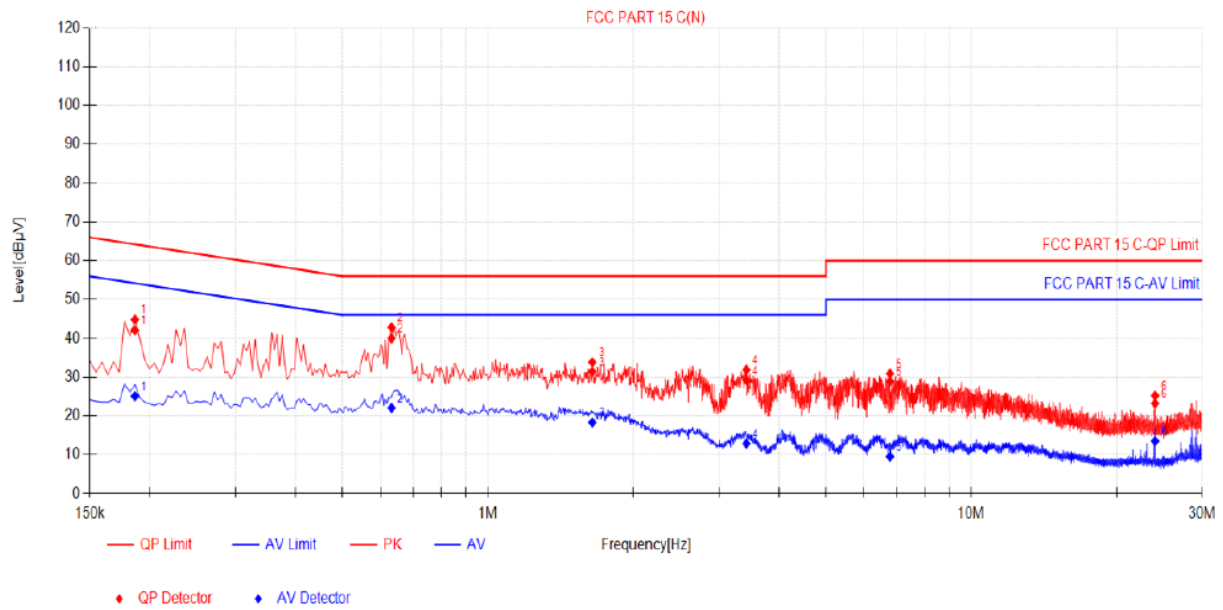

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Reading[dB μV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.186	10.01	32.01	42.02	64.21	22.19	15.06	25.07	54.21	29.14	PASS
2	0.6315	10.12	29.89	40.01	56.00	15.99	11.91	22.03	46.00	23.97	PASS
3	1.644	10.15	21.28	31.43	56.00	24.57	8.17	18.32	46.00	27.68	PASS
4	3.426	10.19	18.99	29.18	56.00	26.82	2.69	12.88	46.00	33.12	PASS
5	6.792	10.39	18.49	28.88	60.00	31.12	-0.89	9.50	50.00	40.50	PASS
6	24	10.67	12.52	23.19	60.00	36.81	2.85	13.52	50.00	36.48	PASS

Note: 1). QP Value (dBμV) = QP Reading (dBμV) + Factor (dB)

2). Factor (dB) = insertion loss of LISN (dB) + Cable loss (dB)


3). QPMargin(dB) = QP Limit (dBμV) - QP Value (dBμV)

4). AVMargin(dB) = AV Limit (dBμV) - AV Value (dBμV)


4.2 Radiated Emission

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

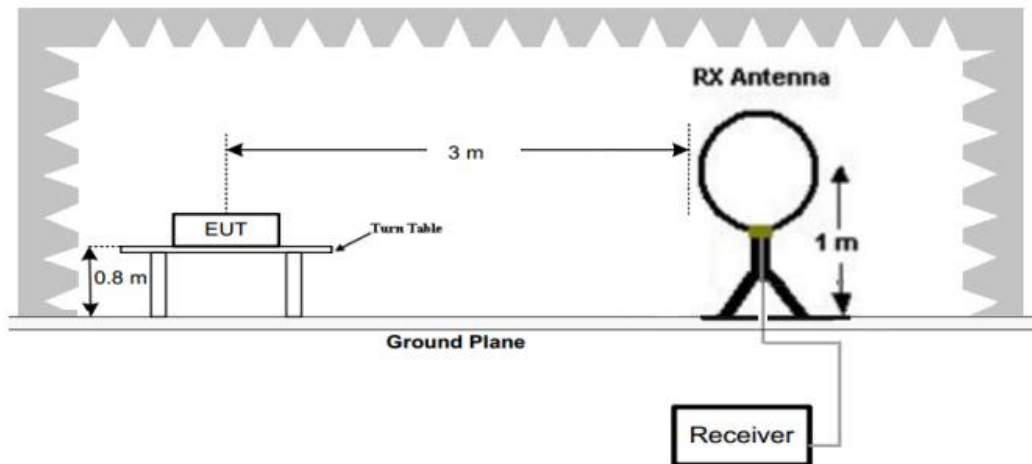


Frequency range 30MHz – 1000MHz

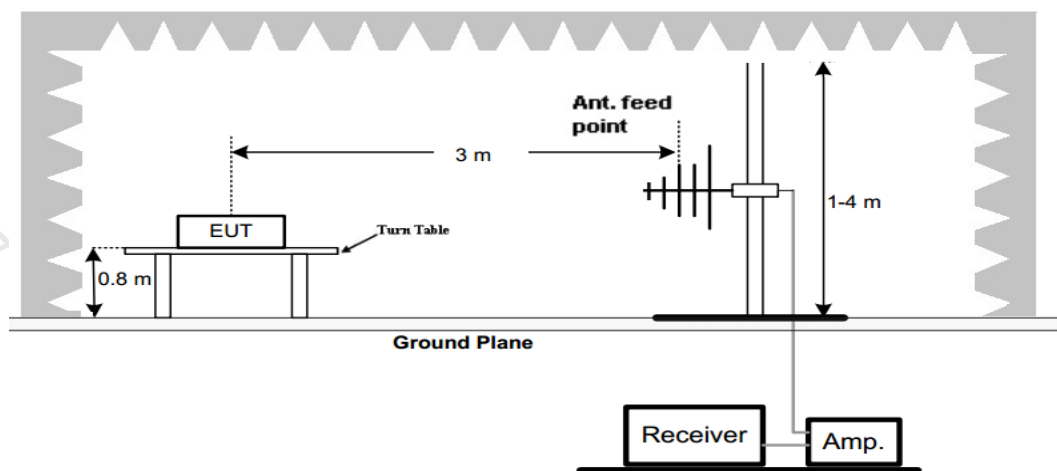

Frequency range above 1GHz-25GHz

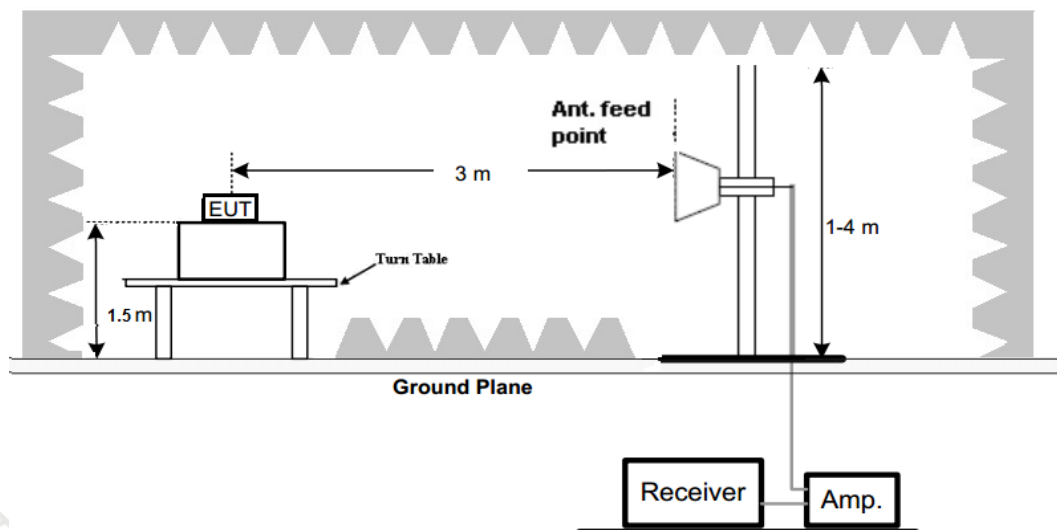

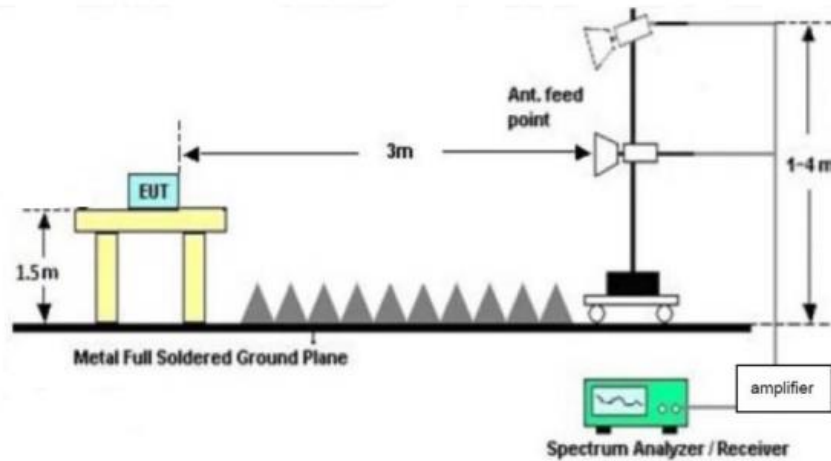

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz; the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$\text{Transd} = AF + CL - AG$$

RADIATION LIMIT

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China
Tel: +86-755 2322 5875 E-mail: cta@cta-test.cn Web: http://www.cta-test.cn

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500


TEST RESULTS

Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. All three channels (lowest/middle/highest) of each mode were measured below 1GHz and recorded worst case at 802.11b low channel.
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

For 30MHz-1GHz

Model: AK-3820S

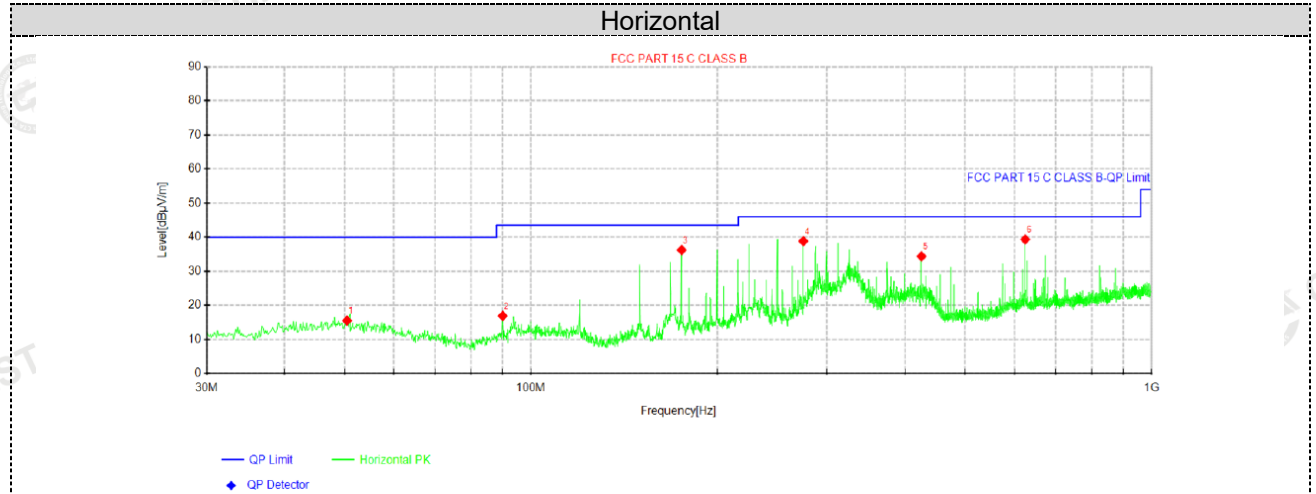
**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	50.4912	26.73	15.55	-11.18	40.00	24.45	200	289	Horizontal
2	90.0188	31.60	16.90	-14.70	43.50	26.60	100	359	Horizontal
3	175.015	51.07	36.25	-14.82	43.50	7.25	100	340	Horizontal
4	275.046	50.36	38.84	-11.52	46.00	7.16	200	228	Horizontal
5	425.032	44.30	34.39	-9.91	46.00	11.61	100	271	Horizontal
6	625.095	45.05	39.35	-5.70	46.00	6.65	100	35	Horizontal

Note:1). Level (dBμV/m)= Reading (dBμV)+ Factor (dB/m)


2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)


3). Margin(dB) = Limit (dBμV/m) - Level (dBμV/m)

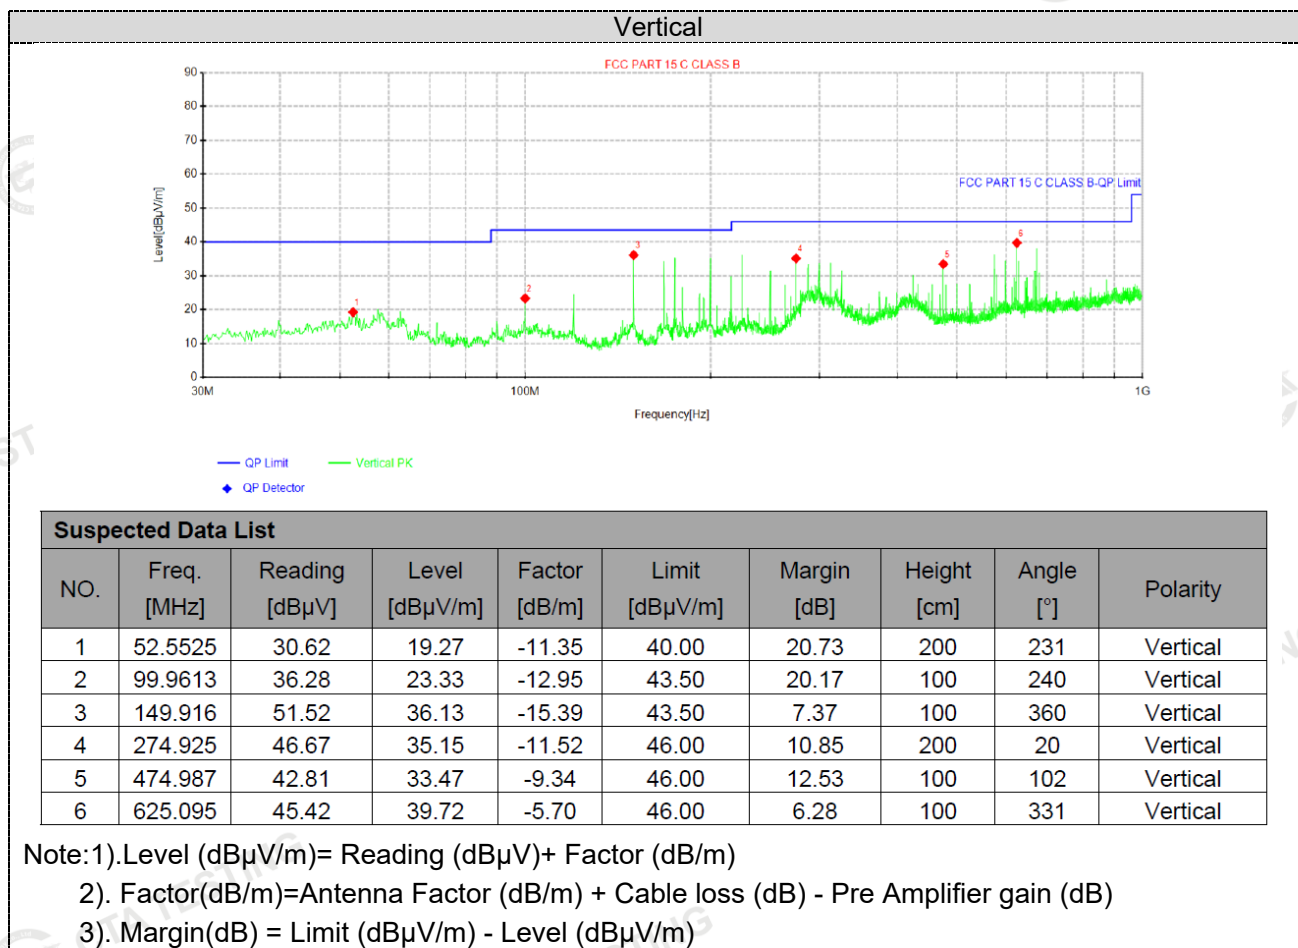

For 30MHz-1GHz

Model: AK-3820

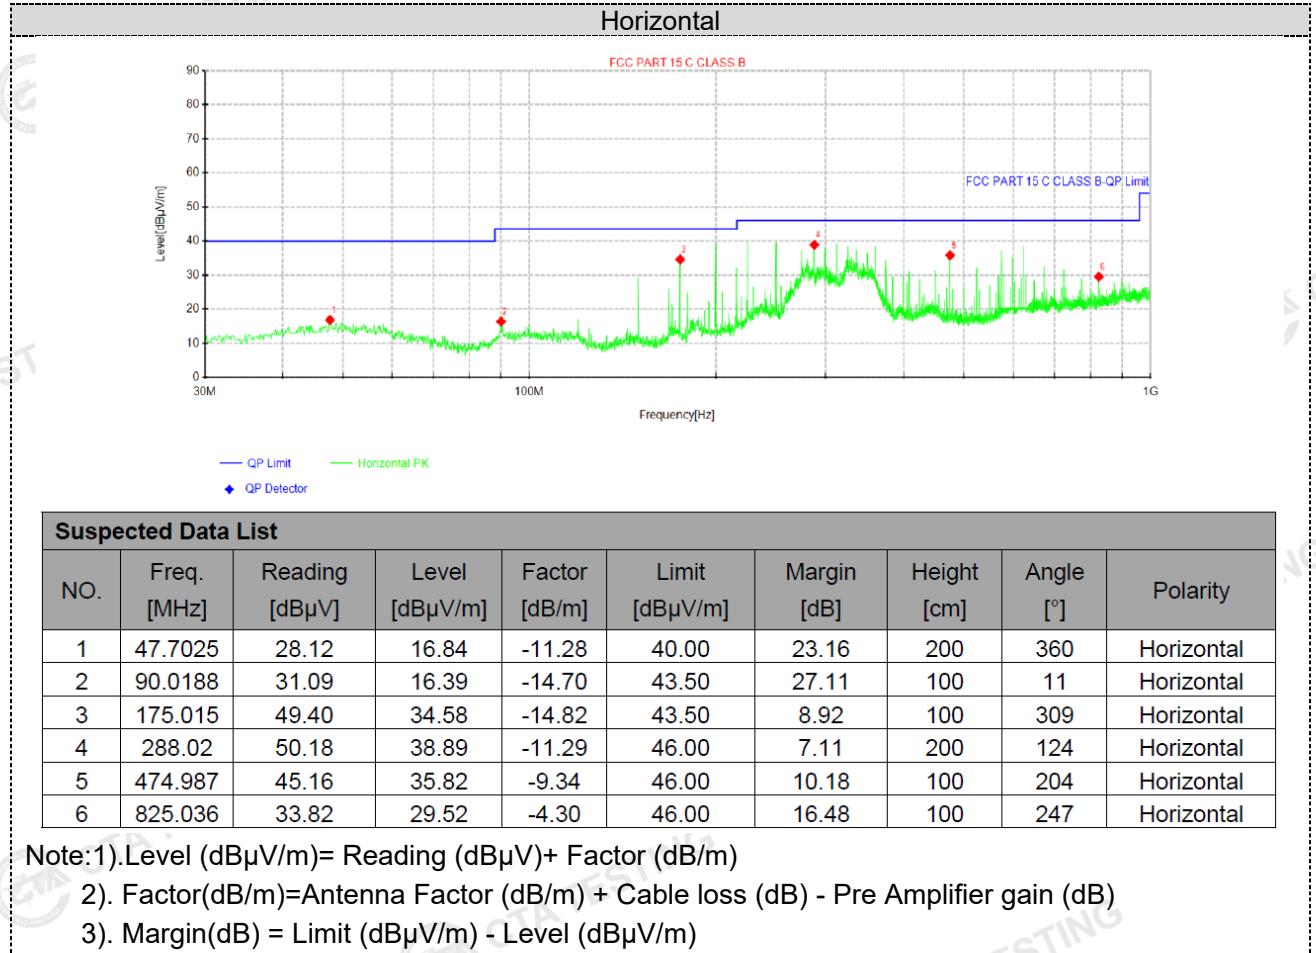


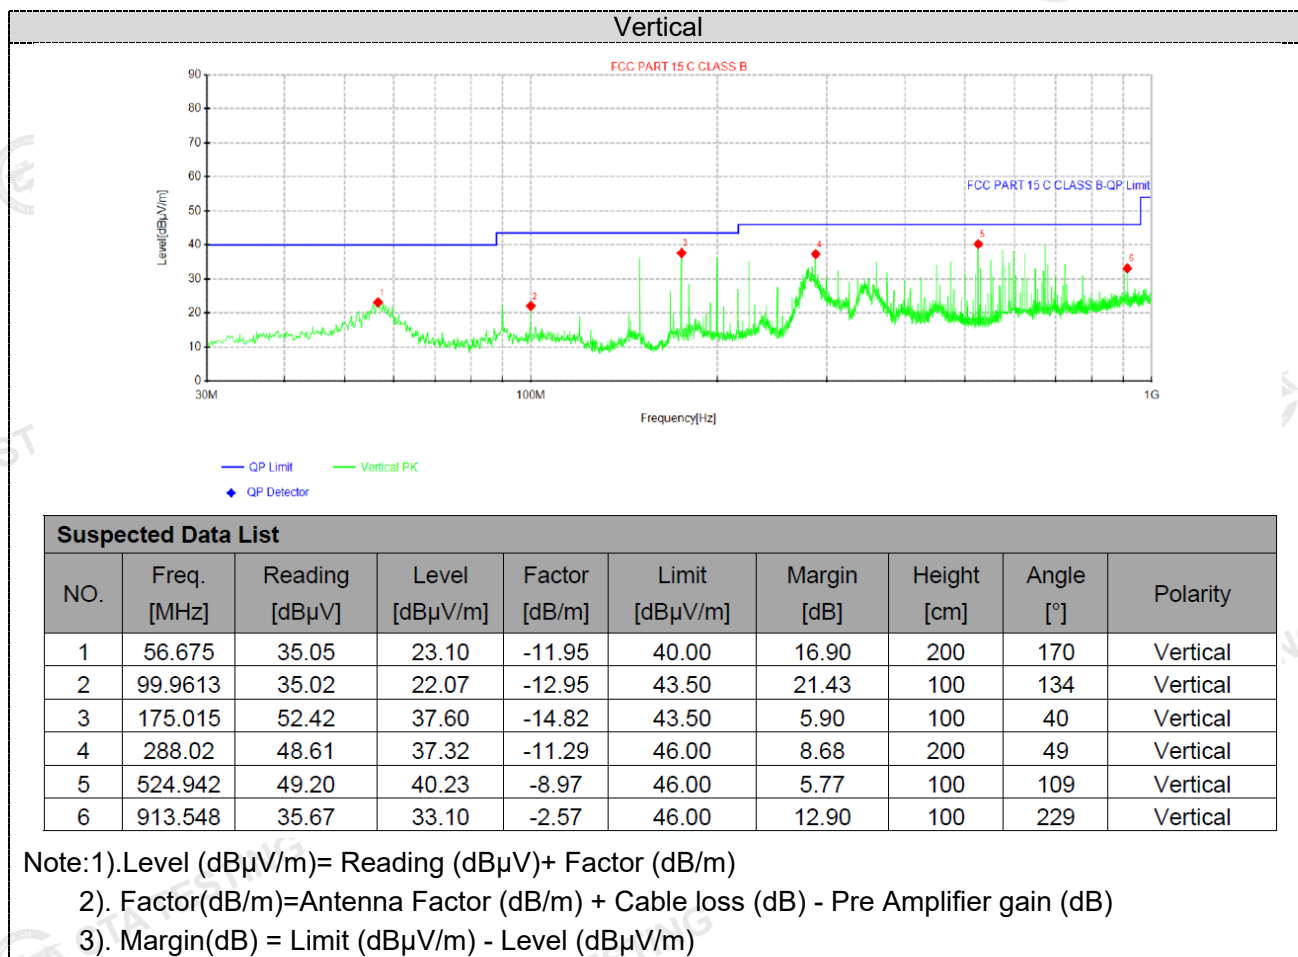

For 30MHz-1GHz

Model: AK-3120

Horizontal

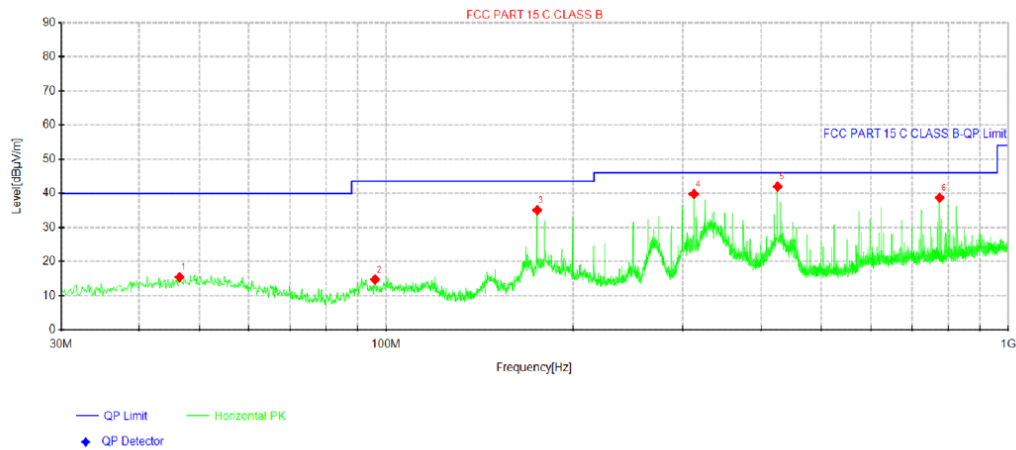


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	46.49	26.80	15.45	-11.35	40.00	24.55	200	27	Horizontal
2	95.96	28.45	14.76	-13.69	43.50	28.74	100	54	Horizontal
3	175.015	49.88	35.06	-14.82	43.50	8.44	100	63	Horizontal
4	311.906	50.69	39.80	-10.89	46.00	6.20	200	281	Horizontal
5	425.032	51.90	41.99	-9.91	46.00	4.01	100	88	Horizontal
6	775.081	43.37	38.71	-4.66	46.00	7.29	100	245	Horizontal

Note:1). Level (dBμV/m) = Reading (dBμV) + Factor (dB/m)


2). Factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)

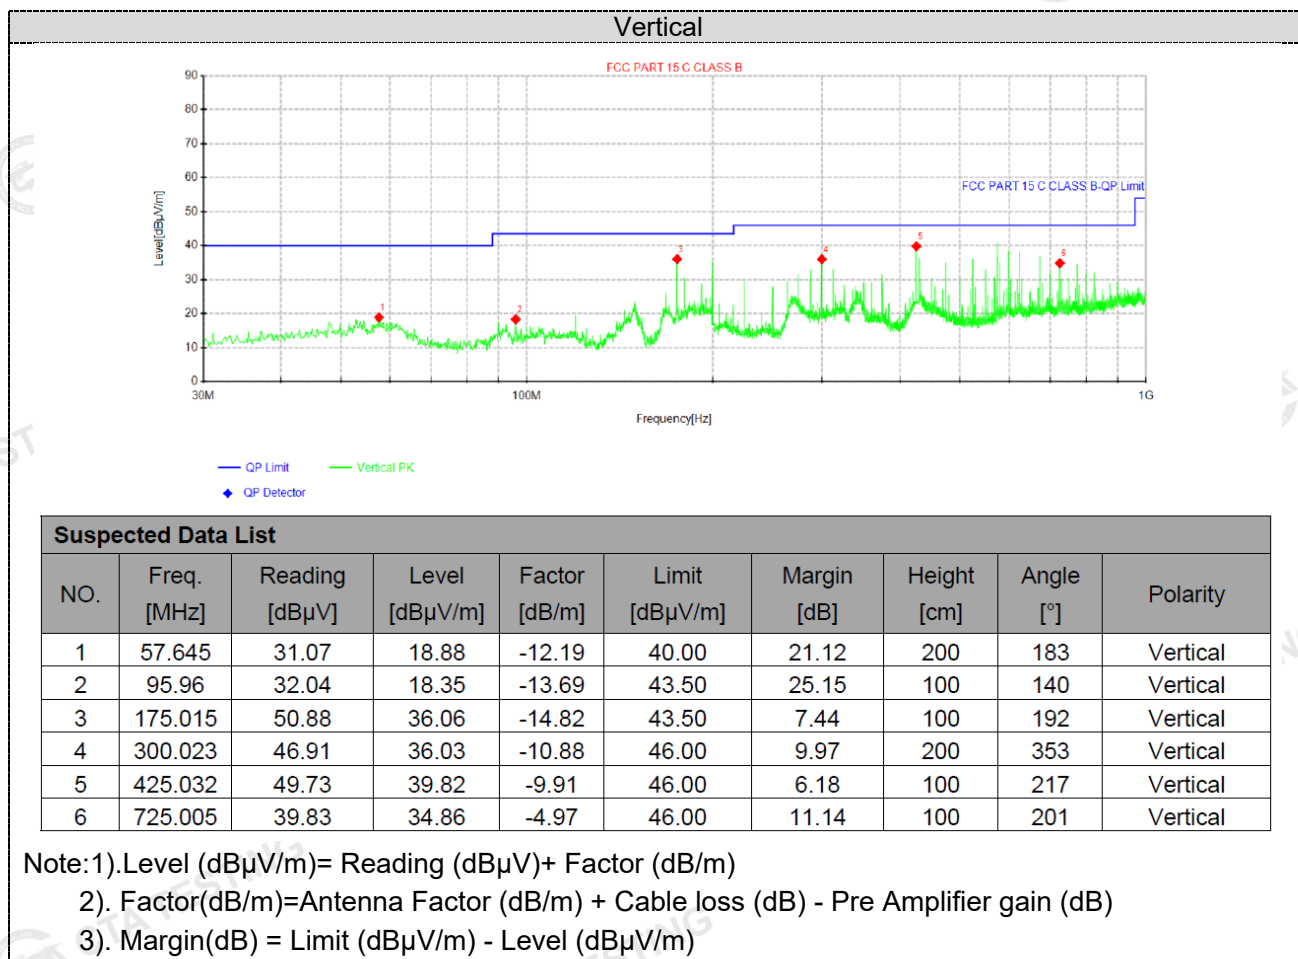

For 30MHz-1GHz

Model: AK-5020

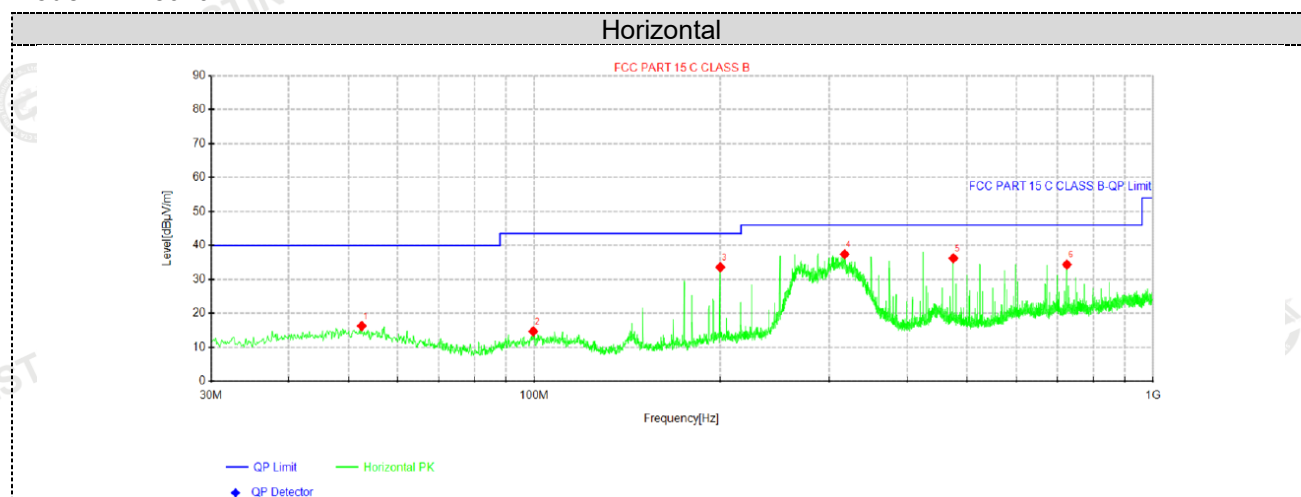
**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	52.5525	27.61	16.26	-11.35	40.00	23.74	200	186	Horizontal
2	99.5975	27.70	14.68	-13.02	43.50	28.82	100	112	Horizontal
3	199.992	46.37	33.57	-12.80	43.50	9.93	100	150	Horizontal
4	316.756	48.33	37.40	-10.93	46.00	8.60	200	267	Horizontal
5	474.987	45.56	36.22	-9.34	46.00	9.78	100	150	Horizontal
6	725.005	39.34	34.37	-4.97	46.00	11.63	100	240	Horizontal

Note:1). Level (dBμV/m)= Reading (dBμV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)


3). Margin(dB) = Limit (dBμV/m) - Level (dBμV/m)

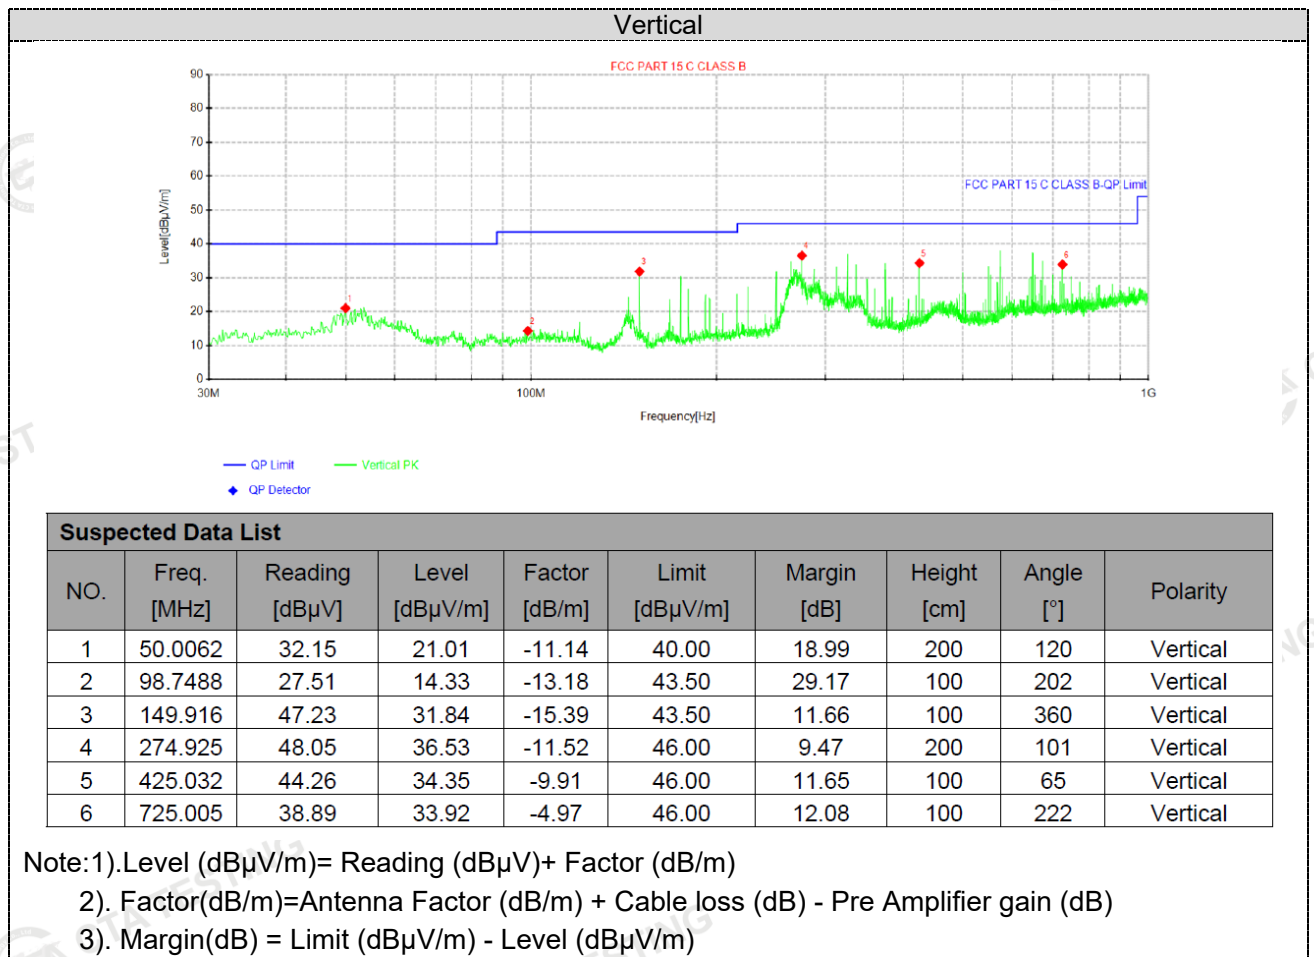

For 30MHz-1GHz

Model: AK-3120

Horizontal

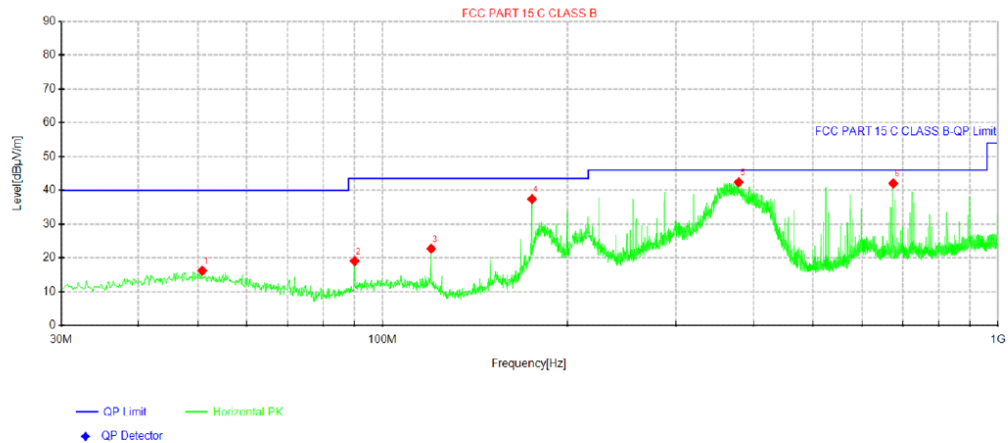


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	50.855	27.43	16.21	-11.22	40.00	23.79	200	161	Horizontal
2	90.0188	33.75	19.05	-14.70	43.50	24.45	100	34	Horizontal
3	119.967	36.57	22.71	-13.86	43.50	20.79	100	42	Horizontal
4	175.015	52.22	37.40	-14.82	43.50	6.10	200	60	Horizontal
5	378.23	52.78	42.40	-10.38	46.00	3.60	100	266	Horizontal
6	675.05	47.43	42.07	-5.36	46.00	3.93	100	0	Horizontal

Note:1). Level (dBμV/m)= Reading (dBμV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Limit (dBμV/m) - Level (dBμV/m)

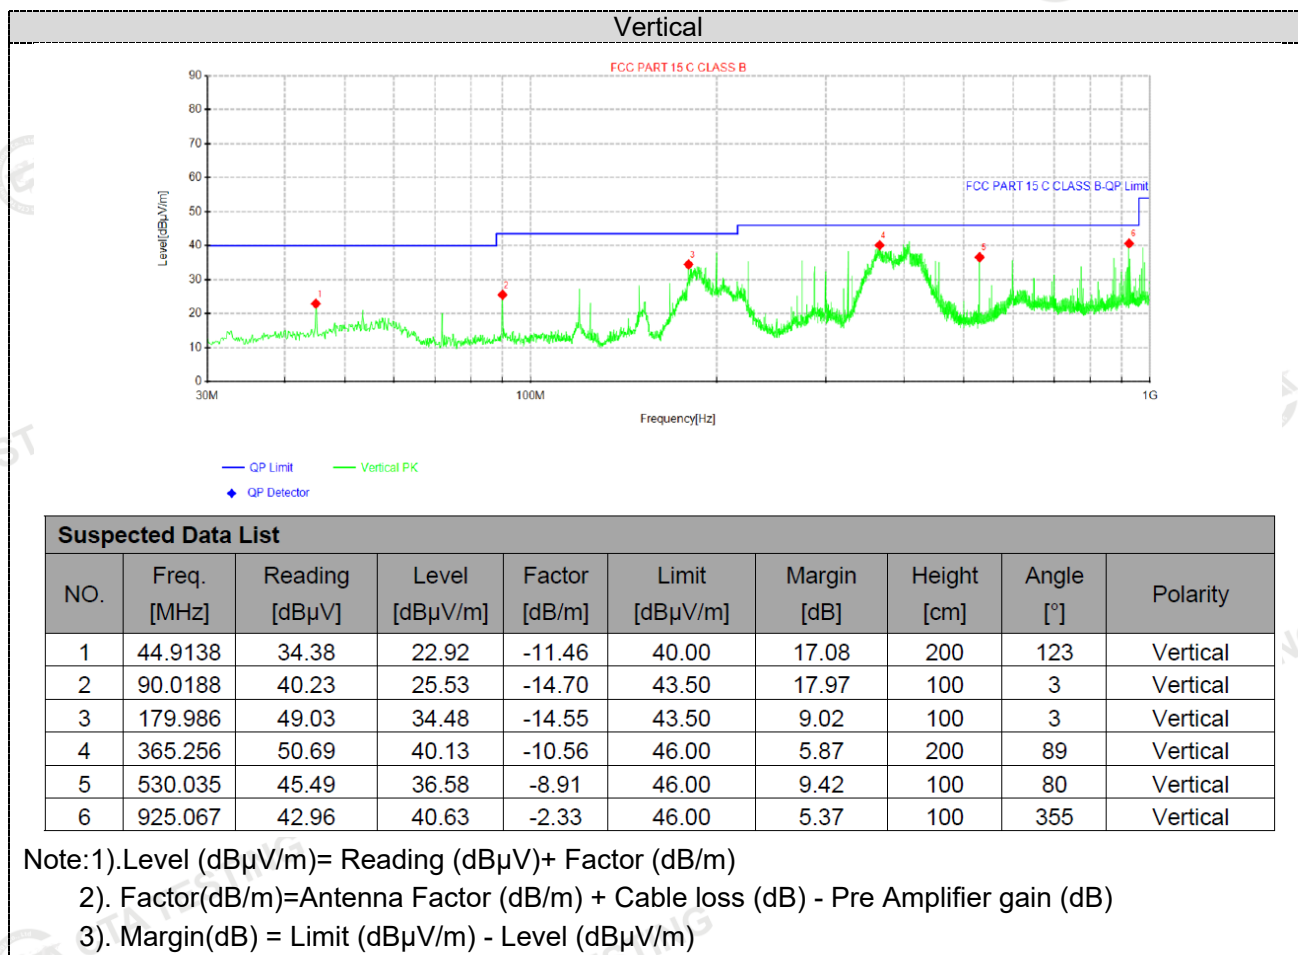

For 1GHz to 25GHz

Note: 802.11b/802.11g/802.11n (HT20)/802.11n (HT40) Mode all have been tested, only worse case 802.11n20 mode is reported

Model: AK-3820S

(above 1GHz)

Frequency(MHz):			2412		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4824.00	62.18	PK	74	11.82	66.54	32.4	5.11	41.87	-4.36
4824.00	45.49	AV	54	8.51	49.85	32.4	5.11	41.87	-4.36
7236.00	54.61	PK	74	19.39	55.24	36.58	6.43	43.64	-0.63
7236.00	43.42	AV	54	10.58	44.05	36.58	6.43	43.64	-0.63

Frequency(MHz):			2412		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4824.00	59.94	PK	74	14.06	64.30	32.4	5.11	41.87	-4.36
4824.00	43.11	AV	54	10.89	47.47	32.4	5.11	41.87	-4.36
7236.00	52.86	PK	74	21.14	53.49	36.58	6.43	43.64	-0.63
7236.00	41.92	AV	54	12.08	42.55	36.58	6.43	43.64	-0.63

Frequency(MHz):			2437		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4874.00	61.45	PK	74	12.55	65.40	32.56	5.34	41.85	-3.95
4874.00	44.97	AV	54	9.03	48.92	32.56	5.34	41.85	-3.95
7311.00	54.00	PK	74	20.00	54.36	36.54	6.81	43.71	-0.36
7311.00	42.66	AV	54	11.34	43.02	36.54	6.81	43.71	-0.36

Frequency(MHz):			2437		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4874.00	59.64	PK	74	14.36	63.59	32.56	5.34	41.85	-3.95
4874.00	42.69	AV	54	11.31	46.64	32.56	5.34	41.85	-3.95
7311.00	52.39	PK	74	21.61	52.75	36.54	6.81	43.71	-0.36
7311.00	40.84	AV	54	13.16	41.20	36.54	6.81	43.71	-0.36

Frequency(MHz):			2462		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4924.00	60.87	PK	74	13.13	64.33	32.73	5.64	41.83	-3.46
4924.00	44.44	AV	54	9.56	47.90	32.73	5.64	41.83	-3.46
7386.00	53.15	PK	74	20.85	53.21	36.5	7.23	43.79	-0.06
7386.00	41.81	AV	54	12.19	41.87	36.5	7.23	43.79	-0.06

Frequency(MHz):			2462		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4924.00	58.89	PK	74	15.11	62.35	32.73	5.64	41.83	-3.46
4924.00	42.79	AV	54	11.21	46.25	32.73	5.64	41.83	-3.46
7386.00	51.64	PK	74	22.36	51.70	36.5	7.23	43.79	-0.06

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Tel: +86-755 2322 5875 E-mail: cta@cta-test.cn Web: http://www.cta-test.cn

7386.00	40.07	AV	54	13.93	40.13	36.5	7.23	43.79	-0.06
---------	-------	----	----	-------	-------	------	------	-------	-------

Model: AK-3820**(above 1GHz)**

Frequency(MHz):			2412		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4824.00	62.15	PK	74	11.85	66.51	32.4	5.11	41.87	-4.36
4824.00	44.68	AV	54	9.32	49.04	32.4	5.11	41.87	-4.36
7236.00	54.23	PK	74	19.77	54.86	36.58	6.43	43.64	-0.63
7236.00	43.06	AV	54	10.94	43.69	36.58	6.43	43.64	-0.63

Frequency(MHz):			2412		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4824.00	60.54	PK	74	13.46	64.90	32.4	5.11	41.87	-4.36
4824.00	43.06	AV	54	10.94	47.42	32.4	5.11	41.87	-4.36
7236.00	52.67	PK	74	21.33	53.30	36.58	6.43	43.64	-0.63
7236.00	41.18	AV	54	12.82	41.81	36.58	6.43	43.64	-0.63

Frequency(MHz):			2437		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4874.00	61.52	PK	74	12.48	65.47	32.56	5.34	41.85	-3.95
4874.00	43.88	AV	54	10.12	47.83	32.56	5.34	41.85	-3.95
7311.00	53.52	PK	74	20.48	53.88	36.54	6.81	43.71	-0.36
7311.00	42.45	AV	54	11.55	42.81	36.54	6.81	43.71	-0.36

Frequency(MHz):			2437		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4874.00	59.83	PK	74	14.17	63.78	32.56	5.34	41.85	-3.95
4874.00	42.14	AV	54	11.86	46.09	32.56	5.34	41.85	-3.95
7311.00	52.02	PK	74	21.98	52.38	36.54	6.81	43.71	-0.36
7311.00	40.76	AV	54	13.24	41.12	36.54	6.81	43.71	-0.36

Frequency(MHz):			2462		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4924.00	60.92	PK	74	13.08	64.38	32.73	5.64	41.83	-3.46
4924.00	43.28	AV	54	10.72	46.74	32.73	5.64	41.83	-3.46
7386.00	52.65	PK	74	21.35	52.71	36.5	7.23	43.79	-0.06
7386.00	41.82	AV	54	12.18	41.88	36.5	7.23	43.79	-0.06

Frequency(MHz):			2462		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4924.00	59.23	PK	74	14.77	62.69	32.73	5.64	41.83	-3.46
4924.00	41.38	AV	54	12.62	44.84	32.73	5.64	41.83	-3.46
7386.00	50.58	PK	74	23.42	50.64	36.5	7.23	43.79	-0.06
7386.00	40.21	AV	54	13.79	40.27	36.5	7.23	43.79	-0.06

Model: AK-3120

(above 1GHz)

Frequency(MHz):			2412		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4824.00	61.76	PK	74	12.24	66.12	32.4	5.11	41.87	-4.36
4824.00	44.74	AV	54	9.26	49.10	32.4	5.11	41.87	-4.36
7236.00	54.13	PK	74	19.87	54.76	36.58	6.43	43.64	-0.63
7236.00	42.96	AV	54	11.04	43.59	36.58	6.43	43.64	-0.63

Frequency(MHz):			2412		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4824.00	59.72	PK	74	14.28	64.08	32.4	5.11	41.87	-4.36
4824.00	43.21	AV	54	10.79	47.57	32.4	5.11	41.87	-4.36
7236.00	52.38	PK	74	21.62	53.01	36.58	6.43	43.64	-0.63
7236.00	41.34	AV	54	12.66	41.97	36.58	6.43	43.64	-0.63

Frequency(MHz):			2437		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4874.00	61.11	PK	74	12.89	65.06	32.56	5.34	41.85	-3.95
4874.00	44.13	AV	54	9.87	48.08	32.56	5.34	41.85	-3.95
7311.00	53.50	PK	74	20.50	53.86	36.54	6.81	43.71	-0.36
7311.00	42.44	AV	54	11.56	42.80	36.54	6.81	43.71	-0.36

Frequency(MHz):			2437		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4874.00	59.54	PK	74	14.46	63.49	32.56	5.34	41.85	-3.95
4874.00	42.47	AV	54	11.53	46.42	32.56	5.34	41.85	-3.95
7311.00	51.90	PK	74	22.10	52.26	36.54	6.81	43.71	-0.36
7311.00	40.69	AV	54	13.31	41.05	36.54	6.81	43.71	-0.36

Frequency(MHz):			2462		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4924.00	60.58	PK	74	13.42	64.04	32.73	5.64	41.83	-3.46
4924.00	43.60	AV	54	10.40	47.06	32.73	5.64	41.83	-3.46
7386.00	52.87	PK	74	21.13	52.93	36.5	7.23	43.79	-0.06
7386.00	41.89	AV	54	12.11	41.95	36.5	7.23	43.79	-0.06

Frequency(MHz):			2462		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4924.00	58.96	PK	74	15.04	62.42	32.73	5.64	41.83	-3.46
4924.00	41.99	AV	54	12.01	45.45	32.73	5.64	41.83	-3.46
7386.00	50.72	PK	74	23.28	50.78	36.5	7.23	43.79	-0.06
7386.00	40.07	AV	54	13.93	40.13	36.5	7.23	43.79	-0.06

Model: AK-5020

(above 1GHz)

Frequency(MHz):			2412		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4824.00	61.96	PK	74	12.04	66.32	32.4	5.11	41.87	-4.36
4824.00	45.22	AV	54	8.78	49.58	32.4	5.11	41.87	-4.36
7236.00	54.26	PK	74	19.74	54.89	36.58	6.43	43.64	-0.63
7236.00	43.10	AV	54	10.90	43.73	36.58	6.43	43.64	-0.63

Frequency(MHz):			2412		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4824.00	60.11	PK	74	13.89	64.47	32.4	5.11	41.87	-4.36
4824.00	43.48	AV	54	10.52	47.84	32.4	5.11	41.87	-4.36
7236.00	52.52	PK	74	21.48	53.15	36.58	6.43	43.64	-0.63
7236.00	41.09	AV	54	12.91	41.72	36.58	6.43	43.64	-0.63

Frequency(MHz):			2437		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4874.00	61.22	PK	74	12.78	65.17	32.56	5.34	41.85	-3.95
4874.00	44.58	AV	54	9.42	48.53	32.56	5.34	41.85	-3.95
7311.00	53.56	PK	74	20.44	53.92	36.54	6.81	43.71	-0.36
7311.00	42.47	AV	54	11.53	42.83	36.54	6.81	43.71	-0.36

Frequency(MHz):			2437		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4874.00	59.58	PK	74	14.42	63.53	32.56	5.34	41.85	-3.95
4874.00	42.45	AV	54	11.55	46.40	32.56	5.34	41.85	-3.95
7311.00	51.90	PK	74	22.10	52.26	36.54	6.81	43.71	-0.36
7311.00	40.76	AV	54	13.24	41.12	36.54	6.81	43.71	-0.36

Frequency(MHz):			2462		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4924.00	60.57	PK	74	13.43	64.03	32.73	5.64	41.83	-3.46
4924.00	43.64	AV	54	10.36	47.10	32.73	5.64	41.83	-3.46
7386.00	52.79	PK	74	21.21	52.85	36.5	7.23	43.79	-0.06
7386.00	41.90	AV	54	12.10	41.96	36.5	7.23	43.79	-0.06

Frequency(MHz):			2462		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4924.00	59.00	PK	74	15.00	62.46	32.73	5.64	41.83	-3.46
4924.00	41.64	AV	54	12.36	45.10	32.73	5.64	41.83	-3.46
7386.00	51.12	PK	74	22.88	51.18	36.5	7.23	43.79	-0.06
7386.00	40.38	AV	54	13.62	40.44	36.5	7.23	43.79	-0.06

Model: AK-3120-H

(above 1GHz)

Frequency(MHz):			2412		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4824.00	61.86	PK	74	12.14	66.22	32.4	5.11	41.87	-4.36
4824.00	45.41	AV	54	8.59	49.77	32.4	5.11	41.87	-4.36
7236.00	54.53	PK	74	19.47	55.16	36.58	6.43	43.64	-0.63
7236.00	43.50	AV	54	10.50	44.13	36.58	6.43	43.64	-0.63

Frequency(MHz):			2412		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4824.00	60.14	PK	74	13.86	64.50	32.4	5.11	41.87	-4.36
4824.00	43.75	AV	54	10.25	48.11	32.4	5.11	41.87	-4.36
7236.00	52.89	PK	74	21.11	53.52	36.58	6.43	43.64	-0.63
7236.00	41.45	AV	54	12.55	42.08	36.58	6.43	43.64	-0.63

Frequency(MHz):			2437		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4874.00	61.35	PK	74	12.65	65.30	32.56	5.34	41.85	-3.95
4874.00	44.81	AV	54	9.19	48.76	32.56	5.34	41.85	-3.95
7311.00	54.00	PK	74	20.00	54.36	36.54	6.81	43.71	-0.36
7311.00	42.84	AV	54	11.16	43.20	36.54	6.81	43.71	-0.36

Frequency(MHz):			2437		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4874.00	59.78	PK	74	14.22	63.73	32.56	5.34	41.85	-3.95
4874.00	43.29	AV	54	10.71	47.24	32.56	5.34	41.85	-3.95
7311.00	52.40	PK	74	21.60	52.76	36.54	6.81	43.71	-0.36
7311.00	41.16	AV	54	12.84	41.52	36.54	6.81	43.71	-0.36

Frequency(MHz):			2462		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4924.00	60.72	PK	74	13.28	64.18	32.73	5.64	41.83	-3.46
4924.00	44.16	AV	54	9.84	47.62	32.73	5.64	41.83	-3.46
7386.00	53.24	PK	74	20.76	53.30	36.5	7.23	43.79	-0.06
7386.00	42.14	AV	54	11.86	42.20	36.5	7.23	43.79	-0.06

Frequency(MHz):			2462		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4924.00	59.11	PK	74	14.89	62.57	32.73	5.64	41.83	-3.46
4924.00	42.11	AV	54	11.89	45.57	32.73	5.64	41.83	-3.46
7386.00	51.73	PK	74	22.27	51.79	36.5	7.23	43.79	-0.06
7386.00	40.58	AV	54	13.42	40.64	36.5	7.23	43.79	-0.06

1) Emission level (dBuV/m) = Meter Reading+ antenna Factor+ cable loss- preamp factor.

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Tel:+86-755 2322 5875 E-mail:cta@cta-test.cn Web:http://www.cta-test.cn

- 2) Margin value = Limits-Emission level.
- 3) -- Mean the PK detector measured value is below average limit.
- 4) The other emission levels were very low against the limit.
- 5) RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

Results of Band Edges Test (Radiated)

Note: 802.11b/802.11g/802.11n (HT20)/802.11n (HT40) Mode all have been tested, only worse case

802.11n20 mode is reported

Model: AK-3820S

Frequency(MHz):			2412		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	61.78	PK	74	12.22	72.20	27.42	4.31	42.15	-10.42
2390.00	42.42	AV	54	11.58	52.84	27.42	4.31	42.15	-10.42
Frequency(MHz):			2412		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	60.13	PK	74	13.87	70.55	27.42	4.31	42.15	-10.42
2390.00	40.68	AV	54	13.32	51.10	27.42	4.31	42.15	-10.42
Frequency(MHz):			2462		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	61.22	PK	74	12.78	71.33	27.7	4.47	42.28	-10.11
2483.50	41.72	AV	54	12.28	51.83	27.7	4.47	42.28	-10.11
Frequency(MHz):			2462		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	59.66	PK	74	14.34	69.77	27.7	4.47	42.28	-10.11
2483.50	40.01	AV	54	13.99	50.12	27.7	4.47	42.28	-10.11

Model: AK-3820

Frequency(MHz):			2412		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	61.84	PK	74	12.16	72.26	27.42	4.31	42.15	-10.42
2390.00	42.84	AV	54	11.16	53.26	27.42	4.31	42.15	-10.42
Frequency(MHz):			2412		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	59.83	PK	74	14.17	70.25	27.42	4.31	42.15	-10.42
2390.00	40.91	AV	54	13.09	51.33	27.42	4.31	42.15	-10.42
Frequency(MHz):			2462		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	61.01	PK	74	12.99	71.12	27.7	4.47	42.28	-10.11
2483.50	42.01	AV	54	11.99	52.12	27.7	4.47	42.28	-10.11
Frequency(MHz):			2462		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)

Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Tel: +86-755 2322 5875 E-mail: cta@cta-test.cn Web: http://www.cta-test.cn

2483.50	59.17	PK	74	14.83	69.28	27.7	4.47	42.28	-10.11
2483.50	40.26	AV	54	13.74	50.37	27.7	4.47	42.28	-10.11

Model: AK-3120

Frequency(MHz):			2412		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	61.67	PK	74	12.33	72.09	27.42	4.31	42.15	-10.42
2390.00	42.36	AV	54	11.64	52.78	27.42	4.31	42.15	-10.42
Frequency(MHz):			2412		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	59.92	PK	74	14.08	70.34	27.42	4.31	42.15	-10.42
2390.00	40.58	AV	54	13.42	51.00	27.42	4.31	42.15	-10.42
Frequency(MHz):			2462		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	60.86	PK	74	13.14	70.97	27.7	4.47	42.28	-10.11
2483.50	41.80	AV	54	12.20	51.91	27.7	4.47	42.28	-10.11
Frequency(MHz):			2462		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	59.35	PK	74	14.65	69.46	27.7	4.47	42.28	-10.11
2483.50	40.25	AV	54	13.75	50.36	27.7	4.47	42.28	-10.11

Model: AK-5020

Frequency(MHz):			2412		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	61.59	PK	74	12.41	72.01	27.42	4.31	42.15	-10.42
2390.00	42.76	AV	54	11.24	53.18	27.42	4.31	42.15	-10.42
Frequency(MHz):			2412		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	60.05	PK	74	13.95	70.47	27.42	4.31	42.15	-10.42
2390.00	40.92	AV	54	13.08	51.34	27.42	4.31	42.15	-10.42
Frequency(MHz):			2462		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	60.87	PK	74	13.13	70.98	27.7	4.47	42.28	-10.11
2483.50	42.13	AV	54	11.87	52.24	27.7	4.47	42.28	-10.11
Frequency(MHz):			2462		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	59.09	PK	74	14.91	69.20	27.7	4.47	42.28	-10.11
2483.50	40.28	AV	54	13.72	50.39	27.7	4.47	42.28	-10.11

Model: AK-3120-H

Frequency(MHz):			2412		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	61.75	PK	74	12.25	72.17	27.42	4.31	42.15	-10.42
2390.00	42.45	AV	54	11.55	52.87	27.42	4.31	42.15	-10.42
Frequency(MHz):			2412		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	59.96	PK	74	14.04	70.38	27.42	4.31	42.15	-10.42
2390.00	40.60	AV	54	13.40	51.02	27.42	4.31	42.15	-10.42
Frequency(MHz):			2462		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	61.06	PK	74	12.94	71.17	27.7	4.47	42.28	-10.11
2483.50	41.81	AV	54	12.19	51.92	27.7	4.47	42.28	-10.11
Frequency(MHz):			2462		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	59.39	PK	74	14.61	69.50	27.7	4.47	42.28	-10.11
2483.50	40.07	AV	54	13.93	50.18	27.7	4.47	42.28	-10.11

Note:

- 1) Emission level (dBuV/m) = Meter Reading+ antenna Factor+ cable loss- preamp factor.
- 2) Margin value = Limits-Emission level.
- 3) -- Mean the PK detector measured value is below average limit.
- 4) The other emission levels were very low against the limit.
- 5) RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

4.3 Maximum Peak Conducted Output Power

Limit

The Maximum Peak Output Power Measurement is 30dBm.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration



Test Results

Please refer to Appendix RF Test Data for 2.4GWIFI

Note:

- 1) Measured output power at difference data rate for each mode and recorded worst case for each mode.
- 2) Test results including cable loss.
- 3) Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; MCS0 at IEEE 802.11n HT20; MCS0 at IEEE 802.11n HT40;

4.4 Power Spectral Density

Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW ≥ 3 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.

Test Configuration



Test Results

Please refer to Appendix RF Test Data for 2.4GWIFI

Note:

- 1) Measured peak power spectrum density at difference data rate for each mode and recorded worst case for each mode.
- 2) Test results including cable loss;
- 3) Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; MCS0 at IEEE 802.11n HT20; MCS0 at IEEE 802.11n HT40;

4.5 6dB Bandwidth


Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

Test Configuration



Test Results

Please refer to Appendix RF Test Data for 2.4GWIFI

Note:

- 1) Measured peak power spectrum density at difference data rate for each mode and recorded worst case for each mode.
- 2) Test results including cable loss;
- 3) Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; MCS0 at IEEE 802.11n HT20; MCS0 at IEEE 802.11n HT40;

4.6 Out-of-band Emissions

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge and out-of-band emissions.

Test Configuration



Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandage measurement data. And record the worst data in the report.

Please refer to Appendix RF Test Data for 2.4GWIFI

4.7 Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result:

The maximum gain of antenna was 0.95 dBi.


Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Shenzhen CTA Testing Technology Co., Ltd. does not assume any responsibility.

4.8 On Time and Duty Cycle

Standard Applicable

None; for reporting purpose only.

TEST CONFIGURATION



Test Procedures

- 1). Set the Centre frequency of the spectrum analyzer to the transmitting frequency;
- 2). Set the span=0MHz, RBW=8MHz, VBW=8MHz, Sweep time=5ms;
- 3). Detector = peak;
- 4). Trace mode = Single hold.

TEST RESULTS

Please refer to Appendix RF Test Data for 2.4GWIFI

Duty Cycle= Transmission Duration/ Transmission Period

5 Test Setup Photos of the EUT

Please refer to separated files for Test Setup Photos of the EUT.

6 Photos of the EUT

Please refer to separated files for External Photos & Internal Photos of the EUT.

***** End of Report *****