




For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

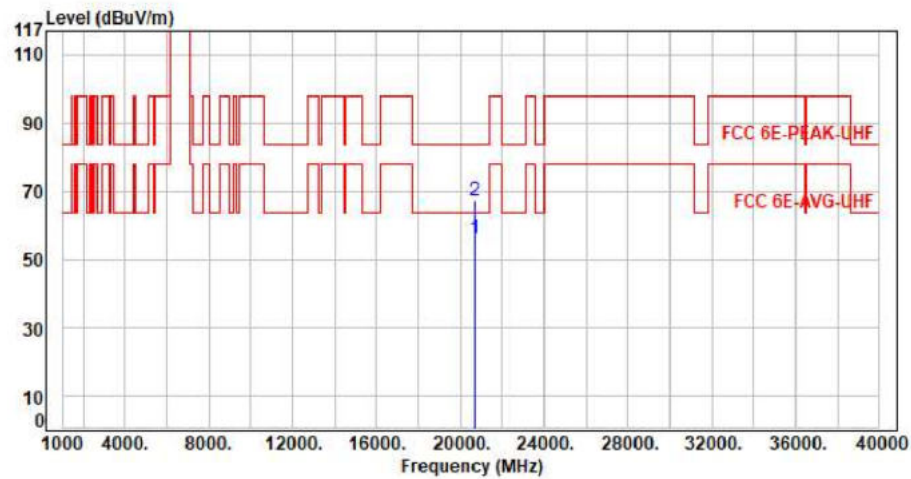


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20655.00	10.99	45.01	56.00	63.54	-7.54	Average	150	360	P
2	20655.00	10.99	56.22	67.21	83.54	-16.33	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

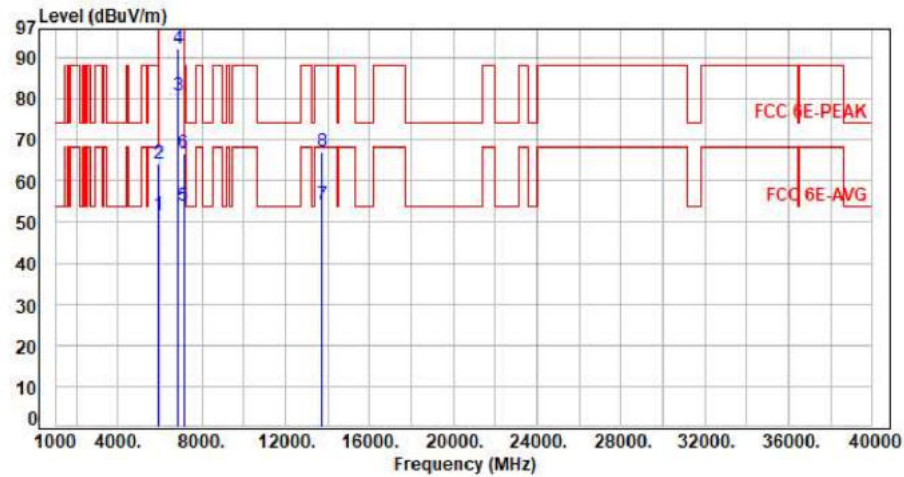

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	44.01	51.67	68.20	-16.53	Average	395	287	P
2	5925.00	7.66	56.41	64.07	88.20	-24.13	Peak	395	287	P
3	6885.00	9.56	71.13	80.69	200.00	-119.31	Average	395	287	P
4	6885.00	9.56	82.69	92.25	200.00	-107.75	Peak	395	287	P
5	7125.00	10.05	43.90	53.95	68.20	-14.25	Average	395	287	P
6	7125.00	10.05	56.77	66.82	88.20	-21.38	Peak	395	287	P
7	13770.00	22.69	31.58	54.27	68.20	-13.93	Average	100	157	P
8	13770.00	22.69	44.31	67.00	88.20	-21.20	Peak	100	157	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

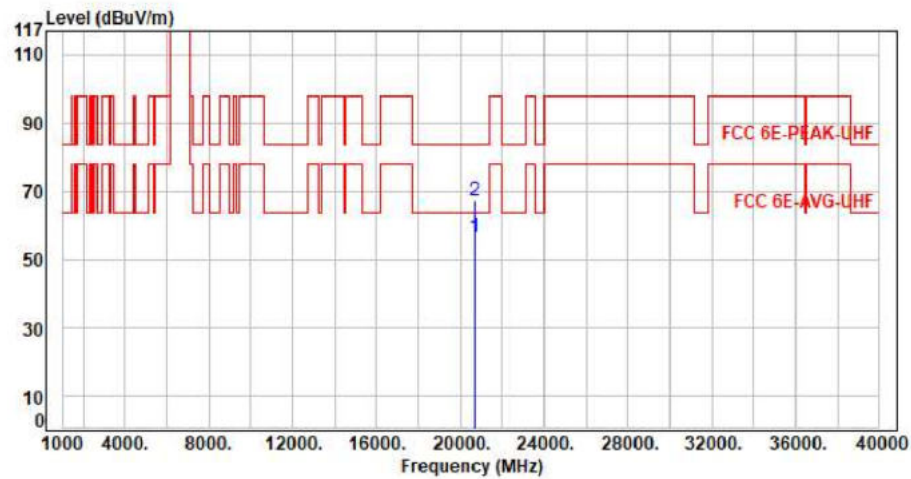


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20655.00	10.99	45.58	56.57	63.54	-6.97	Average	150	360	P
2	20655.00	10.99	56.11	67.10	83.54	-16.44	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

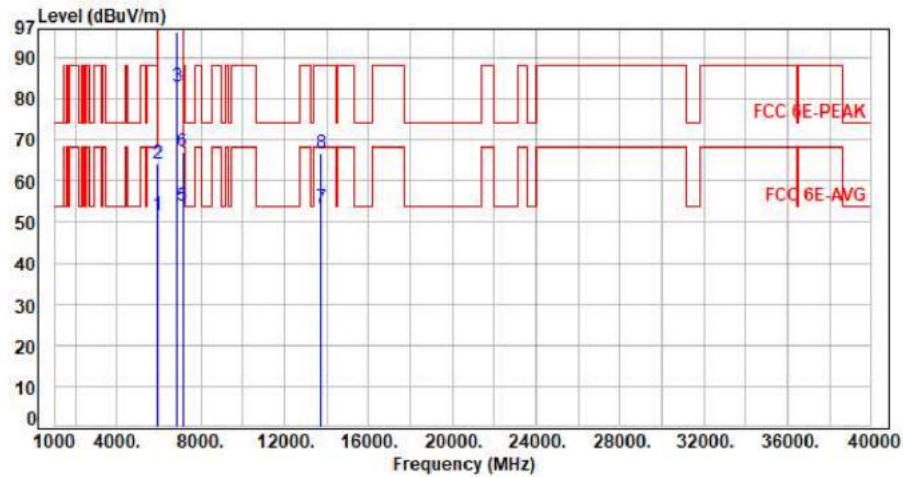

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	44.11	51.77	68.20	-16.43	Average	278	28	P
2	5925.00	7.66	56.42	64.08	88.20	-24.12	Peak	278	28	P
3	6865.00	9.52	73.44	82.96	200.00	-117.04	Average	278	28	P
4	6865.00	9.52	86.75	96.27	200.00	-103.73	Peak	278	28	P
5	7125.00	10.05	43.92	53.97	68.20	-14.23	Average	278	28	P
6	7125.00	10.05	56.94	66.99	88.20	-21.21	Peak	278	28	P
7	13730.00	22.57	31.08	53.65	68.20	-14.55	Average	100	124	P
8	13730.00	22.57	44.33	66.90	88.20	-21.30	Peak	100	124	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

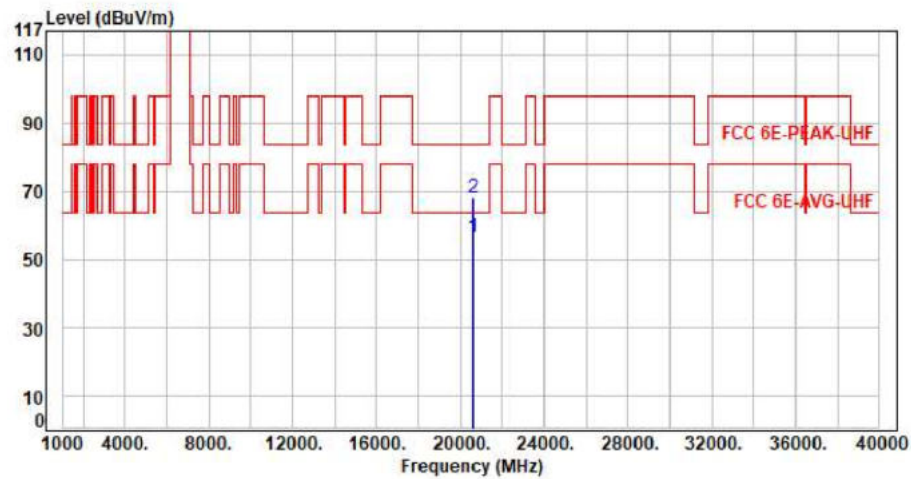


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20595.00	11.31	45.18	56.49	63.54	-7.05	Average	150	360	P
2	20595.00	11.31	56.79	68.10	83.54	-15.44	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

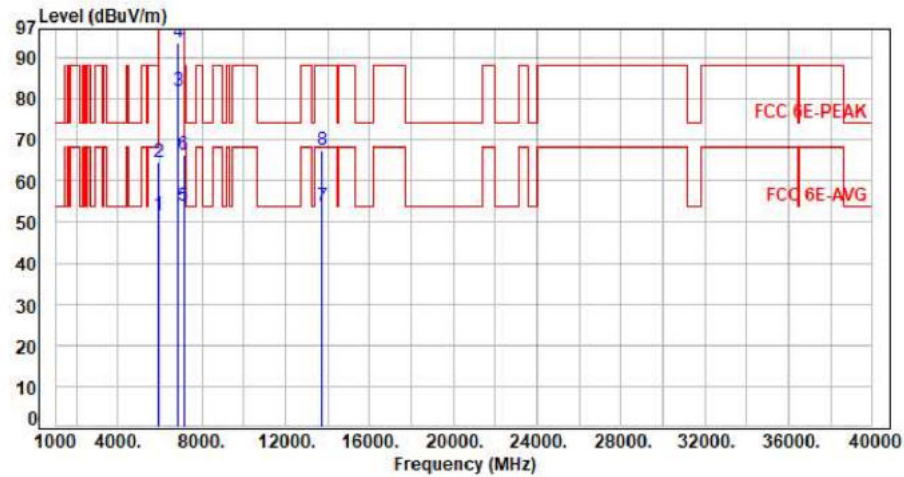

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	44.05	51.71	68.20	-16.49	Average	395	285	P
2	5925.00	7.66	56.92	64.58	88.20	-23.62	Peak	395	285	P
3	6865.00	9.52	72.24	81.76	200.00	-118.24	Average	395	285	P
4	6865.00	9.52	84.09	93.61	200.00	-106.39	Peak	395	285	P
5	7125.00	10.05	43.95	54.00	68.20	-14.20	Average	395	285	P
6	7125.00	10.05	56.20	66.25	88.20	-21.95	Peak	395	285	P
7	13730.00	22.57	31.28	53.85	68.20	-14.35	Average	100	120	P
8	13730.00	22.57	44.98	67.55	88.20	-20.65	Peak	100	120	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

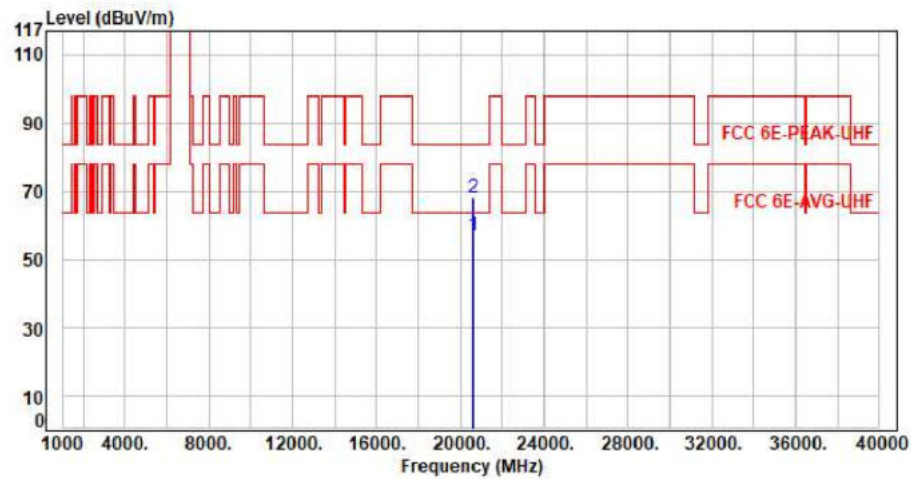

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20595.00	11.31	45.48	56.79	63.54	-6.75	Average	150	360	P
2	20595.00	11.31	56.67	67.98	83.54	-15.56	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

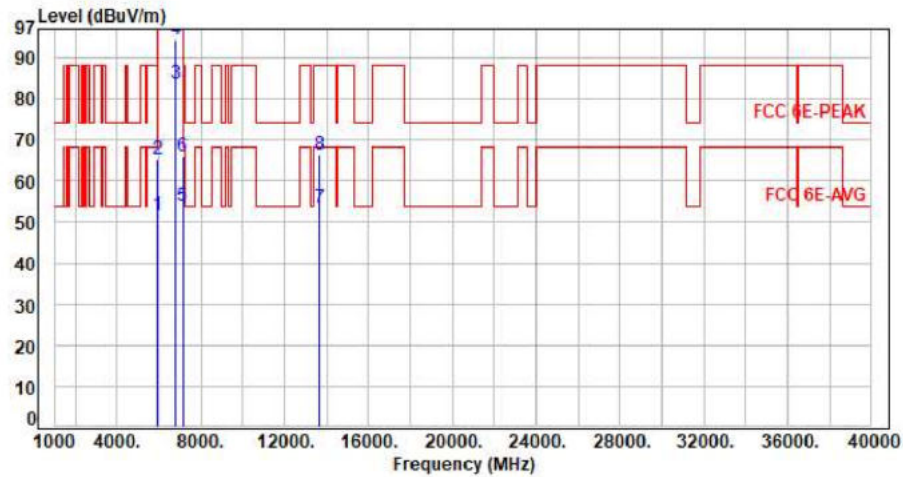

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	44.07	51.73	68.20	-16.47	Average	281	27	P
2	5925.00	7.66	57.53	65.19	88.20	-23.01	Peak	281	27	P
3	6825.00	9.47	74.33	83.80	200.00	-116.20	Average	281	27	P
4	6825.00	9.47	84.89	94.36	200.00	-105.64	Peak	281	27	P
5	7125.00	10.05	43.92	53.97	68.20	-14.23	Average	281	27	P
6	7125.00	10.05	56.14	66.19	88.20	-22.01	Peak	281	27	P
7	13650.00	22.24	31.42	53.66	68.20	-14.54	Average	100	182	P
8	13650.00	22.24	44.31	66.55	88.20	-21.65	Peak	100	182	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

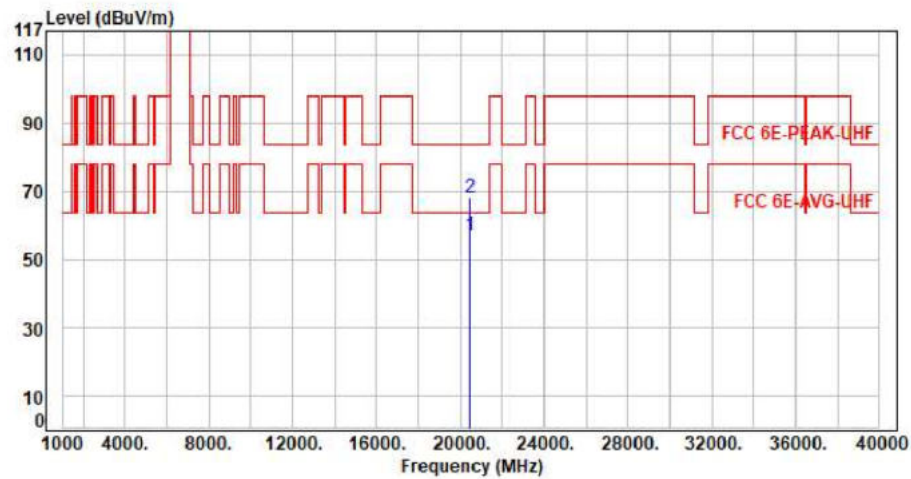


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20475.00	11.45	45.57	57.02	63.54	-6.52	Average	150	360	P
2	20475.00	11.45	56.67	68.12	83.54	-15.42	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

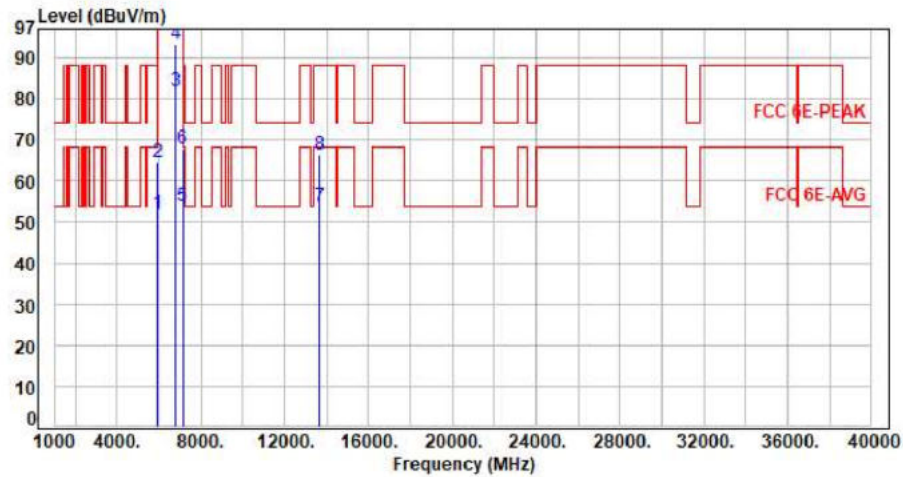

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	44.18	51.84	68.20	-16.36	Average	400	281	P
2	5925.00	7.66	57.01	64.67	88.20	-23.53	Peak	400	281	P
3	6825.00	9.47	72.50	81.97	200.00	-118.03	Average	400	281	P
4	6825.00	9.47	83.67	93.14	200.00	-106.86	Peak	400	281	P
5	7125.00	10.05	43.97	54.02	68.20	-14.18	Average	400	281	P
6	7125.00	10.05	57.84	67.89	88.20	-20.31	Peak	400	281	P
7	13650.00	22.24	31.48	53.72	68.20	-14.48	Average	100	122	P
8	13650.00	22.24	44.22	66.46	88.20	-21.74	Peak	100	122	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

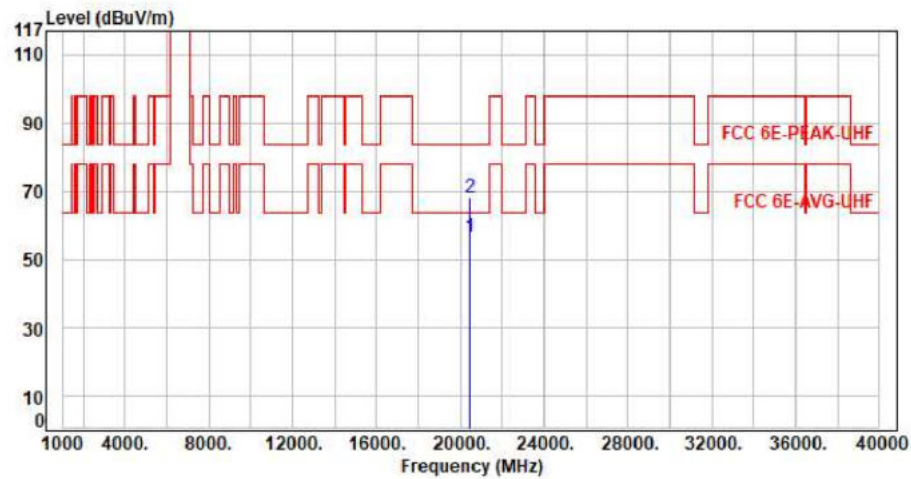


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20475.00	11.45	45.08	56.53	63.54	-7.01	Average	150	360	P
2	20475.00	11.45	56.57	68.02	83.54	-15.52	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

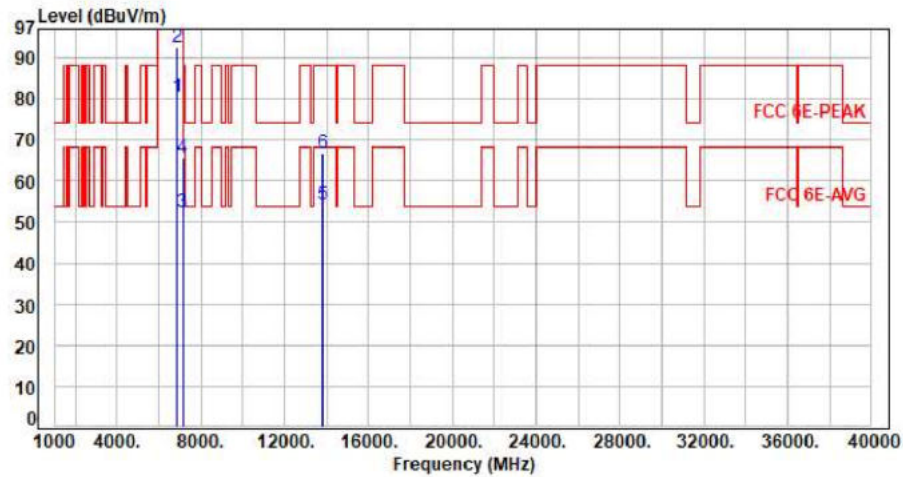


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.59	70.84	80.43	200.00	-119.57	Average	278	26	P
2	6895.00	9.59	82.92	92.51	200.00	-107.49	Peak	278	26	P
3	7125.00	10.05	42.36	52.41	68.20	-15.79	Average	278	26	P
4	7125.00	10.05	55.78	65.83	88.20	-22.37	Peak	278	26	P
5	13790.00	22.74	31.58	54.32	68.20	-13.88	Average	100	175	P
6	13790.00	22.74	44.11	66.85	88.20	-21.35	Peak	100	175	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

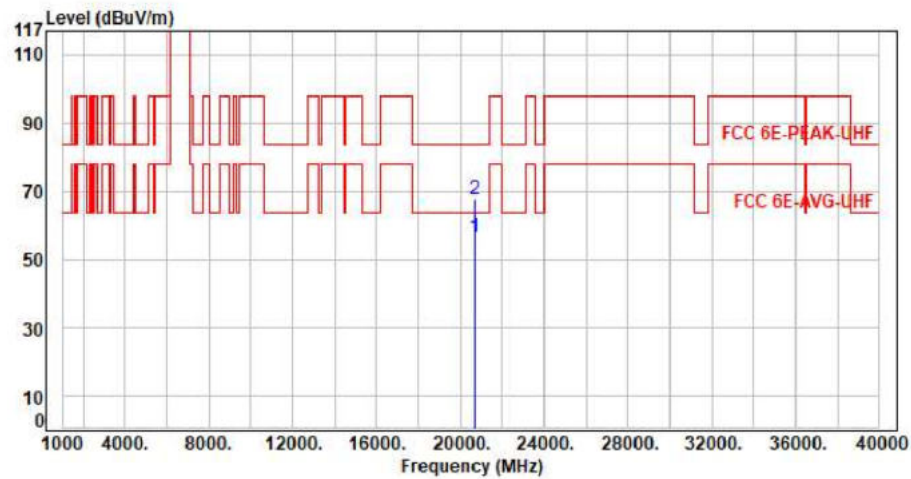

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20685.00	11.04	45.61	56.65	63.54	-6.89	Average	150	360	P
2	20685.00	11.04	56.66	67.70	83.54	-15.84	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

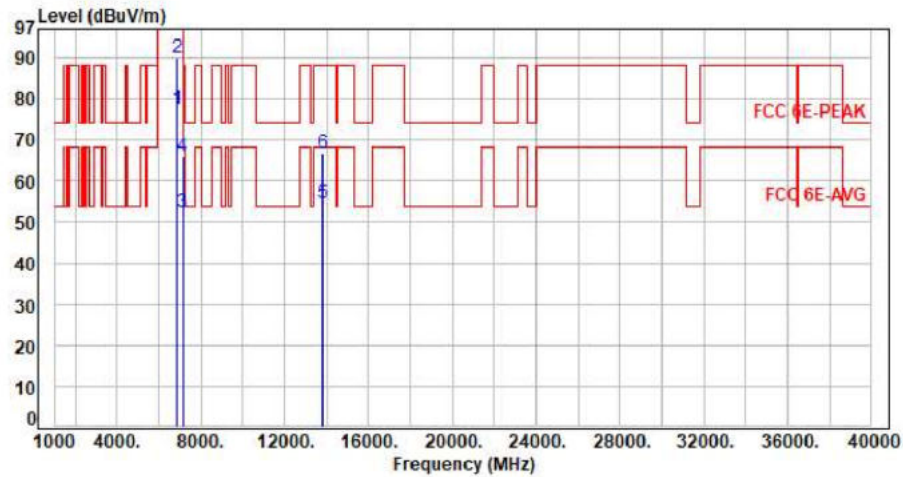


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.59	67.96	77.55	200.00	-122.45	Average	400	279	P
2	6895.00	9.59	80.52	90.11	200.00	-109.89	Peak	400	279	P
3	7125.00	10.05	42.38	52.43	68.20	-15.77	Average	400	279	P
4	7125.00	10.05	55.95	66.00	88.20	-22.20	Peak	400	279	P
5	13790.00	22.74	31.66	54.40	68.20	-13.80	Average	100	225	P
6	13790.00	22.74	44.11	66.85	88.20	-21.35	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

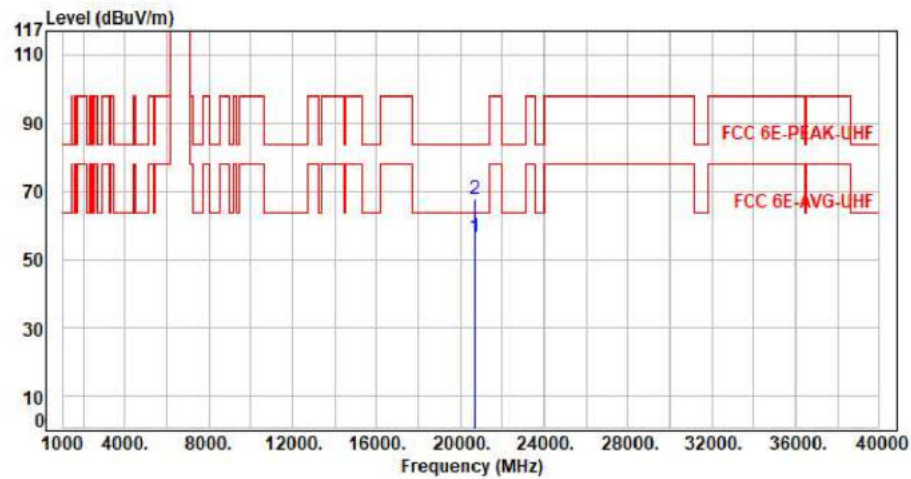

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20685.00	11.04	45.65	56.69	63.54	-6.85	Average	150	360	P
2	20685.00	11.04	56.76	67.80	83.54	-15.74	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

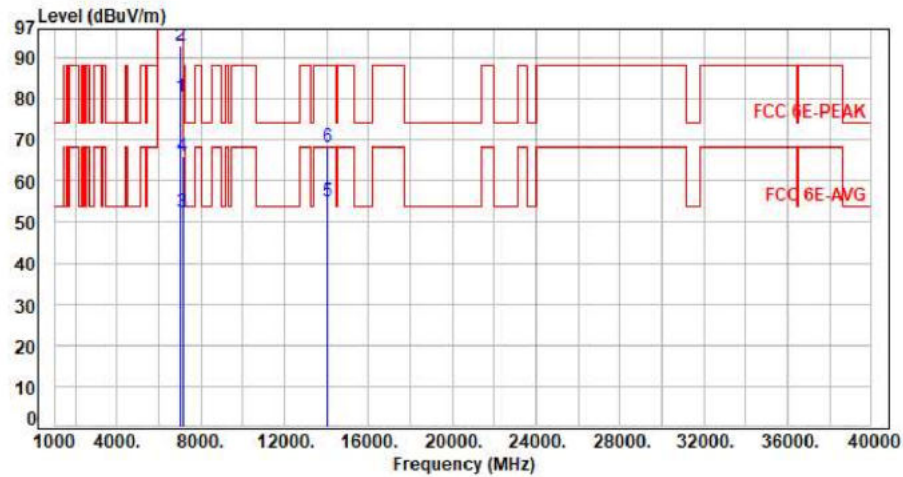


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.68	70.66	80.34	200.00	-119.66	Average	100	27	P
2	7015.00	9.68	83.42	93.10	200.00	-106.90	Peak	100	27	P
3	7125.00	10.05	42.37	52.42	68.20	-15.78	Average	100	27	P
4	7125.00	10.05	55.88	65.93	88.20	-22.27	Peak	100	27	P
5	14030.00	23.39	31.59	54.98	68.20	-13.22	Average	100	124	P
6	14030.00	23.39	44.68	68.07	88.20	-20.13	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

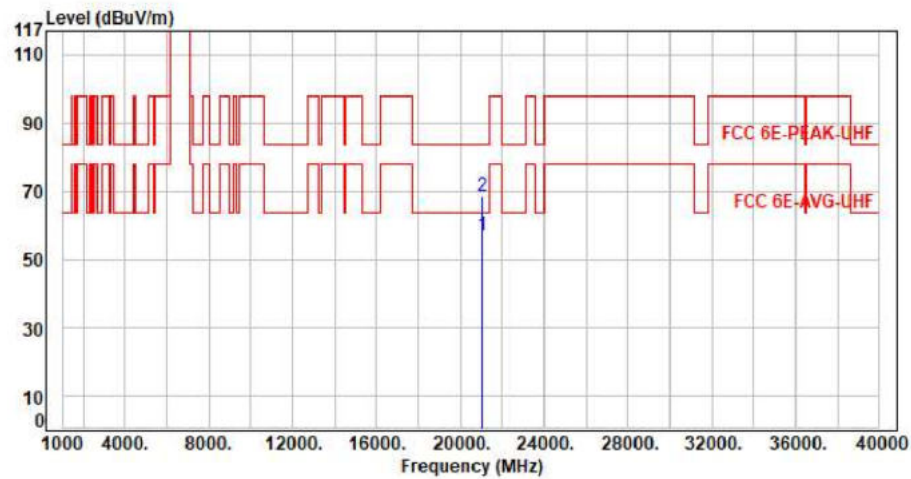


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21045.00	11.50	45.62	57.12	63.54	-6.42	Average	150	360	P
2	21045.00	11.50	56.88	68.38	83.54	-15.16	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

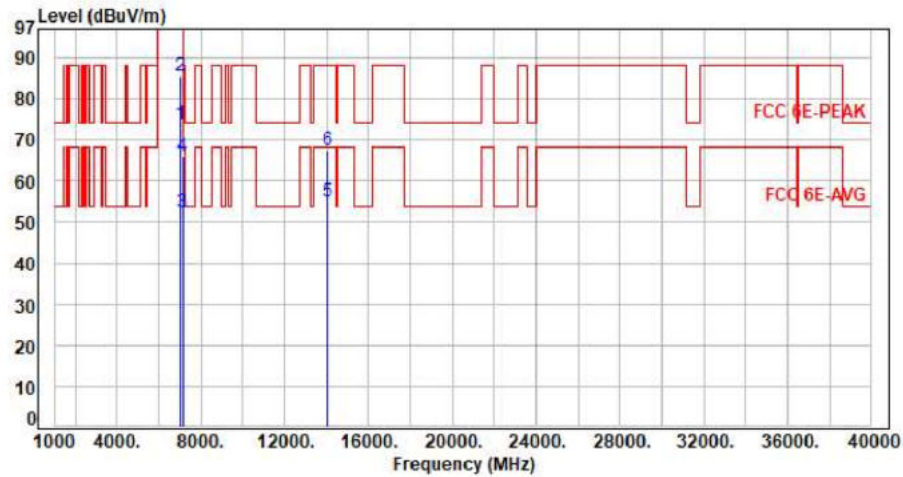


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.68	64.09	73.77	200.00	-126.23	Average	100	222	P
2	7015.00	9.68	75.87	85.55	200.00	-114.45	Peak	100	222	P
3	7125.00	10.05	42.30	52.35	68.20	-15.85	Average	100	222	P
4	7125.00	10.05	56.11	66.16	88.20	-22.04	Peak	100	222	P
5	14030.00	23.39	31.69	55.08	68.20	-13.12	Average	100	138	P
6	14030.00	23.39	44.21	67.60	88.20	-20.60	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

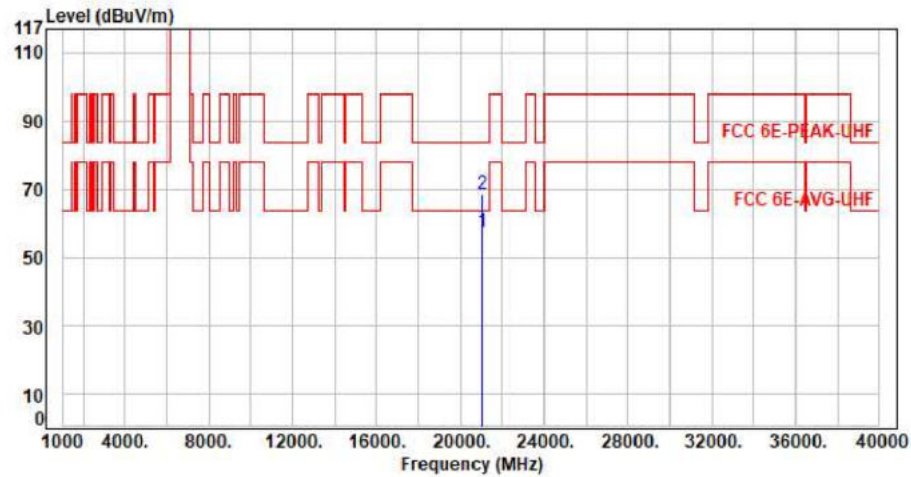


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21045.00	11.50	45.98	57.48	63.54	-6.06	Average	150	360	P
2	21045.00	11.50	56.98	68.48	83.54	-15.06	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

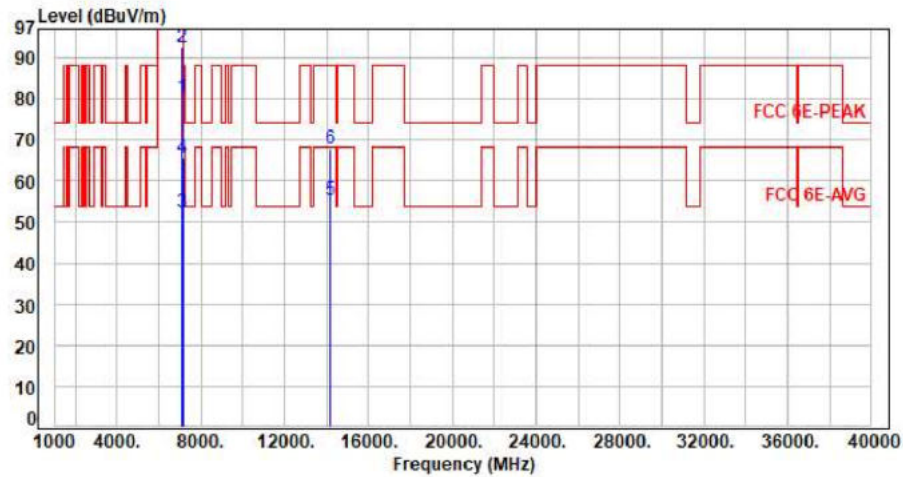


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.96	70.26	80.22	200.00	-119.78	Average	100	29	P
2	7095.00	9.96	82.76	92.72	200.00	-107.28	Peak	100	29	P
3	7125.00	10.05	42.30	52.35	68.20	-15.85	Average	100	29	P
4	7125.00	10.05	55.59	65.64	88.20	-22.56	Peak	100	29	P
5	14190.00	23.79	31.68	55.47	68.20	-12.73	Average	100	282	P
6	14190.00	23.79	44.12	67.91	88.20	-20.29	Peak	100	282	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

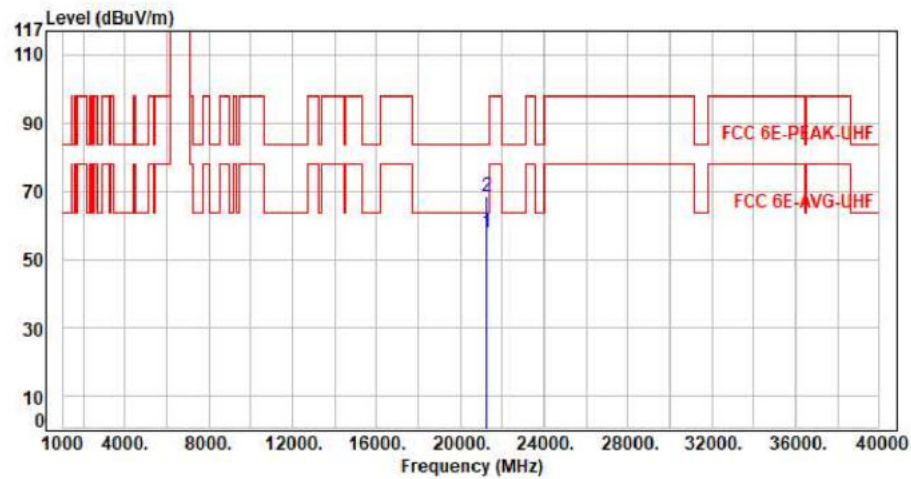


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21285.00	11.80	45.99	57.79	63.54	-5.75	Average	150	360	P
2	21285.00	11.80	56.53	68.33	83.54	-15.21	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

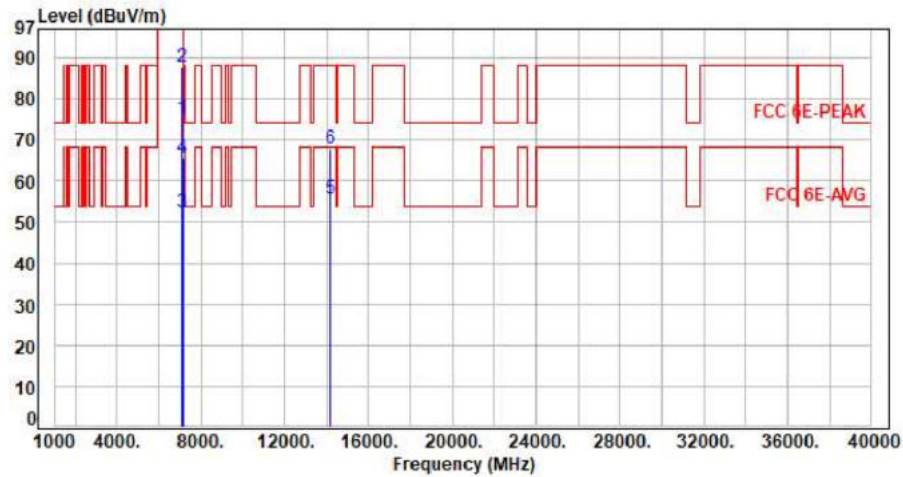


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.96	65.24	75.20	200.00	-124.80	Average	100	227	P
2	7095.00	9.96	77.72	87.68	200.00	-112.32	Peak	100	227	P
3	7125.00	10.05	42.30	52.35	68.20	-15.85	Average	100	227	P
4	7125.00	10.05	55.43	65.48	88.20	-22.72	Peak	100	227	P
5	14190.00	23.79	31.94	55.73	68.20	-12.47	Average	100	225	P
6	14190.00	23.79	44.21	68.00	88.20	-20.20	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

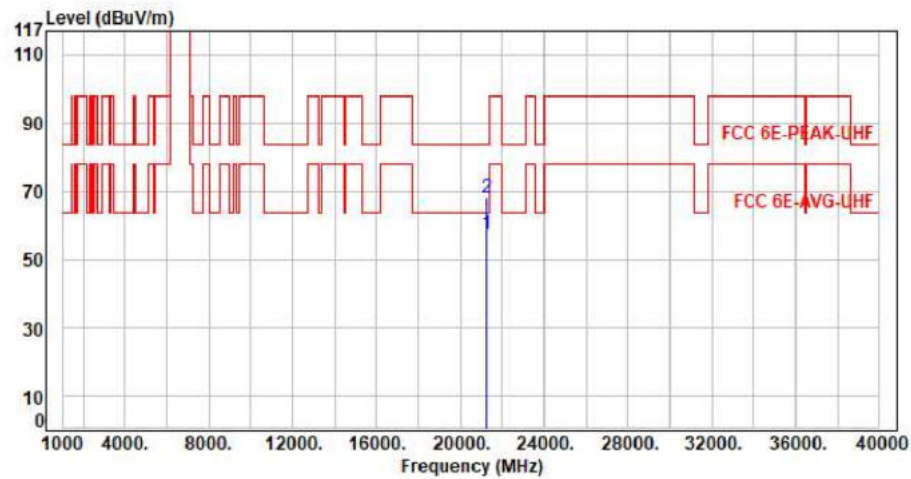


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21285.00	11.80	45.73	57.53	63.54	-6.01	Average	150	360	P
2	21285.00	11.80	56.05	67.85	83.54	-15.69	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

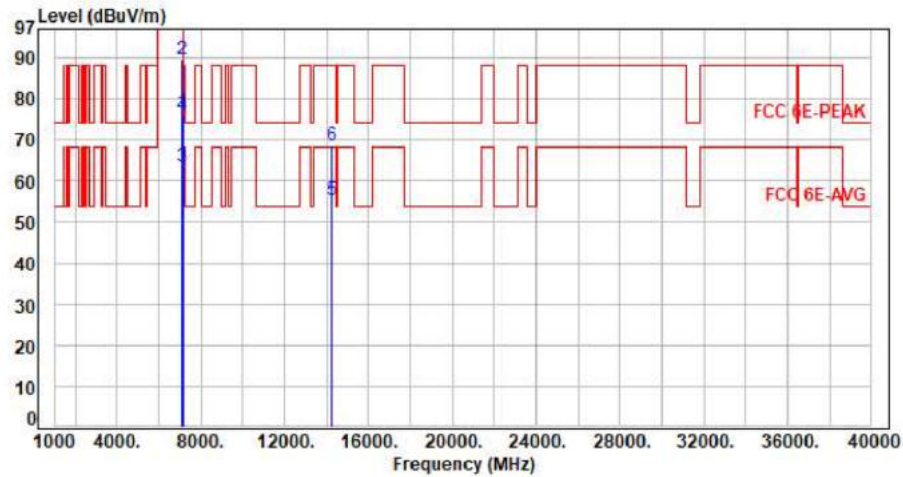


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	10.02	66.80	76.82	200.00	-123.18	Average	100	27	P
2	7115.00	10.02	79.47	89.49	200.00	-110.51	Peak	100	27	P
3	7125.00	10.05	53.31	63.36	68.20	-4.84	Average	100	27	P
4	7125.00	10.05	65.83	75.88	88.20	-12.32	Peak	100	27	P
5	14230.00	23.94	31.24	55.18	68.20	-13.02	Average	100	145	P
6	14230.00	23.94	44.58	68.52	88.20	-19.68	Peak	100	145	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

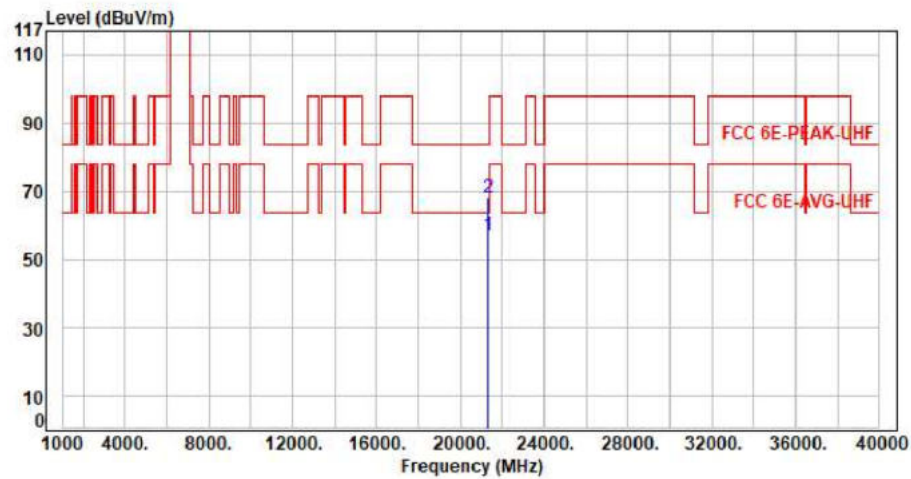

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21345.00	11.36	45.52	56.88	63.54	-6.66	Average	150	360	P
2	21345.00	11.36	56.84	68.20	83.54	-15.34	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

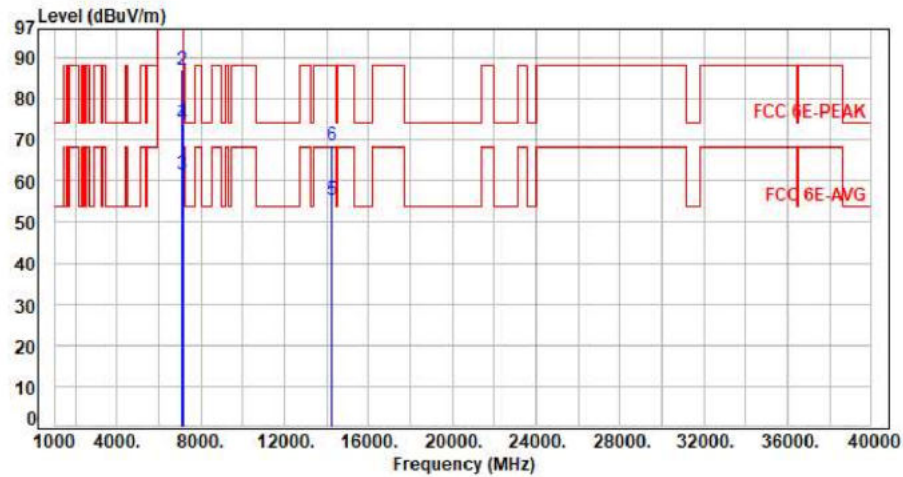


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	10.02	64.54	74.56	200.00	-125.44	Average	377	272	P
2	7115.00	10.02	77.00	87.02	200.00	-112.98	Peak	377	272	P
3	7125.00	10.05	51.62	61.67	68.20	-6.53	Average	377	272	P
4	7125.00	10.05	63.79	73.84	88.20	-14.36	Peak	377	272	P
5	14230.00	23.94	31.26	55.20	68.20	-13.00	Average	100	225	P
6	14230.00	23.94	44.62	68.56	88.20	-19.64	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

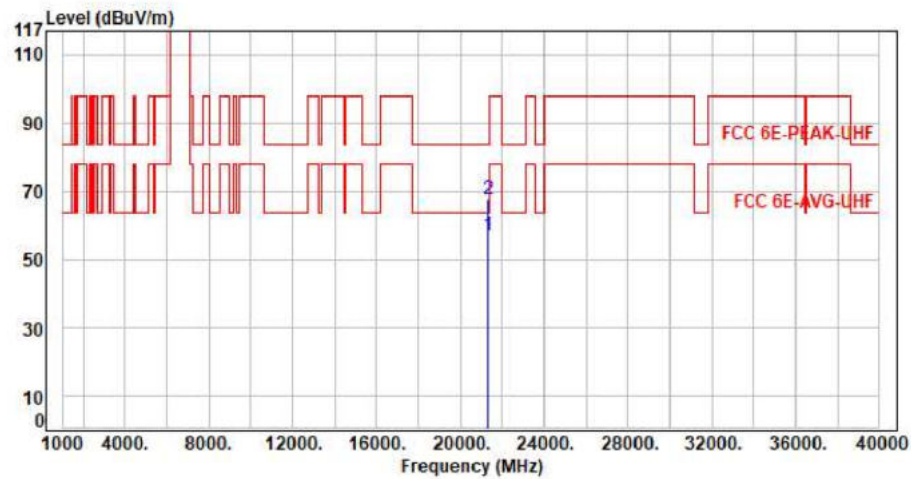


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21345.00	11.36	45.72	57.08	63.54	-6.46	Average	150	360	P
2	21345.00	11.36	56.43	67.79	83.54	-15.75	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

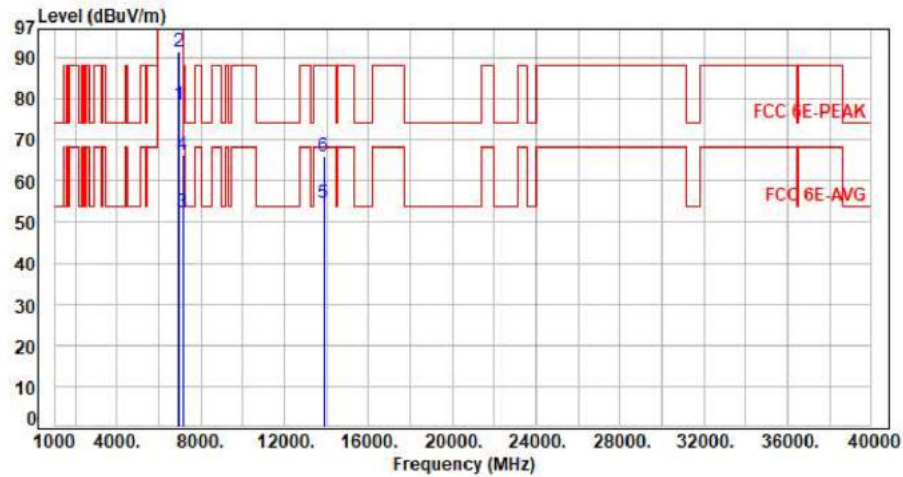


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.61	68.80	78.41	200.00	-121.59	Average	100	28	P
2	6925.00	9.61	81.75	91.36	200.00	-108.64	Peak	100	28	P
3	7125.00	10.05	42.17	52.22	68.20	-15.98	Average	100	28	P
4	7125.00	10.05	56.48	66.53	88.20	-21.67	Peak	100	28	P
5	13850.00	22.86	31.69	54.55	68.20	-13.65	Average	100	124	P
6	13850.00	22.86	43.28	66.14	88.20	-22.06	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

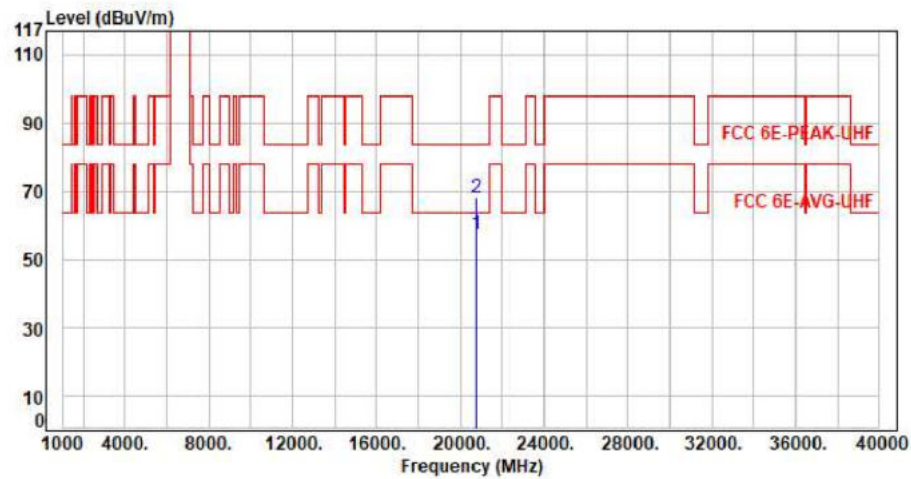


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20775.00	11.39	45.95	57.34	63.54	-6.20	Average	150	360	P
2	20775.00	11.39	56.71	68.10	83.54	-15.44	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

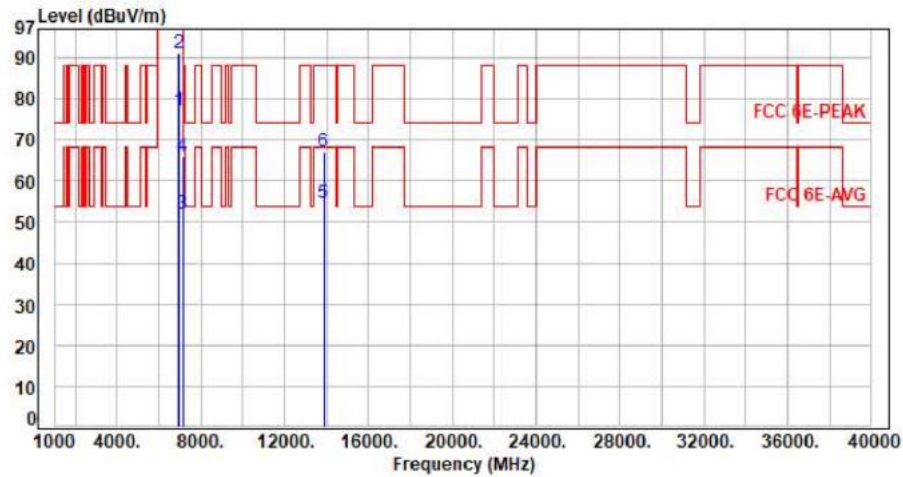


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.61	67.57	77.18	200.00	-122.82	Average	392	285	P
2	6925.00	9.61	81.39	91.00	200.00	-109.00	Peak	392	285	P
3	7125.00	10.05	42.11	52.16	68.20	-16.04	Average	392	285	P
4	7125.00	10.05	55.98	66.03	88.20	-22.17	Peak	392	285	P
5	13850.00	22.86	31.68	54.54	68.20	-13.66	Average	100	124	P
6	13850.00	22.86	44.13	66.99	88.20	-21.21	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

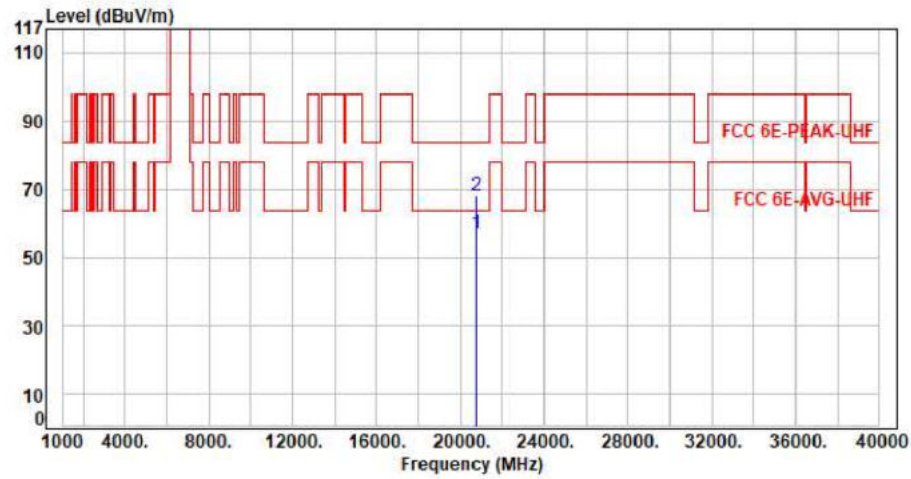


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20775.00	11.39	45.77	57.16	63.54	-6.38	Average	150	360	P
2	20775.00	11.39	56.71	68.10	83.54	-15.44	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

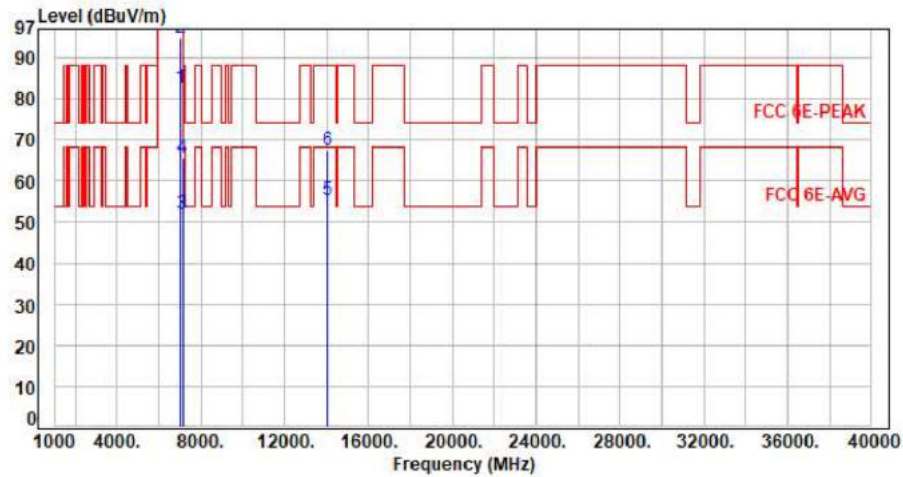


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	9.65	72.91	82.56	200.00	-117.44	Average	267	50	P
2	7005.00	9.65	85.18	94.83	200.00	-105.17	Peak	267	50	P
3	7125.00	10.05	42.07	52.12	68.20	-16.08	Average	267	50	P
4	7125.00	10.05	55.55	65.60	88.20	-22.60	Peak	267	50	P
5	14010.00	23.32	31.87	55.19	68.20	-13.01	Average	100	199	P
6	14010.00	23.32	44.13	67.45	88.20	-20.75	Peak	100	199	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

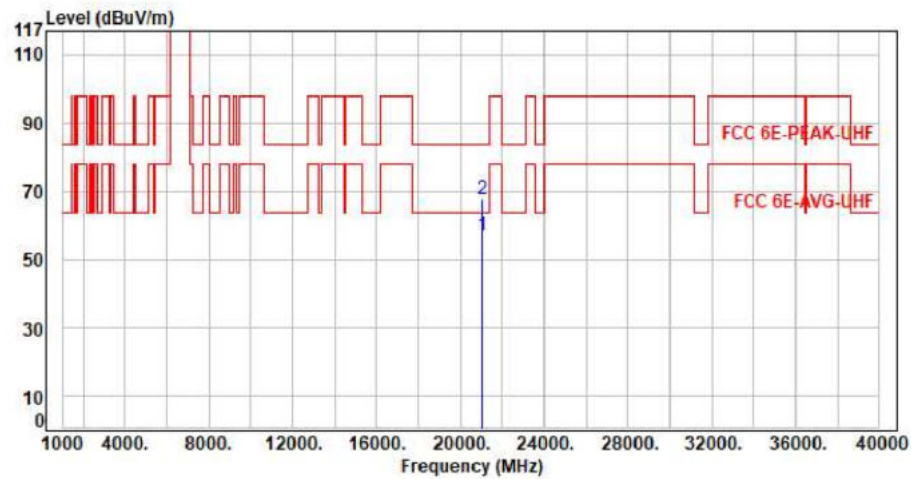


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21015.00	11.48	45.32	56.80	63.54	-6.74	Average	150	360	P
2	21015.00	11.48	56.00	67.48	83.54	-16.06	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

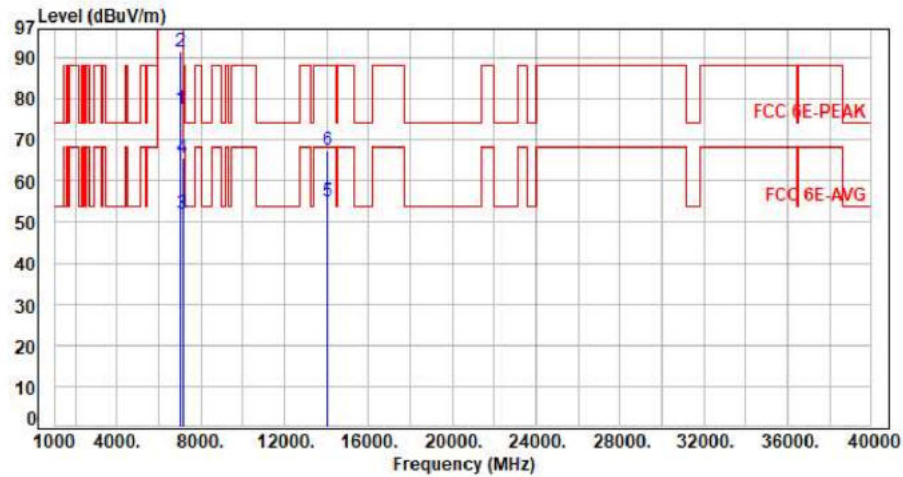


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	9.65	67.71	77.36	200.00	-122.64	Average	329	278	P
2	7005.00	9.65	81.93	91.58	200.00	-108.42	Peak	329	278	P
3	7125.00	10.05	41.99	52.04	68.20	-16.16	Average	329	278	P
4	7125.00	10.05	55.50	65.55	88.20	-22.65	Peak	329	278	P
5	14010.00	23.32	31.66	54.98	68.20	-13.22	Average	100	124	P
6	14010.00	23.32	44.22	67.54	88.20	-20.66	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

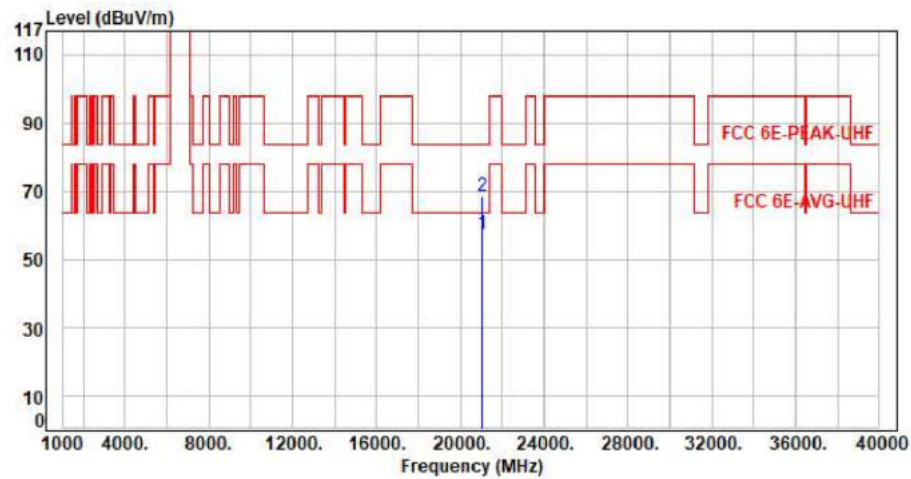


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21015.00	11.48	45.77	57.25	63.54	-6.29	Average	150	360	P
2	21015.00	11.48	56.81	68.29	83.54	-15.25	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

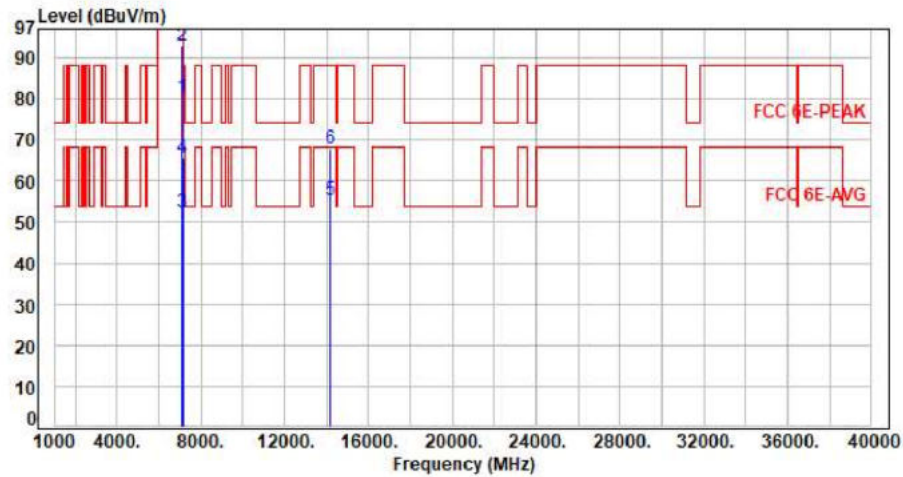


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	9.91	70.45	80.36	200.00	-119.64	Average	100	7	P
2	7085.00	9.91	83.18	93.09	200.00	-106.91	Peak	100	7	P
3	7125.00	10.05	42.14	52.19	68.20	-16.01	Average	100	7	P
4	7125.00	10.05	55.75	65.80	88.20	-22.40	Peak	100	7	P
5	14170.00	23.72	31.74	55.46	68.20	-12.74	Average	100	221	P
6	14170.00	23.72	44.10	67.82	88.20	-20.38	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

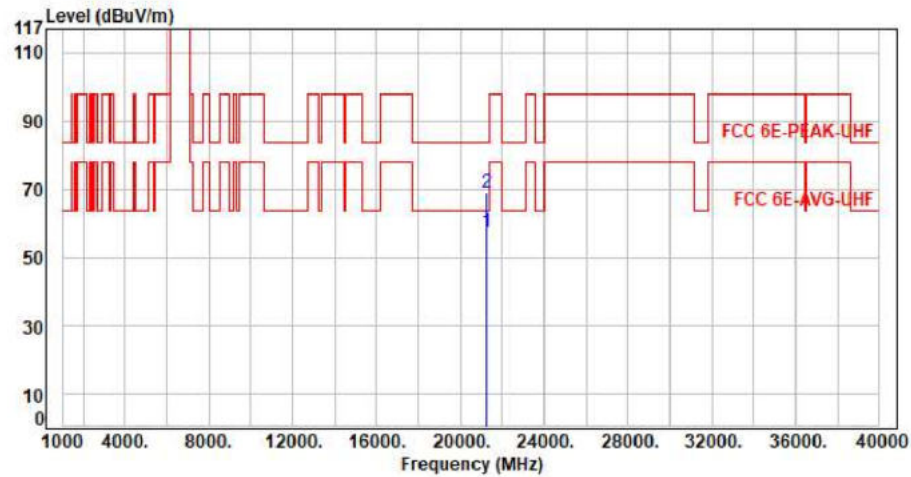


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21255.00	11.84	45.55	57.39	63.54	-6.15	Average	150	360	P
2	21255.00	11.84	56.99	68.83	83.54	-14.71	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

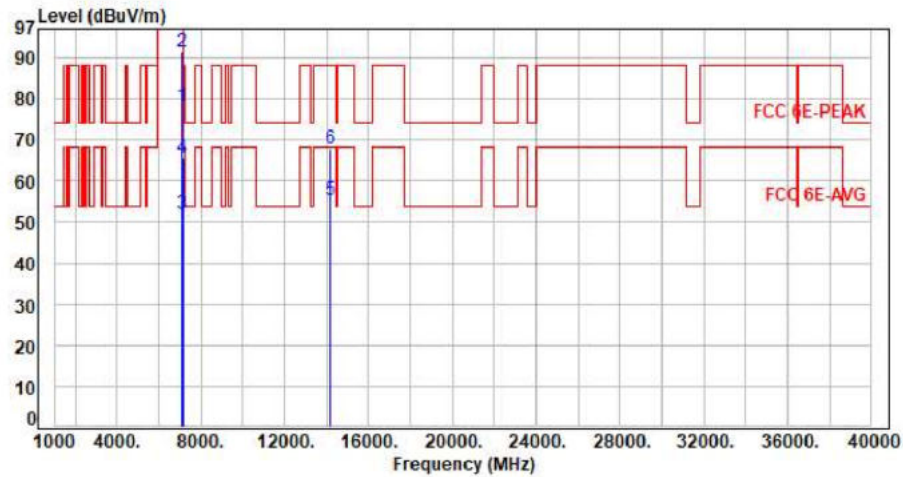

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	9.91	68.44	78.35	200.00	-121.65	Average	326	275	P
2	7085.00	9.91	81.46	91.37	200.00	-108.63	Peak	326	275	P
3	7125.00	10.05	42.11	52.16	68.20	-16.04	Average	326	275	P
4	7125.00	10.05	55.53	65.58	88.20	-22.62	Peak	326	275	P
5	14170.00	23.72	31.52	55.24	68.20	-12.96	Average	100	134	P
6	14170.00	23.72	44.09	67.81	88.20	-20.39	Peak	100	134	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor