



FCC TEST REPORT

FCC ID: 2BDS8-EONON

Applicant: SunBoBoDigital Co.Ltd

Address: Unit 3306, 33/F New Trend Centre,704 Prince Edward Road East,Kowloon, Hong Kong

Manufacturer: SunBoBoDigital Co.Ltd

Address: Unit 3306, 33/F New Trend Centre,704 Prince Edward Road East,Kowloon, Hong Kong

EUT: Car Media Player

Trade Mark: EONON

Model Number: E90A12S
E20S, E39A12, E39A12S, E46A12, E46A12S, E46A12S-6G, E90A12, E90A12S-6G,
GMA12, GMA12S, GMA12S-6G, GMA12S2-U, GMA12S-6G, M3BKA12, M3BKA12S,
M3BKA12S-6G, M3BLA12, M3BLA12S, M3BLA12S-6G, MIN SE Plus, MIN T, MIN T Plus,
MIN TYT, P3, P4, P5, S1, S6, Q01SE, Q02SE, Q03PRO, Q03SE, Q04PRO, Q04SE,
Q05SE, Q49PRO, Q49SE, Q50PRO, Q50SE, Q51PRO, Q51SE, Q53PRO, Q53SE,
Q63PRO, Q63SE, Q65PRO, Q65SE, Q67PRO, Q67SE, Q80Plus, Q80PRO, Q80SE,
TYTA12, TYTA12S, TYTA12S-6G, UA12 Plus, UA12S Plus, UA12S Plus-6G, UA12T,
UA12T Plus, UA12TS, UA12TS-6G, UA12TS Plus, UA12TS Plus-6G, VWA12, VWA12S,
VWA12S-6G, X20, X20 Plus, X3, X3 Plus, X3T, X3U, X3U Plus, X4

Date of Receipt: Nov. 06, 2023

Test Date: Nov. 06, 2023 - Nov. 24, 2023

Date of Report: Nov. 24, 2023

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

Applicable Standards: FCC Part 15 Subpart B
ANSI C63.4:2014

Test Result: Pass

Report Number: DL-20231124021E

Prepared (Test Engineer): Alisa Song

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	3
2. TEST SUMMARY.....	3
3. GENERAL INFORMATION	4
4. TEST INSTRUMENT USED	5
5. CONDUCTED EMISSION TEST	6
6. RADIATION EMISSION TEST.....	8
7. SETUP PHOTOGRAPHS.....	14
8. EUT PHOTOGRAPHS	15

**1. VERSION**

Version No.	Date	Description
00	Nov. 24, 2023	Original

2. TEST SUMMARY

EMC Emission				
Standard	Test Item	Limit	Result	Remark
FCC PART 15 B	Conducted Emission at power ports	Class B	N/A	
	Radiated Emission below 1GHz	Class B	PASS	
	Radiated Emission above 1GHz	Class B	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

Test lab: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street,
Longgang District, Shenzhen, Guangdong, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118



3. GENERAL INFORMATION

3.1 Description of Device (EUT)

EUT: Car Media Player

Trade Mark: EONON

Model Number: E90A12S
E20S, E39A12, E39A12S, E46A12, E46A12S, E46A12S-6G, E90A12,
E90A12S-6G, GMA12, GMA12S, GMA12S-6G, GMA12S2-U, GMA12S-6G,
M3BKA12, M3BKA12S, M3BKA12S-6G, M3BLA12, M3BLA12S, M3BLA12S-6G,
MIN SE Plus, MIN T, MIN T Plus, MIN TYT, P3, P4, P5, S1, S6, Q01SE, Q02SE,
Q03PRO, Q03SE, Q04PRO, Q04SE, Q05SE, Q49PRO, Q49SE, Q50PRO,
Q50SE, Q51PRO, Q51SE, Q53PRO, Q53SE, Q63PRO, Q63SE, Q65PRO,
Q65SE, Q67PRO, Q67SE, Q80Plus, Q80PRO, Q80SE, TYTA12, TYTA12S,
TYTA12S-6G, UA12 Plus, UA12S Plus, UA12S Plus-6G, UA12T, UA12T Plus,
UA12TS, UA12TS-6G, UA12TS Plus, UA12TS Plus-6G, VWA12, VWA12S,
VWA12S-6G, X20, X20 Plus, X3, X3 Plus, X3T, X3U, X3U Plus, X4

Test Model: E90A12S

Model difference: The product's different for model number and appearance color.


Power Supply: DC 12V

Working Frequency: Above 108MHz

3.2 Tested System Details

None.

3.3 Block Diagram of Test Set-up



3.4 Test Mode Description

Mode1. On Mode

3.5 Test Auxiliary Equipment

None.

3.6 Test Uncertainty

Conducted Emission Uncertainty : $\pm 2.56\text{dB}$

Radiated Emission Uncertainty(<1G) : $\pm 3.65\text{dB}$

Radiated Emission Uncertainty (>1G) $\pm 4.89\text{dB}$

**4. TEST INSTRUMENT USED****For Conducted Emission Test (843 Shielded Room)**

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
843 Shielded Room	ChengYu	843 Room	843	Sep. 20, 2022	Sep. 19, 2025
EMI Receiver	R&S	ESR	101421	Nov. 04, 2023	Nov. 03, 2024
LISN	R&S	ENV216	102417	Nov. 04, 2023	Nov. 03, 2024
Clamp	COM-POWER	CLA-050	431071	Nov. 04, 2023	Nov. 03, 2024
3-Loop Antenna	DAZE	ZN30401	13021	Nov. 04, 2023	Nov. 03, 2024
ISN T8	Schwarzbeck	NTFM 8158	101135	Nov. 04, 2023	Nov. 03, 2024
ISN T5	Schwarzbeck	NTFM 8158	101136	Nov. 04, 2023	Nov. 03, 2024
843 Cable 1#	ChengYu	CE Cable	001	Nov. 04, 2023	Nov. 03, 2024
843 Cable 1#	ChengYu	CE Cable	002	Nov. 04, 2023	Nov. 03, 2024

For Radiated Emission Test (966 chamber)

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
966 Chamber	ChengYu	966 Room	966	Sep. 20, 2022	Sep. 19, 2025
Spectrum Analyzer	Agilent	E4408B	MY50140780	Nov. 04, 2023	Nov. 03, 2024
EMI Receiver	R&S	ESRP7	101393	Nov. 04, 2023	Nov. 03, 2024
Amplifier	Schwarzbeck	BBV9743B	00153	Nov. 04, 2023	Nov. 03, 2024
Amplifier	EMEC	EM01G8GA	00270	Nov. 04, 2023	Nov. 03, 2024
Broadband Trilog Antenna	Schwarzbeck	VULB9162	00306	Nov. 04, 2023	Nov. 03, 2024
Horn Antenna	Schwarzbeck	BBHA9120D	02139	Nov. 04, 2023	Nov. 03, 2024
966 Cable 1#	ChengYu	966	004	Nov. 04, 2023	Nov. 03, 2024
966 Cable 2#	ChengYu	966	003	Nov. 04, 2023	Nov. 03, 2024


Other

Name	Manufacturer	Model	Software version
EMC Conduction Test System	FALA	EZ_EMG	EMC-CON 3A1.1
EMC radiation test system	FALA	EZ_EMG	FA-03A2
RF test system	MAIWEI	MTS8310	2.0.0.0
RF communication test system	MAIWEI	MTS8200	2.0.0.0

5. CONDUCTED EMISSION TEST

5.1 Block Diagram of Test Setup

For Mains Terminals Test

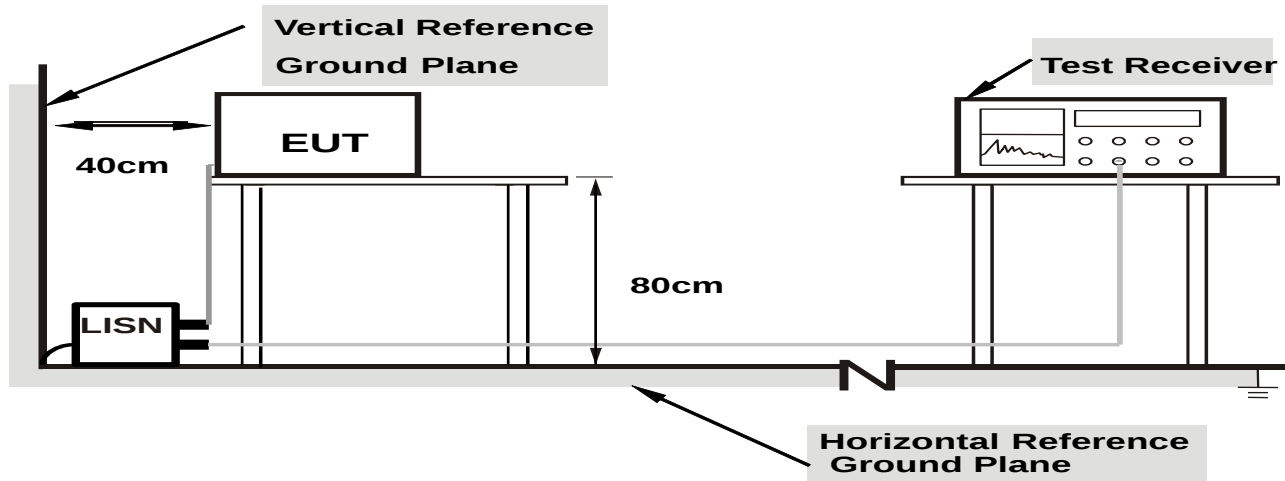

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

5.2 Test Standard and Limit

FCC PART 15 B

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15~0.50	66 ~ 56*	55 ~ 46*
0.50~5.00	56	46
5.00~30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

5.3 EUT Configuration on Test

The following equipment's are installed on conducted emission test to meet FCC PART 15 B requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

5.4 Operating Condition of EUT

5.4.1 Setup the EUT and simulators as shown in Section 5.1.

5.4.2 Turn on the power of all equipments.

5.4.3 Let the EUT work in test modes and test it.



5.5 Test Procedure

The EUT is put on the table and connected to the AC mains through a Artificial Mains Network (AMN) or ISN. This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are checked to find out the maximum conducted emission levels according to the **ANSI C63.4** regulations during conducted emission test.

The bandwidth of the test receiver (R&S Test Receiver ESR) is set at 10KHz.

The frequency range from 150 KHz to 30 MHz is investigated.

5.6 Test Result


The EUT is powered by DC, no requirements for this item.




6. RADIATION EMISSION TEST

6.1 Block Diagram of Test Setup

Below 1GHz

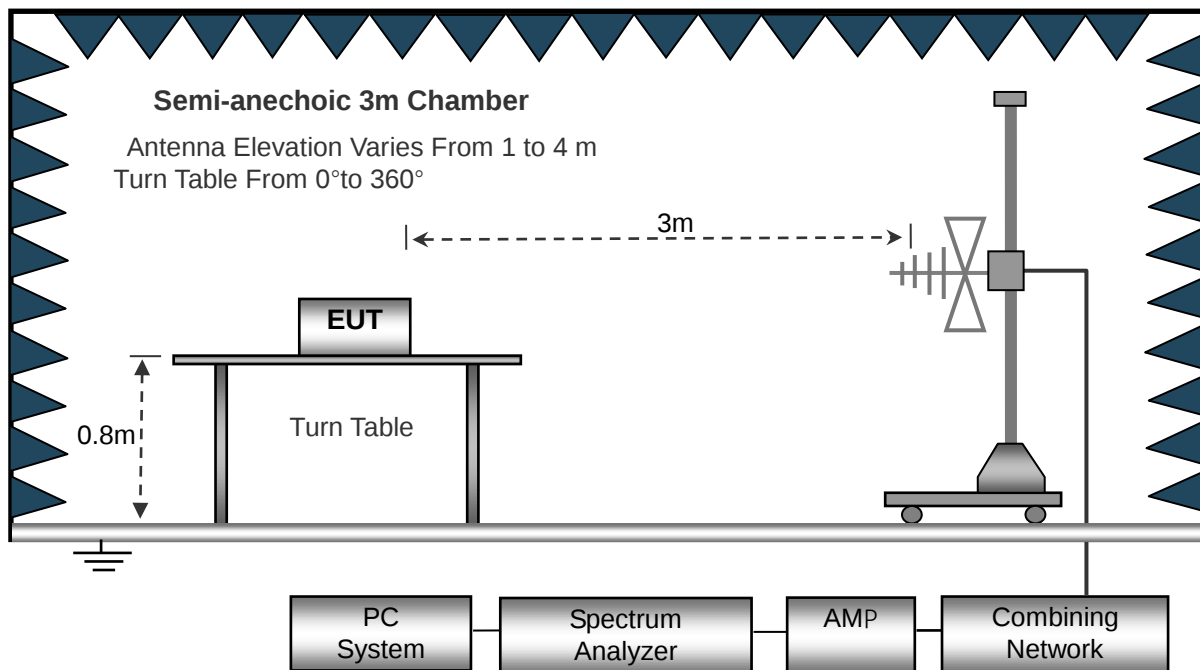

Above 1GHz

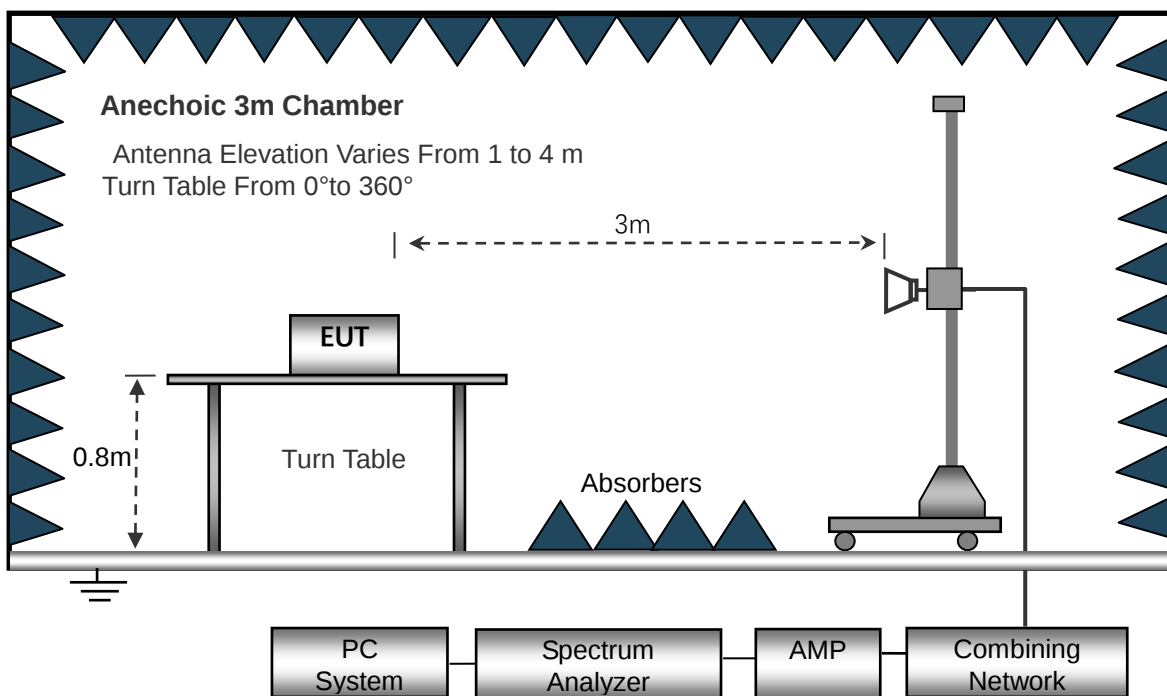

6.2 Test Standard and Limit

FCC PART 15 B



Below 1GHz

Frequency (MHz)	Distance (Meters)	Field Strengths Limits (dB μ V/m)
30 ~ 88	3	40.0
88 ~ 216	3	43.5
216 ~ 960	3	46.0
960 ~ 1000	3	54.0

Above 1GHz

Frequency MHz	Distance (Meters)	Field Strengths Limits dB(μ V)/m	Detector
Above 1000	3	74.0	PEAK
	3	54.0	AVERAGE

Remark:

(1) The smaller limit shall apply at the cross point between two frequency bands.

(2) Distance refers to the distance in meters between the measuring instrument, antenna and the closed point of any part of the device or system.

6.3 EUT Configuration on Test

The FCC PART 15 B regulations test method must be used to find the maximum emission during radiated emission test.

The configuration of EUT is the same as used in conducted emission test.

Please refer to Section 5.3.

6.4 Operating Condition of EUT

Same as conducted emission test, which is listed in Section 5.4 except the test set up replaced as Section 6.2.

6.5 Test Procedure

- 1) The radiated emissions test was conducted in a semi-anechoic chamber.
- 2) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
- 3) Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT.
- 4) The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.
- 5) The bandwidth setting on the field strength meter (R&S Test Receiver ESCI) is set at 120KHz.
- 6) The frequency range from 30MHz to 1000MHz, 1000MHz to 2000MHz is checked.
- 7) The peak emission below the average's limit, so the average's result no recoring.

6.6 Test Result

PASS

Please refer to the following page.



Radiation Emission Test Data			
Temperature:	24.5℃	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Horizontal
Test Voltage:	DC 12V	Test Mode:	Mode 1



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		57.7961	34.50	-11.24	23.26	40.00	-16.74	QP
2		92.4624	36.16	-15.51	20.65	43.50	-22.85	QP
3		148.9624	35.78	-16.27	19.51	43.50	-23.99	QP
4		209.3129	39.79	-13.01	26.78	43.50	-16.72	QP
5	*	298.2681	41.52	-10.73	30.79	46.00	-15.21	QP
6		584.7894	34.29	-5.86	28.43	46.00	-17.57	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit ;



Radiation Emission Test Data			
Temperature:	24.5℃	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Vertical
Test Voltage:	DC 12V	Test Mode:	Mode 1

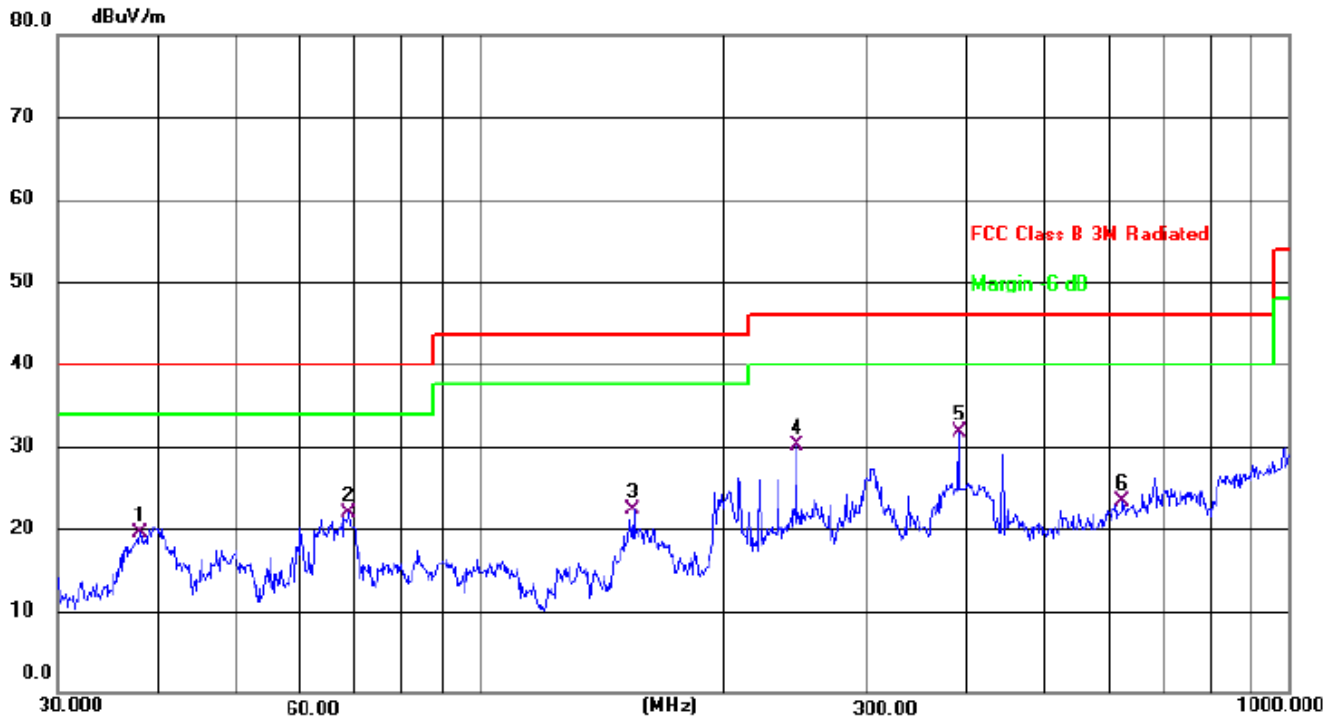

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		37.9448	32.46	-13.05	19.41	40.00	-20.59	QP
2		68.8721	36.58	-14.67	21.91	40.00	-18.09	QP
3		154.8204	38.41	-16.18	22.23	43.50	-21.27	QP
4		245.9507	41.12	-11.11	30.01	46.00	-15.99	QP
5	*	390.7225	40.09	-8.42	31.67	46.00	-14.33	QP
6		622.8900	27.55	-4.22	23.33	46.00	-22.67	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit



Radiation Emission Test Data			
Temperature:	24.5℃	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Horizontal
Test Voltage:	DC 12V	Test Mode:	Mode 1

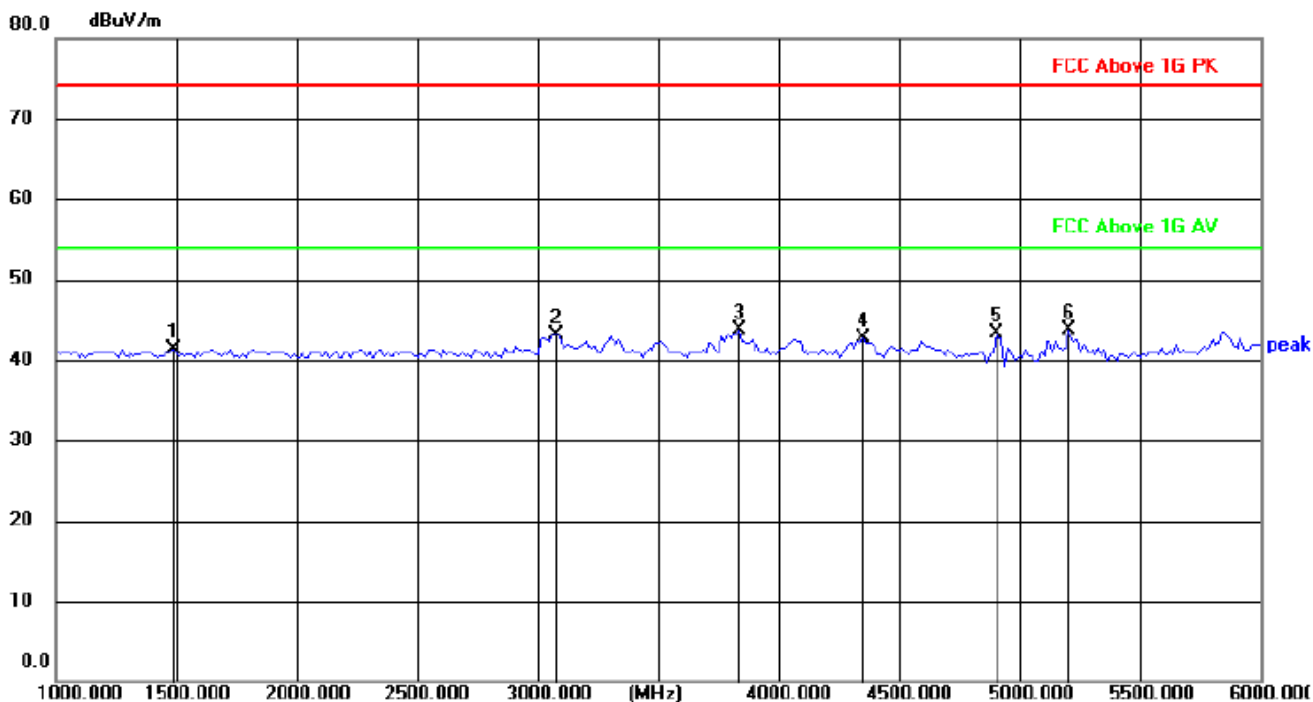

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		1487.500	81.53	-40.27	41.26	74.00	32.74	peak
2		3075.000	80.12	-37.06	43.06	74.00	30.94	peak
3		3837.500	79.40	-35.75	43.65	74.00	30.35	peak
4		4350.000	78.02	-35.37	42.65	74.00	31.35	peak
5		4900.000	78.33	-34.98	43.35	74.00	30.65	peak
6	*	5200.000	78.05	-34.34	43.71	74.00	30.29	peak


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit ;



Radiation Emission Test Data			
Temperature:	24.5℃	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Vertical
Test Voltage:	DC 12V	Test Mode:	Mode 1

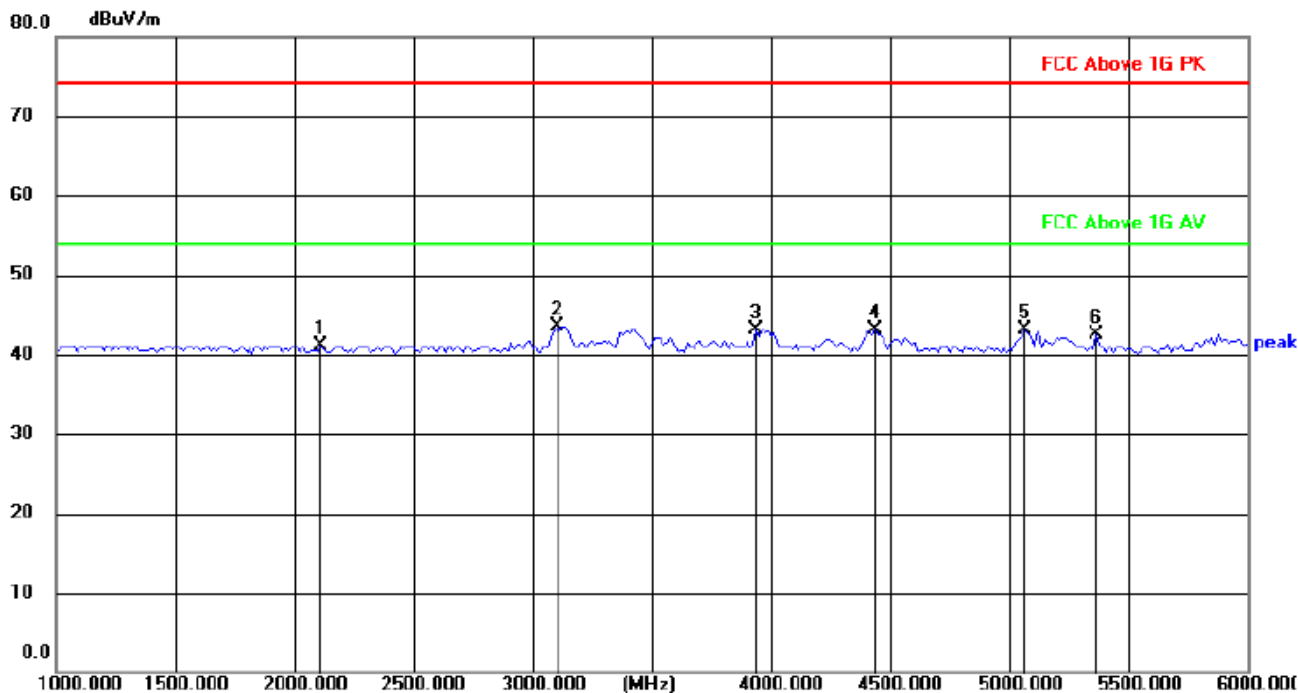

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB	dBuV/m	dB/m	dB
1		2112.500	78.92	-37.78	41.14	74.00	32.86
2	*	3100.000	80.57	-36.99	43.58	74.00	30.42
3		3937.500	78.87	-35.70	43.17	74.00	30.83
4		4437.500	78.31	-35.29	43.02	74.00	30.98
5		5062.500	77.92	-34.74	43.18	74.00	30.82
6		5362.500	76.42	-33.87	42.55	74.00	31.45

Remark:


Correct Factor = Cable loss + Antenna factor – Preamplifier;

Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit

Above 6G test data are below limit 20 dB, so no need to report.




7. SETUP PHOTOGRAPHS


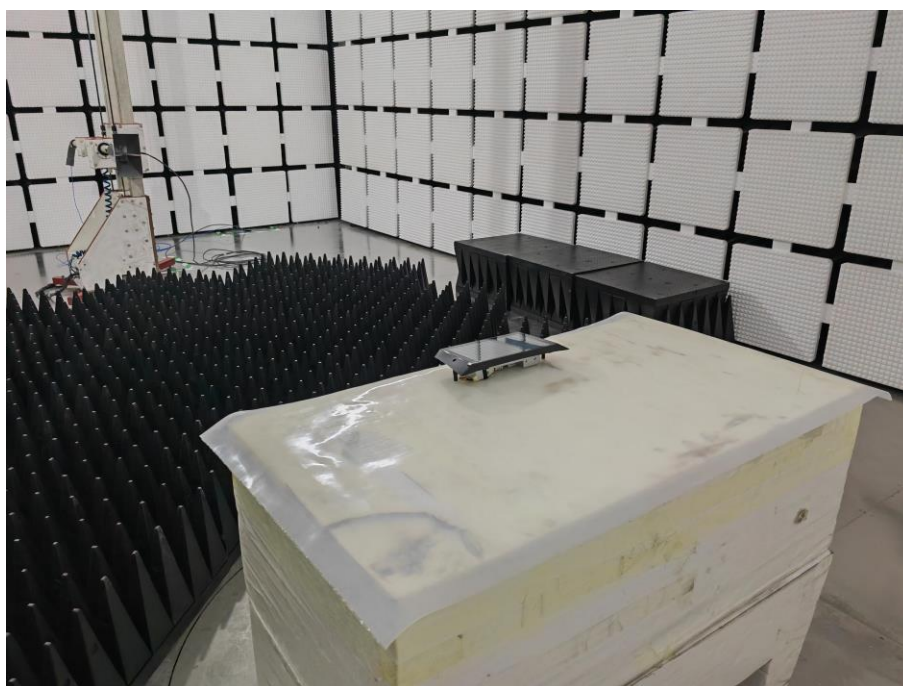





8. EUT PHOTOGRAPHS


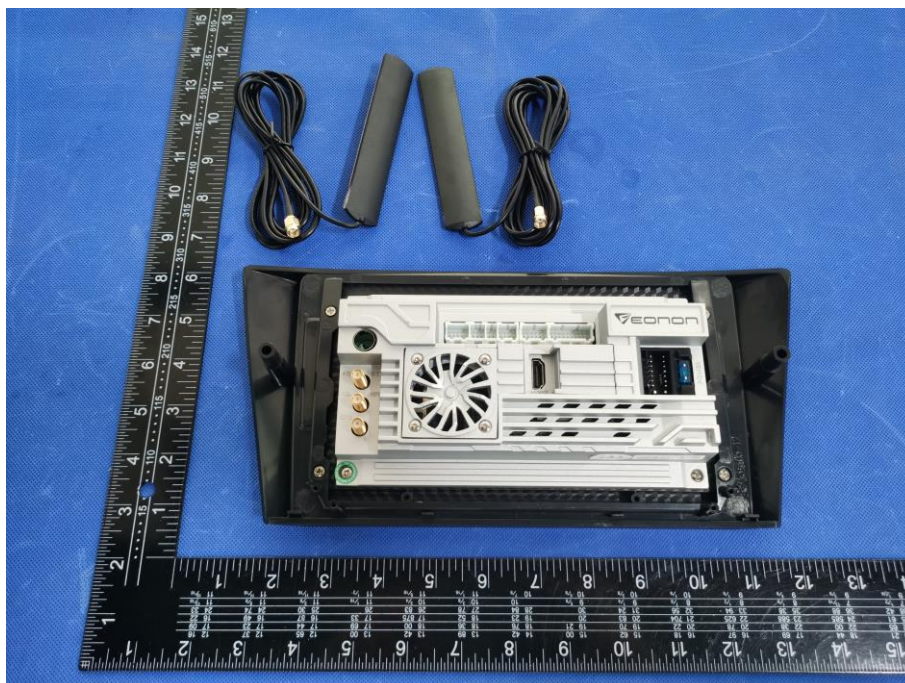





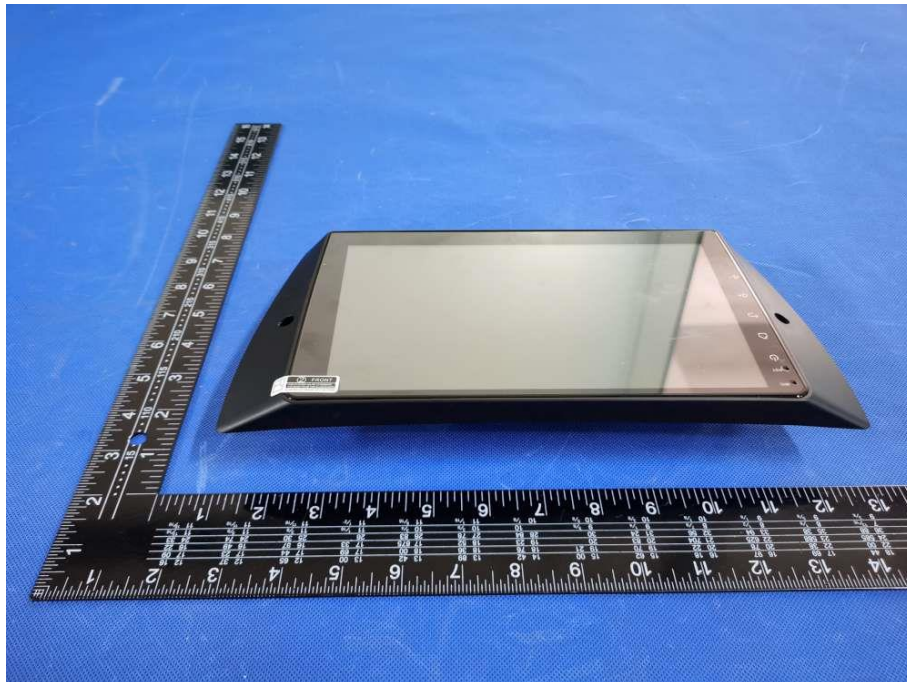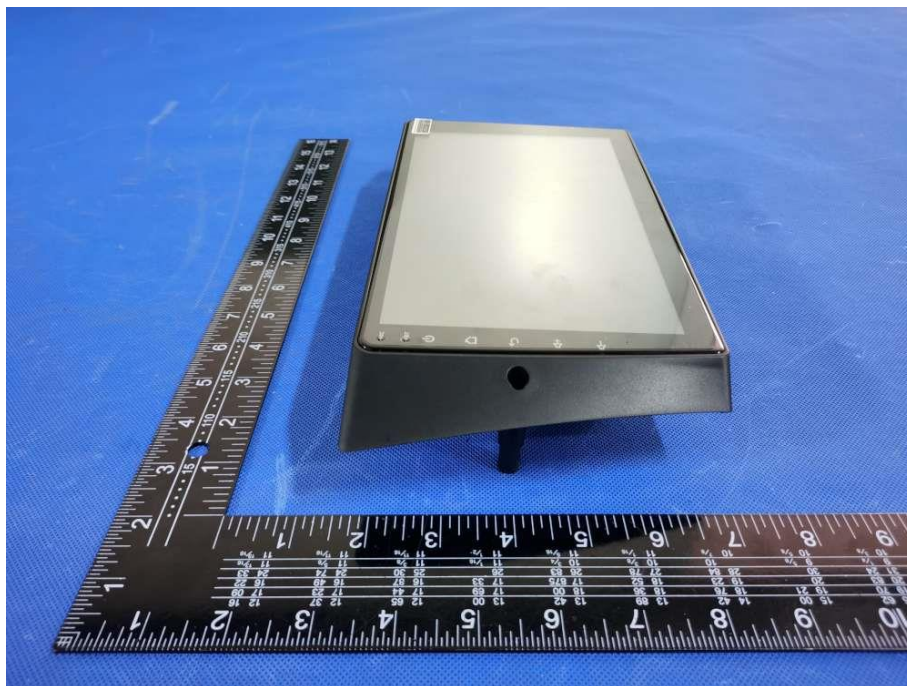



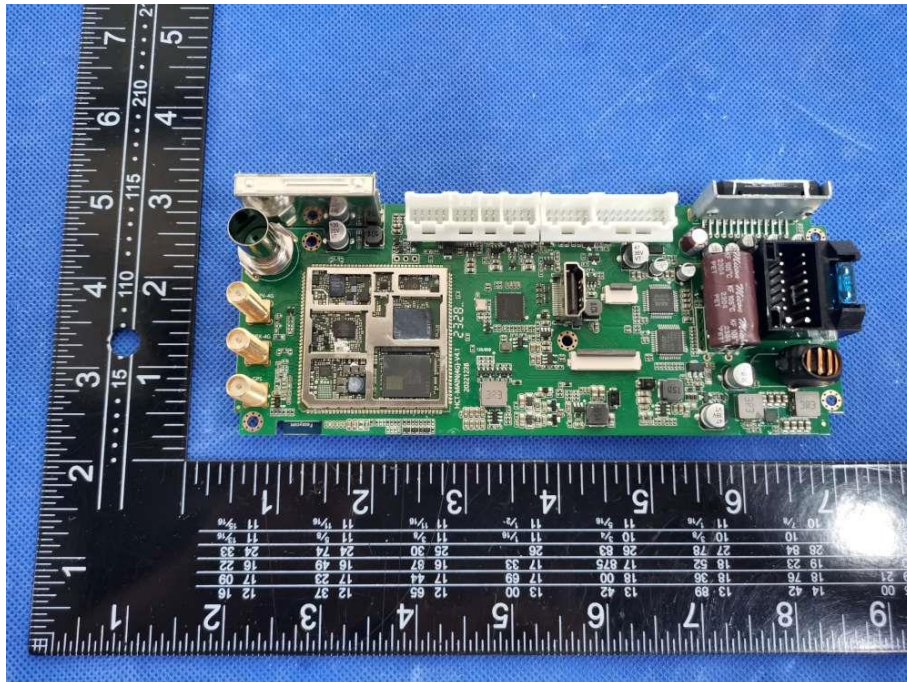

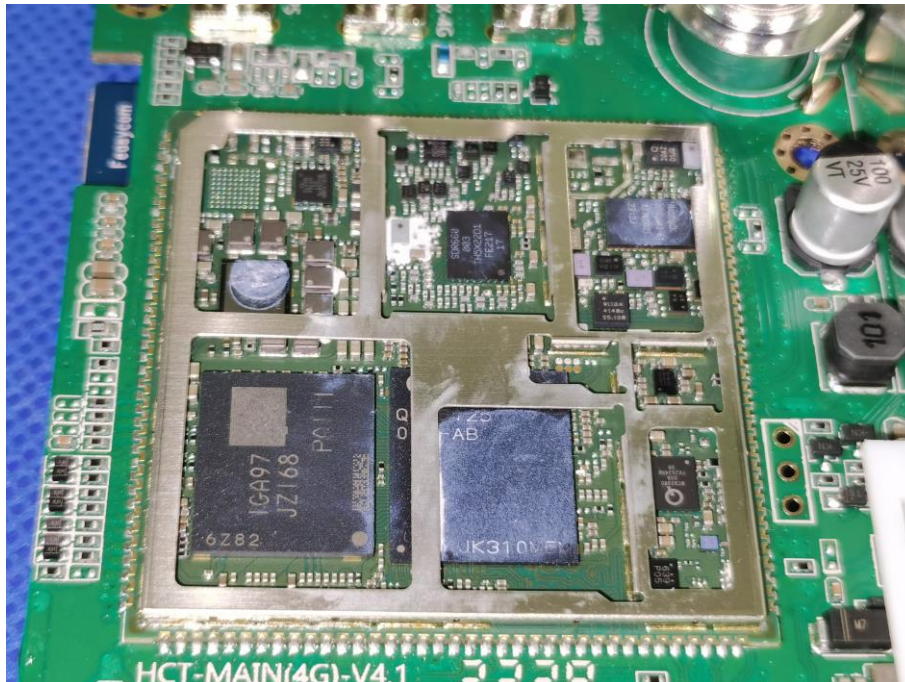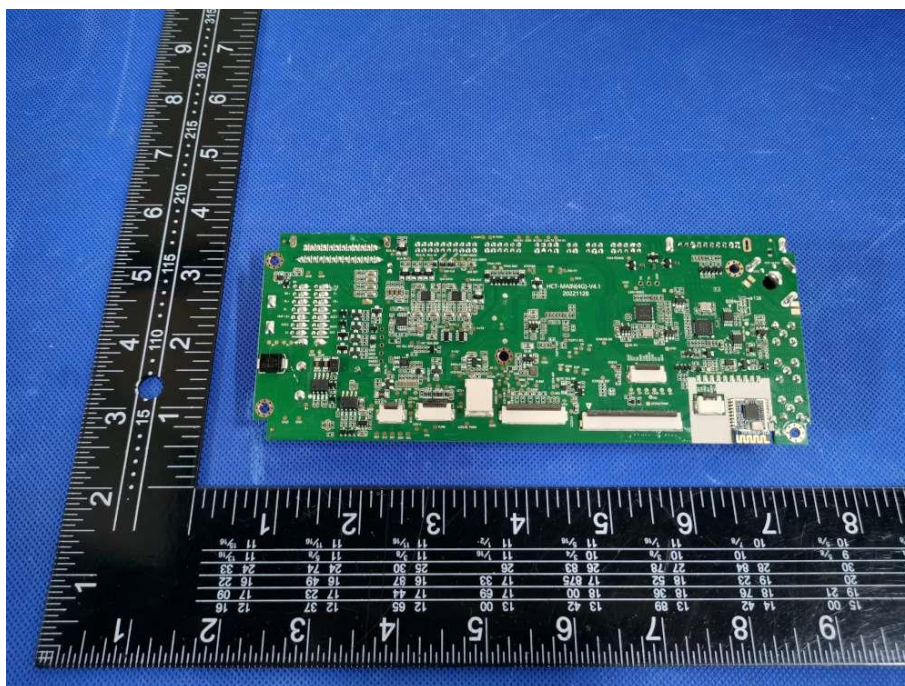

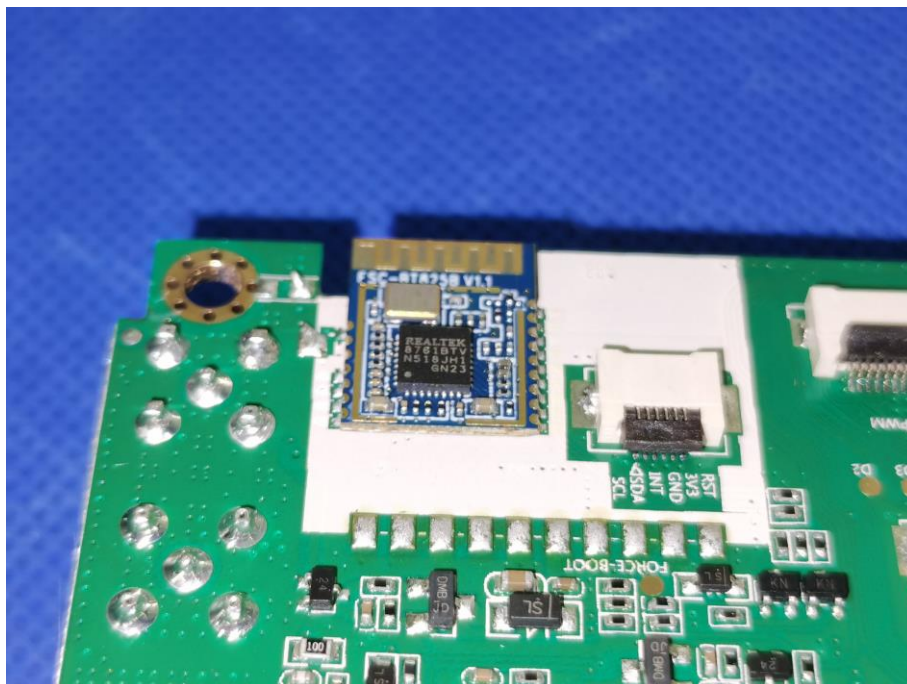

***** END OF REPORT *****