


16.2 BLOCK DIAGRAM OF TEST SETUP

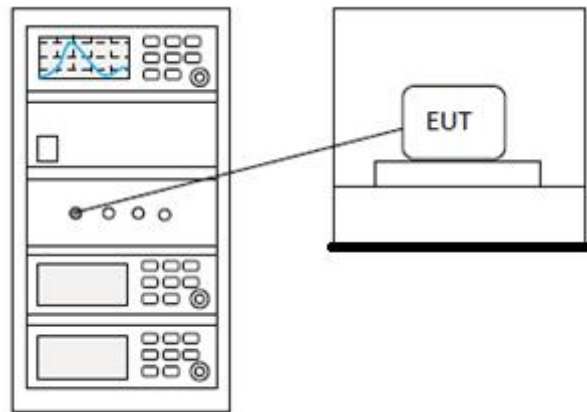

16.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


17 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25℃
Humidity	60%

17.1 LIMITS

Limit:	≤8dBm in any 3 kHz band during any time interval of continuous transmission
---------------	---

17.2 BLOCK DIAGRAM OF TEST SETUP

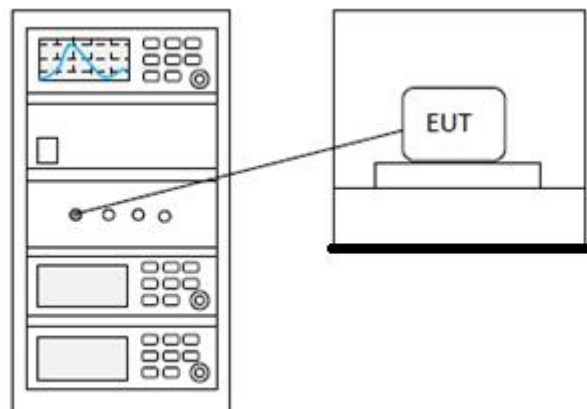

17.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


18 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25℃
Humidity	60%

18.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq \text{hopping channels} < 50$
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

18.2 BLOCK DIAGRAM OF TEST SETUP

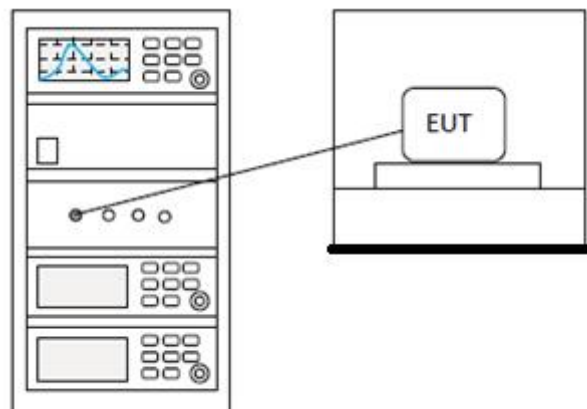

18.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


19 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

19.1 LIMITS

Limit:	≥500 kHz
--------	----------

19.2 BLOCK DIAGRAM OF TEST SETUP

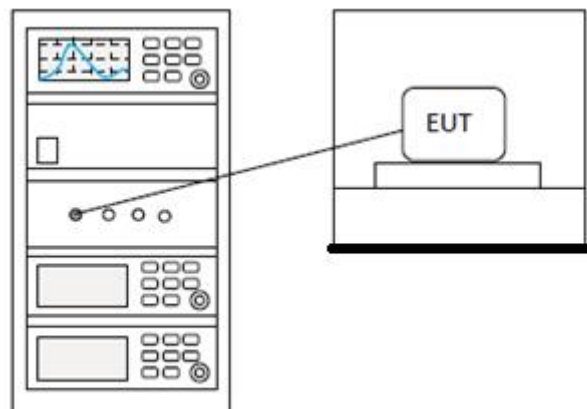

19.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


20 APPENDIX

Appendix1


20.1 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-0.691	30	Pass
NVNT	BLE 1M	2442	Ant1	-0.06	30	Pass
NVNT	BLE 1M	2480	Ant1	0.298	30	Pass


Power NVNT BLE 1M 2402MHz Ant1

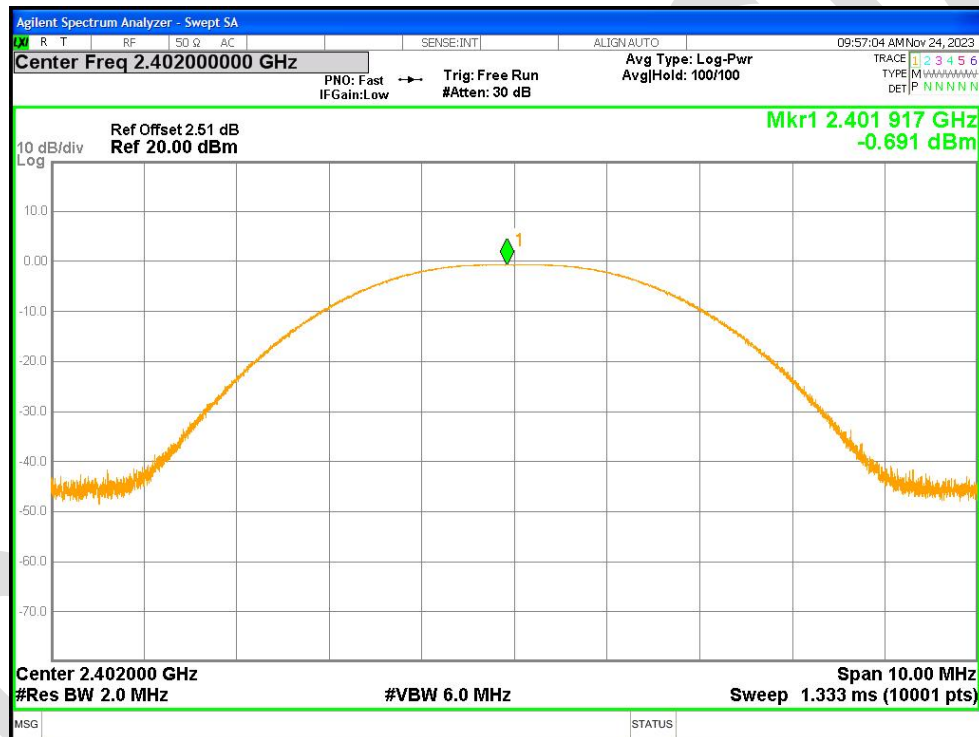

Power NVNT BLE 1M 2442MHz Ant1

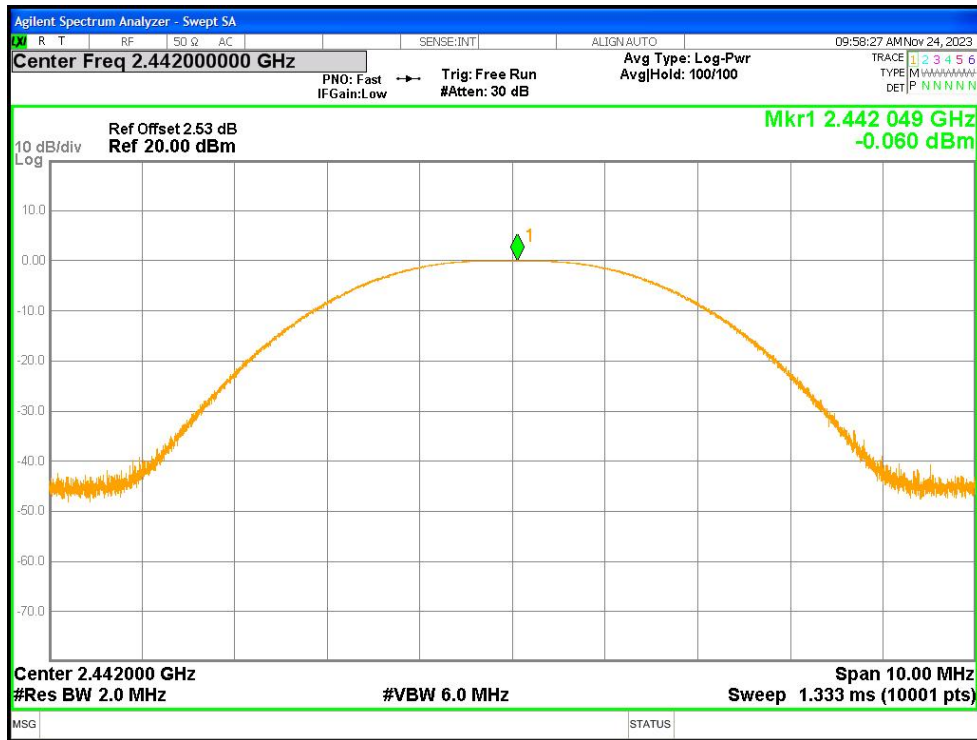


Power NVNT BLE 1M 2480MHz Ant1

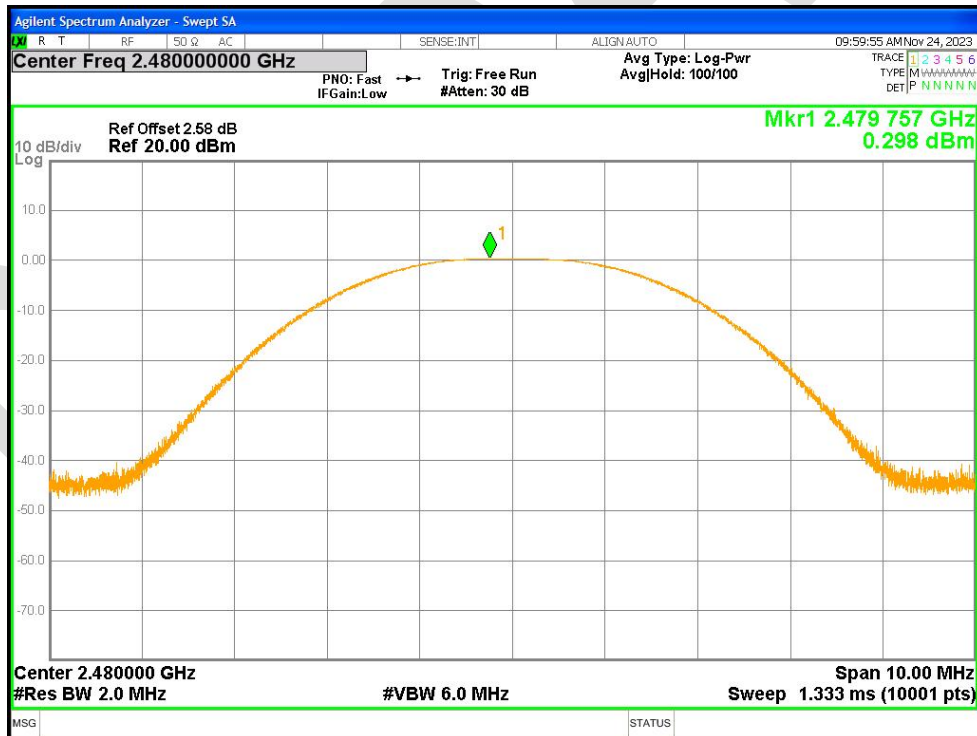


20.2 -6DB BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.714	0.5	Pass
NVNT	BLE 1M	2442	Ant1	0.725	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.751	0.5	Pass


-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

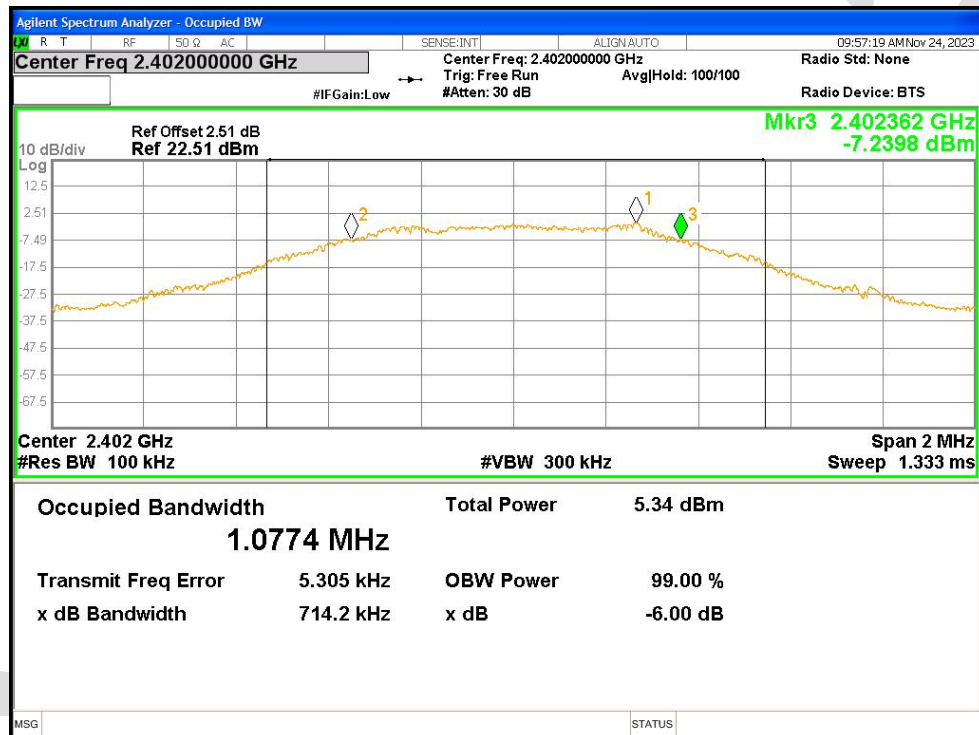

-6dB Bandwidth NVNT BLE 1M 2442MHz Ant1

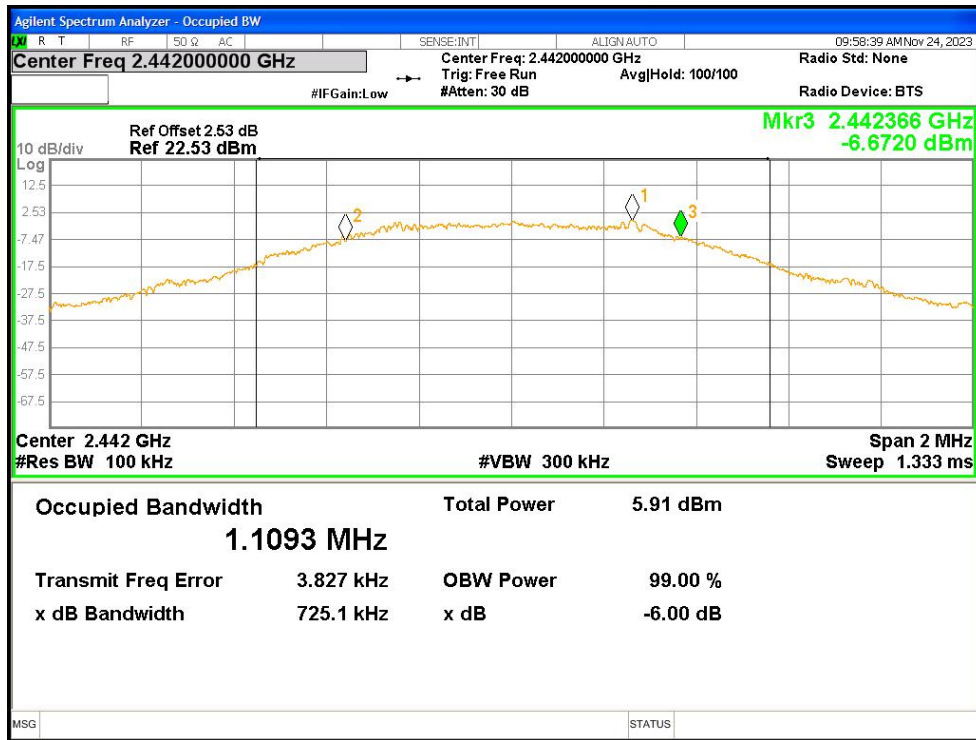


-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

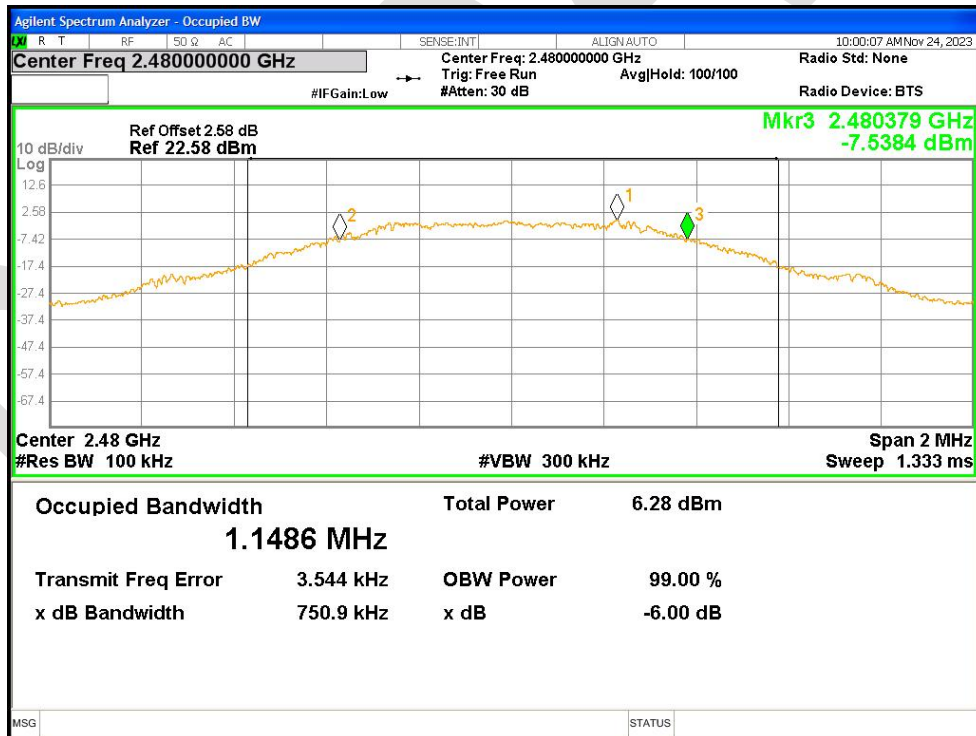


20.3 OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.085479829
NVNT	BLE 1M	2442	Ant1	1.122824575
NVNT	BLE 1M	2480	Ant1	1.156026329


OBW NVNT BLE 1M 2402MHz Ant1

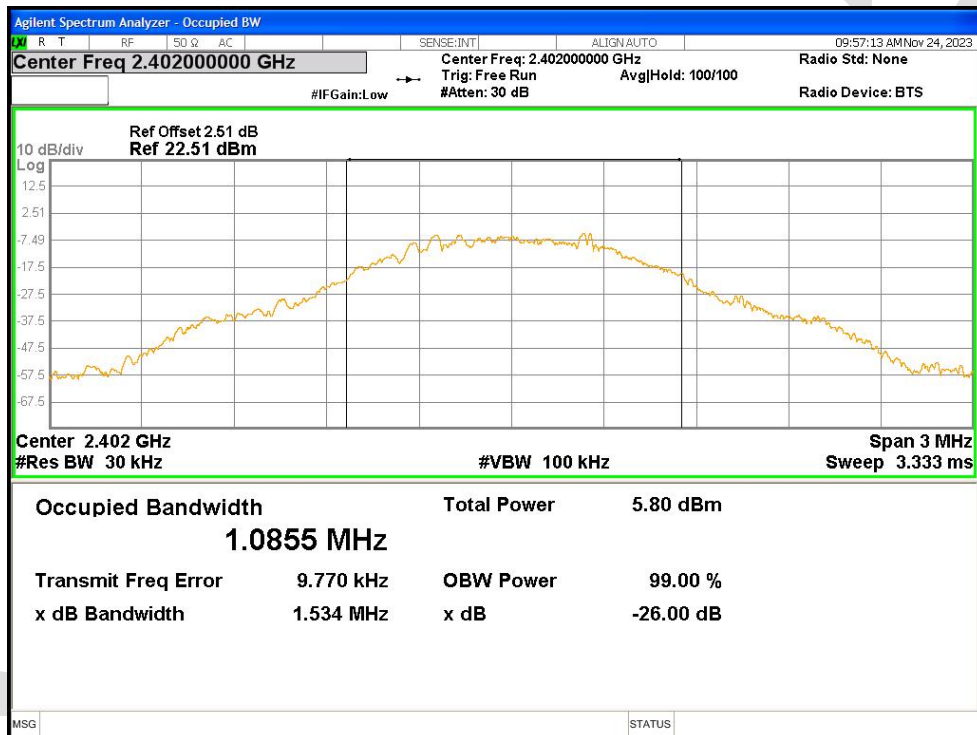

OBW NVNT BLE 1M 2442MHz Ant1

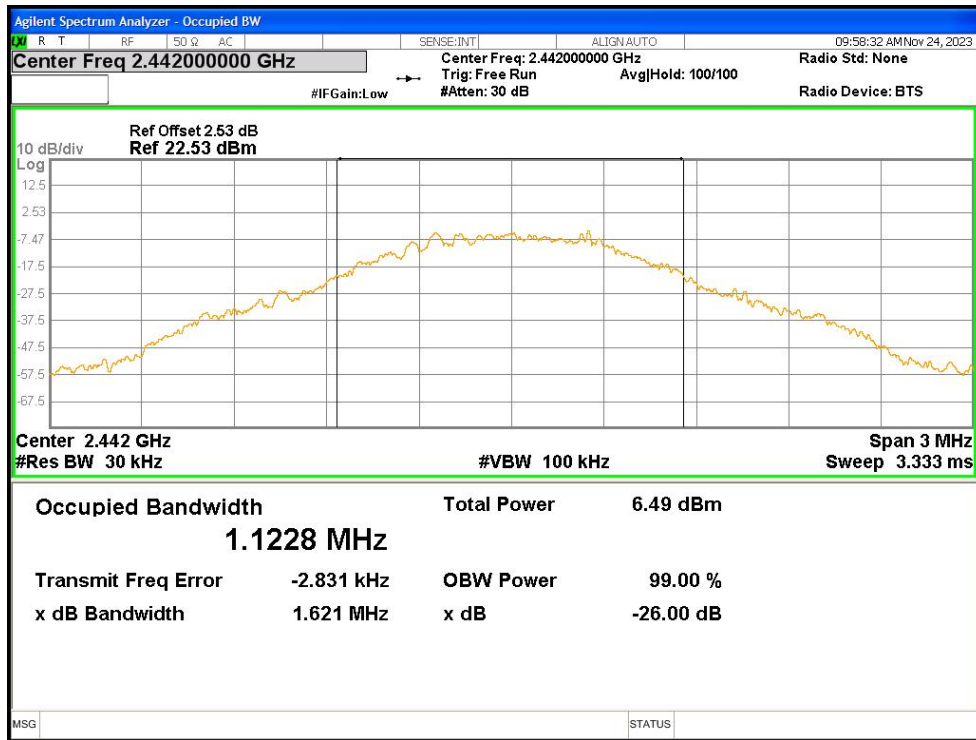


OBW NVNT BLE 1M 2480MHz Ant1

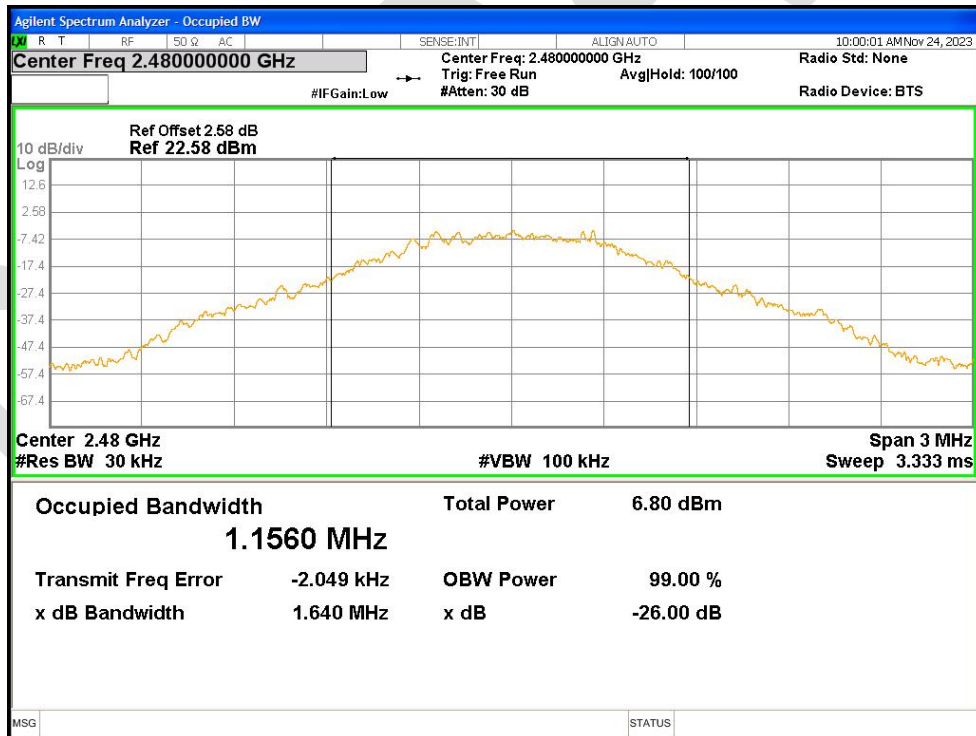


20.4 MAXIMUM POWER SPECTRAL DENSITY LEVEL

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-16.24	8	Pass
NVNT	BLE 1M	2442	Ant1	-15.666	8	Pass
NVNT	BLE 1M	2480	Ant1	-15.468	8	Pass


PSD NVNT BLE 1M 2402MHz Ant1

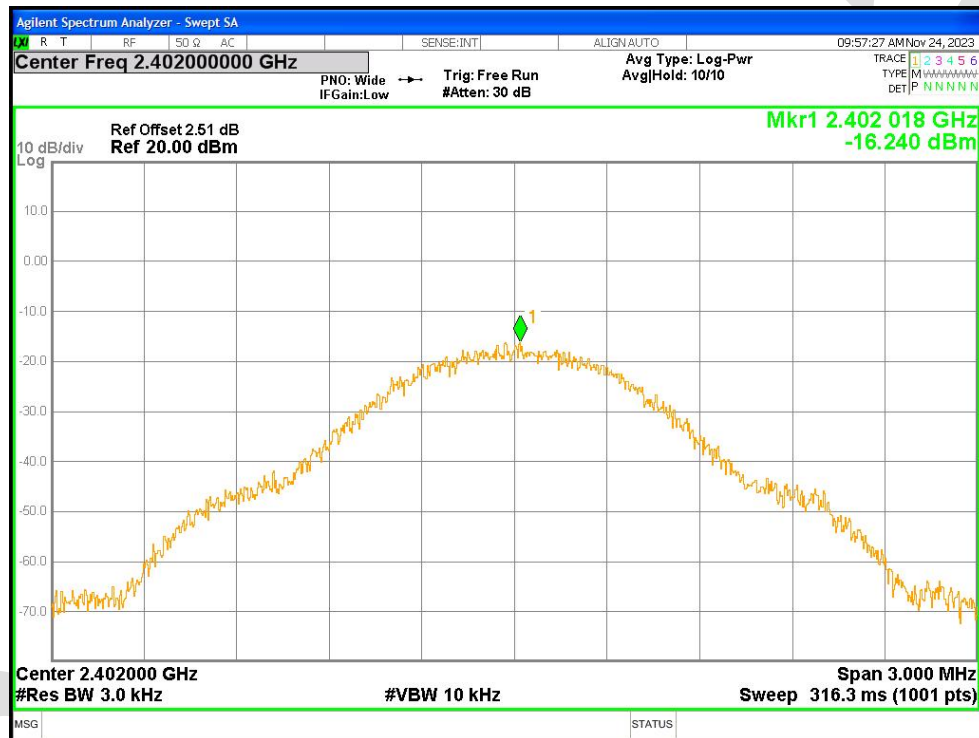

PSD NVNT BLE 1M 2442MHz Ant1

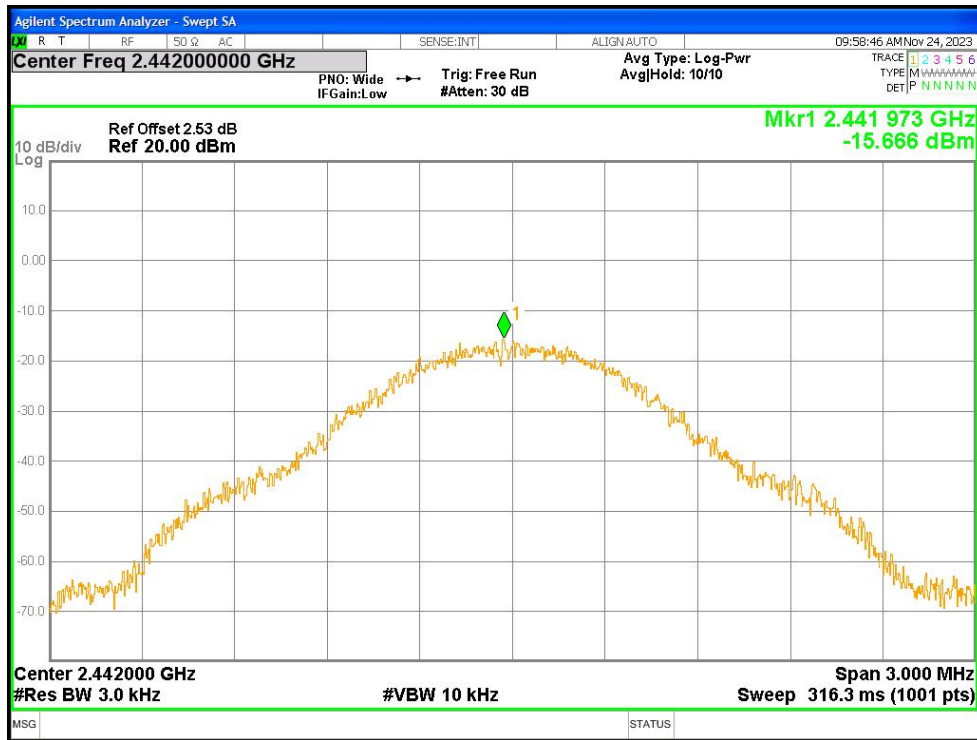


PSD NVNT BLE 1M 2480MHz Ant1

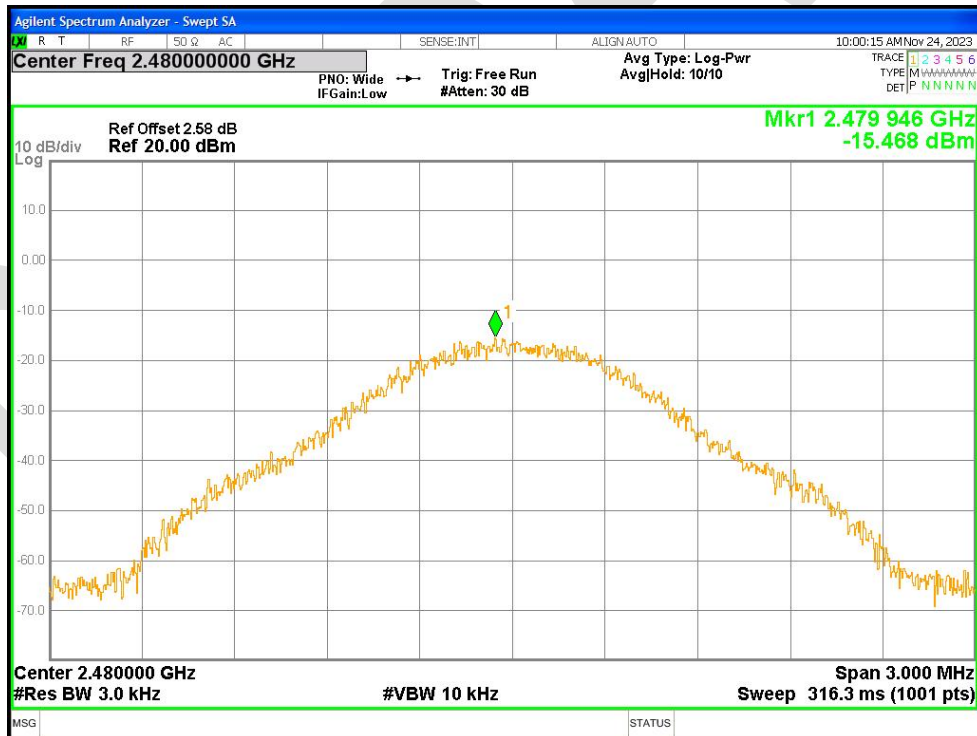


20.5 BAND EDGE

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-47.74	-20	Pass
NVNT	BLE 1M	2480	Ant1	-52.77	-20	Pass


Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

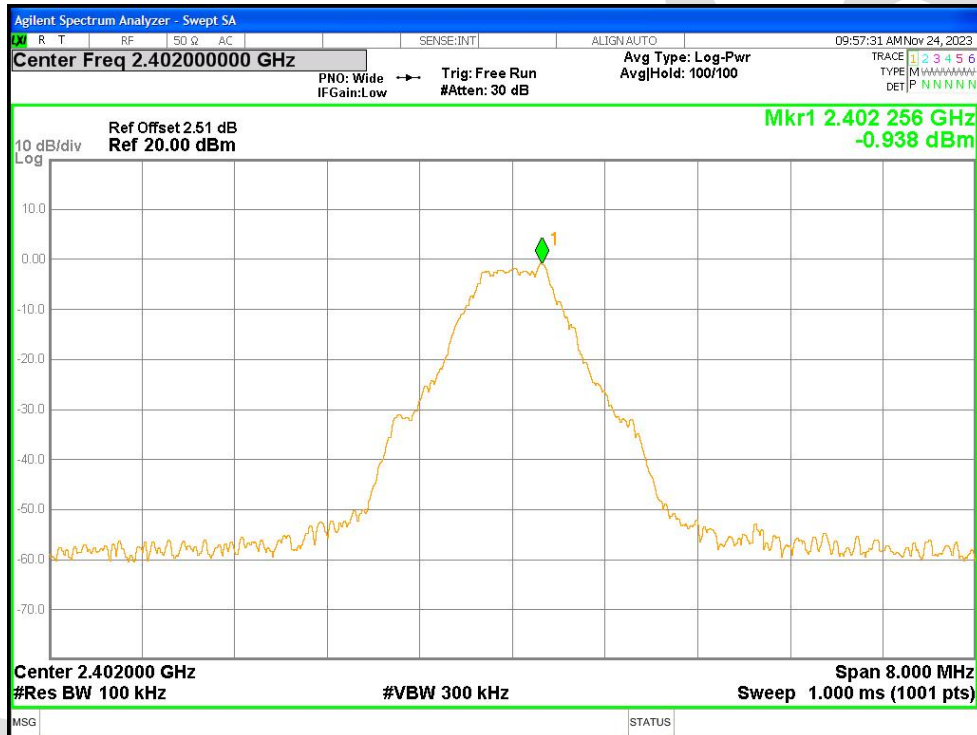


Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

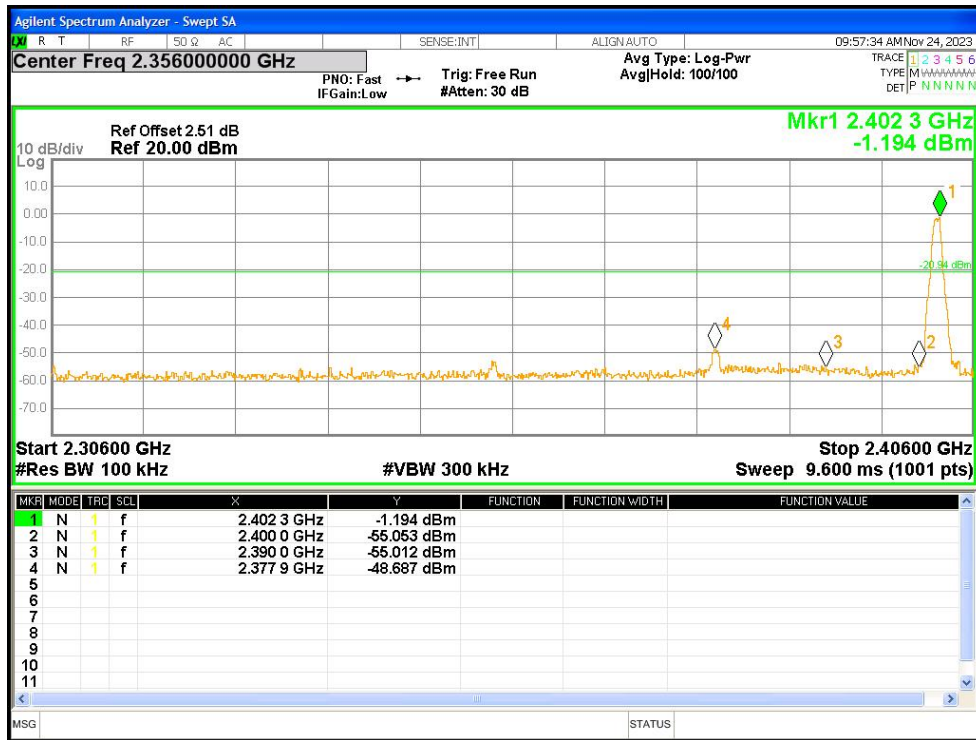

Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

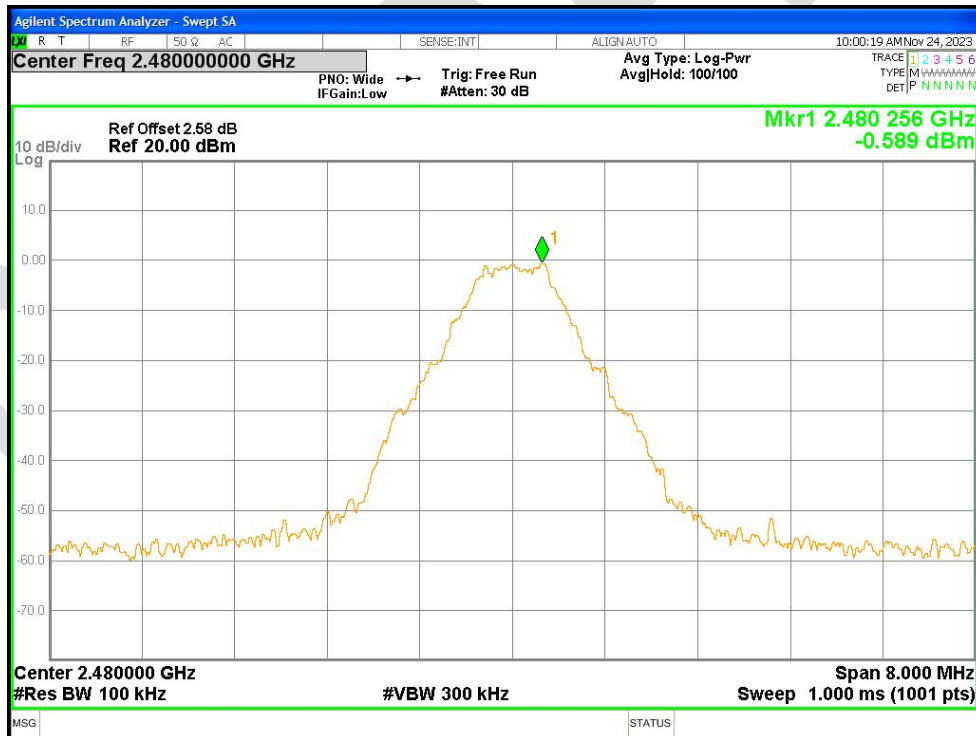


Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

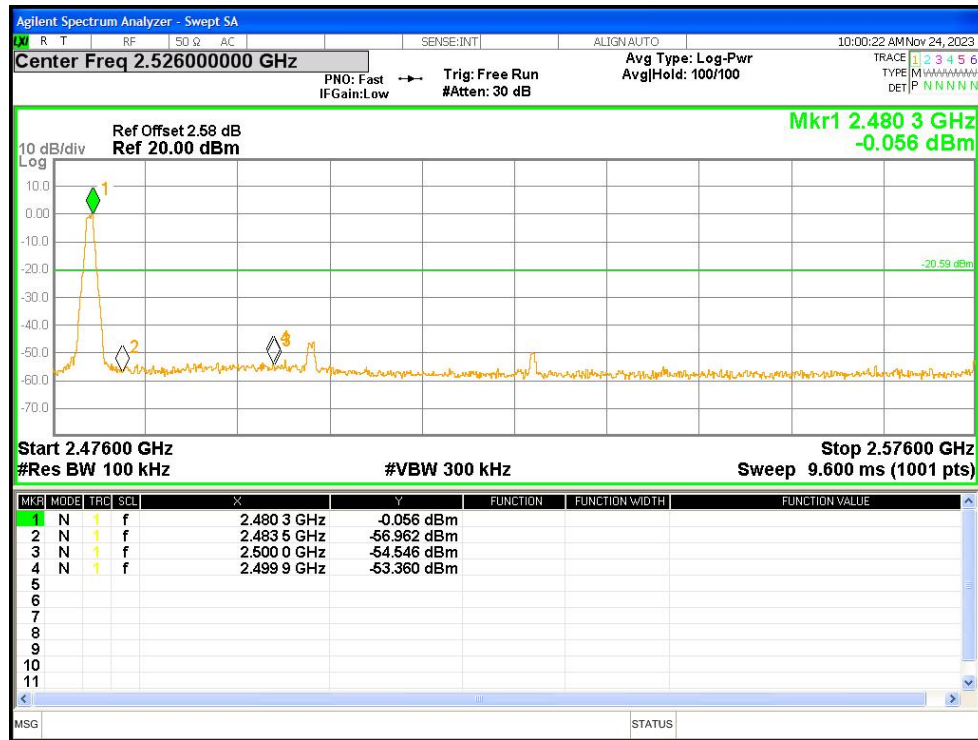


20.6 CONDUCTED RF SPURIOUS EMISSION

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-43.28	-20	Pass
NVNT	BLE 1M	2442	Ant1	-42.78	-20	Pass
NVNT	BLE 1M	2480	Ant1	-44.93	-20	Pass


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

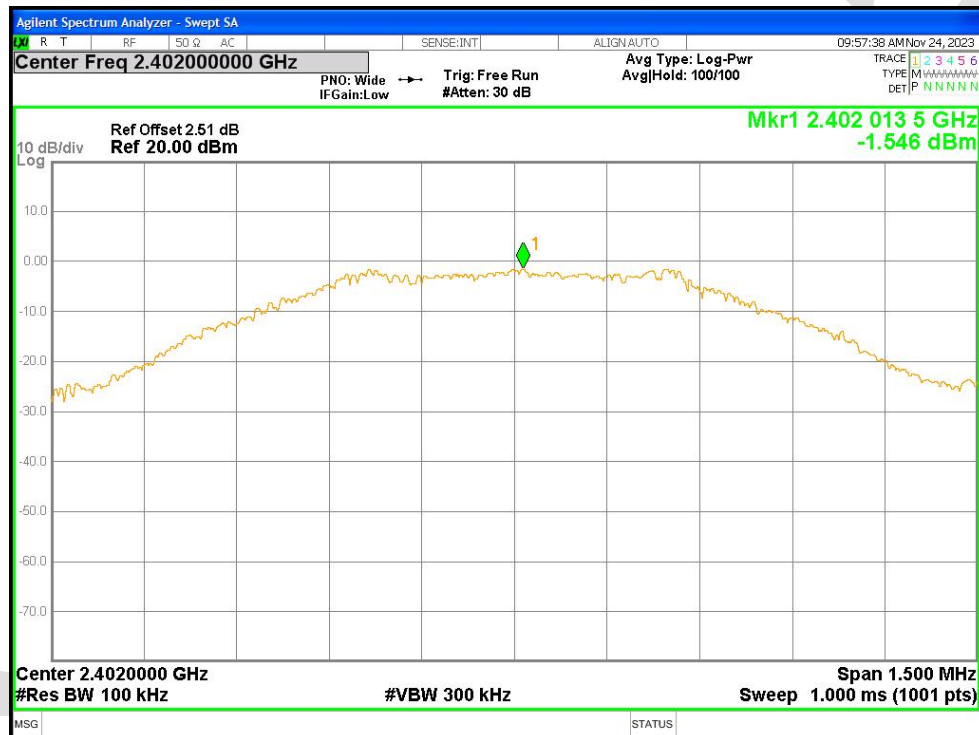


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

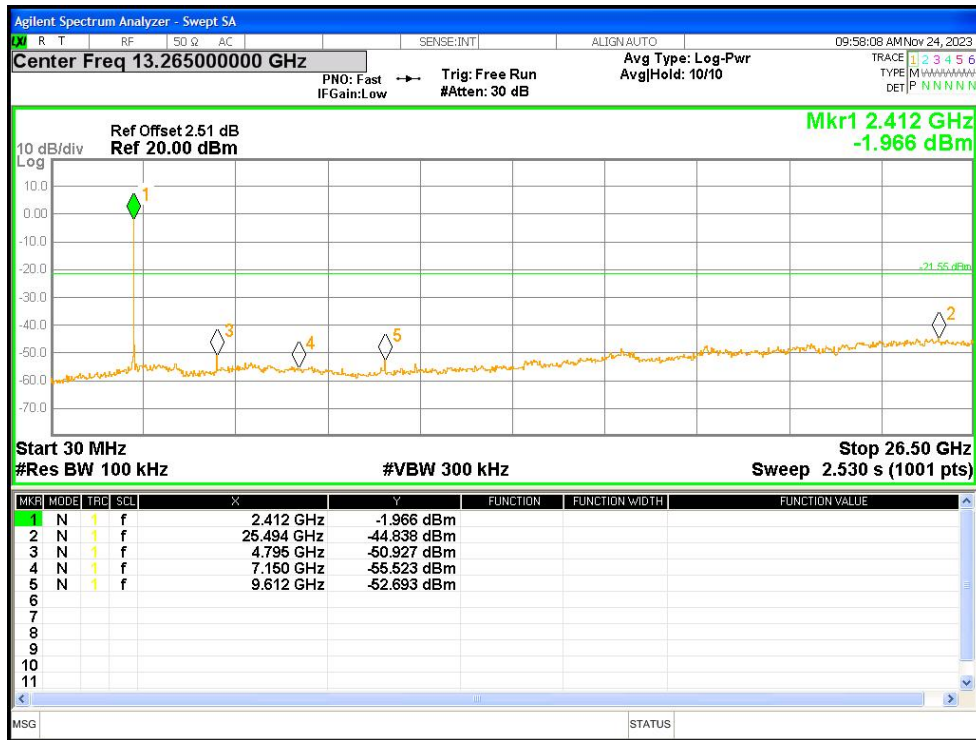


Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Ref

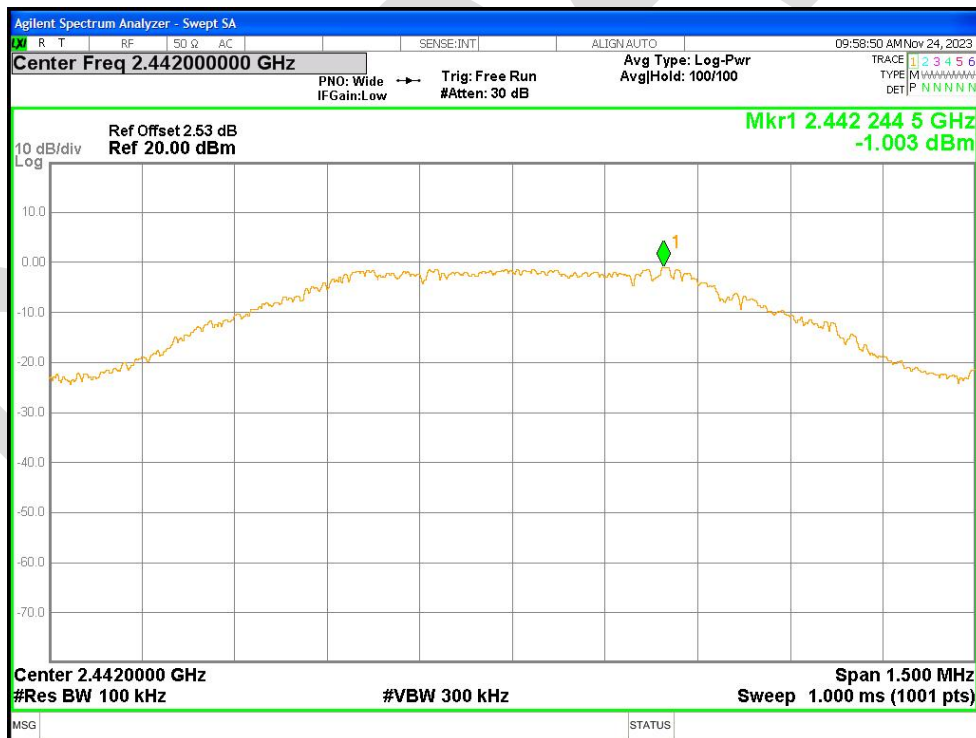

Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Emission

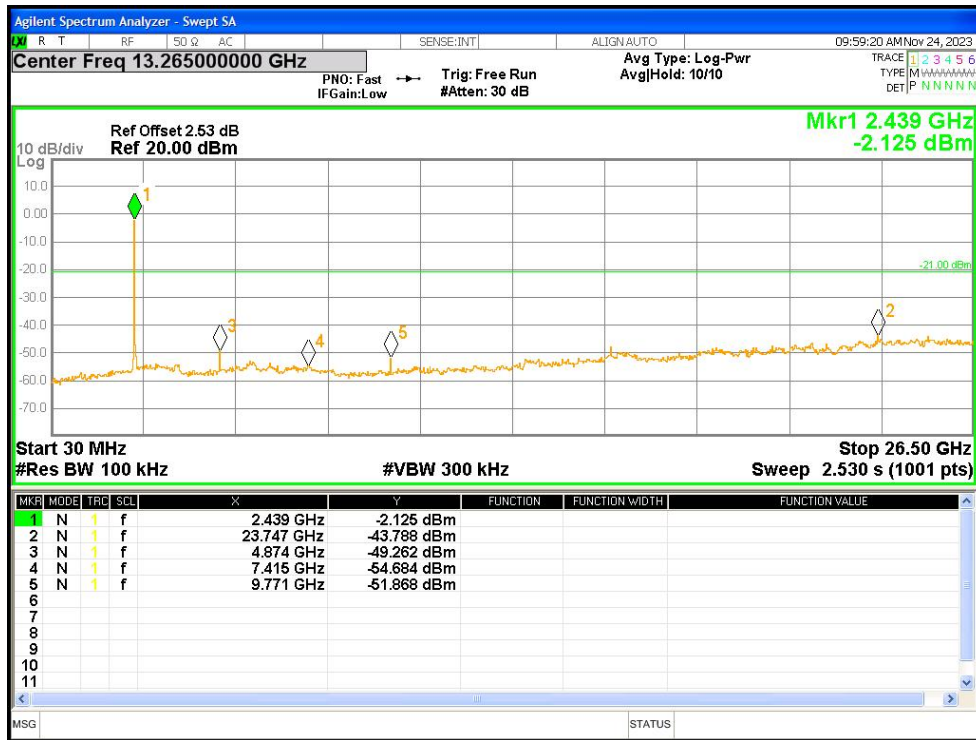

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

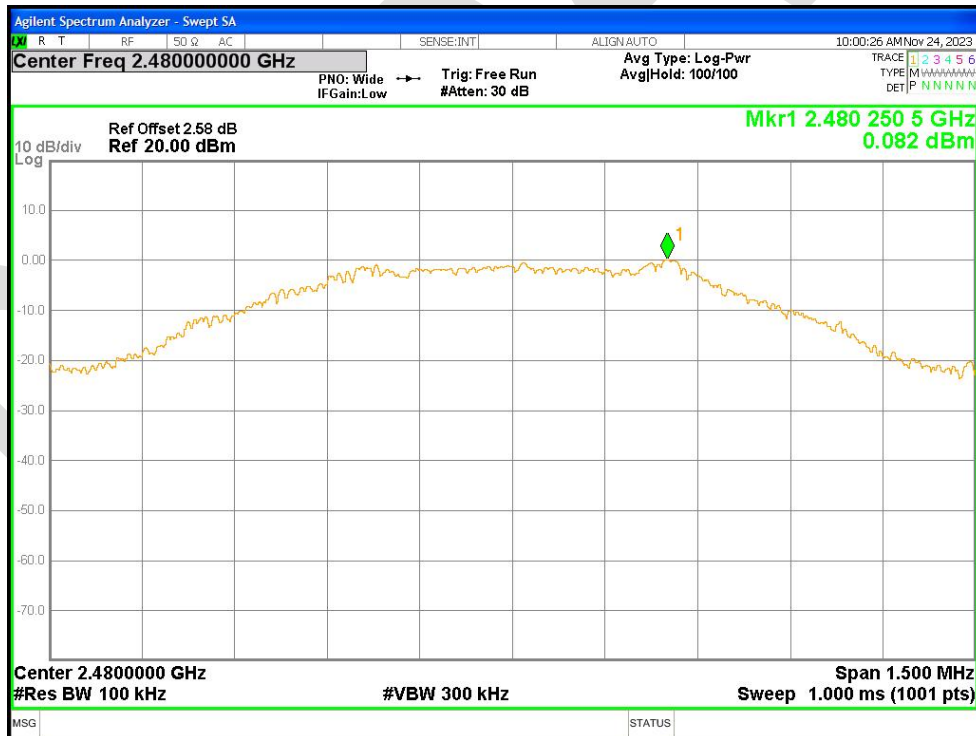

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

