



# FCC Part 15C Test Report

## FCC ID: 2BDU7-K7

Applicant: Shenzhen ISAKE electronic co., LTD

Address: 501, Unit 2, Building 3, Yongfeng Fourth Road, Baishixia Community, Fuyong Street, Baoan District, Shenzhen

Manufacturer: Shenzhen ISAKE electronic co., LTD

Address: 501, Unit 2, Building 3, Yongfeng Fourth Road, Baishixia Community, Fuyong Street, Baoan District, Shenzhen

EUT: Translator

Trade Mark: N/a

Model Number: K9, K7, K8, K10, K11, K12, K13, X6, X8, X9, X10, X11, X12, X13, M6, M7, M8, M9, M10, M11, M12, M15

Date of Receipt: Mar. 07, 2025

Test Date: Mar. 07, 2025 to Mar. 14, 2025

Date of Report: Mar. 14, 2025

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

Applicable Standards: FCC PART 15 C 15.247  
ANSI C63.10:2020

Test Result: Pass

Report Number: DLE-250311005R

Prepared (Test Engineer): Pxing Huang

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



*This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.*



| Table of Contents                                                 | Page |
|-------------------------------------------------------------------|------|
| 1.1 MEASUREMENT UNCERTAINTY .....                                 | 4    |
| 1.2 TEST FACILITY .....                                           | 4    |
| 2. GENERAL INFORMATION .....                                      | 5    |
| 2.1 GENERAL DESCRIPTION OF EUT .....                              | 5    |
| 2.2 DESCRIPTION OF TEST MODES .....                               | 6    |
| 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED ..... | 6    |
| 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE) .....            | 6    |
| 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS .....                      | 7    |
| 3. EMC EMISSION TEST .....                                        | 8    |
| 3.1 CONDUCTED EMISSION MEASUREMENT .....                          | 8    |
| 3.2 POWER LINE CONDUCTED EMISSION Limits .....                    | 8    |
| 3.3TEST PROCEDURE .....                                           | 8    |
| 3.4 DEVIATION FROM TEST STANDARD .....                            | 8    |
| 3.5 TEST SETUP .....                                              | 9    |
| 3.6 EUT OPERATING CONDITIONS .....                                | 9    |
| 3.7 TEST RESULTS .....                                            | 9    |
| 4. RADIATED EMISSION MEASUREMENT .....                            | 12   |
| 4.1 RADIATED EMISSION LIMITS .....                                | 12   |
| 4.2 TEST PROCEDURE .....                                          | 13   |
| 4.3 DEVIATION FROM TEST STANDARD .....                            | 13   |
| 4.4 TEST SETUP .....                                              | 13   |
| 4.5 EUT OPERATING CONDITIONS .....                                | 14   |
| 4.6 TEST RESULTS .....                                            | 14   |
| 5. RADIATED BAND EMISSION MEASUREMENT .....                       | 18   |
| 5.1 TEST REQUIREMENT: .....                                       | 18   |
| 5.2 TEST PROCEDURE .....                                          | 18   |
| 5.3 DEVIATION FROM TEST STANDARD .....                            | 18   |
| 5.4 TEST SETUP .....                                              | 19   |
| 5.5 EUT OPERATING CONDITIONS .....                                | 19   |
| 5.6 TEST RESULT .....                                             | 20   |
| 6.1 APPLIED PROCEDURES / LIMIT .....                              | 21   |
| 6.2 TEST PROCEDURE .....                                          | 21   |
| 6.3 DEVIATION FROM STANDARD .....                                 | 21   |
| 6.4 TEST SETUP .....                                              | 21   |
| 6.5 EUT OPERATION CONDITIONS .....                                | 21   |
| 6.6 TEST RESULTS .....                                            | 21   |
| 7. POWER SPECTRAL DENSITY TEST .....                              | 22   |



## Table of Contents

## Page

|                                          |    |
|------------------------------------------|----|
| 7.1 APPLIED PROCEDURES / LIMIT .....     | 22 |
| 7.2 TEST PROCEDURE .....                 | 22 |
| 7.3 DEVIATION FROM STANDARD .....        | 22 |
| 7.4 TEST SETUP .....                     | 22 |
| 7.5 EUT OPERATION CONDITIONS .....       | 22 |
| 7.6 TEST RESULTS .....                   | 22 |
| 8. 6DB BANDWIDTH TEST .....              | 23 |
| 8.1 APPLIED PROCEDURES / LIMIT .....     | 23 |
| 8.2 TEST PROCEDURE .....                 | 23 |
| 8.3 DEVIATION FROM STANDARD .....        | 23 |
| 8.4 TEST SETUP .....                     | 23 |
| 8.5 EUT OPERATION CONDITIONS .....       | 23 |
| 8.6 TEST RESULTS .....                   | 23 |
| 9. OUT OF BAND EMISSIONS TEST .....      | 24 |
| 9.1 APPLIED PROCEDURES / LIMIT .....     | 24 |
| 9.2 TEST PROCEDURE .....                 | 24 |
| 9.3 DEVIATION FROM STANDARD .....        | 24 |
| 9.4 TEST SETUP .....                     | 24 |
| 9.5 EUT OPERATION CONDITIONS .....       | 24 |
| 9.6 TEST RESULTS .....                   | 24 |
| 10. SPURIOUS RF CONDUCTED EMISSION ..... | 25 |
| 10.1 APPLIED PROCEDURES / LIMIT .....    | 25 |
| 10.2 TEST PROCEDURE .....                | 25 |
| 10.3 DEVIATION FROM STANDARD .....       | 25 |
| 10.4 TEST SETUP .....                    | 25 |
| 10.5 EUT OPERATION CONDITIONS .....      | 25 |
| 10.6 TEST RESULTS .....                  | 25 |
| 11. ANTENNA REQUIREMENT .....            | 26 |
| 11.1 STANDARD REQUIREMENT .....          | 26 |
| 11.2 EUT ANTENNA .....                   | 26 |
| 12. TEST SEUUP PHOTO AND EUT PHOTO ..... | 27 |



## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

| FCC Part15 (15.247) , Subpart C |                             |          |        |
|---------------------------------|-----------------------------|----------|--------|
| Standard Section                | Test Item                   | Judgment | Remark |
| 15.207                          | Conducted Emission          | PASS     |        |
| 15.247(c)                       | Radiated Spurious Emission  | PASS     |        |
| 15.205                          | Band Edge Emission          | PASS     |        |
| 15.247(b)(3)                    | Peak Output Power           | PASS     |        |
| 15.247(a)(2)                    | 6dB Bandwidth               | PASS     |        |
| 15.247(e)                       | Power Spectral Density      | PASS     |        |
| 15.247(d)                       | Band edge measurements      | PASS     |        |
| 15.247(d)                       | Conducted Spurious Emission | PASS     |        |
| 15.203                          | Antenna Requirement         | PASS     |        |

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

### 1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$  providing a level of confidence of approximately 95 %.

| No. | Item                         | Uncertainty               |
|-----|------------------------------|---------------------------|
| 1   | Conducted Emission Test      | $\pm 2.56\text{dB}$       |
| 2   | RF power,conducted           | $\pm 0.42\text{dB}$       |
| 3   | Spurious emissions,conducted | $\pm 2.76\text{dB}$       |
| 4   | All emissions,radiated(<1G)  | $\pm 3.65\text{dB}$       |
| 5   | All emissions,radiated(>1G)  | $\pm 4.89\text{dB}$       |
| 6   | Bandwidth                    | $\pm 1.5 \times 10^{-6}$  |
| 7   | Power Spectral Density       | $\pm 0.2\text{dB}$        |
| 8   | Temperature                  | $\pm 0.5^{\circ}\text{C}$ |
| 9   | Humidity                     | $\pm 2\%$                 |

### 1.2 TEST FACILITY

Shenzhen DL Testing Technology Co., Ltd.

Add.: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: CN0118



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

|                      |                                                                                                    |
|----------------------|----------------------------------------------------------------------------------------------------|
| Product Name:        | Translator                                                                                         |
| Model No.:           | K9, K7, K8, K10, K11, K12, K13, X6, X8, X9, X10, X11, X12, X13, M6, M7, M8, M9, M10, M11, M12, M15 |
| Model Difference:    | All the same except the model number.                                                              |
| Sample No.:          | 20250307-001#                                                                                      |
| Operation Frequency: | BLE: 2402~2480 MHz                                                                                 |
| Channel Numbers:     | 40 Channels for BLE                                                                                |
| Channel Separation:  | 2MHz for BLE                                                                                       |
| Modulation Type:     | GFSK for BLE                                                                                       |
| Antenna Type:        | PCB Antenna                                                                                        |
| Antenna Gain:        | 0 dBi                                                                                              |
| Power Supply:        | DC 5V from adapter input AC 120V/60Hz or DC 3.7V from battery                                      |

Note:

- 1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.The EUT's all information provided by client.
- 3.Channel List

| Channel List |                 |         |                 |         |                 |         |                 |
|--------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel      | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 00           | 2402            | 10      | 2422            | 20      | 2442            | 30      | 2462            |
| 01           | 2404            | 11      | 2424            | 21      | 2444            | 31      | 2464            |
| 02           | 2406            | 12      | 2426            | 22      | 2446            | 32      | 2466            |
| 03           | 2408            | 13      | 2428            | 23      | 2448            | 33      | 2468            |
| 04           | 2410            | 14      | 2430            | 24      | 2450            | 34      | 2470            |
| 05           | 2412            | 15      | 2432            | 25      | 2452            | 35      | 2472            |
| 06           | 2414            | 16      | 2434            | 26      | 2454            | 36      | 2474            |
| 07           | 2416            | 17      | 2436            | 27      | 2456            | 37      | 2476            |
| 08           | 2418            | 18      | 2438            | 28      | 2458            | 38      | 2478            |
| 09           | 2420            | 19      | 2440            | 29      | 2460            | 39      | 2480            |



## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode | Description for BLE |
|--------------|---------------------|
|              | GFSK                |
| Mode 1       | 2402MHz             |
| Mode 2       | 2440MHz             |
| Mode 3       | 2480MHz             |

Remark: N/A

## 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Radiated Spurious Emission Test



Conducted Spurious Emission Test



Conducted Emission Test



## 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Model/Type No. | Series No. | Note |
|------|-----------|----------------|------------|------|
| 1    | Notebook  | Lenovo G475    | GB14477457 | AE   |
| 2    | Adapter   | GAT-0501000U   | N/A        | AE   |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
|      |               |              |        |      |

Note:



- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

### Radiation test, Band-edge test and 6db bandwidth test equipment

| Item | Equipment                           | Manufacturer    | Type No.  | Serial No. | Last calibration | Calibrated until |
|------|-------------------------------------|-----------------|-----------|------------|------------------|------------------|
| 1    | Spectrum Analyzer<br>(9kHz-26.5GHz) | Agilent         | E4408B    | MY50140780 | Nov. 01, 2024    | Oct. 31, 2025    |
| 2    | Test Receiver<br>(9kHz-7GHz)        | R&S             | ESRP7     | 101393     | Nov. 01, 2024    | Oct. 31, 2025    |
| 3    | Bilog Antenna<br>(30MHz-1GHz)       | R&S             | VULB9162  | 00306      | Nov. 01, 2024    | Oct. 31, 2025    |
| 4    | Horn Antenna<br>(1GHz-18GHz)        | Schwarzbeck     | BBHA9120D | 02139      | Nov. 01, 2024    | Oct. 31, 2025    |
| 5    | Horn Antenna<br>(18GHz-40GHz)       | A.H. Systems    | SAS-574   | 588        | Nov. 01, 2024    | Oct. 31, 2025    |
| 6    | Amplifier<br>(9KHz-6GHz)            | Schwarzbeck     | BBV9743B  | 00153      | Nov. 01, 2024    | Oct. 31, 2025    |
| 7    | Amplifier<br>(1GHz-18GHz)           | EMEC            | EM01G8GA  | 00270      | Nov. 01, 2024    | Oct. 31, 2025    |
| 8    | Amplifier<br>(18GHz-40GHz)          | Quanjuda        | DLE-161   | 97         | Nov. 01, 2024    | Oct. 31, 2025    |
| 9    | Loop Antenna<br>(9KHz-30MHz)        | Schwarzbeck     | FMZB1519B | 00014      | Nov. 01, 2024    | Oct. 31, 2025    |
| 10   | RF cables1<br>(9kHz-1GHz)           | ChengYu         | 966       | 004        | Nov. 01, 2024    | Oct. 31, 2025    |
| 11   | RF cables2<br>(1GHz-40GHz)          | ChengYu         | 966       | 003        | Nov. 01, 2024    | Oct. 31, 2025    |
| 12   | Antenna connector                   | Florida RF Labs | N/A       | RF 01#     | Nov. 01, 2024    | Oct. 31, 2025    |
| 13   | Power probe                         | KEYSIGHT        | U2021XA   | MY55210018 | Nov. 01, 2024    | Oct. 31, 2025    |
| 14   | Signal Analyzer<br>9kHz-26.5GHz     | Agilent         | N9020A    | MY55370280 | Nov. 01, 2024    | Oct. 31, 2025    |
| 15   | Test Receiver<br>20kHz-40GHz        | R&S             | ESU 40    | 100376     | Nov. 01, 2024    | Oct. 31, 2025    |
| 16   | D.C. Power Supply                   | LongWei         | PS-305D   | 010964729  | Nov. 01, 2024    | Oct. 31, 2025    |

### Conduction Test equipment

| Item | Equipment         | Manufacturer | Type No. | Serial No. | Last calibration | Calibrated until |
|------|-------------------|--------------|----------|------------|------------------|------------------|
| 1    | 843 Shielded Room | YIHENG       | 843 Room | 843        | Nov. 05, 2023    | Nov. 04, 2026    |
| 2    | EMI Receiver      | R&S          | ESR      | 101421     | Nov. 01, 2024    | Oct. 31, 2025    |
| 3    | LISN              | R&S          | ENV216   | 102417     | Nov. 01, 2024    | Oct. 31, 2025    |
| 4    | 843 Cable 1#      | ChengYu      | CE Cable | 001        | Nov. 01, 2024    | Oct. 31, 2025    |

### Other

| Item | Name                         | Manufacturer | Model   | Software version |
|------|------------------------------|--------------|---------|------------------|
| 1    | EMC Conduction Test System   | FALA         | EZ_EMCC | EMC-CON 3A1.1    |
| 2    | EMC radiation test system    | FALA         | EZ_EMCC | FA-03A2          |
| 3    | RF test system               | MAIWEI       | MTS8310 | 2.0.0.0          |
| 4    | RF communication test system | MAIWEI       | MTS8200 | 2.0.0.0          |



### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

#### 3.2 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

| FREQUENCY (MHz) | Limit (dBuV) |           | Standard |
|-----------------|--------------|-----------|----------|
|                 | Quasi-peak   | Average   |          |
| 0.15 -0.5       | 66 - 56 *    | 56 - 46 * | FCC      |
| 0.50 -5.0       | 56.00        | 46.00     | FCC      |
| 5.0 -30.0       | 60.00        | 50.00     | FCC      |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |


#### 3.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 3.4 DEVIATION FROM TEST STANDARD

No deviation

### 3.5 TEST SETUP

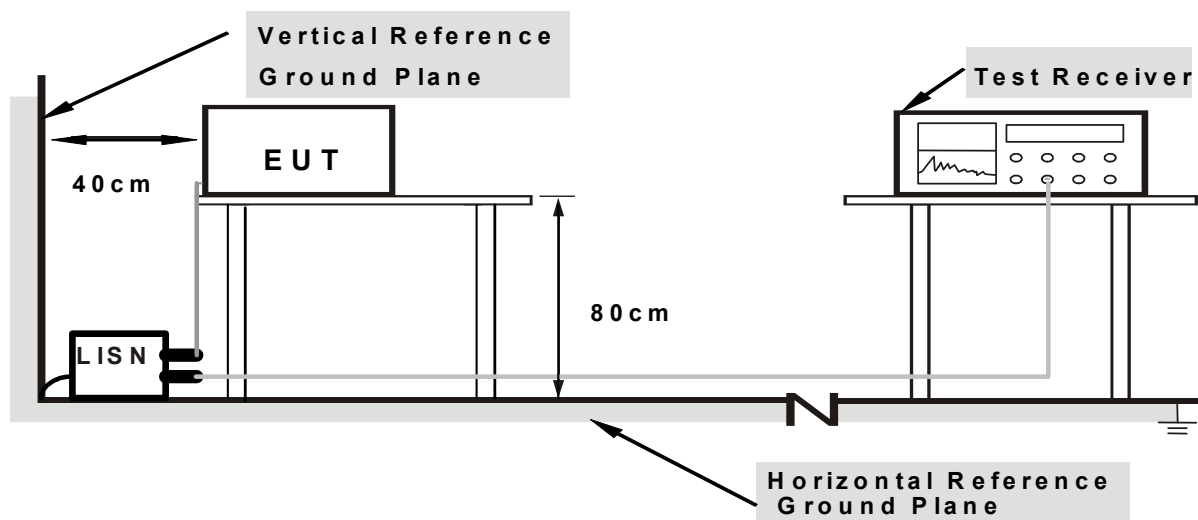

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

### 3.6 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

### 3.7 TEST RESULTS

Note: 1. All modes were tested at AC 120V and 240V, only the worst result of AC 120V was reported.  
2. All modes were Pre tested, and only worst mode 1was reported in the report.




|               |              |                    |     |
|---------------|--------------|--------------------|-----|
| Temperature:  | 25 °C        | Relative Humidity: | 54% |
| Pressure:     | 1010hPa      | Phase :            | L   |
| Test Voltage: | AC 120V/60Hz |                    |     |
| Test Mode:    | Mode 1       |                    |     |

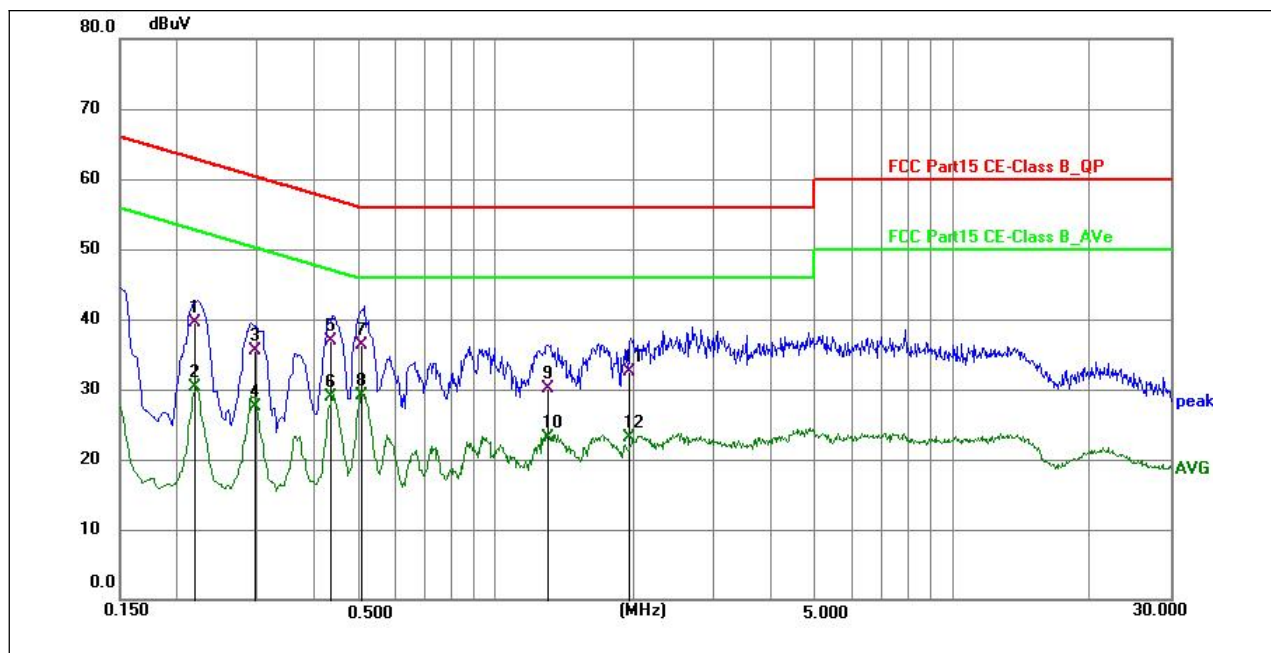

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|
| 1   | 0.2180          | 20.04          | 19.49       | 39.53        | 62.89        | -23.36      | QP       |
| 2   | 0.2180          | 10.77          | 19.49       | 30.26        | 52.89        | -22.63      | AVG      |
| 3   | 0.2945          | 15.96          | 19.49       | 35.45        | 60.40        | -24.95      | QP       |
| 4   | 0.2945          | 8.06           | 19.49       | 27.55        | 50.40        | -22.85      | AVG      |
| 5   | 0.4341          | 17.48          | 19.49       | 36.97        | 57.17        | -20.20      | QP       |
| 6   | 0.4341          | 9.32           | 19.49       | 28.81        | 47.17        | -18.36      | AVG      |
| 7   | 0.5087          | 16.91          | 19.48       | 36.39        | 56.00        | -19.61      | QP       |
| 8 * | 0.5087          | 9.62           | 19.48       | 29.10        | 46.00        | -16.90      | AVG      |
| 9   | 1.3039          | 10.58          | 19.51       | 30.09        | 56.00        | -25.91      | QP       |
| 10  | 1.3039          | 3.51           | 19.51       | 23.02        | 46.00        | -22.98      | AVG      |
| 11  | 1.9696          | 12.97          | 19.54       | 32.51        | 56.00        | -23.49      | QP       |
| 12  | 1.9696          | 3.63           | 19.54       | 23.17        | 46.00        | -22.83      | AVG      |



|               |              |                    |     |
|---------------|--------------|--------------------|-----|
| Temperature:  | 25 °C        | Relative Humidity: | 54% |
| Pressure:     | 1010hPa      | Phase :            | N   |
| Test Voltage: | AC 120V/60Hz |                    |     |
| Test Mode:    | Mode 1       |                    |     |

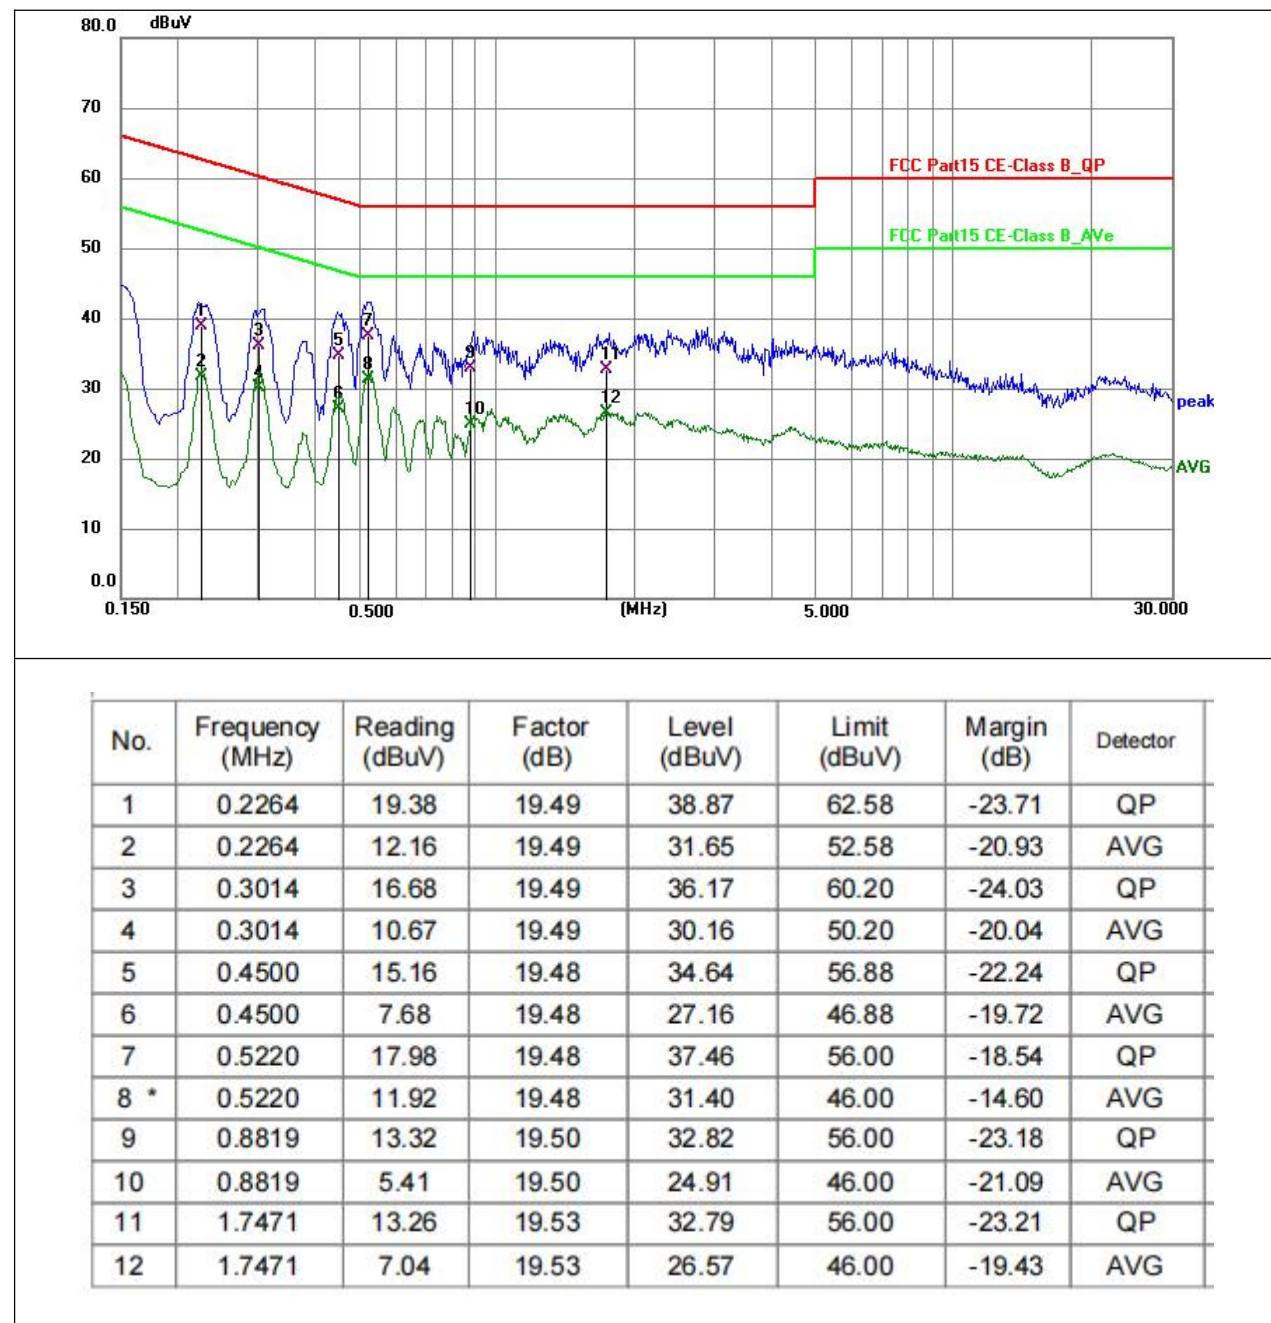

## Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor



#### 4. RADIATED EMISSION MEASUREMENT

##### 4.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies<br>(MHz) | Field Strength<br>(micorvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(KHz)                          | 300                              |
| 0.490~1.705          | 24000/F(KHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

##### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

| FREQUENCY (MHz) | Limit (dBuV/m) (at 3M) |         |
|-----------------|------------------------|---------|
|                 | PEAK                   | AVERAGE |
| Above 1000      | 74                     | 54      |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

| Spectrum Parameter                    | Setting                                          |
|---------------------------------------|--------------------------------------------------|
| Attenuation                           | Auto                                             |
| Start Frequency                       | 1000 MHz                                         |
| Stop Frequency                        | 25GHz                                            |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter     | Setting                          |
|------------------------|----------------------------------|
| Attenuation            | Auto                             |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |



## 4.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

## 4.3 DEVIATION FROM TEST STANDARD


No deviation

## 4.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

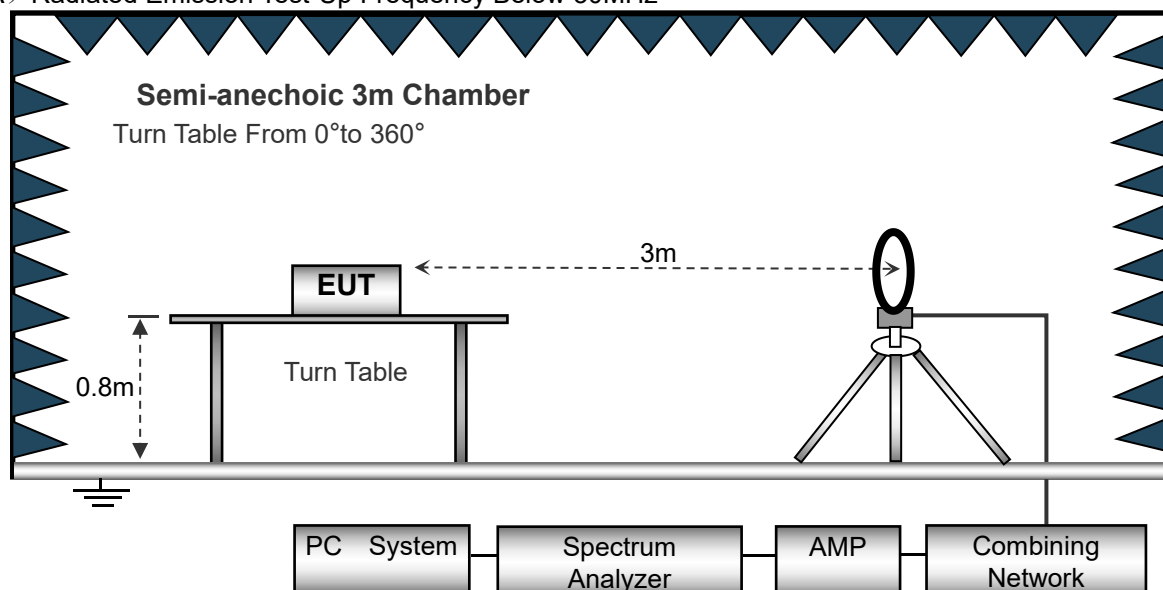

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

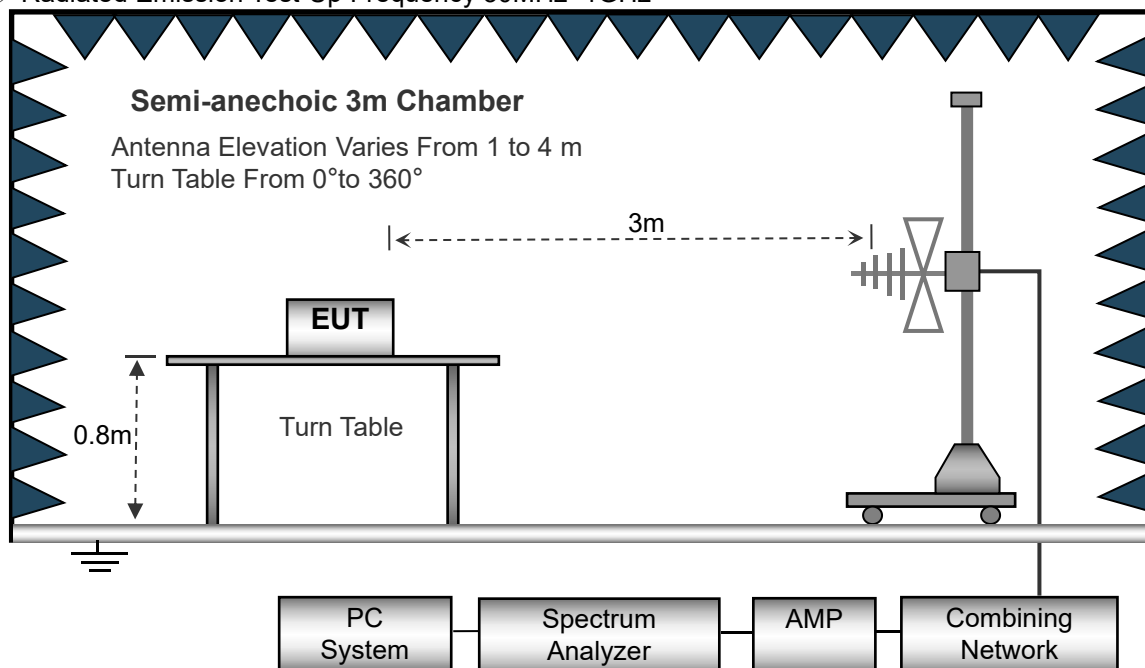

#### (C) Radiated Emission Test-Up Frequency Above 1GHz

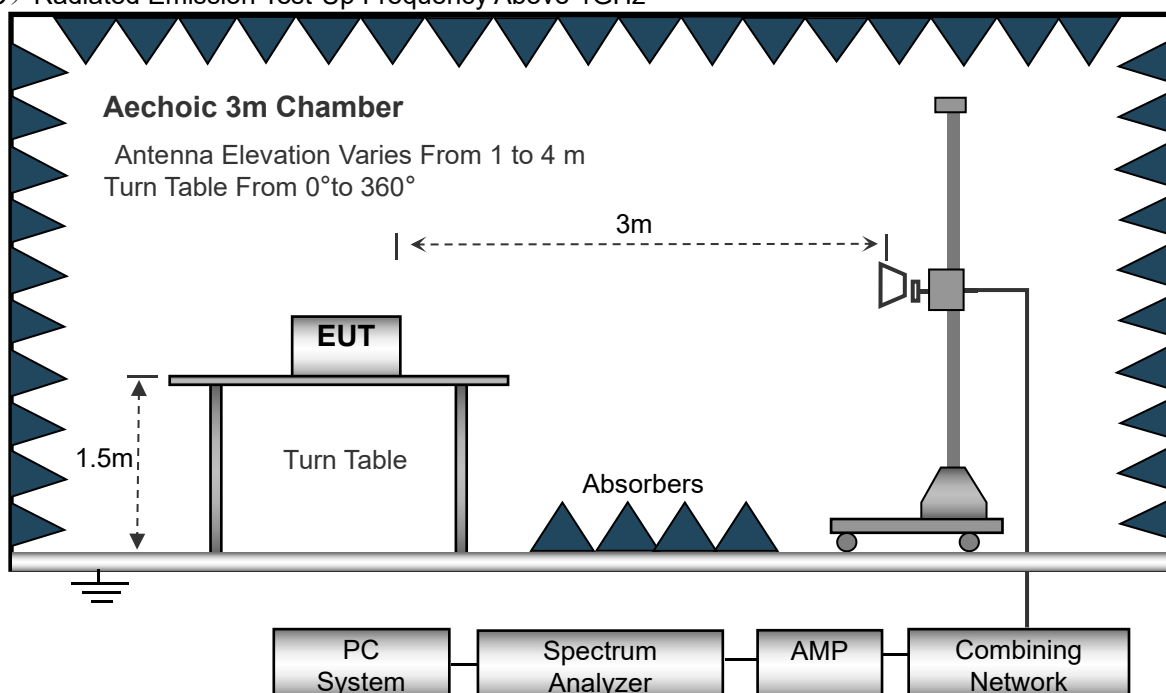

### 4.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

### 4.6 TEST RESULTS


Note: 1. All modes were Pre tested, and only worst mode 1 was reported in the report.

2. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that “Z axis” position was the worst, and test data recorded in this report.



## Below 1GHz Test Results

|                |              |                    |            |
|----------------|--------------|--------------------|------------|
| Temperature:   | 26℃          | Relative Humidity: | 54%        |
| Pressure:      | 1010 hPa     | Polarization :     | Horizontal |
| Test Voltage : | AC 120V/60Hz |                    |            |
| Test Mode :    | Mode 1       |                    |            |

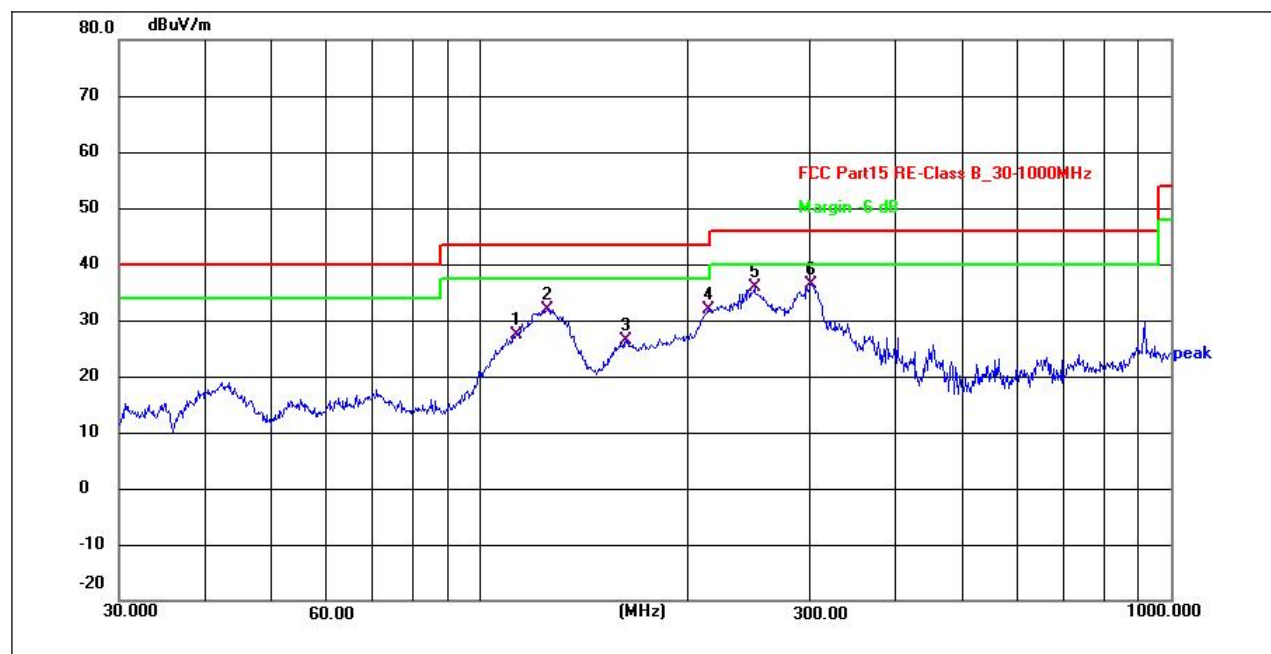

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1   | 112.9196        | 43.62          | -16.17        | 27.45          | 43.50          | -16.05      | QP       |
| 2   | 125.0066        | 50.06          | -18.16        | 31.90          | 43.50          | -11.60      | QP       |
| 3   | 162.6105        | 45.01          | -18.63        | 26.38          | 43.50          | -17.12      | QP       |
| 4   | 213.7633        | 47.79          | -15.88        | 31.91          | 43.50          | -11.59      | QP       |
| 5   | 249.4250        | 50.80          | -14.98        | 35.82          | 46.00          | -10.18      | QP       |
| 6   | 301.4224        | 49.69          | -13.40        | 36.29          | 46.00          | -9.71       | QP       |


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



|                |              |                    |          |
|----------------|--------------|--------------------|----------|
| Temperature:   | 26°C         | Relative Humidity: | 54%      |
| Pressure:      | 1010 hPa     | Polarization :     | Vertical |
| Test Voltage : | AC 120V/60Hz |                    |          |
| Test Mode :    | Mode 1       |                    |          |

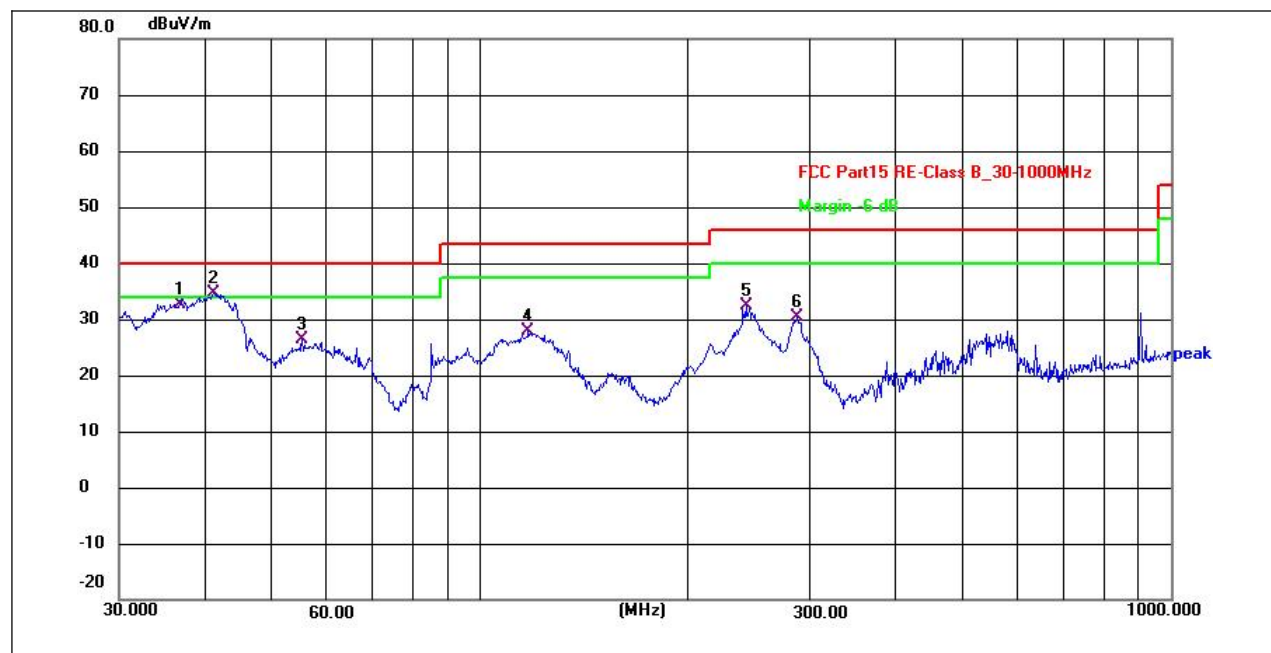

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1   | 36.7661         | 48.55          | -15.86        | 32.69          | 40.00          | -7.31       | QP       |
| 2   | 41.1320         | 49.49          | -14.87        | 34.62          | 40.00          | -5.38       | QP       |
| 3   | 55.2207         | 41.00          | -14.64        | 26.36          | 40.00          | -13.64      | QP       |
| 4   | 117.3602        | 44.86          | -16.91        | 27.95          | 43.50          | -15.55      | QP       |
| 5   | 242.5252        | 47.41          | -15.07        | 32.34          | 46.00          | -13.66      | QP       |
| 6   | 287.9904        | 44.19          | -13.72        | 30.47          | 46.00          | -15.53      | QP       |

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Limit – Level;



## Above 1GHz Test Results

| Polar<br>(H/V)  | Frequency | Meter<br>Reading | Pre-<br>amplifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|-----------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                 | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB/m)            | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| Mode 1: 2402MHz |           |                  |                   |               |                   |                   |          |        |                  |
| V               | 4804.00   | 75.68            | 52.12             | 2.73          | 27.38             | 53.67             | 74.00    | -20.33 | PK               |
| V               | 4804.00   | 64.72            | 52.12             | 2.73          | 27.38             | 42.71             | 54.00    | -11.29 | AV               |
| V               | 7206.00   | 75.77            | 52.16             | 2.78          | 27.41             | 53.80             | 74.00    | -20.20 | PK               |
| V               | 7206.00   | 63.67            | 52.16             | 2.78          | 27.41             | 41.70             | 54.00    | -12.30 | AV               |
| H               | 4804.00   | 64.49            | 52.12             | 2.73          | 27.38             | 42.48             | 74.00    | -31.52 | PK               |
| H               | 4804.00   | 55.31            | 52.16             | 2.78          | 27.41             | 33.34             | 54.00    | -20.66 | AV               |
| H               | 7206.00   | 64.65            | 52.16             | 2.78          | 27.41             | 42.68             | 74.00    | -31.32 | PK               |
| H               | 7206.00   | 55.68            | 52.12             | 2.73          | 27.38             | 33.67             | 54.00    | -20.33 | AV               |
| Mode 2: 2440MHz |           |                  |                   |               |                   |                   |          |        |                  |
| V               | 4880.00   | 75.70            | 52.23             | 2.86          | 27.44             | 53.77             | 74.00    | -20.23 | PK               |
| V               | 4880.00   | 64.24            | 52.23             | 2.86          | 27.44             | 42.31             | 54.00    | -11.69 | AV               |
| V               | 7320.00   | 75.51            | 52.26             | 2.88          | 27.49             | 53.62             | 74.00    | -20.38 | PK               |
| V               | 7332.00   | 63.60            | 52.26             | 2.88          | 27.49             | 41.71             | 54.00    | -12.29 | AV               |
| H               | 4880.00   | 65.30            | 52.23             | 2.86          | 27.44             | 43.37             | 74.00    | -30.63 | PK               |
| H               | 4880.00   | 52.79            | 52.26             | 2.88          | 27.49             | 30.90             | 54.00    | -23.10 | AV               |
| H               | 7320.00   | 64.70            | 52.26             | 2.88          | 27.49             | 42.81             | 74.00    | -31.19 | PK               |
| H               | 7320.00   | 52.70            | 52.23             | 2.86          | 27.44             | 30.77             | 54.00    | -23.23 | AV               |
| Mode 3: 2480MHz |           |                  |                   |               |                   |                   |          |        |                  |
| V               | 4960.00   | 61.28            | 51.74             | 3.08          | 31.25             | 43.87             | 74.00    | -30.13 | PK               |
| V               | 4960.00   | 45.14            | 51.74             | 3.08          | 31.25             | 27.73             | 54.00    | -26.27 | AV               |
| V               | 7440.00   | 68.50            | 49.98             | 7.16          | 36.63             | 62.31             | 74.00    | -11.69 | PK               |
| V               | 7440.00   | 42.76            | 49.98             | 7.16          | 36.63             | 36.57             | 54.00    | -17.43 | AV               |
| H               | 4960.00   | 61.71            | 51.74             | 3.08          | 31.25             | 44.30             | 74.00    | -29.70 | PK               |
| H               | 4960.00   | 45.70            | 51.74             | 3.08          | 31.25             | 28.29             | 54.00    | -25.71 | AV               |
| H               | 7440.00   | 67.13            | 49.98             | 7.16          | 36.63             | 60.94             | 74.00    | -13.06 | PK               |
| H               | 7440.00   | 42.49            | 49.98             | 7.16          | 36.63             | 36.30             | 54.00    | -17.70 | AV               |

## Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-Amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



## 5. RADIATED BAND EMISSION MEASUREMENT

### 5.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

| FREQUENCY (MHz) | Limit (dBuV/m) (at 3M) |         |
|-----------------|------------------------|---------|
|                 | PEAK                   | AVERAGE |
| Above 1000      | 74                     | 54      |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

| Spectrum Parameter                    | Setting                                          |
|---------------------------------------|--------------------------------------------------|
| Attenuation                           | Auto                                             |
| Start Frequency                       | 2300MHz                                          |
| Stop Frequency                        | 2520MHz                                          |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

### 5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 5.3 DEVIATION FROM TEST STANDARD

No deviation

## 5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

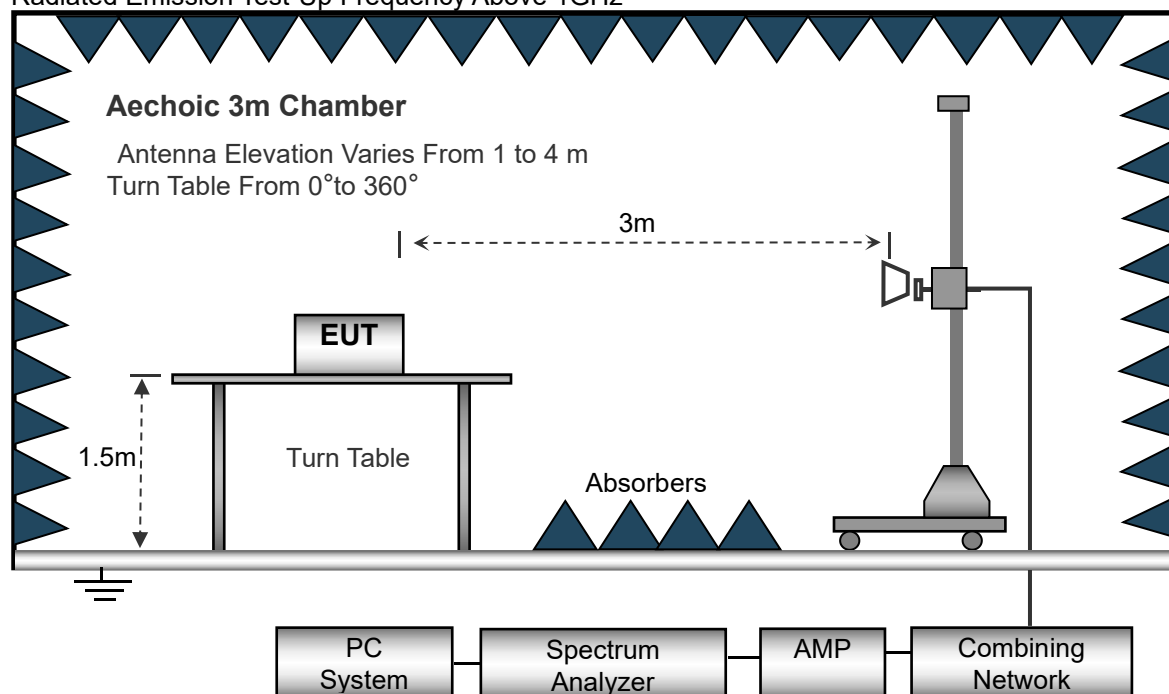

## 5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**5.6 TEST RESULT**

| Polar<br>(H/V)  | Frequency | Meter<br>Reading | Pre-<br>amplifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|-----------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                 | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB/m)            | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| Mode 1: 2402MHz |           |                  |                   |               |                   |                   |          |        |                  |
| V               | 2390.00   | 60.91            | 51.77             | 3.03          | 31.34             | 43.51             | 74.00    | -30.49 | PK               |
| V               | 2390.00   | 45.38            | 51.77             | 3.03          | 31.34             | 27.98             | 54.00    | -26.02 | AV               |
| V               | 2400.00   | 68.30            | 50.02             | 7.24          | 36.63             | 62.15             | 74.00    | -11.85 | PK               |
| V               | 2400.00   | 52.42            | 50.02             | 7.24          | 36.63             | 46.27             | 54.00    | -7.73  | AV               |
| H               | 2390.00   | 58.66            | 51.53             | 11.34         | 41.52             | 59.99             | 74.00    | -14.01 | PK               |
| H               | 2390.00   | 41.42            | 51.77             | 3.03          | 31.34             | 24.02             | 54.00    | -29.98 | AV               |
| H               | 2400.00   | 55.55            | 51.77             | 3.03          | 31.34             | 38.15             | 74.00    | -35.85 | PK               |
| H               | 2400.00   | 46.65            | 50.02             | 7.24          | 36.63             | 40.50             | 54.00    | -13.50 | AV               |

| Polar<br>(H/V)  | Frequency | Meter<br>Reading | Pre-<br>amplifier | Cable<br>Loss | Antenna<br>Factor | Emission<br>Level | Limits   | Margin | Detector<br>Type |
|-----------------|-----------|------------------|-------------------|---------------|-------------------|-------------------|----------|--------|------------------|
|                 | (MHz)     | (dBuV)           | (dB)              | (dB)          | (dB/m)            | (dBuV/m)          | (dBuV/m) | (dB)   |                  |
| Mode 3: 2480MHz |           |                  |                   |               |                   |                   |          |        |                  |
| V               | 2483.50   | 60.53            | 51.69             | 3.05          | 31.39             | 43.28             | 74.00    | -30.72 | PK               |
| V               | 2483.50   | 44.58            | 51.69             | 3.05          | 31.39             | 27.33             | 54.00    | -26.67 | AV               |
| V               | 2500.00   | 68.64            | 50.11             | 7.25          | 36.58             | 62.36             | 74.00    | -11.64 | PK               |
| V               | 2500.00   | 52.43            | 50.11             | 7.25          | 36.58             | 46.15             | 54.00    | -7.85  | AV               |
| H               | 2483.50   | 57.65            | 51.53             | 11.34         | 41.52             | 58.98             | 74.00    | -15.02 | PK               |
| H               | 2483.50   | 40.89            | 51.69             | 3.05          | 31.39             | 23.64             | 54.00    | -30.36 | AV               |
| H               | 2500.00   | 59.65            | 51.69             | 3.05          | 31.39             | 42.40             | 74.00    | -31.60 | PK               |
| H               | 2500.00   | 48.50            | 50.11             | 7.25          | 36.58             | 42.22             | 54.00    | -11.78 | AV               |

**Remark:**

1. Emission Level = Reading Level+Antenna Factor+Cable loss-Preamp Factor.
2. Over Limit= Absolute Level - Limit.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has not to be reported.
4. EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report (Z orientation)



## 6. Peak Output Power

### 6.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C |                   |                 |                       |        |
|---------------------------------|-------------------|-----------------|-----------------------|--------|
| Section                         | Test Item         | Limit           | Frequency Range (MHz) | Result |
| 15.247 (b)(3)                   | Peak Output Power | 1 watt or 30dBm | 2400-2483.5           | PASS   |

### 6.2 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP



### 6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 6.6 TEST RESULTS

Please see the Appendix for the BLE data



## 7. POWER SPECTRAL DENSITY TEST

### 7.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C |                        |                        |                       |        |
|---------------------------------|------------------------|------------------------|-----------------------|--------|
| Section                         | Test Item              | Limit                  | Frequency Range (MHz) | Result |
| 15.247                          | Power Spectral Density | 8 dBm<br>(in any 3KHz) | 2400-2483.5           | PASS   |

| Spectrum Parameters | Setting                           |
|---------------------|-----------------------------------|
| Attenuation         | Auto                              |
| Span Frequency      | = the frequency band of operation |
| RB                  | $RBW \geq 3kHz$                   |
| VB                  | $VBW \geq 3RBW$                   |
| Detector            | Peak                              |
| Trace               | Max Hold                          |
| Sweep Time          | Auto                              |

### 7.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP



### 7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 7.6 TEST RESULTS

Please see the Appendix for the BLE data



## 8. 6DB BANDWIDTH TEST

### 8.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C |           |                      |                      |        |
|---------------------------------|-----------|----------------------|----------------------|--------|
| Section                         | Test Item | Limit                | Frequency Range(MHz) | Result |
| 15.247(a)(2)                    | Bandwidth | $\geq 500\text{KHz}$ | 2400-2483.5          | PASS   |

### 8.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

### 8.3 DEVIATION FROM STANDARD

No deviation.

### 8.4 TEST SETUP



### 8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

### 8.6 TEST RESULTS

Please see the Appendix for the BLE data



## 9. OUT OF BAND EMISSIONS TEST

### 9.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### 9.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.

### 9.3 DEVIATION FROM STANDARD

No deviation.

### 9.4 TEST SETUP



### 9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

### 9.6 TEST RESULTS

Please see the Appendix for the BLE data



## 10. SPURIOUS RF CONDUCTED EMISSION

### 10.1 APPLIED PROCEDURES / LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.
3. For below 30MHz, For 9KHz-150kHz, 150K-10MHz, We use the RBW 1KHz, 10KHz, So the limit need to be calculated by " $10\lg(BW1/BW2)$ ". for example For 9KHz-150kHz, RBW 1KHz, The Limit = the highest emission level -  $20 - 10\lg(100/1) =$  the highest emission level - 40.

### 10.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.

### 10.3 DEVIATION FROM STANDARD

No deviation.

### 10.4 TEST SETUP



### 10.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

### 10.6 TEST RESULTS

Please see the Appendix for the BLE data



## 11. ANTENNA REQUIREMENT

### 11.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 11.2 EUT ANTENNA

The EUT antenna is PCB Antenna. It comply with the standard requirement.reference to the attachment photo for details.



## 12. TEST SEUUP PHOTO AND EUT PHOTO

Please see the attachment for details.

\*\*\*\*\* END OF REPORT \*\*\*\*\*