



SAR TEST REPORT

Product Name: Tecdesk Model 6

Model Name: Model 6

FCC ID: 2BDUK-MODEL6

Issued For : Tecdesk (UK) Ltd.

Santok House, Unit L, Braintree Industrial Estate, Braintree Road, Ruislip, HA4 0EJ, UK

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China

Report Number: LGT23K114HA01

Sample Received Date: Nov. 29, 2023

Date of Test: Dec. 01, 2023 ~ Jan. 11, 2024

Date of Issue: Jan. 15, 2024

Max. SAR (1g): Body: 1.279 W/kg

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



Table of Contents

1. General Information	5
1.1 EUT Description	5
1.2 Test Environment	6
1.3 Test Factory	6
2. Test Standards and Limits	7
3. SAR Measurement System	8
3.1 Definition of Specific Absorption Rate (SAR)	8
3.2 SAR System	8
4. Tissue Simulating Liquids	11
4.1 Simulating Liquids Parameter Check	11
5. SAR System Validation	13
5.1 Validation System	13
5.2 Validation Result	14
6. SAR Evaluation Procedures	15
7. EUT Antenna Location Sketch	16
7.1 SAR test exclusion consider table	17
8. EUT Test Position	19
8.1 Body-worn Position Conditions	19
9. Uncertainty	20
9.1 Measurement Uncertainty	20
10. Conducted Power Measurement	21
10.1 Test Result:	21
11. EUT and Test Setup Photo	29
11.1 EUT Photos	29
11.2 Setup Photos	32
12. SAR Result Summary	35
12.1 Body-worn and Hotspot SAR	35
13. Equipment List	39
Appendix A. System Validation Plots	40
Appendix B. SAR Test Plots	46
Appendix C. Probe Calibration and Dipole Calibration Report	51



Revision History

Rev.	Issue Date	Contents
00	Jan. 15, 2024	Initial Issue



TEST REPORT CERTIFICATION

Applicant	Tecdesk (UK) Ltd.
Address	Santok House, Unit L, Braintree Industrial Estate, Braintree Road, Ruislip, HA4 0EJ, UK
Manufacture	Tecdesk (UK) Ltd.
Address	Santok House, Unit L, Braintree Industrial Estate, Braintree Road, Ruislip, HA4 0EJ, UK
Product Name	Tecdesk Model 6
Trademark	Tecdesk
Model Name	Model 6
Sample number	LGT2311110-3

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
ANSI/IEEE Std. C95.1-1992 FCC 47 CFR Part 2 (2.1093) IEEE 1528: 2013	PASS

Prepared by:

Zane Shan

Zane Shan
Engineer

Approved by:

Vita Li

Vita Li
Manager





1. General Information

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

1.1 EUT Description

Product Name	Tecdesk Model 6	
Trademark	Tecdesk	
Model Name	Model 6	
Series Model	N/A	
Model Difference	N/A	
Device Category	Portable	
Product stage	Production unit	
RF Exposure Environment	General Population / Uncontrolled	
Hardware Version	Model 6	
Software Version	MODEL6_SW_V2.0_HW_V1.0_VOWFVLTE_240424	
Frequency Range	LTE Band 5:824 ~ 849MHz LTE Band 7:2500 ~ 2570MHz LTE Band 41:2496~2690MHz WLAN 802.11b/g/n20: 2412 MHz ~ 2462 MHz Bluetooth: 2402 ~ 2480 MHz	
Max. Reported SAR(1g): (Limit:1.6W/kg) Test distance:0mm	Mode	Body Worn and Hotspot(W/kg)
	LTE Band 5	1.279
	LTE Band 7	1.102
	LTE Band 41	0.485
	2.4G WLAN	0.259
	Bluetooth	0.074
1-g Sum SAR		1.538
Battery	Rated Voltage:3.8V Capacity: 2100mAh	
Operating Mode:	LTE: QPSK, 16QAM 2.4G WLAN: 802.11b(DSSS): CCK, DQPSK, DBPSK 802.11g(OFDM): BPSK, QPSK,16-QAM,64-QAM 802.11n(OFDM): BPSK, QPSK,16-QAM,64-QAM Bluetooth: GFSK +π/4DQPSK+8DPSK BLE: GFSK	
Antenna Specification	LTE: FPC Antenna Bluetooth: FPC Antenna WLAN: FPC Antenna	
Operating Mode	Maximum continuous output	
SIM Card	Only support single SIM card.	
Hotspot Mode	Support	
DTM Mode	Not Support	



1.2 Test Environment

Ambient conditions in the SAR laboratory:

Items	Required
Temperature (°C)	18-25
Humidity (%RH)	30-70

1.3 Test Factory

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate	FCC Registration No.: 746540
	A2LA Certificate No.: 6727.01
	IC Registration No.: CN0136



2. Test Standards and Limits

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D01 v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
7	FCC KDB 941225 D05 v02r05	SAR for LTE Devices
8	FCC KDB 941225 D06 v02r01	Hotspot Mode SAR
9	FCC KDB 248227 D01 Wi-Fi SAR v02r02	SAR Considerations for 802.11 Devices

(A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body Partial-Body Hands, Wrists, Feet and Ankles

0.4 8.0 20.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body Partial-Body Hands, Wrists, Feet and Ankles

0.08 1.6 4.0

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

NOTE
GENERAL POPULATION/UNCONTROLLED EXPOSURE
PARTIAL BODY LIMIT
1.6 W/kg



3. SAR Measurement System

3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by


$$\text{SAR} = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue;

ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SAR System

MVG SAR System Diagram:

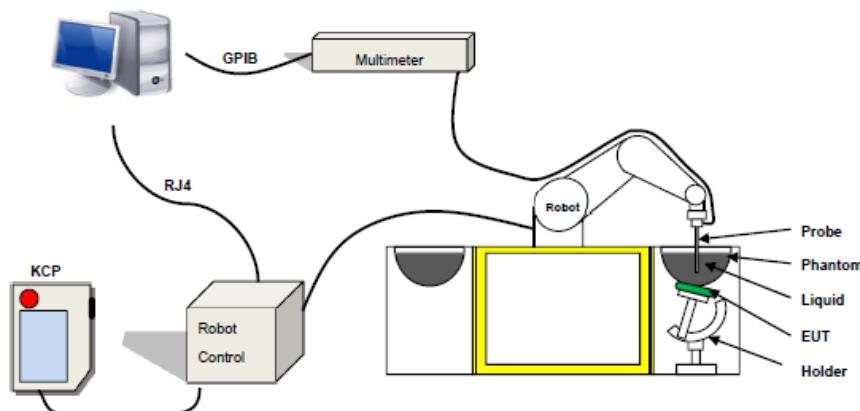

COMOSAR is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The COMOSAR system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue



The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 1g mass.

3.2.1 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 04/22 EPGO364 with following specifications is used

- Probe Length: 330 mm
- Length of Individual Dipoles: 2mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter: 2.5 mm
- Distance between dipole/probe extremity: 1 mm
- Dynamic range: 0.01-100 W/kg
- Probe linearity: 3%
- Axial Isotropy: < 0.10 dB
- Spherical Isotropy: < 0.10 dB
- Calibration range: 600 MHz to 6 GHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°



Figure 1-MVG COMOSAR Dosimetric E field Probe



3.2.2 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

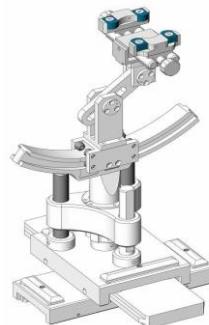


Figure-SN 06/22 SAM 148



Figure-SN 06/22 ELLI 51

3.2.3 Device Holder



The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



4. Tissue Simulating Liquids

4.1 Simulating Liquids Parameter Check

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values

The uncertainty due to the liquid conductivity and permittivity arises from two different sources. The first source of error is the deviation of the liquid conductivity from its target value (max $\pm 5\%$) and the second source of error arises from the measurement procedures used to assess conductivity. The uncertainty shall be assessed using a rectangular probability. For 1 g averaging, the maximum weighting coefficient for SAR is 0.5.

IEEE SCC-34/SC-2 RECOMMENDED TISSUE DIELECTRIC PARAMETERS

The head and body tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 have been incorporated in the following table.

Frequency	ϵ_r	σ 10g S/m
300	45.3	0.87
450	43.5	0.87
750	41.9	0.89
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1800 to 2000	40.0	1.40
2100	39.8	1.49
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40
3500	37.9	2.91
4000	37.4	3.43
4500	36.8	3.94
5000	36.2	4.45
5200	36.0	4.66
5400	35.8	4.86
5600	35.5	5.07
5800	35.3	5.27



LIQUID MEASUREMENT RESULTS

Date	Ambient		Simulating Liquid		Parameters	Target	Measured	Deviation %	Limited %
	Temp. [°C]	Humidity %	Frequency (MHz)	Temp. [°C]					
2024-01-10	22.3	60	835	22	Permittivity	41.50	41.86	0.87	±5
					Conductivity	0.90	0.88	-2.22	±5
2023-12-01	23.8	57	2450	23.5	Permittivity	39.20	40.05	2.17	±5
					Conductivity	1.80	1.75	-2.78	±5
2024-01-11	20.8	50	2600	20.5	Permittivity	39.00	39.70	1.79	±5
					Conductivity	1.96	1.95	-0.51	±5




5. SAR System Validation

5.1 Validation System

Each MVG system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the MVG software, enable the user to conduct the system performance check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.

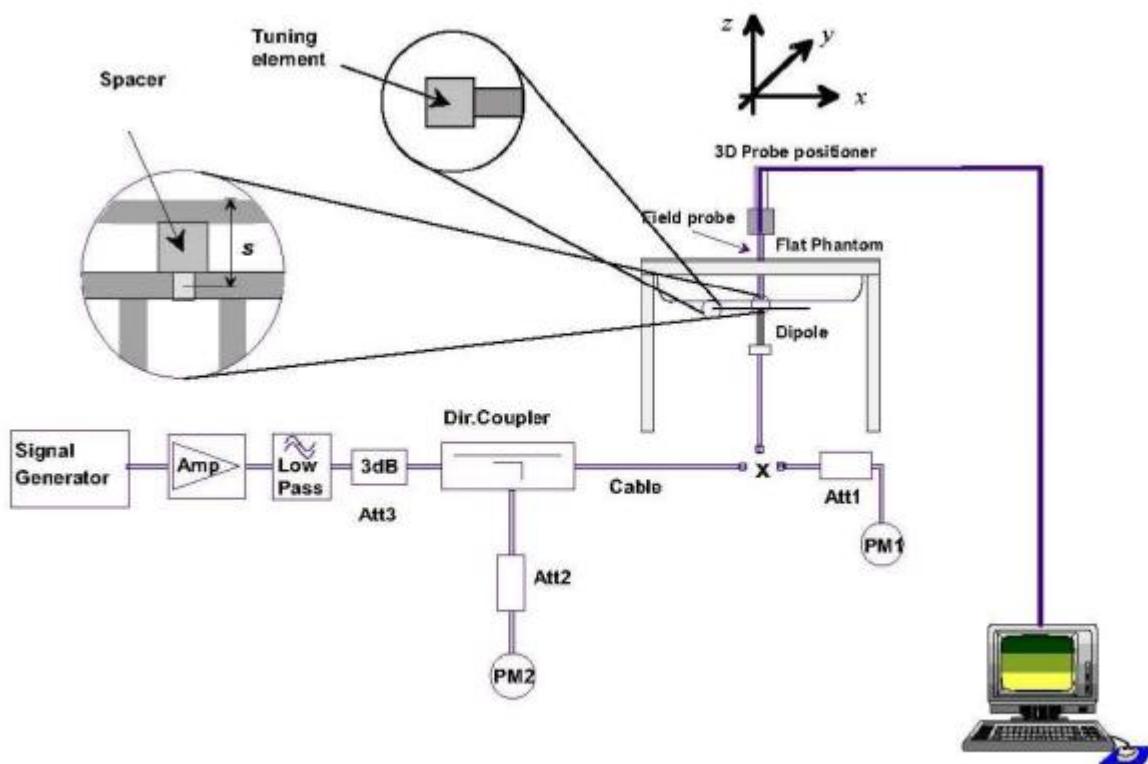



5.2 Validation Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of $\pm 10\%$.

Date	Freq.	Power	Tested Value	Normalized SAR	Target SAR	Tolerance	Limit
	(MHz)	(mW)	(W/Kg)	(W/kg)	1g(W/kg)	(%)	(%)
2024-01-10	835	100	0.942	9.42	9.75	-3.38	10
2023-12-01	2450	100	5.263	52.63	54.28	-3.04	10
2024-01-11	2600	100	5.427	54.27	56.58	-4.08	10

Note:

1. The tolerance limit of System validation $\pm 10\%$.
2. The dipole input power (forward power) was 100 mW.
3. The results are normalized to 1 W input power.



6. SAR Evaluation Procedures

The procedure for assessing the average SAR value consists of the following steps:

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

Area Scan & Zoom Scan


First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.



7. EUT Antenna Location Sketch

It is a Tecdesk Model 6, support LTE/WLAN/BT mode.

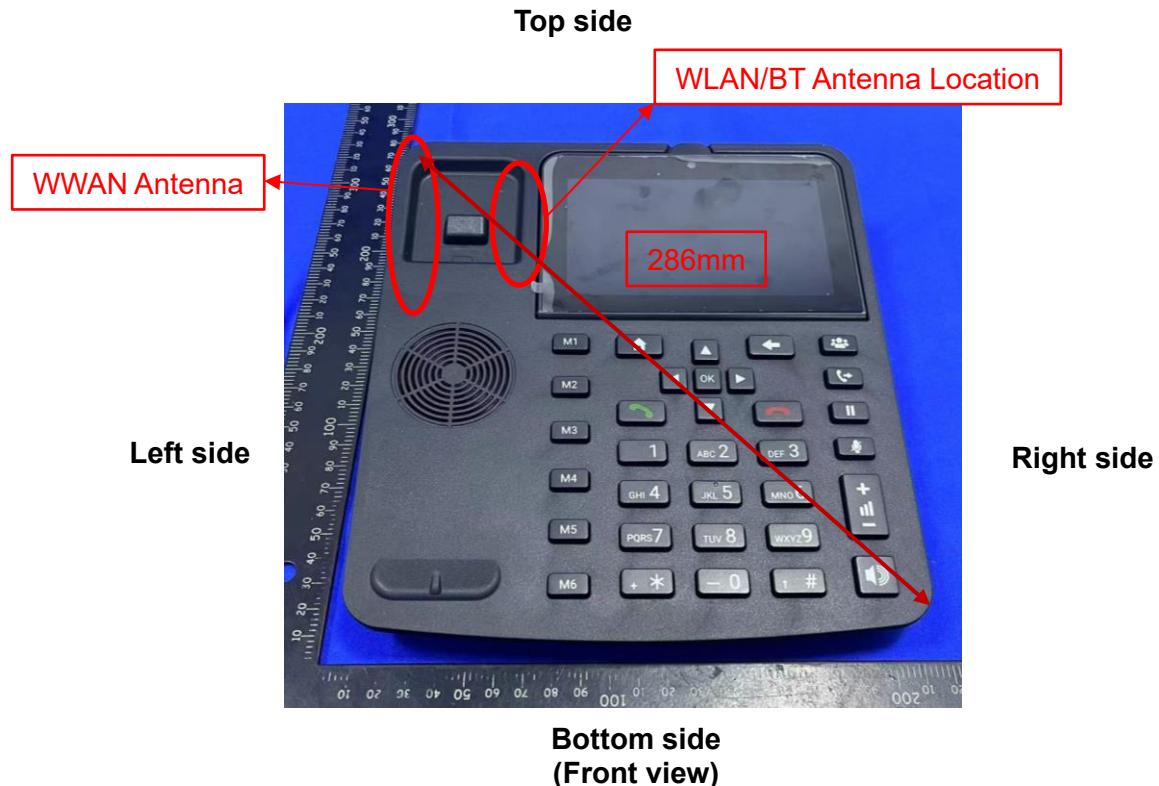

Antenna Separation Distance(mm)						
ANT	Back Side	Front Side	Left Side	Right Side	Top Side	Bottom Side
WLAN/BT	≤5	≤5	45	147	20	167
WWAN	≤5	≤5	≤5	198	≤5	128

Note 1: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.



7.1 SAR test exclusion consider table

The WWAN/WLAN/BT SAR evaluation of Maximum power (dBm) summing tolerance.

	Wireless Interface	LTE Band 5	LTE Band 7	LTE Band 41	BLE	2.4G WLAN
Exposure Position	Calculated Frequency(MHz)	844	2560	2680	2402	2462
	Maximum Turn-up power (dBm)	24	23.5	23.5	5.5	18.5
	Maximum rated power(mW)	251.19	223.87	223.87	3.55	70.79
	Separation distance (mm)	5	5	5	5	5
Back Side	exclusion threshold(mW)	16.33	9.38	9.16	9.68	9.56
	Testing required?	YES	YES	YES	NO	YES
	Separation distance (mm)	5	5	5	5	5
Front Side	exclusion threshold(mW)	16.33	9.38	9.16	9.68	9.56
	Testing required?	YES	YES	YES	NO	YES
	Separation distance (mm)	5	5	5	45	45
Left Edge	exclusion threshold(mW)	16.33	9.38	9.16	46.78	45.60
	Testing required?	YES	YES	YES	NO	YES
	Separation distance (mm)	198	198	198	147	147
Right Edge	exclusion threshold(mW)	996.02	1573.75	1571.63	1066.78	1065.60
	Testing required?	NO	NO	NO	NO	NO
	Separation distance (mm)	20	20	20	5	5
Top Edge	exclusion threshold(mW)	-5.52	-206.25	-208.37	9.68	9.56
	Testing required?	YES	YES	YES	NO	YES
	Separation distance (mm)	128	128	128	167	167
Bottom Edge	exclusion threshold(mW)	602.16	873.75	871.63	1266.78	1265.60
	Testing required?	NO	NO	NO	NO	NO



Note:

1. maximum power is the source-based time-average power and represents the maximum RF output power among production units.
2. per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. per KDB 447498 D01, standalone SAR test exclusion threshold is applied; if the distance of the antenna to the user is <25mm, 25mm is used to determine SAR exclusion threshold
4. per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distance ≤ 50 mm are determined by:
$$[(\text{max.power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and} \leq 7.5 \text{ for 10-g extremity SAR}$$

$f(\text{GHz})$ is the RF channel transmit frequency in GHz. Power and distance are rounded to the nearest mW and mm before calculation.

The result is rounded to one decimal place for comparison

For <50mm distance, we just calculate mW of the exclusion threshold value(3.0) to do compare

5. per KDB 447498 D01, at 100 MHz to 6GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following
 - a)[threshold at 50mm in step 1]+(test separation distance -50mm)*(f (MHz)/150)]mW, at 100 MHz to 1500 MHz
 - b) [threshold at 50mm in step1]+(test separation distance -50mm) *10]mW at > 1500 MHz and ≤ 6 GHz
6. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of each of these configurations is less than 1/4db higher than those measured at the lower data rate than 11b mode, thus the SAR can be excluded.




8. EUT Test Position

This EUT was tested in Front Side, Back Side, Left Side and Top Side.

8.1 Body-worn Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing function, the relevant hand and body exposure condition are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surface and edges with a transmitting antenna located within 25 mm from that surface or edge. When form factor of a handset is smaller than 9cm x 5cm, a test separation distance of 5mm (instead of 10mm) is required for testing hotspot mode. When the separate distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

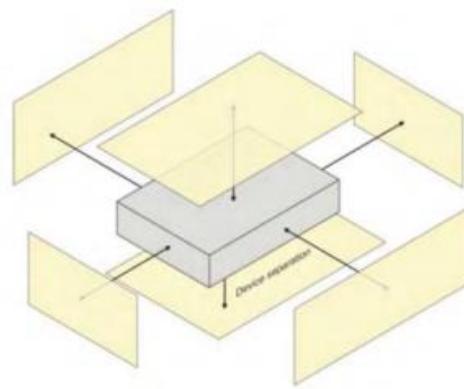



9. Uncertainty

9.1 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528: 2013. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Symbol	Uncertainty Component	Prob. Dist.	Unc. $a(x_i)$	Div. q_i	$u(x_i) = a(x_i)/q_i$	C_i	$u(y) = C_i * u(x_i)$	v_i
Measurement system errors								
CF	Probe calibration	N ($k = 2$)	5.8	2	2.90	1	2.90	∞
CF _{drift}	Probe calibration drift	R	0.12	$\sqrt{3}$	0.07	1	0.07	∞
LIN	Probe linearity and detection limit	R	1.91	$\sqrt{3}$	1.10	1	1.10	∞
BBS	Broadband signal	R	0.15	$\sqrt{3}$	0.09	1	0.09	∞
ISO	Probe isotropy	R	0.18	$\sqrt{3}$	0.10	1	0.10	∞
DAE	Other probe and data acquisition errors	N	2.7	1	2.70	1	2.70	∞
AMB	RF ambient and noise	N	1.73	1	1.73	1	1.73	∞
Δ_{xyz}	Probe positioning errors	N	0.81	1	0.81	$2/\delta$	0.81	
DAT	Data processing errors	N	2.5	1	2.50	1	2.50	∞
Phantom and device (DUT or validation antenna) errors								
LIQ(σ)	Measurement of phantom conductivity(σ)	N	4.4	1	4.4	$c\epsilon, c\sigma$	4.40	∞
LIQ(T_c)	Temperature effects (medium)	R	2.9	$\sqrt{3}$	1.67	$c\epsilon, c\sigma$	1.67	∞
EPS	Shell permittivity	R	3.4	$\sqrt{3}$	1.96	See 8.4.2.3	0.49	∞
DIS	Distance between the radiating element of the DUT and the phantom medium	N	0.8	1	0.8	2	1.60	∞
D_{xyz}	Repeatability of positioning the DUT or source against the phantom	N	1.5	1	1.5	1	1.50	5
H	Device holder effects	N	3	1	3	1	3.00	
MOD	Effect of operating mode on probe sensitivity	R	3.59	$\sqrt{3}$	2.07	1	2.07	∞
TAS	Time-average SAR	R	1.73	$\sqrt{3}$	1.00	1	1.00	∞
RF _{drift}	Variation in SAR due to drift in output of DUT	N	2.89	1	2.89	1	2.89	
VAL	Validation antenna uncertainty (validation measurement only)	N	1.45	1	1.45	1	1.45	
P _{in}	Uncertainty in accepted power (validation measurement only)	N	2.5	1	2.5	1	2.50	
Corrections to the SAR result (if applied)								
C(ϵ', σ)	Phantom deviation from target (ϵ', σ)	N	2.31	1	2.31	1	2.31	
C(R)	SAR scaling	R	1.15	$\sqrt{3}$	0.66	1	0.66	
u(Δ SAR)	Combined uncertainty						9.53	
U	Expanded uncertainty and effective degrees of freedom					U =	19.06	



10. Conducted Power Measurement

10.1 Test Result:

2.4G WLAN

2.4GWIFI				
Mode	Channel Number	Frequency (MHz)	Output Power (dBm)	Output Power (mW)
802.11b	1	2412	15.62	36.48
	6	2437	15.61	36.39
	11	2462	17.96	62.52
802.11g	1	2412	13.03	20.09
	6	2437	12.83	19.19
	11	2462	14.75	29.85
802.11 n-HT20	1	2412	11.22	13.24
	6	2437	10.64	11.59
	11	2462	12.82	19.14

Bluetooth

BT				
Mode	Channel Number	Frequency (MHz)	Average Power (dBm)	Output Power (mW)
GFSK(1Mbps)	0	2402	2.17	1.65
	39	2441	1.20	1.32
	78	2480	-0.05	0.99
$\pi/4$ -QPSK(2Mbps)	0	2402	4.10	2.57
	39	2441	3.26	2.12
	78	2480	2.08	1.61
8DPSK(3Mbps)	0	2402	4.47	2.80
	39	2441	3.66	2.32
	78	2480	2.48	1.77

BLE

BLE				
Mode	Channel Number	Frequency (MHz)	Average Power (dBm)	Output Power (mW)
GFSK(1Mbps)	0	2402	5.37	3.44
	19	2440	2.13	1.63
	39	2480	1.35	1.36



LTE Conducted Power

General Note:

1. Anritsu CMW500 base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05, smaller bandwidth SAR testing is not required.



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	22.77	22.78	23.35
	1	2		22.8	22.9	23.29
	1	5		22.8	22.88	23.32
	3	0		22.66	22.85	23.34
	3	1		22.77	22.89	23.21
	3	2		22.68	22.91	23.26
	6	0		21.64	21.74	22.28
1.4	1	0	16-QAM	22.67	22.57	23.39
	1	2		22.5	22.52	23.17
	1	5		22.51	22.48	23.16
	3	0		21.83	21.84	22.7
	3	1		21.81	21.8	22.55
	3	2		21.81	21.8	22.62
	6	0		20.82	20.77	21.49
3	1	0	QPSK	22.56	22.89	23.37
	1	7		22.59	22.96	23.2
	1	14		22.62	23.01	23.34
	8	0		21.72	21.89	22.33
	8	4		21.71	21.91	22.28
	8	7		21.8	21.88	22.24
	15	0		21.54	21.89	22.45
3	1	0	16-QAM	22.48	21.85	22.48
	1	7		22.39	21.85	22.43
	1	14		22.49	21.86	22.4
	8	0		20.67	21.05	21.39
	8	4		20.46	20.84	21.36
	8	7		20.44	20.9	21.41
	15	0		20.67	20.78	21.36



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.56	22.76	23.1
	1	12		22.48	22.78	23.18
	1	24		22.65	23.04	23.25
	12	0		21.7	21.78	22.11
	12	6		21.56	21.87	22.28
	12	11		21.64	21.91	22.41
	25	0		21.59	21.78	22.39
5	1	0	16-QAM	21.72	21.47	22.07
	1	12		21.76	21.41	22.27
	1	24		21.82	21.61	22.15
	12	0		20.58	20.97	21.38
	12	6		20.4	20.71	21.33
	12	11		20.33	20.76	21.35
	25	0		20.55	20.96	21.34
10	1	0	QPSK	22.74	22.9	23.02
	1	24		22.73	23.05	23.25
	1	49		22.85	23.28	23.44
	25	0		21.56	21.81	22.06
	25	12		21.72	21.77	22.29
	25	24		21.73	22.02	22.44
	50	0		21.85	21.89	22.28
10	1	0	16-QAM	22.61	21.67	21.82
	1	24		22.68	21.79	22.29
	1	49		22.8	22.08	22.16
	25	0		20.39	20.99	21.04
	25	12		20.75	20.9	21.29
	25	24		20.57	21.28	21.41
	50	0		20.73	20.86	21.3



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.68	22.6	22.56
	1	12		22.61	22.44	22.56
	1	24		22.58	22.69	22.54
	12	0		21.61	21.76	21.7
	12	6		21.66	21.79	21.53
	12	11		21.65	21.81	21.54
	25	0		21.63	21.78	21.51
5	1	0	16-QAM	21.41	21.92	21.89
	1	12		21.41	21.9	21.88
	1	24		21.39	21.95	21.93
	12	0		20.71	20.85	20.48
	12	6		20.55	20.8	20.6
	12	11		20.62	20.85	20.51
	25	0		20.77	20.82	20.73
10	1	0	QPSK	22.69	22.83	22.58
	1	24		22.51	22.78	22.62
	1	49		22.5	22.84	22.75
	25	0		21.65	21.72	21.5
	25	12		21.65	21.8	21.66
	25	24		21.65	21.81	21.68
	50	0		21.58	21.71	21.53
10	1	0	16-QAM	22.89	21.9	21.66
	1	24		22.81	21.94	21.76
	1	49		22.79	21.97	21.76
	25	0		20.65	20.93	20.72
	25	12		20.59	20.92	20.77
	25	24		20.64	20.9	20.73
	50	0		20.69	20.91	20.79



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	22.58	22.71	22.65
	1	37		22.52	22.8	22.65
	1	74		22.46	22.74	22.76
	36	0		21.64	21.73	21.66
	36	18		21.62	21.87	21.49
	36	39		21.5	21.8	21.54
	75	0		21.63	21.67	21.51
15	1	0	16-QAM	22.91	21.84	22.37
	1	38		22.77	21.8	22.42
	1	75		22.85	21.81	22.5
	36	0		20.75	21.04	20.7
	36	18		20.72	20.9	20.64
	36	39		20.74	21.03	20.64
	75	0		20.76	20.85	20.85
20	1	0	QPSK	22.61	22.82	22.77
	1	49		22.48	22.9	22.76
	1	99		22.53	22.76	22.93
	50	0		21.65	21.84	21.66
	50	24		21.62	21.79	21.54
	50	49		21.55	21.74	21.53
	100	0		21.65	21.78	21.55
20	1	0	16-QAM	21.49	22.04	21.61
	1	49		21.44	22.05	21.51
	1	99		21.54	21.99	21.77
	50	0		20.78	20.88	20.69
	50	24		20.77	20.8	20.65
	50	49		20.75	20.77	20.69
	100	0		20.63	20.81	20.68



LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.76	22.29	22.71
	1	12		22.71	22.24	22.73
	1	24		22.71	22.19	22.76
	12	0		21.84	21.48	21.6
	12	6		21.84	21.43	21.72
	12	11		21.67	21.31	21.71
	25	0		21.71	21.31	21.6
5	1	0	16-QAM	21.59	21.7	21.23
	1	12		21.48	21.74	21.3
	1	24		21.46	21.64	21.31
	12	0		20.79	20.5	20.56
	12	6		20.77	20.44	20.69
	12	11		20.76	20.47	20.69
	25	0		20.84	20.65	20.93
10	1	0	QPSK	22.86	22.35	22.52
	1	24		22.82	22.43	22.57
	1	49		22.78	22.39	22.66
	25	0		21.76	21.37	21.5
	25	12		21.69	21.22	21.6
	25	24		21.59	21.36	21.7
	50	0		21.72	21.23	21.61
10	1	0	16-QAM	22.27	20.6	21.83
	1	24		22.24	20.57	22.1
	1	49		22.22	20.59	21.97
	25	0		20.76	20.36	20.63
	25	12		20.71	20.34	20.74
	25	24		20.79	20.44	20.71
	50	0		20.8	20.52	20.72



LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	22.87	22.34	22.26
	1	37		22.81	22.44	22.46
	1	74		22.81	22.47	22.52
	36	0		21.74	21.31	21.52
	36	18		21.69	21.31	21.49
	36	39		21.65	21.29	21.63
	75	0		21.75	21.26	21.51
15	1	0	16-QAM	22.37	20.66	21.57
	1	38		22.08	20.59	21.64
	1	75		22.23	20.69	21.76
	36	0		20.73	20.57	20.45
	36	18		20.68	20.57	20.63
	36	39		20.74	20.63	20.62
	75	0		20.68	20.52	20.82
20	1	0	QPSK	22.69	22.44	22.64
	1	49		22.58	22.49	22.65
	1	99		22.69	22.57	22.9
	50	0		21.77	21.42	21.57
	50	24		21.73	21.29	21.52
	50	49		21.65	21.4	21.71
	100	0		21.55	21.3	21.56
20	1	0	16-QAM	21.51	21.16	21.34
	1	49		21.37	21.05	21.09
	1	99		21.37	21.11	21.15
	50	0		20.87	20.47	20.75
	50	24		20.89	20.46	20.86
	50	49		20.92	20.49	20.92
	100	0		20.65	20.58	20.74




11. EUT and Test Setup Photo

11.1 EUT Photos

Front side




Back side

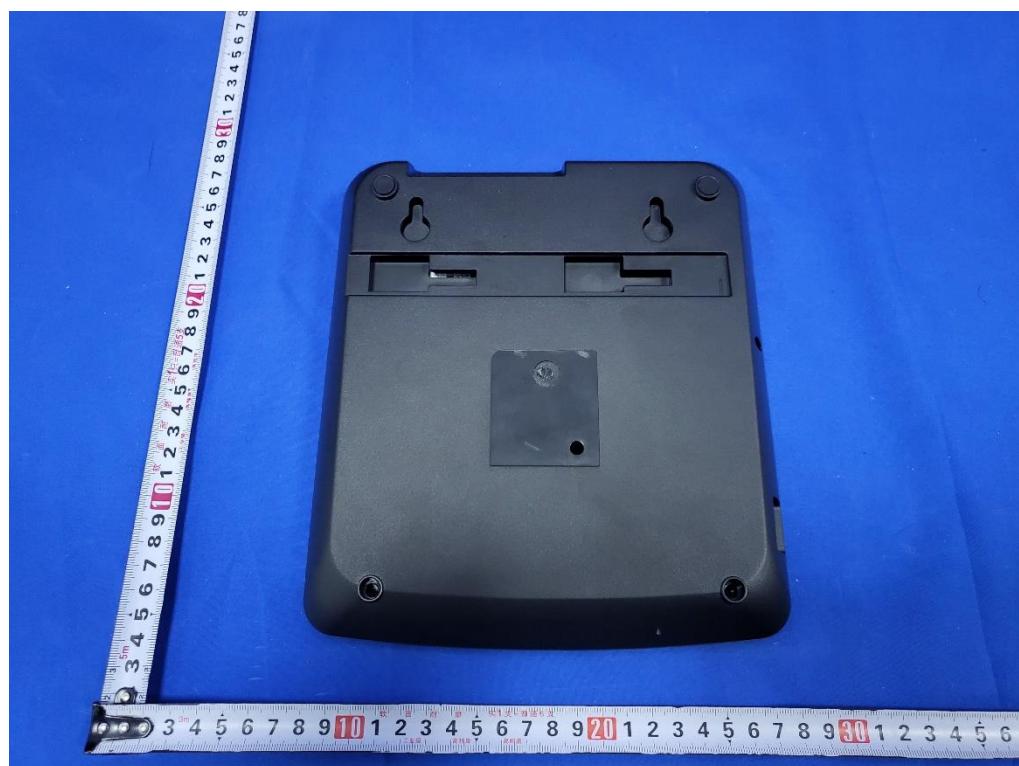



Right Edge

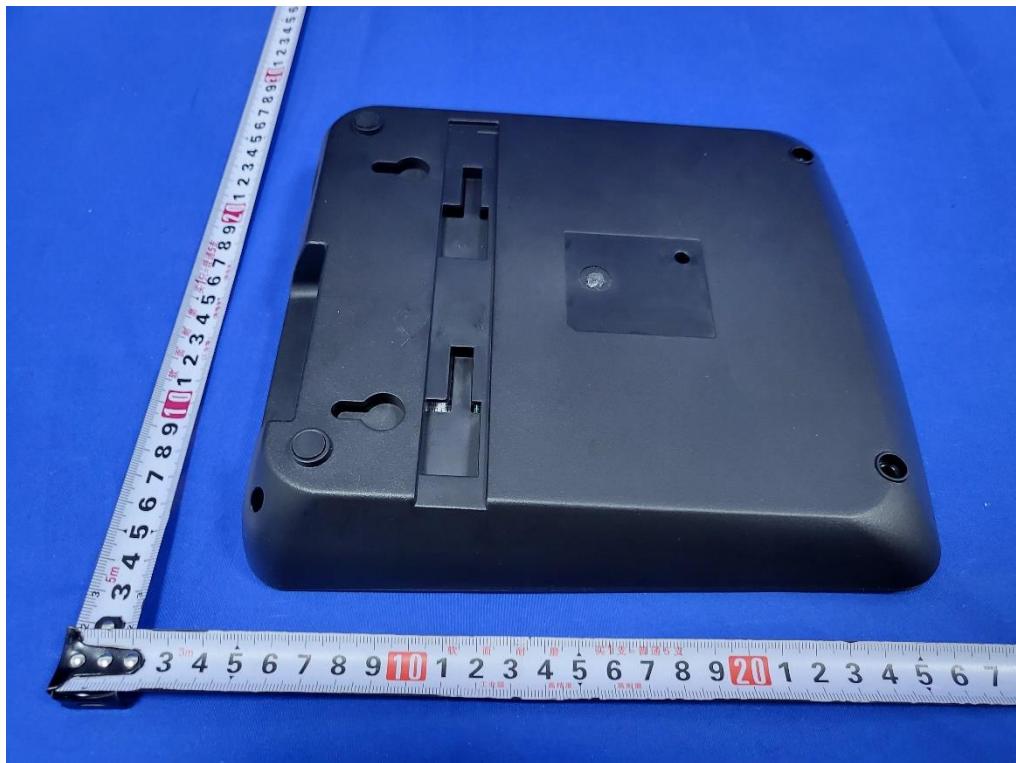


Left Edge





Top Edge

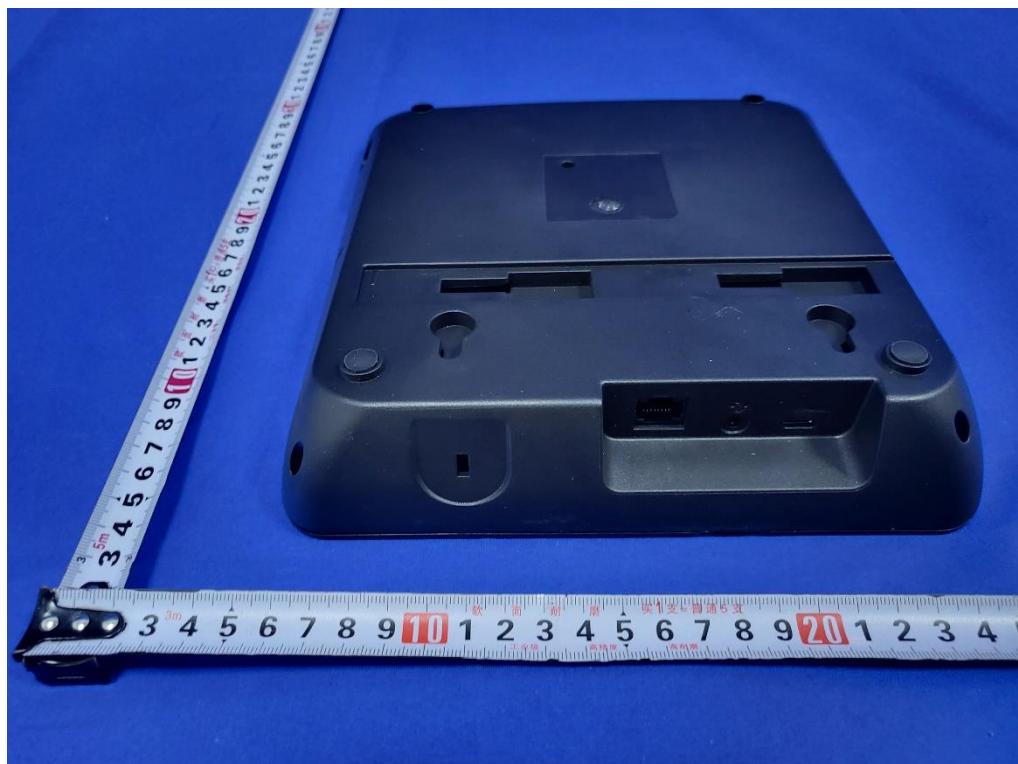

Bottom Edge





11.2 Setup Photos

Body Front side (separation distance is 0mm)



Body Back side (separation distance 0mm)





Body Left side (separation distance is 0mm)




Body Top side (separation distance is 0mm)





Liquid depth (15 cm)

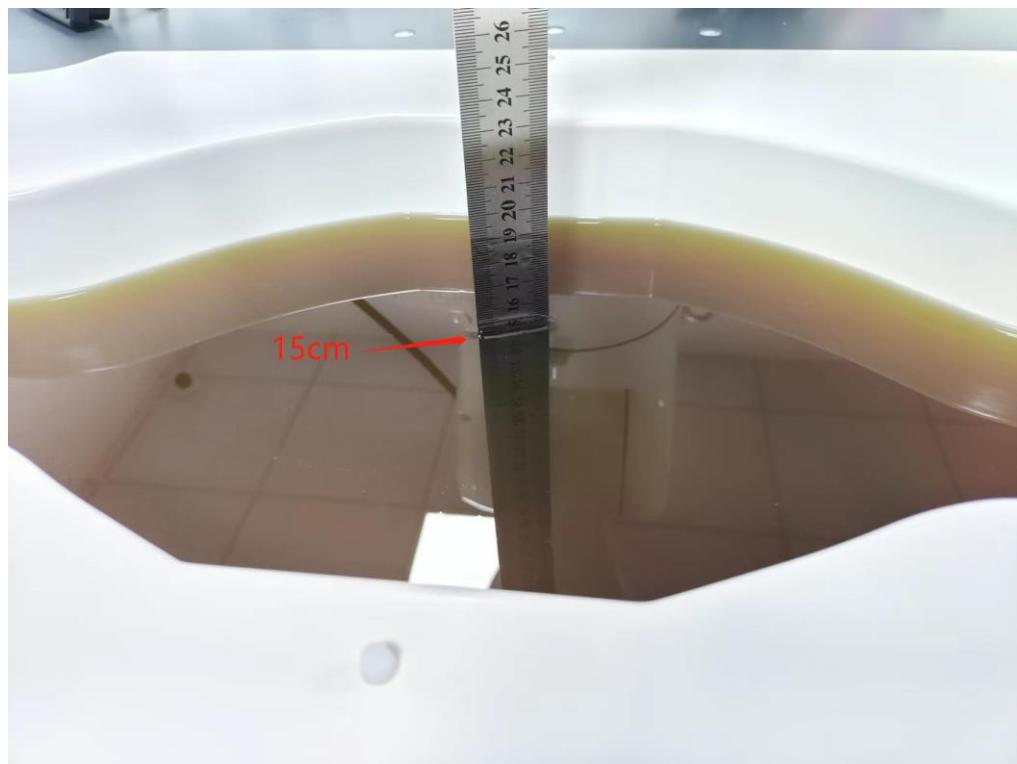



12. SAR Result Summary

12.1 Body-worn and Hotspot SAR

Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	Result 1g (W/Kg)	Power Drift (%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)	Meas. No.
LTE Band 5	10M	QPSK	1	0	Front side	844	0.356	2.09	23.5	23.44	0.361	/
			25	0	Front side	844	0.298	1.57	22.5	22.44	0.302	/
			1	0	Back Side	829	0.696	2.60	23.5	22.8	0.818	/
			1	0	Back Side	836.5	0.851	0.52	23.5	23.28	0.895	/
			1	0	Back Side	844	0.980	3.83	23.5	23.44	0.994	/
			25	0	Back Side	844	0.773	0.50	22.5	22.44	0.784	/
			50	0	Back Side	844	0.713	-1.34	22.5	22.28	0.750	/
			1	0	Left Side	829	0.901	-0.27	23.5	22.8	1.059	/
			1	0	Left Side	836.5	1.075	-2.34	23.5	23.28	1.131	/
			1	0	Left Side	844	1.261	-3.76	23.5	23.44	1.279	1
			25	0	Left Side	829	0.701	-0.93	22.5	21.73	0.837	/
			25	0	Left Side	836.5	0.848	-2.50	22.5	22.02	0.947	/
			25	0	Left Side	844	0.984	-0.66	22.5	22.44	0.998	/
			50	0	Left Side	844	0.703	-3.86	22.5	22.28	0.740	/
			1	0	Top Side	844	0.171	-2.39	24	23.44	0.195	/
			25	0	Top Side	844	0.144	-0.70	22.5	22.44	0.146	/
LTE Band 7	20M	QPSK	1	0	Front side	2560	0.105	-1.38	23	22.93	0.107	/
			50	0	Front side	2535	0.073	-0.72	22	21.84	0.076	/
			1	0	Back Side	2560	0.409	-0.81	23	22.93	0.416	/
			50	0	Back Side	2535	0.286	-2.04	22	21.84	0.297	/
			1	0	Left Side	2510	0.772	-2.31	23	22.61	0.845	/
			1	0	Left Side	2535	0.938	-0.80	23	22.9	0.960	/
			1	0	Left Side	2560	1.084	-1.03	23	22.93	1.102	2
			50	0	Left Side	2535	0.739	-2.99	22	21.84	0.767	/
			100	0	Left Side	2535	0.701	1.34	22	21.78	0.737	/
			1	0	Top Side	2560	0.095	-3.58	23	22.93	0.097	/
			50	0	Top Side	2535	0.064	3.68	22	21.84	0.066	/
LTE Band 41	20M	QPSK	1	0	Front side	2680	0.070	2.64	23.5	22.9	0.080	/
			50	0	Front side	2506	0.052	3.24	22	21.77	0.055	/
			1	0	Back Side	2680	0.267	-0.93	23.5	22.9	0.307	/
			50	0	Back Side	2506	0.187	2.77	22	21.77	0.197	/
			1	0	Left Side	2680	0.422	-1.49	23.5	22.9	0.485	3
			50	0	Left Side	2506	0.305	0.96	22	21.77	0.322	/
			1	0	Top Side	2680	0.070	2.14	23.5	22.9	0.080	/
			50	0	Top Side	2506	0.052	0.21	22	21.77	0.055	/



Band	Model	Test Position	Freq.	Result 1g (W/Kg)	Power Drift (%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)	Meas. No.
2.4GHz WLAN	802.11 b	Front Side	2462	0.186	-1.89	18.00	17.96	0.188	/
		Back Side	2462	0.257	1.01	18.00	17.96	0.259	4
		Left Side	2462	0.065	0.41	18.00	17.96	0.066	/
		Top Side	2462	0.032	-0.89	18.00	17.96	0.032	/
BLE	GFSK	Front Side	2402	0.072	-0.61	5.50	5.37	0.074	5
		Back Side	2402	0.071	-1.56	5.50	5.37	0.073	/
		Left Side	2402	0.031	1.06	5.50	5.37	0.032	/
		Top Side	2402	0.028	0.82	5.50	5.37	0.029	/

Note:

1. Per KDB 447498 D01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
- a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
- b. Scaled SAR(W/kg) = Measured SAR(W/kg) *Tune-up Scaling Factor
2. Per KDB 865664 D01, Repeated measurement is not required when the original highest measured SAR is <0.80 W/kg.



Repeated SAR

Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	Result 1g (W/Kg)	Power Drift (%)	Max. Turn-up Power (dBm)	Meas. Output Power (dBm)	Scaled SAR (W/Kg)
LTE Band 5	10M	QPSK	1	0	Back Side	829	0.668	-3.19	23.5	22.8	0.785
			1	0	Back Side	836.5	0.829	1.94	23.5	23.28	0.872
			1	0	Back Side	844	0.936	-0.79	23.5	23.44	0.949
			1	0	Left Side	829	0.868	1.10	23.5	22.80	1.020
			1	0	Left Side	836.5	1.026	-1.88	23.5	23.28	1.080
			1	0	Left Side	844	1.212	0.59	23.5	23.44	1.229
			25	0	Left Side	829	0.670	1.27	22.5	21.73	0.800
			25	0	Left Side	836.5	0.848	-3.24	22.5	22.02	0.947
			25	0	Left Side	844	0.964	3.35	22.5	22.44	0.977
LTE Band 7	10M	QPSK	1	0	Left Side	2510	0.763	-3.09	23	22.61	0.835
			1	0	Left Side	2535	0.902	-2.99	23	22.90	0.923
			1	0	Left Side	2560	1.046	3.45	23	22.93	1.063

Repeated SAR measurement

Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Freq.	Original Measured SAR 1g(W/kg) 1g (W/Kg)	1 st Repeated SAR 1g	Ratio
LTE Band 5	10M	QPSK	1	0	Back Side	829	0.696	0.668	1.041
			1	0	Back Side	836.5	0.851	0.829	1.027
			1	0	Back Side	844	0.980	0.936	1.047
			1	0	Left Side	829	0.901	0.868	1.038
			1	0	Left Side	836.5	1.075	1.026	1.047
			1	0	Left Side	844	1.261	1.212	1.041
			25	0	Left Side	829	0.701	0.670	1.047
			25	0	Left Side	836.5	0.848	0.848	1.000
			25	0	Left Side	844	0.984	0.964	1.021
LTE Band 7	10M	QPSK	1	0	Left Side	2510	0.772	0.763	1.012
			1	0	Left Side	2535	0.938	0.902	1.040
			1	0	Left Side	2560	1.084	1.046	1.036

Note:

1. Per KDB 865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/Kg}$.
2. Per KDB 865664 D01, if the ratio of largest to smallest SAR for the original and first repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/Kg}$, only one repeated measurement is required.
3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is $\geq 1.45\text{W/Kg}$.
4. The ratio is the difference in percentage between original and repeated measured SAR.



Simultaneous Multi-band Transmission Evaluation:

Application Simultaneous Transmission information:

Position	Simultaneous State
Body	1. LTE + 2.4GHz WLAN
	2. LTE + Bluetooth

NOTE:

1. Bluetooth and WLAN can't simultaneous transmission at the same time.
2. For simultaneous transmission at head and body exposure position, 2 transmitters simultaneous transmission was the worst state.
3. If the test separation distance is <5mm, 5mm is used for excluded SAR calculation.
4. KDB 447498 / 4.3.2 (2) when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:
 - a) (max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[\sqrt{f} (GHz) /x] W/kg for test separation distances≤ 50 mm;
Where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.
 - b) 0.4W/Kg for 1-g SAR and 1.0W/Kg for 10-g SAR, when the separation distance is >50mm.

Simultaneous Mode	Position	Mode	Max. 1-g SAR	1-g Sum SAR
			(W/kg)	(W/kg)
LTE + 2.4G WLAN	Body	LTE	1.279	1.538
		2.4G WLAN	0.259	
LTE + Bluetooth	Body	LTE	1.279	1.353
		Bluetooth	0.074	

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR-1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR-1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.



13. Equipment List

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
835MHz Dipole	MVG	DIP0G835	SN 06/22 DIP0G835-639	2022.02.11	2025.02.10
2450MHz Dipole	MVG	DIP2G450	SN 06/22 DIP2G450-645	2022.02.11	2025.02.10
2600MHz Dipole	MVG	DIP2G600	SN 06/22 DIP2G600-646	2022.02.11	2025.02.10
E-Field Probe	MVG	EPGO364	SN 04/22 EPGO364	2023.02.10	2024.02.09
Liquid Calibration Kit	MVG	OCPG 87	SN 06/22 OCPG87	2023.02.10	2024.02.09
Antenna	MVG	ANTA 73	SN 06/22 ANTA 73	N/A	N/A
Ellipsoid Phantom	MVG	ELLI 51	SN 06/22 ELLI 51	N/A	N/A
Phantom	MVG	SAM 148	SN 06/22 SAM148	N/A	N/A
Phone holder	MVG	MSH 117	SN 06/22 MSH 117	N/A	N/A
Laptop holder	MVG	LSH 36	SN 06/22 LSH 38	N/A	N/A
Directional coupler	SHW	SHWDCP	202303280013	N/A	N/A
Network Analyzer	Agilent	E5071C	MY46418070	2023.03.27	2024.03.26
Multi Meter	Keithley	DMM6500	DMM6500	2023.03.27	2024.03.26
Signal Generator	Keithley	N5182B	MY59100717	2023.04.07	2024.04.06
Wireless Communication Test Set	R&S	CMW500	137737	2023.04.14	2024.04.13
Power Sensor	R&S	Z11	116184	2023.04.13	2024.04.12
Temperature hygrometer	N/A	ST-W2318	N/A	2023.04.24	2024.04.23
Thermograph	N/A	TP101	N/A	2023.04.25	2024.04.24



Appendix A. System Validation Plots

System Performance Check Data (835MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2024-01-10

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW835
Channels	Middle
Signal	CW
Frequency (MHz)	835.000
Relative permittivity	41.86
Conductivity (S/m)	0.88
Probe	SN 04/22 EPGO364
ConvF	1.72
Crest factor:	1:1

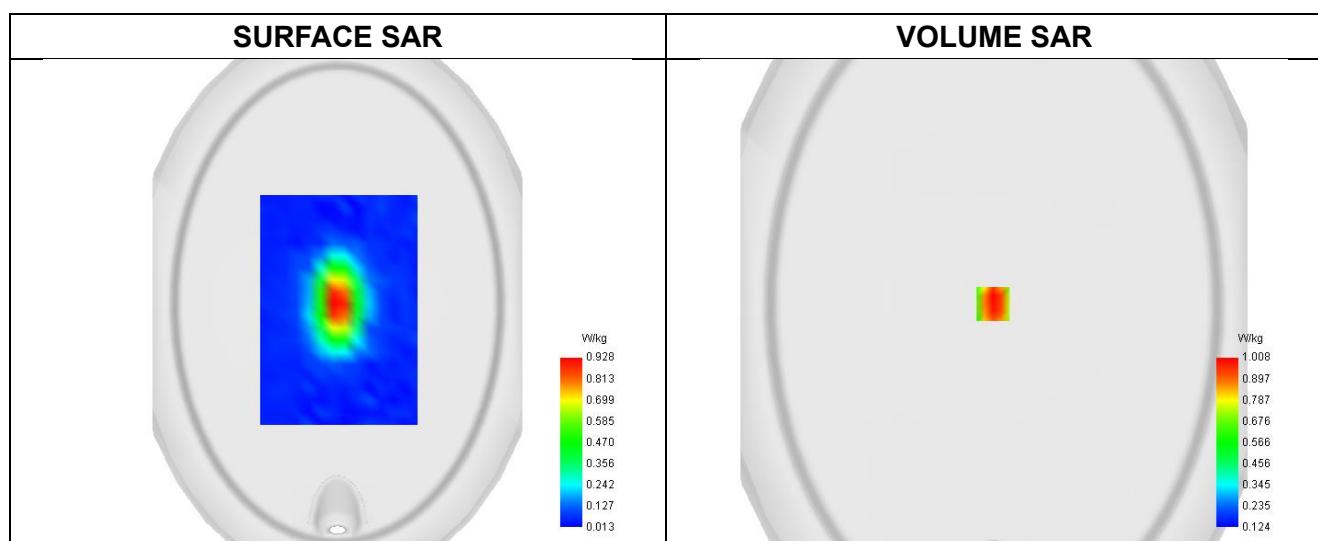


Maximum location: X=-1.00, Y=0.00 ; SAR Peak: 1.51 W/kg

SAR 10g (W/Kg)	0.620
SAR 1g (W/Kg)	0.942



Z Axis Scan

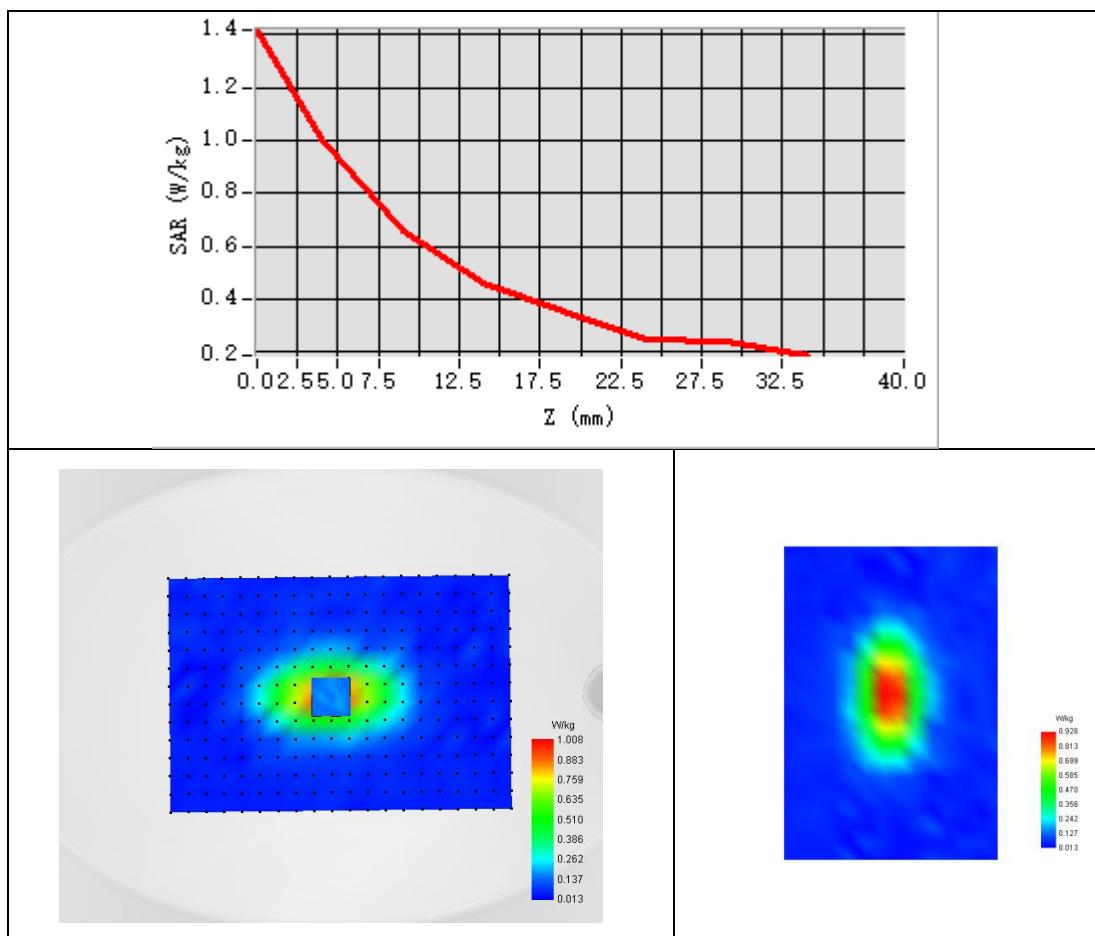



System Performance Check Data (2450MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2023-12-01

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels	Middle
Signal	CW
Frequency (MHz)	2450.000
Relative permittivity	40.05
Conductivity (S/m)	1.75
Probe	SN 04/22 EPGO364
ConvF	2.33
Crest factor:	1:1

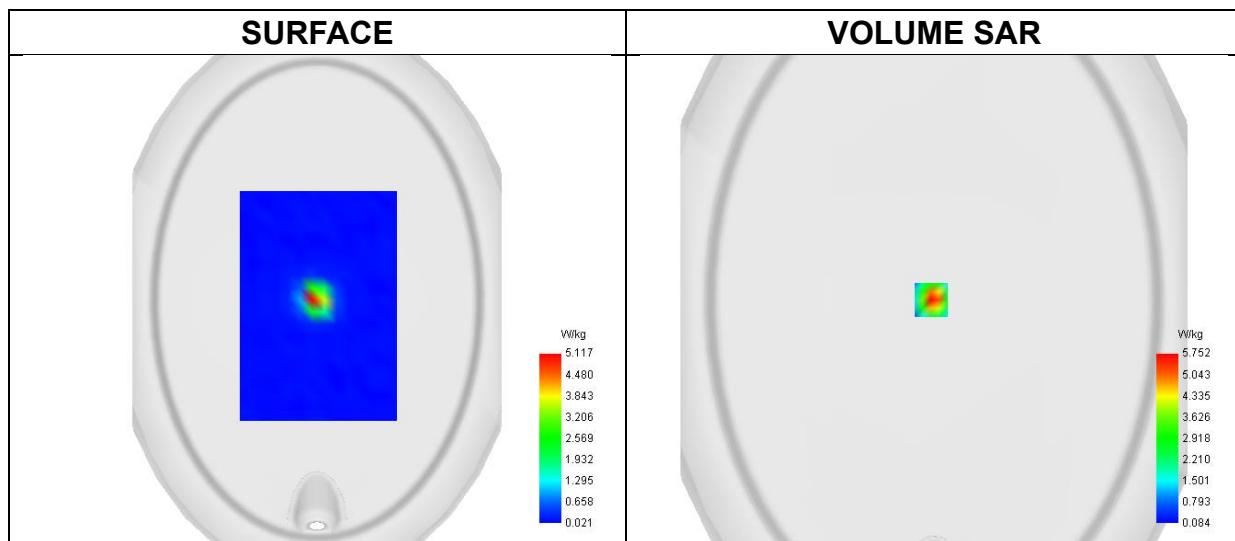


Maximum location: X=-3.00, Y=0.00 ; SAR Peak: 9.15 W/kg

SAR 10g (W/Kg)	2.402
SAR 1g (W/Kg)	5.263



Z Axis Scan

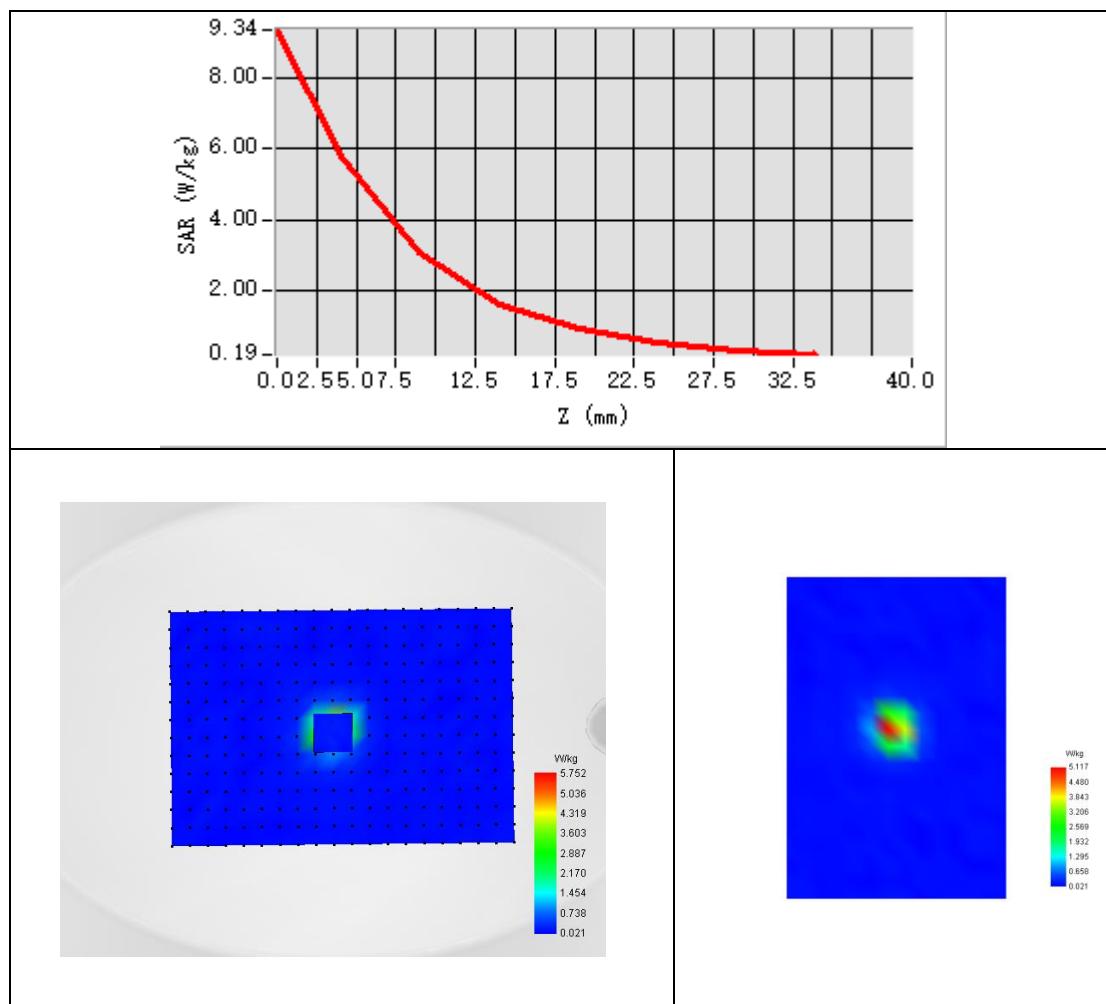



System Performance Check Data (2600MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2024-01-11

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW
Frequency (MHz)	2600.000
Relative permittivity	39.70
Conductivity (S/m)	1.95
Probe	SN 04/22 EPGO364
ConvF	2.36
Crest factor:	1:1

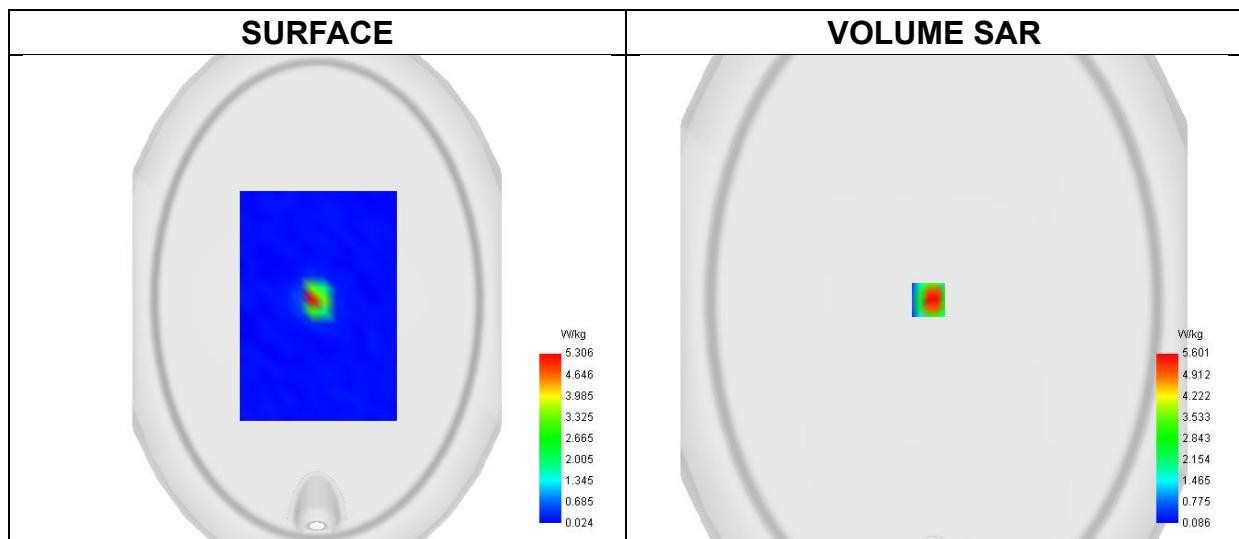


Maximum location: X=-5.00, Y=0.00 ; SAR Peak: 10.43 W/kg

SAR 10g (W/Kg)	2.388
SAR 1g (W/Kg)	5.427



Z Axis Scan

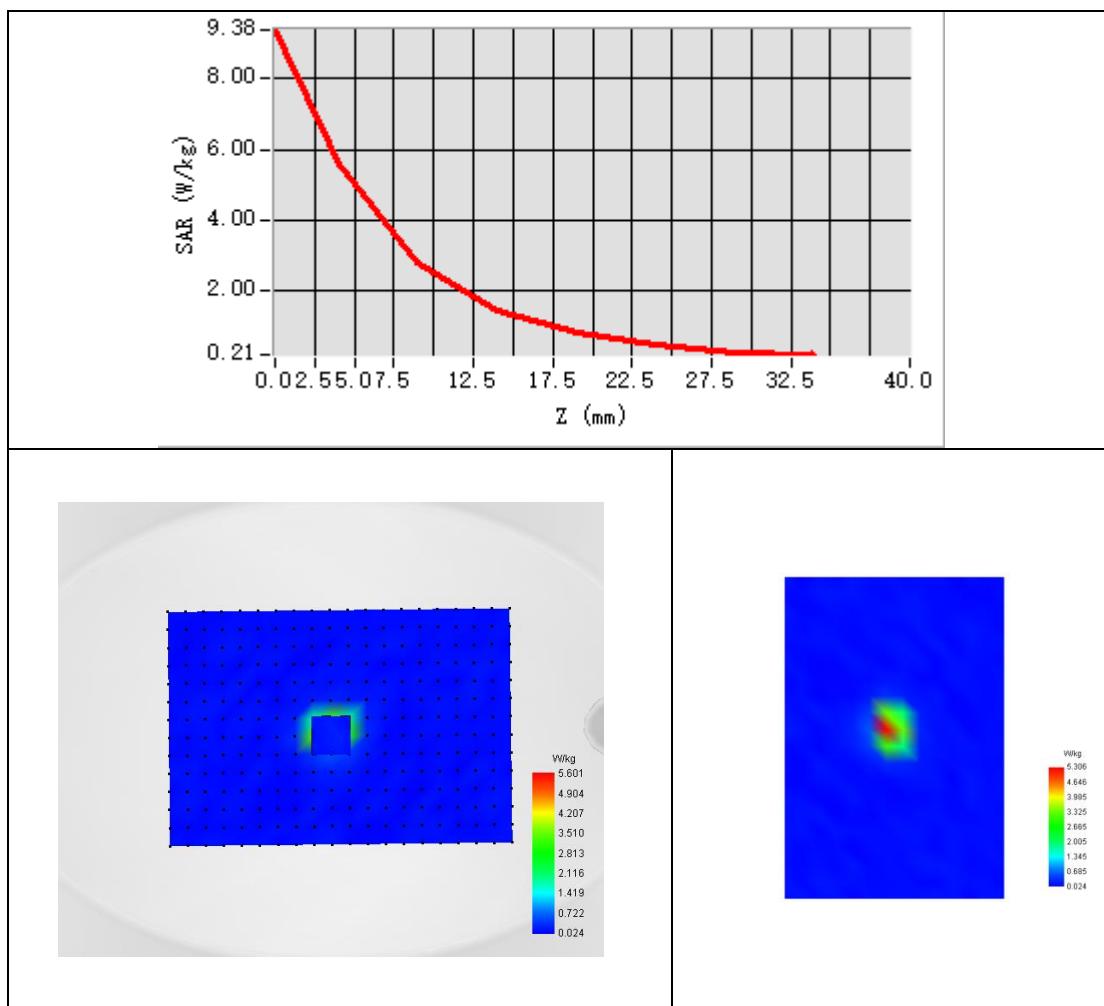




Appendix B. SAR Test Plots

Plot 1:

Test Date	2024-01-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Left Side
Band	LTE band 5
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.781
SAR 1g (W/Kg)	1.261
ConvF	1.72
Relative permittivity	41.86
Conductivity (S/m)	0.88

Maximum location: X=3.00, Y=-70.00 ; SAR Peak: 1.86 W/kg

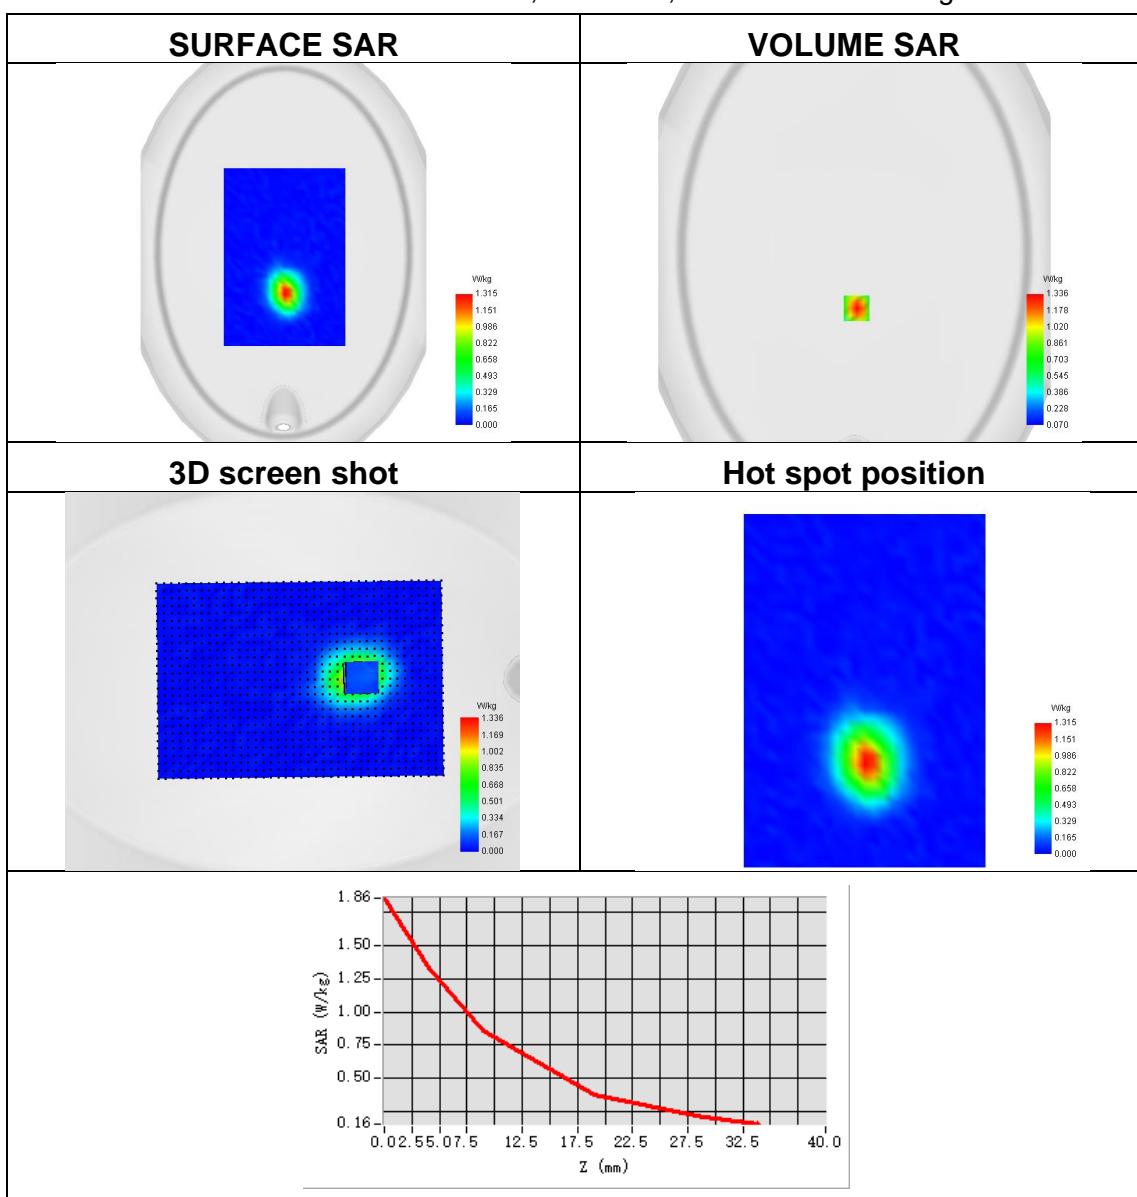




Plot 2:

Test Date	2024-01-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Left Side
Band	LTE band 7
Signal	LTE FDD
Frequency	2560
SAR 10g (W/Kg)	0.502
SAR 1g (W/Kg)	1.084
ConvF	2.36
Relative permittivity	39.70
Conductivity (S/m)	1.95

Maximum location: X=12.00, Y=-39.00 ; SAR Peak: 1.96 W/kg

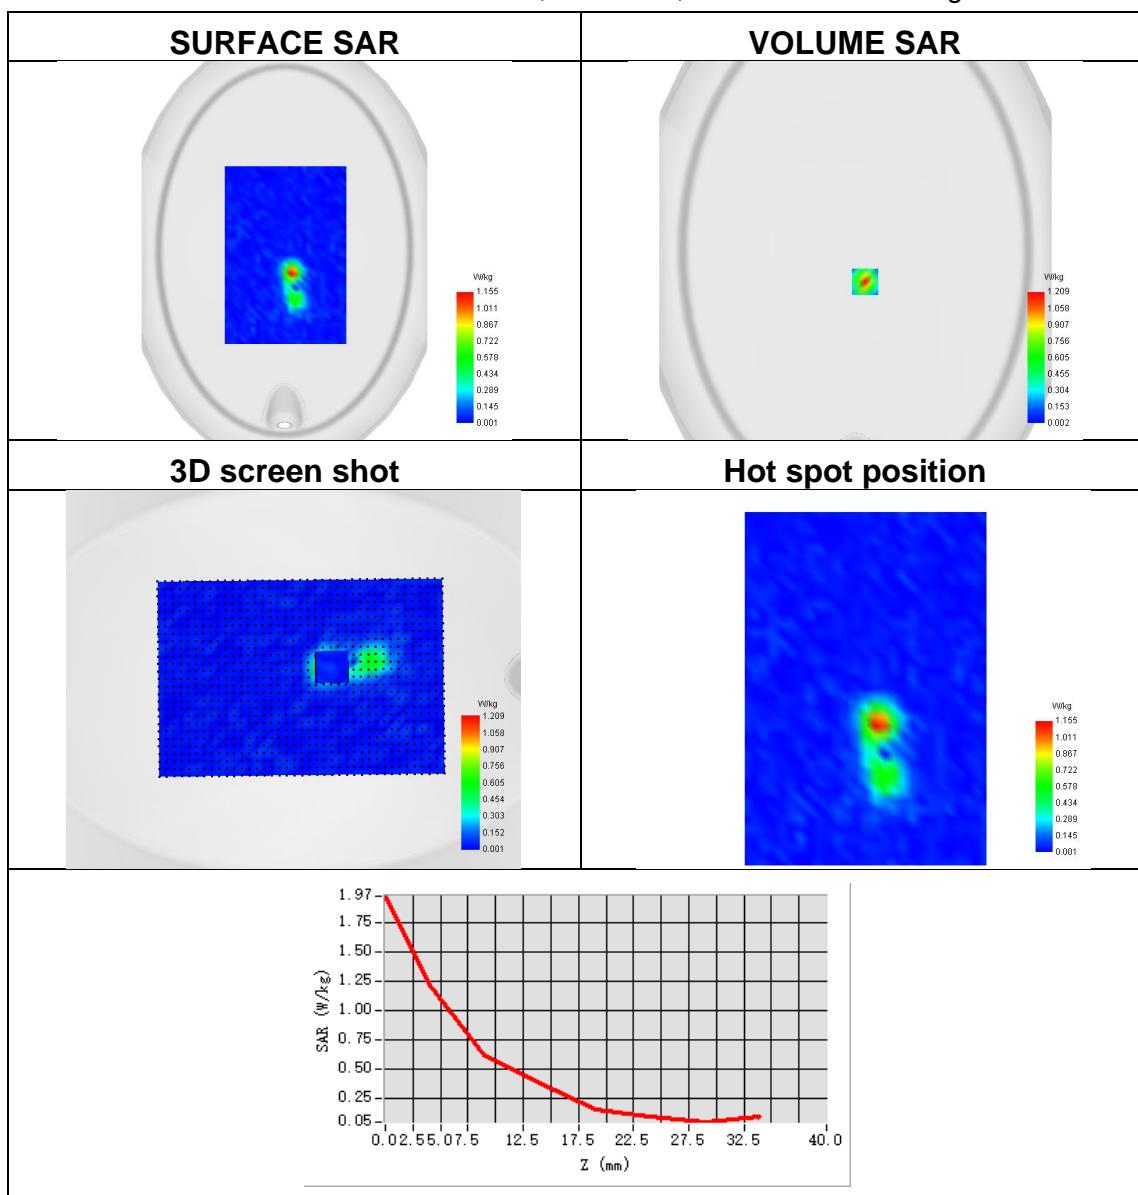




Plot 3:

Test Date	2024-01-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Left Side
Band	LTE band 41
Signal	LTE TDD
Frequency	2680
SAR 10g (W/Kg)	0.199
SAR 1g (W/Kg)	0.422
ConvF	2.36
Relative permittivity	39.70
Conductivity (S/m)	1.95

Maximum location: X=8.00, Y=-45.00 ; SAR Peak: 0.87 W/kg

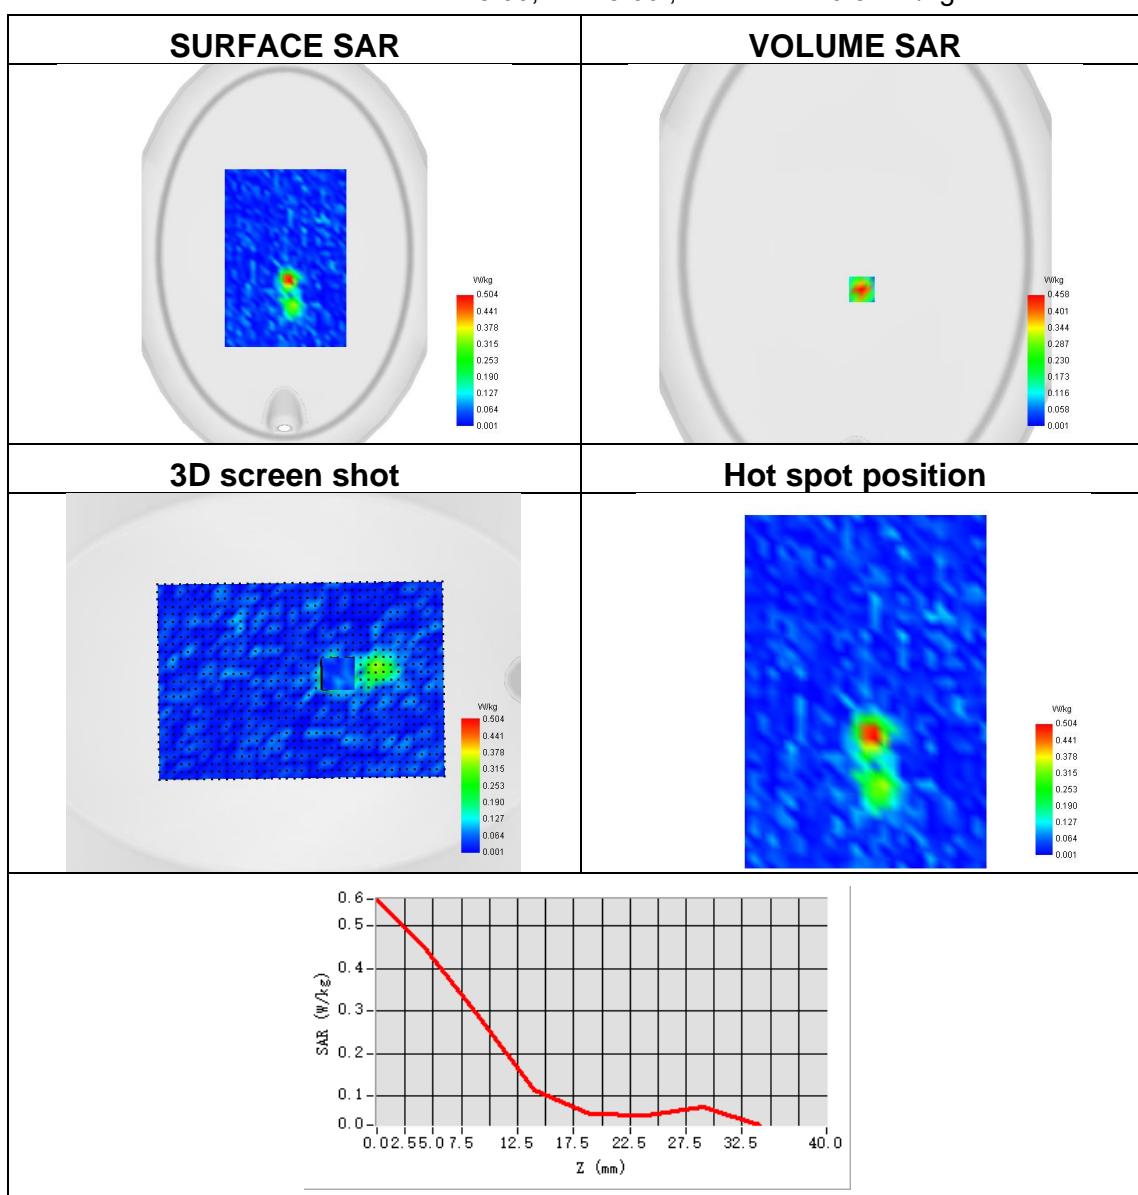




Plot 4:

Test Date	2023-12-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Back Side
Band	ISM
Signal	IEEE 802.11 b
Frequency	2462
SAR 10g (W/Kg)	0.119
SAR 1g (W/Kg)	0.257
ConvF	2.33
Relative permittivity	40.05
Conductivity (S/m)	1.75

Maximum location: X=-5.00, Y=-12.00 ; SAR Peak: 0.66 W/kg

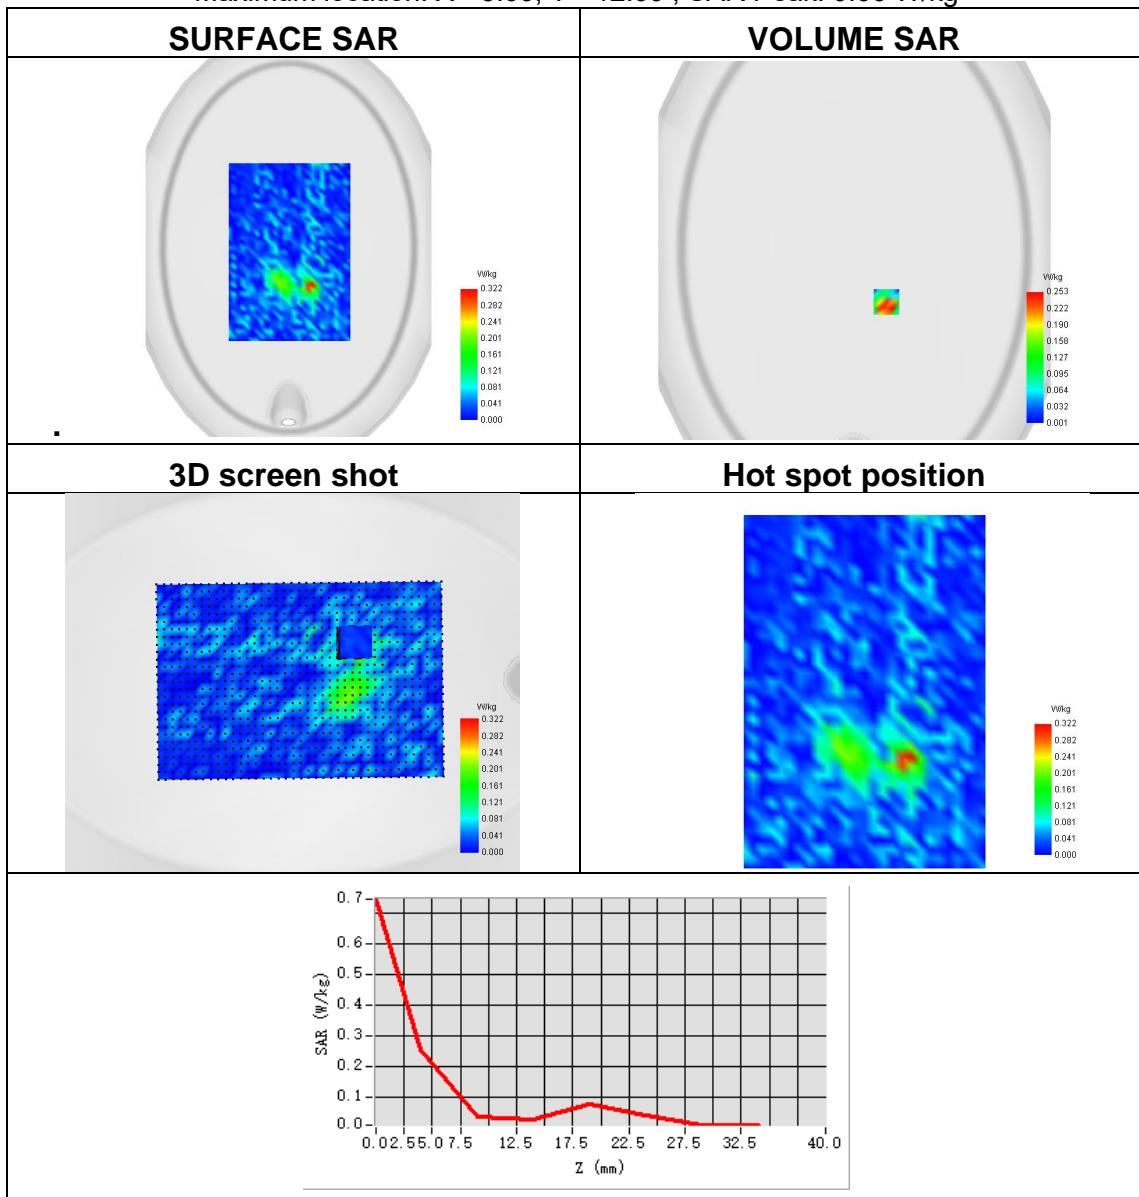




Plot 5:

Test Date	2023-12-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Front Side
Band	Bluetooth
Signal	Bluetooth
Frequency	2402
SAR 10g (W/Kg)	0.029
SAR 1g (W/Kg)	0.072
ConvF	2.33
Relative permittivity	40.05
Conductivity (S/m)	1.75

Maximum location: X=-38.00, Y=-39.00 ; SAR Peak: 0.36 W/kg

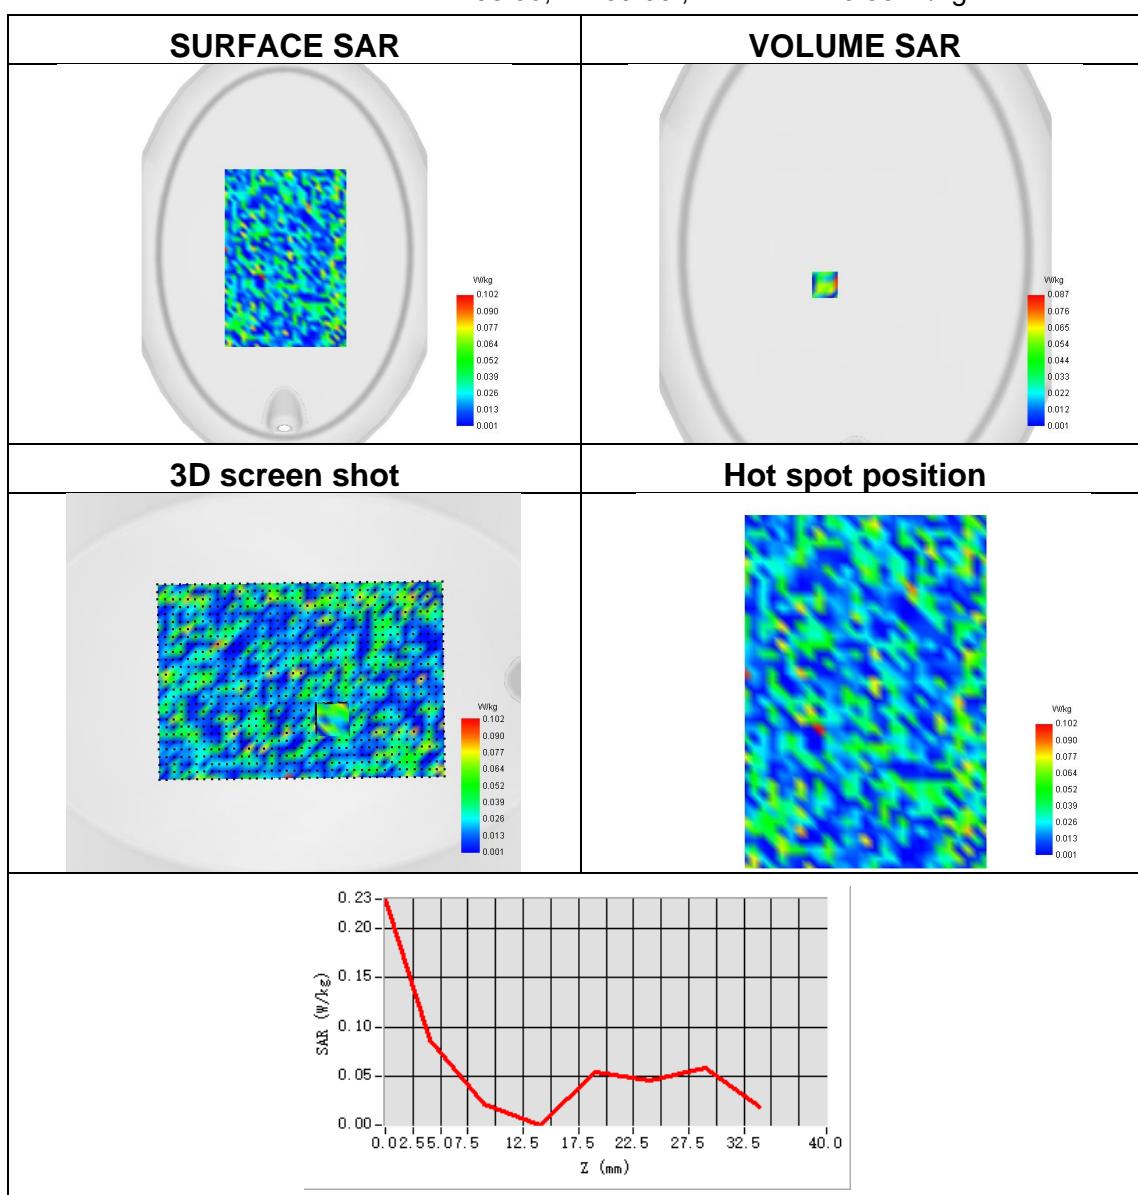



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

*****END OF THE REPORT*****