

Letter of acceptance

Customer name: Hancai

Customer Item: 01.011.0239

Our model: YZ-G25-2.5-4.8UH-3200GS-7MM

Date of sample delivery: October 26th, 2024

Supplier: Dongguan jieruisi technology co., ltd

draw	examine	approved
Lin Lu	Xia ng Gu i De ng	RuShen g Lu

Customer acknowledges that:

Qualif ied	Unqualified	recognize
Remar k		

Dongguan jieruisi technology co., ltd



Tel: _____

Fax: 86+13632701380

Address: No.96, Langhu Road, Dalingshan Town, Dongguan (3rd floor, Building L, Jinxiongda Science Park) _____

Customer name	Customer item	Model of our company	Versio n	Date
Hancai	01.011.0239	YZ-G25-2.5-4.8UH-3200GS- 7MM	A0	2024.10.26

I. Plane Structure Diagram: Unit: MM

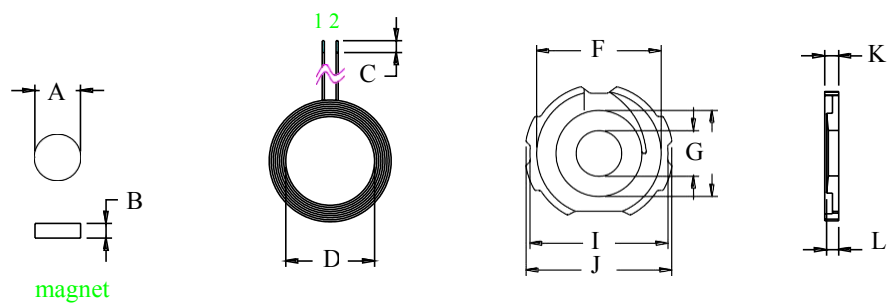

A	7.6±0.1
B	2.0±0.1
C	2±1
D	15±0.2
E	20.7±0.3
F	21±0.2
G	7.7±0.05
H	14.5±0.1
I	23.5±0.3
J	25±0.2
K	2.5±0.15
L	2.4 0.15 column height
M	7±1

II, the product parameters:

foot place	Line diameter	Number of turns	prepare fill
1 - 2	0.08*24	10	Hot air stranded wire

III. Technical Requirements: (The magnetic force of the magnet is 3200 Gauss)

1. Fix the thread head and tail to prevent the thread from loosening and breaking.
2. According to customer's requirements, the excessively long thread ends are cut off and plated with tin, and the depth of tin plating is 2 1 mm.
3. Put appropriate white glue on the magnetic disk and attach the coil, and ensure that the surface of the product is clean and tidy during the process.
4. The use magnetic sheet is provided with a round hole, No damage
5. Additional process (according to customer's requirements): install a 7.6x2.0mm magnet in the middle circular hole of the finished product and attach it to the finished product.

Sticking double-sided adhesive with a diameter of 14mm on the back, and packaging.

IV, Electrical parameter:

1. Inductance value, q value:

$$PIN \ 1 \text{ --- } 2 = 4.8\mu H \pm 0.3\mu H$$

$$Q \text{ value} \geq 20$$

The above inductance values are based on Quanhua 1062A instrument, Take 10KHZ/0.3Vrms as the standard or equivalent instrument.

Q value is based on Quanhua 1062A instrument and 100KHZ/0.3Vrms as standard or equivalent instrument.

V. List of materials:

serial number	name	texture of wood	supplier	Remark
1	Hot air stranded wire	0.08X24	Uighur or equivalent	
2	Magnetic sheet	G25 Die casting substrate	Tiantong or equivalent	
3	tin	High temperature and environmental protection	Thousand islands or equivalent	
4	white glue	BY882	Bao Yue or equivalent.	
5	strong magnetism	7.6*2 (strength greater than 3200GS)	Joint victory or equivalence	
6	Double-sided adhesive	513- 14mm in diameter	Honghui or equivalent	

