



Certificate #4312.01

FCC TEST REPORT

Product Name: Tablet**Trade Mark:** inventus**Model No.:** CT7**Report Number:** 2311147783RFC-4**Test Standards:** FCC 47 CFR Part 15 Subpart E**FCC ID:** 2BDXXBDXX7**Test Result:** PASS**Date of Issue:** March 15, 2024

Prepared for:

INVENTUS GROUP LTD**C/O FLB ACCOUNTANTS LLP 1010 ESKDALE ROAD, WINNERSH
TRIANGLE, WOKINGHAM, UNITED KINGDOM, RG41 5TS**

Prepared by:

**Shenzhen UnionTrust Quality and Technology Co., Ltd.
Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and
technology park, Longhua district, Shenzhen, China****TEL: +86-755-2823 0888****FAX: +86-755-2823 0886**

Prepared by:

David Chen
Senior Project Engineer

Reviewed by:

Robben Chen
Assistant Manager

Approved by:

Billy Li
Technical Director

Date:

March 15, 2024

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

Version

Version No.	Date	Description
V1.0	March 15, 2024	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China
Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <http://www.uttlab.com>
UTTR-RF-FCCPART15.407-V1.2

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	5
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	6
1.4 OTHER INFORMATION	7
1.5 DESCRIPTION OF SUPPORT UNITS	7
1.6 TEST LOCATION	7
1.7 TEST FACILITY	7
1.8 DEVIATION FROM STANDARDS	8
1.9 ABNORMALITIES FROM STANDARD CONDITIONS	8
1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
1.11 MEASUREMENT UNCERTAINTY	8
2. TEST SUMMARY	9
3. EQUIPMENT LIST	10
4. TEST CONFIGURATION	11
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	11
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	11
4.1.2 RECORD OF NORMAL ENVIRONMENT AND TEST SAMPLE	11
4.2 TEST CHANNELS	12
4.3 EUT TEST STATUS	13
4.4 PRE-SCAN	13
4.5 TEST SETUP	14
4.5.1 FOR RADIATED EMISSIONS TEST SETUP	14
4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP	15
4.5.3 FOR CONDUCTED RF TEST SETUP	16
4.6 SYSTEM TEST CONFIGURATION	16
4.7 DUTY CYCLE	17
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	21
5.1 REFERENCE DOCUMENTS FOR TESTING	21
5.2 ANTENNA REQUIREMENT	21
5.3 26 dB BANDWIDTH	22
5.4 6 dB BANDWIDTH	23
5.5 MAXIMUM CONDUCTED OUTPUT POWER	24
5.6 PEAK POWER SPECTRAL DENSITY	28
5.7 RADIATED EMISSIONS AND BAND EDGE MEASUREMENT	30
5.8 DYNAMIC FREQUENCY SELECTION	91
5.9 AC POWER LINE CONDUCTED EMISSION	101
APPENDIX A RF TEST DATA	104
A.1 26dB BANDWIDTH	104
A.2 PEAK POWER SPECTRAL DENSITY	114
A.3 6dB BANDWIDTH	127
APPENDIX 1 PHOTOS OF TEST SETUP	130
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	130

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	INVENTUS GROUP LTD
Address of Applicant:	C/O FLB ACCOUNTANTS LLP 1010 ESKDALE ROAD, WINNERSH TRIANGLE, WOKINGHAM, UNITED KINGDOM, RG41 5TS
Manufacturer:	SHENZHEN ALONG ELECTRONIC CO., LTD.
Address of Manufacturer:	No.35, Xinyuan Industrial Zone, Gushu Community, Xixiang Street, Bao'an District, Shenzhen, GD, PRC

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	Tablet		
Model No.:	CT7		
Trade Mark:	inventus		
DUT Stage:	Identical Prototype		
EUT Supports Function: (Provided by the customer)	GSM Bands:	GSM850/E-GSM900/DCS 1800/PCS 1900	
	UTRA Bands:	WCDMA Band I/II/IV/V/VIII/XI/XIX	
	E-UTRA Bands:	FDD Band 1/2/3/4/5/7/8/11/12/13/17/18/19/20/21/25/26/28/30/66/71	
		TDD Band 38/39/40/41	
	2.4 GHz ISM Band:	IEEE 802.11b/g/n	
		Bluetooth V5.2	
	5 GHz U-NII Bands:	5 150 MHz to 5 250 MHz	IEEE 802.11a/n/ac
		5 250 MHz to 5 350 MHz	IEEE 802.11a/n/ac
		5 470 MHz to 5 725 MHz	IEEE 802.11a/n/ac
		5 725 MHz to 5 850 MHz	IEEE 802.11a/n/ac
	RNSS Band:	1559 MHz to 1610 MHz	GPS/ BDS/ GLONASS
BSR:	VHF Band II	FM	
NFC:	13.553 MHz to 13.567 MHz		
Software Version:	SW1_V9.5_SCT7INVS_ROW_A13_010224 (Provided by the customer)		
Hardware Version:	V1.0 (Provided by the customer)		
Sample Received Date:	November 10, 2023		
Sample Tested Date:	November 23, 2023 to January 7, 2024		
Remark:	The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description.		

1.2.2 Description of Accessories

Adapter	
Model No.:	TPD-203A120167UF01
Input:	100-240V~50/60Hz 0.6A
Output:	5.0V $\Rightarrow$ 3.0A or 9.0V $\Rightarrow$ 2.22A or 12.0V $\Rightarrow$ 1.67A

Battery	
Model No.:	CT7
Battery Type:	Rechargeable Lithium-ion Battery
Rated Voltage:	3.8Vdc
Typical Capacity:	4.35Vdc
Rated Capacity:	8000mAh

Cable	
Connector:	USB Type-C Plug Cable
Cable Type:	Shielded without ferrite
Length:	1.15Meter

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Frequency Bands:	5150 MHz to 5250 MHz (U-NII-1)				
	5250 MHz to 5350 MHz (U-NII-2A)				
	5470 MHz to 5725 MHz (U-NII-2C)				
	5 725 MHz to 5 850 MHz (U-NII-3)				
Frequency Ranges:	5180 MHz to 5240 MHz				
	5260 MHz to 5320 MHz				
	5500 MHz to 5700 MHz				
	5745 MHz to 5825 MHz				
Support Standards:	IEEE 802.11a/n/ac				
TPC Function:	Not Support				
DFS Operational mode:	Slave without radar Interference detection function				
Type of Modulation:	IEEE 802.11a: OFDM(64QAM, 16QAM, QPSK, BPSK)				
	IEEE 802.11n: OFDM(64QAM, 16QAM, QPSK, BPSK)				
	IEEE 802.11ac: OFDM(256QAM, 64QAM, 16QAM, QPSK, BPSK)				
Channel Spacing:	IEEE 802.11a/n-HT20/ac-VHT20: 20 MHz				
	IEEE 802.11n-HT40/ac-VHT40: 40 MHz				
	IEEE 802.11ac-VHT80: 80 MHz				
Data Rate:	IEEE 802.11a: Up to 54 Mbps				
	IEEE 802.11n-HT20: Up to MCS7				
	IEEE 802.11n-HT40: Up to MCS7				
	IEEE 802.11ac-VHT20: Up to MCS8				
	IEEE 802.11ac-VHT40: Up to MCS9				
	IEEE 802.11ac-VHT80: Up to MCS9				
Number of Channels:	5150 MHz to 5250 MHz: 4 for IEEE 802.11a/n-HT20/ac-VHT20 2 for IEEE 802.11n-HT40/ac-VHT40 1 for IEEE 802.11acVHT80				
	5250 MHz to 5350 MHz: 4 for IEEE 802.11a/n-HT20/ac-VHT20 2 for IEEE 802.11n-HT40/ac-VHT40 1 for IEEE 802.11acVHT80				
	5470 MHz to 5725 MHz: 12 for IEEE 802.11a/n-HT20/ac-VHT20 6 for IEEE 802.11n-HT40/ac-VHT40 3 for IEEE 802.11ac-VHT80				
	5725 MHz to 5850 MHz: 5 for IEEE 802.11a/n-HT20/ac-VHT20 2 for IEEE 802.11n-HT40/ac-VHT40 1 for IEEE 802.11ac-VHT80				
Antenna Type:	PIFA Antenna				
Antenna Gain: (Provided by the customer)	5150 - 5250 MHz	0.48 dBi			
	5250 - 5350 MHz	0.86 dBi			
	5470 - 5725 MHz	-0.24 dBi			
	5725 - 5850 MHz	0.01 dBi			
Maximum conducted output power (dBm):		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
	IEEE 802.11a:	14.42	14.66	14.75	14.76
	IEEE 802.11n-HT20:	13.28	13.13	13.15	13.05
	IEEE 802.11n-HT40:	13.35	13.11	13.21	13.04

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

	IEEE 802.11ac-VHT20:	12.77	12.62	12.70	13.09
	IEEE 802.11ac-VHT40:	12.81	12.65	12.74	13.00
	IEEE 802.11ac-VHT80:	13.04	12.85	12.93	13.12
Normal Test Voltage:		3.8 Vdc			

1.4 OTHER INFORMATION

None.

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	FCC ID	Supplied by
Notebook	DELL	Inspiron 5409	N/A	N/A	UnionTrust
Wireless Home Router	SAGEMCOM	FAST5280	N/A	VW3FAST5280	UnionTrust

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.3 Meter	UnionTrust

1.6 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China, China 518109
Telephone: +86 (0) 755 2823 0888
Fax: +86 (0) 755 2823 0886

1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

Designation Number: CN1194

Test Firm Registration Number: 259480

1.8 DEVIATION FROM STANDARDS

None.

1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9kHz-150kHz	±3.2 dB
2	Conducted emission 150kHz-30MHz	±2.7 dB
3	Radiated emission 9kHz-30MHz	± 4.7 dB
4	Radiated emission 30MHz-1GHz	± 4.6 dB
5	Radiated emission 1GHz-18GHz	± 4.4 dB
6	Radiated emission 18GHz-26GHz	± 4.6 dB
7	Radiated emission 26GHz-40GHz	± 4.6 dB
8	Conducted spurious emissions	± 2.7 dB
9	RF Power, Conducted	± 0.68 dB
10	Occupied Bandwidth	± 1.86 %
11	Radio Frequency	± 6.4 x 10 ⁻⁸
12	Transmission Time	± 0.19 %

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart E Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203 FCC 47 CFR Part 15 Subpart E Section 15.407(a)(1) (2)	N/A	PASS
26 dB emission bandwidth	FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(2)(5)	KDB 789033 D02 v02r01 Section C.1	PASS
6 dB bandwidth	FCC 47 CFR Part 15 Subpart E Section 15.407 (e)	KDB 789033 D02 v02r01 Section C.2	PASS
Maximum conducted output power	FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3)	KDB 789033 D02 v02r01 Section E.3.a (Method PM)	PASS
Peak Power Spectral Density	FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3)	KDB 789033 D02 v02r01 Section F	PASS
Radiated Emissions and Band Edge Measurement	FCC 47 CFR Part 15 Subpart E Section 15.407 (b)(1)(2)(3)(4)(6) FCC 47 CFR Part 15 Subpart C Section 15.209/205	KDB 789033 D02 v02r01 Section G.3, G.4, G.5, and G.6	PASS
Dynamic Frequency Selection	FCC 47 CFR Part 15 Subpart E Section 15.407 (h)	KDB 905462 D03 Client Without DFS New Rules v01r02	PASS
AC Power Line Conducted Emission	FCC 47 CFR Part 15 Subpart E Section 15.407 (b)(6) FCC 47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013, Section 6.2.	PASS
Disclaimer and Explanations: The declared of product specification and data (e.g., antenna gain, RF specification, etc) for EUT presented in the report are provided by the customer, and the customer takes all the responsibilities for the accuracy of product specification.			

For Dynamic Frequency Selection

Test Case	Result
Channel Availability Check Time	N/A ^{Note 1}
U-NII Detection Bandwidth	N/A ^{Note 1}
Channel Closing Transmission Time	PASS
Channel Move Time	PASS
DFS Detection Threshold	N/A ^{Note 1}
Non- Occupancy Period	N/A ^{Note 1}
Note: 1) The EUT is slave, NA In this whole report not applicable.	

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	3m SAC	ETS-LINDGREN	3M	Euroshiedpn-CT001270-1317	22-Jan-2021 10-Dec-2023	21-Jan-2024 09-Dec-2026
☒	Receiver	R&S	ESIB26	100114	27-Oct-2023	26-Oct-2024
☒	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	14-Apr-2023	13-Apr-2024
☒	Loop Antenna	ETS-LINDGREN	6502	00202525	30-Oct-2023	29-Oct-2024
☒	Broadband Antenna	ETS-LINDGREN	3142E	00201566	30-Oct-2023	29-Oct-2024
☒	6dB Attenuator	Talent	RA6A5-N-18	18103001	30-Oct-2023	29-Oct-2024
☒	Preamplifier	HP	8447F	2805A02960	31-Oct-2023	30-Oct-2024
☒	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201541	16-Apr-2023	15-Apr-2025
☒	Pre-amplifier	ETS-LINDGREN	00118385	00201874	31-Oct-2023	30-Oct-2024
☒	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	30-Oct-2023	29-Oct-2024
☒	Pre-amplifier	ETS-LINDGREN	00118384	00202652	30-Oct-2023	29-Oct-2024
☒	Band Rejection Filter (5150MHz~5880MHz)	Micro-Tronics	BRM50716	G186	27-Oct-2023	26-Oct-2024
☒	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	Receiver	R&S	ESR7	101181	27-Oct-2023	26-Oct-2024
☒	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	27-Oct-2023	26-Oct-2024
☒	LISN	R&S	ESH2-Z5	860014/024	27-Oct-2023	26-Oct-2024
☐	LISN	ETS-Lindgren	3816/2SH	00201088	27-Oct-2023	26-Oct-2024
☒	Test Software	EZ-EMC	EZ-CON	Software Version: EMC-CON 3A1.1		

RF Conducted Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	14-Apr-2023	13-Apr-2024
☒	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	27-Oct-2023	26-Oct-2024
☐	EXG-B RF Analog Signal Generator	KEYSIGHT	N5171B	MY53051777	27-Oct-2023	26-Oct-2024
☒	MXG X-Series RF Vector Signal Generator	KEYSIGHT	N5182B	MY51350267	27-Oct-2023	26-Oct-2024

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage	Relative Humidity (%)
NT/NV	+15 to +35	3.8Vdc and/or 120 Vac	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment and Test Sample

Test Item	Temp. (°C)	Relative Humidity (%)	Pressure (kPa)	Sample No.	Tested by
AC Power Line Conducted Emission	20.2	55.2	100.8	S202311102384-ZJC61/85	Linson Xie
26 dB emission bandwidth	23.4	59.9	100.2	S202311102384-ZJA02/6	Allen Zhou
Maximum conducted output power					
Peak Power Spectral Density					
6 dB bandwidth					
Dynamic Frequency Selection	25.5	52.9	100.0	S202311102384-ZJC61/85	Yana Zeng
Radiated Emissions and Band Edge Measurement					

4.2 TEST CHANNELS

Mode	Tx/Rx Frequency	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H)
IEEE 802.11a IEEE 802.11n-HT20 IEEE 802.11ac-VHT20	5150 MHz to 5250 MHz	Channel 36	Channel 44	Channel 48
		5180 MHz	5220 MHz	5240 MHz
	5250 MHz to 5350 MHz	Channel 52	Channel 60	Channel 64
		5260 MHz	5300 MHz	5320 MHz
	5470 MHz to 5725 MHz	Channel 100	Channel 120	Channel 140/ Channel 144
		5500 MHz	5600 MHz	5700 MHz/ 5720MHz
	5725 MHz to 5850 MHz	Channel 144/ Channel 149	Channel 157	Channel 165
		5720MHz/ 5745 MHz	5785 MHz	5825 MHz
IEEE 802.11n-HT40 IEEE 802.11ac-VHT40	5150 MHz to 5250 MHz	Channel 38	--	Channel 46
		5190 MHz	--	5230 MHz
	5250 MHz to 5350 MHz	Channel 54	--	Channel 62
		5270 MHz	--	5310 MHz
	5470 MHz to 5725 MHz	Channel 102	Channel 118	Channel 134/ Channel 142
		5510 MHz	5590 MHz	5670 MHz/ 5710MHz
	5725 MHz to 5850 MHz	Channel 142/ Channel 151	--	Channel 159
		5710MHz/ 5755 MHz	--	5795 MHz
IEEE 802.11ac-VHT80	5150 MHz to 5250 MHz	--	Channel 42	--
		--	5210 MHz	--
	5250 MHz to 5350 MHz	--	Channel 58	--
		--	5290 MHz	--
	5470 MHz to 5725 MHz	Channel 106	--	Channel 122/ Channel 138
		5530 MHz	--	5610 MHz/ 5569 MHz
	5725 MHz to 5850 MHz	Channel 138	Channel 155	--
		5610 MHz/ 5775 MHz	5775 MHz	--

4.3 EUT TEST STATUS

Mode	Tx/Rx Function	Description
IEEE 802.11a/n/ac	1Tx/1Rx	1. Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.

Power Setting (Provided by the customer)				
Mode	U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
IEEE 802.11a	17.5	17.5	17.5	17.5
IEEE 802.11n-HT20	16	16	16	15.5
IEEE 802.11n-HT40	16	16	16	15.5
IEEE 802.11ac-VHT20	15.5	15.5	15.5	15.5
IEEE 802.11ac-VHT40	15.5	15.5	15.5	15.5
IEEE 802.11ac-VHT80	16	16	16	16
Test Software (Provided by the customer)				
Engineering mode: *##*#3646633##*#*				

4.4 PRE-SCAN

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Following data rate was (were) selected for the final test as listed below

Mode	Worst-case data rates
IEEE 802.11a	6 Mbps
IEEE 802.11n-HT20	MCS0
IEEE 802.11n-HT40	MCS0
IEEE 802.11ac-VHT20	MCS0
IEEE 802.11ac-VHT40	MCS0
IEEE 802.11ac-VHT80	MCS0

4.5 TEST SETUP

4.5.1 For Radiated Emissions test setup



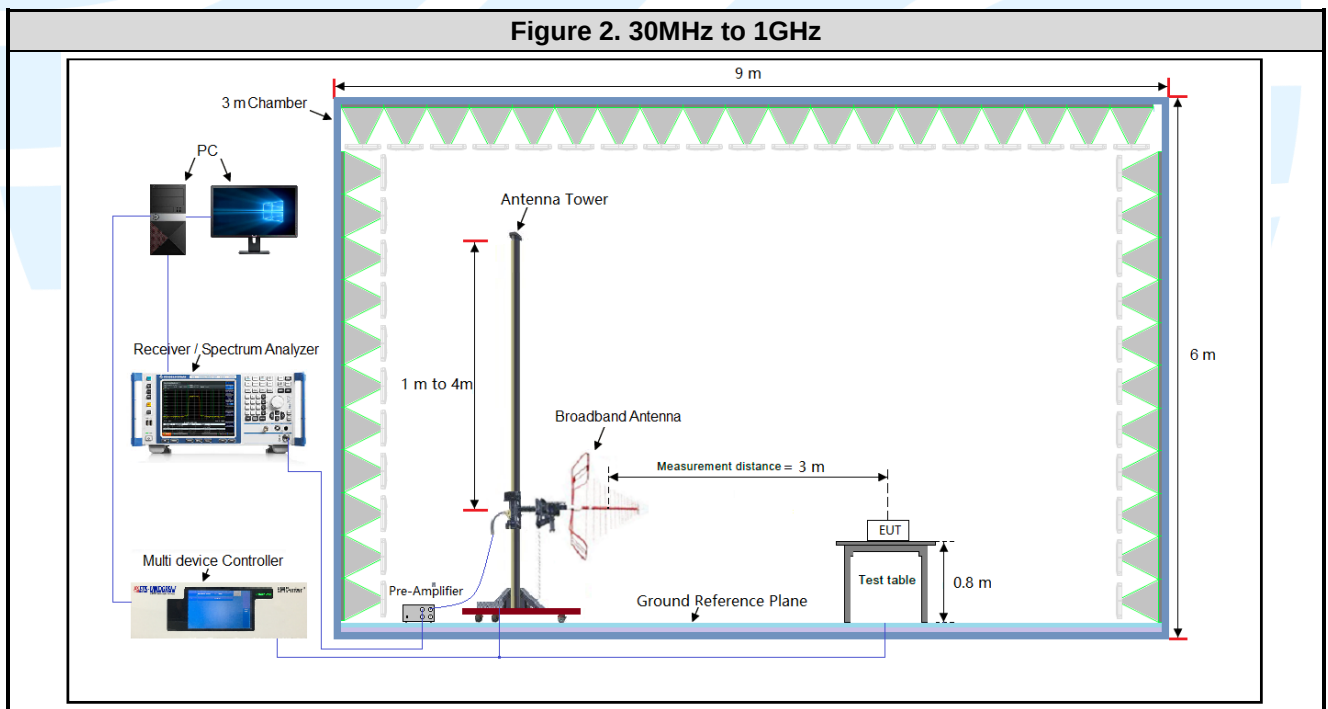


Figure 3. Above 1GHz

The diagram illustrates the experimental setup for measurements above 1 GHz within a 3 m Chamber. The chamber has a width of 9 m and a height of 6 m. The walls are lined with pyramidal absorbers. A Ground Reference Plane is located at the bottom. An Antenna Tower, adjustable from 1 m to 4 m in height, holds a Horn Antenna. A Pre-Amplifier is connected to the antenna. The measurement distance is 3 m. The EUT is placed on a Test table, which is 1.5 m high and mounted on a Turntable. The setup is connected to a Receiver / Spectrum Analyzer, which is linked to a PC and a Multi device Controller.

The diagram illustrates the experimental setup within a Shielding Room. On the left, a PC and a Receiver are connected to a Pulse Limiter. A Ground Reference Plane is established. Two LISN (Line Impedance Stabilization Network) units, LISN 1 and LISN 2, are connected to the AC Mains. The test setup consists of a Test table with two EUT/AE (Equipment Under Test/Accessory Equipment) units and a PSU (Power Supply Unit). The distance between the EUT/AE units is 10 cm, and the distance between the EUT/AE unit and the PSU is 10 cm. The Test table is elevated 40 cm from the floor, with Insulation ≤ 0.15 m. The distance from the AC Mains to LISN 1 is 80 cm, and from LISN 2 to the AC Mains is 80 cm.

4.5.3 For Conducted RF test setup

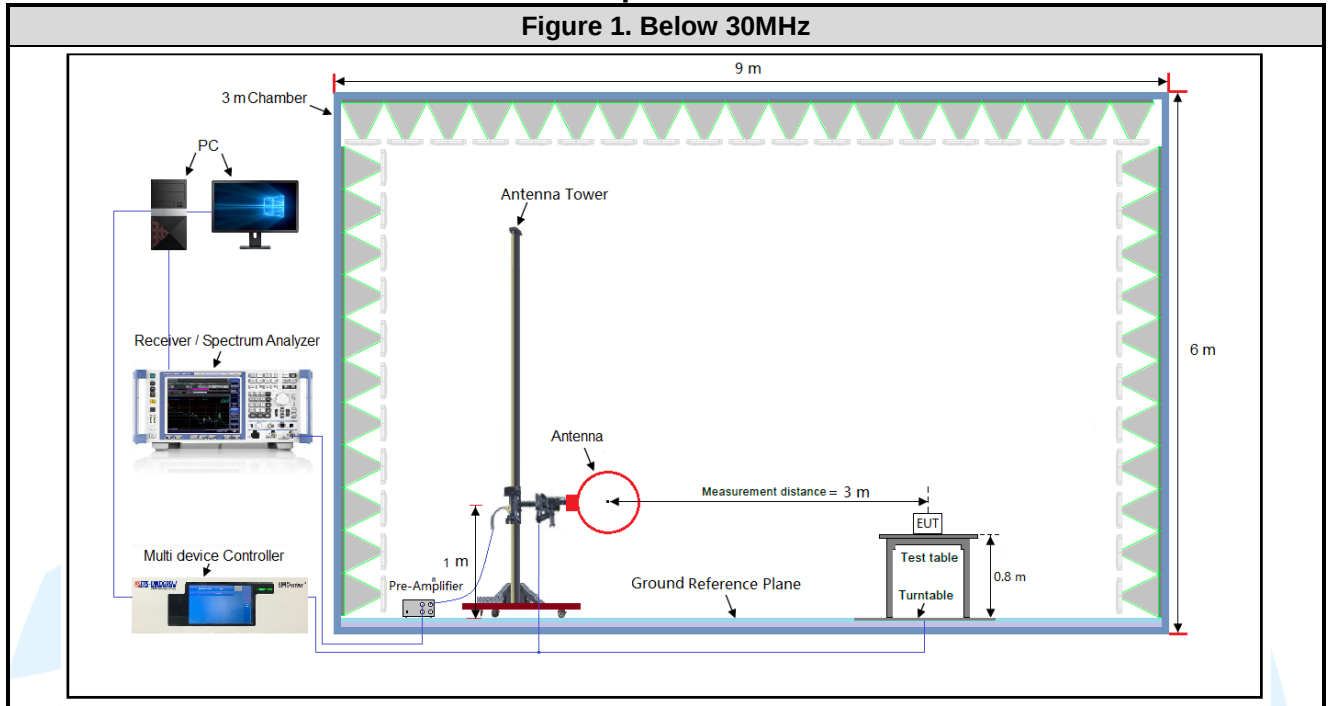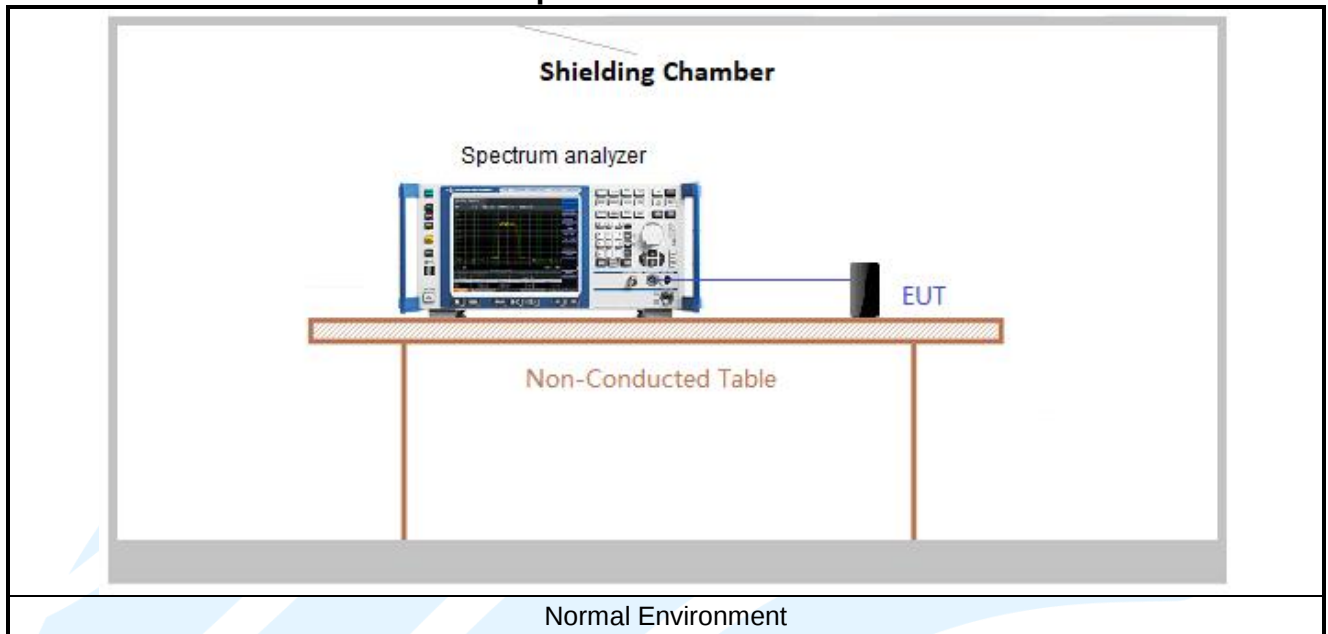

4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.8V battery. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in orientation.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 12.2.


Test Results



Mode	Data Rates	On Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/T Minimum VBW (kHz)
IEEE 802.11a	6 Mbps	1.396	1.429	0.98	97.69	0.101	0.72
IEEE 802.11n-HT20	MCS 0	1.304	1.337	0.98	97.53	0.109	0.77
IEEE 802.11n-HT40	MCS 0	0.650	0.684	0.95	95.03	0.221	1.54
IEEE 802.11ac-VHT20	MCS 0	1.316	1.349	0.98	97.55	0.108	0.76
IEEE 802.11ac-VHT40	MCS 0	0.654	0.688	0.95	95.06	0.220	1.53
IEEE 802.11ac-VHT80	MCS 0	0.325	0.359	0.91	90.53	0.432	3.08



Remark:


- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;

The test plots as follows

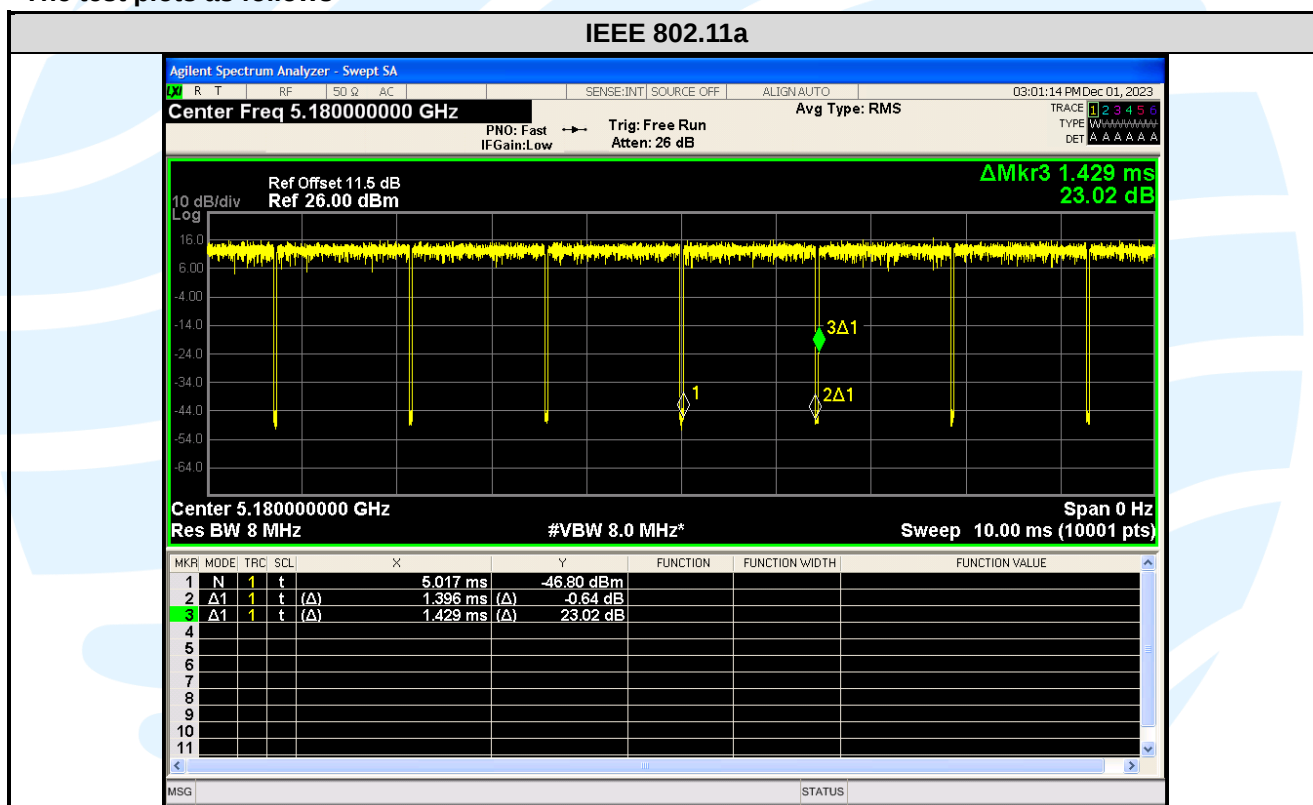

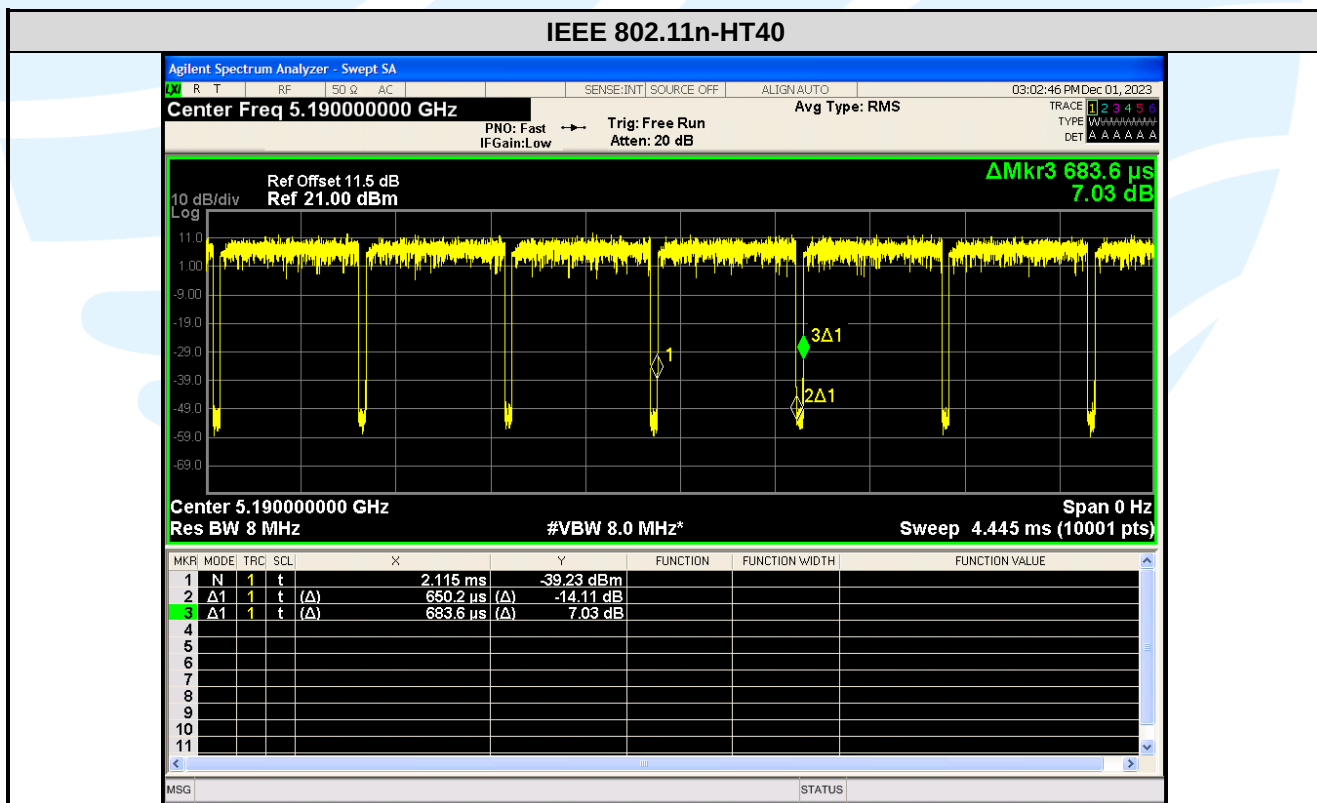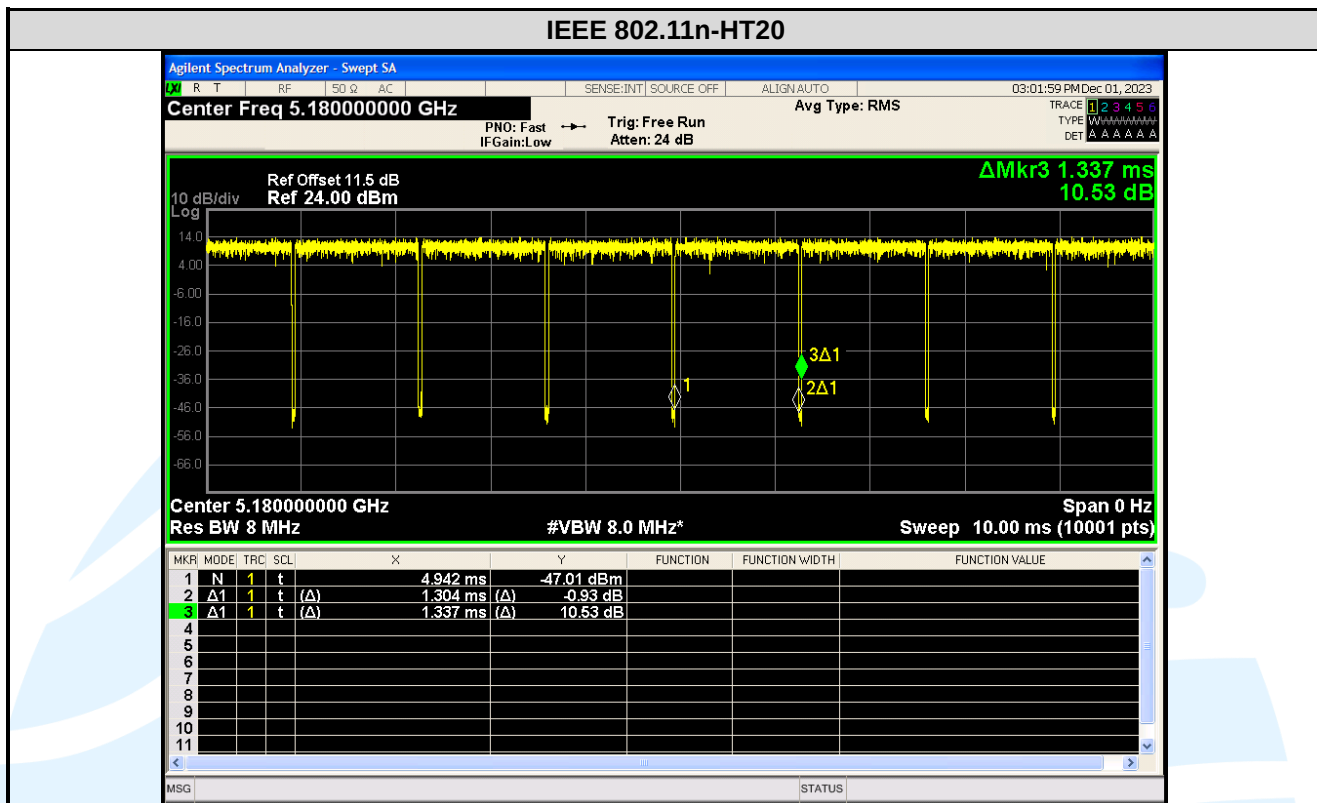

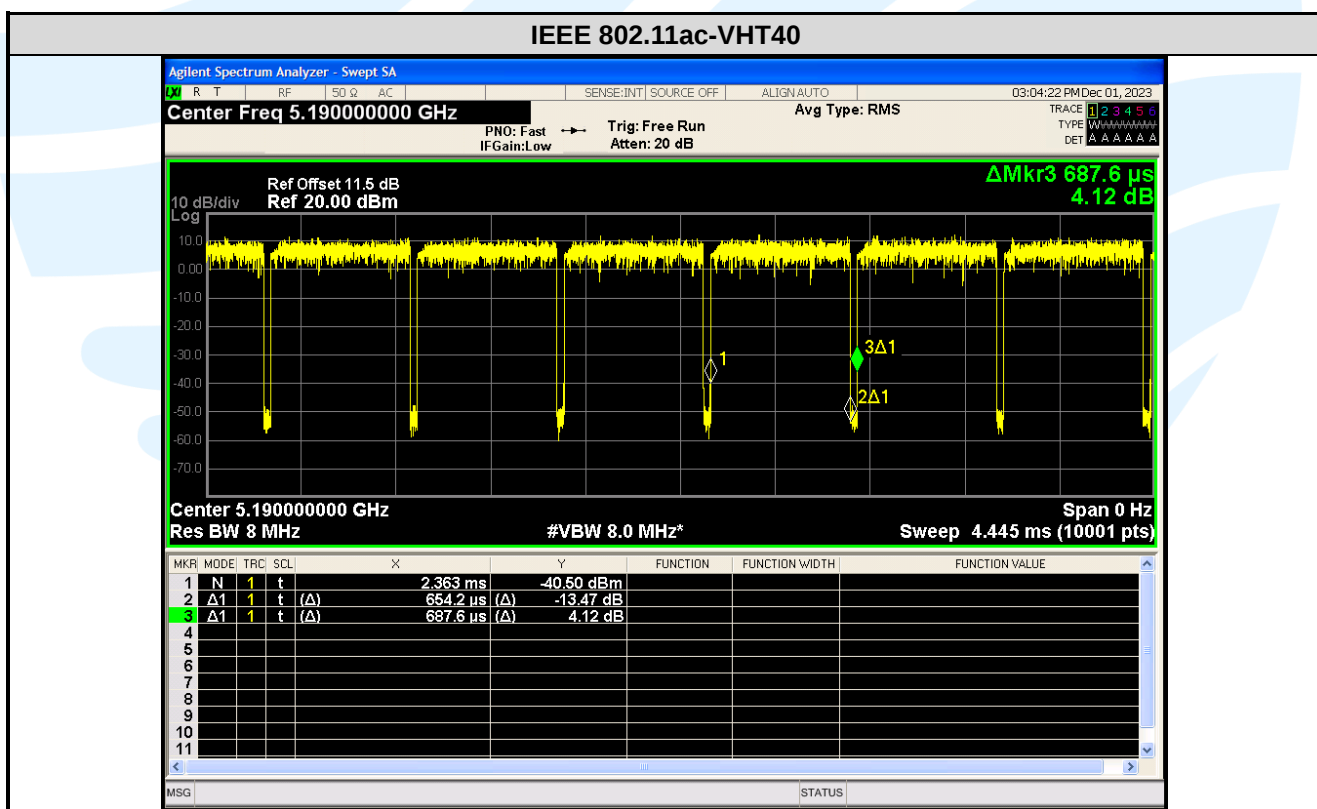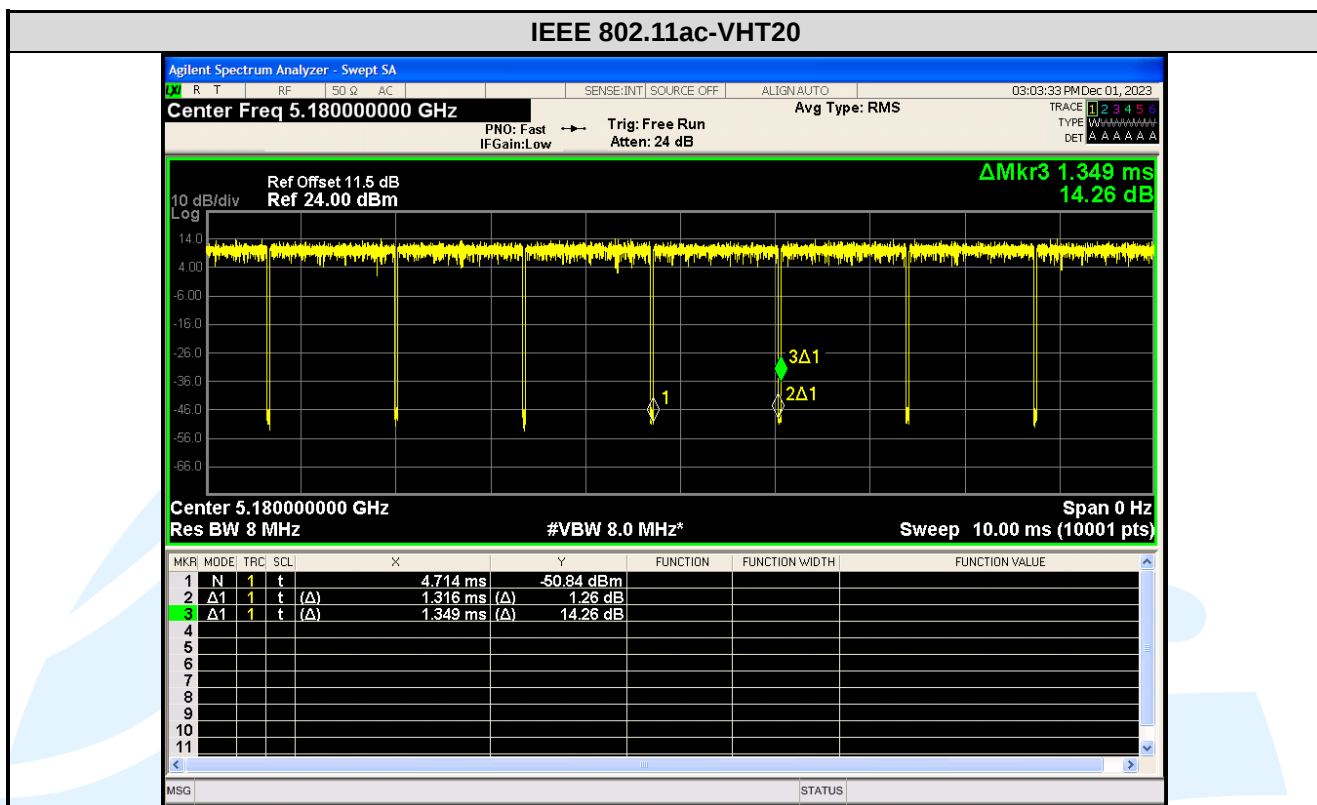

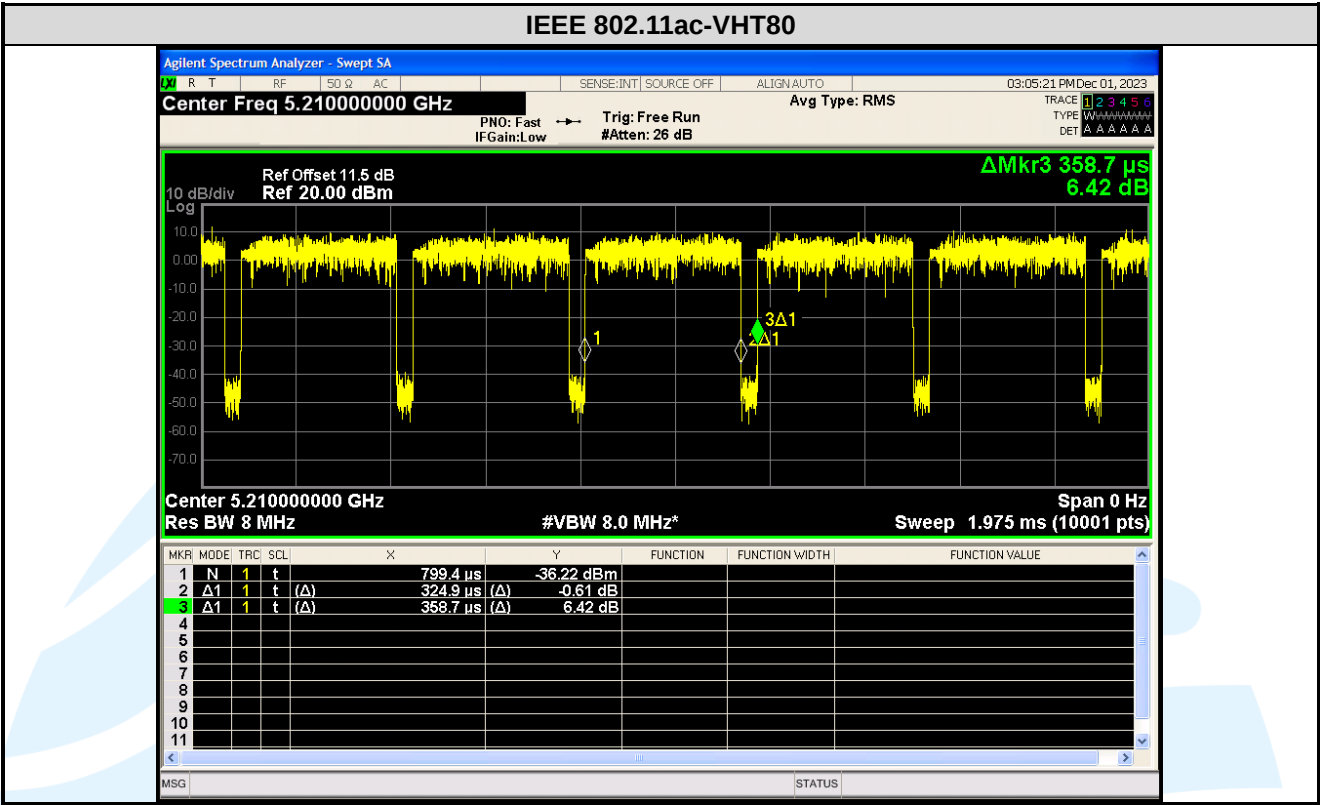

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China
Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <http://www.uttlab.com>
UTTR-RF-FCCPART15.407-V1.2

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 789033 D02 General UNII Test Procedures New Rules v02r01	Guidelines for compliance testing of unlicensed national information infrastructure (U-NII) device part 15, subpart E
5	KDB 905462 D06 802.11 Channel Plans New Rules v02	Operation in U-NII bands -802.11 channel PLAN(\$15.407)
6	KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02	Compliance measurement procedures for Unlicensed –National Information Infrastructure devices operates in the frequency bands 5250 MHz to 5350 MHz and 5470 MHz to 5725 MHz bands incorporating dynamic frequency selection
7	KDB 905462 D03 Client Without DFS New Rules v01r02	U-NII client devices without radar detection capability

5.2 ANTENNA REQUIREMENT

Standard Requirement
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.407(a)(1) (2) requirement: The conducted output power limit specified in paragraph (a) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (a) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power and the peak power spectral density shall be reduced by the by the amount in dB that the directional gain of the antenna exceeds 6 dBi. EUT Antenna: Antenna in the interior of the equipment and no consideration of replacement. The max gain of the antenna is 0.86 dBi.

5.326 DB BANDWIDTH

Test Requirement: FCC 47 CFR Part 15 Subpart E Section 15.407 (a) (2)(5)

Test Method: KDB 789033 D02 v02r01 Section C.1

Limit: None; for reporting purposes only.

Test Procedure:

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum analyzer.

Spectrum analyzer according to the following Settings:

a) Set RBW = approximately 1 % of the emission bandwidth.

b) Set the VBW > RBW.

c) Detector = Peak.

d) Trace mode = max hold.

e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Please refer to Appendix A

5.46 DB BANDWIDTH

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.407 (e)

Test Method: KDB 789033 D02 v02r01Section C.2

Limit: Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure:

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum Analyzer.

Spectrum analyzer according to the following Settings:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 * \text{RBW}$.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Please refer to Appendix A

5.5 MAXIMUM CONDUCTED OUTPUT POWER

Test Requirement: FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3)

Test Method: KDB 789033 D02 v02r01 Section E.3.a(Method PM)

Limits:

1. For the band 5.15-5.25 GHz.
 - (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
 - (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
 - (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
 - (iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure:

1. Connected the EUT's antenna port to measure device by 10dB attenuator.
2. Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of Tx on burst.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Transmitter mode

Test Results: Pass

Test Data:

Antenna gain and the maximum output power limit.

Frequency Band	Antenna Gain (dBi)	Peak Power Limits (dBm)
U-NII-1	0.48	24.0
U-NII-2A	0.86	24.0
U-NII-2C	-0.24	24.0
U-NII-3	0.01	30.0

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

Mode	Band	Channel	Freq. (MHz)	CONDUCTED AVG POWER			
				Meas Value (dBm)	Corr'd Value (dBm)	Limit (dBm)	Result
IEEE 802.11a	U-NII-1	36	5180	14.32	14.42	24.00	Pass
		44	5220	14.27	14.37	24.00	Pass
		48	5240	14.21	14.31	24.00	Pass
	U-NII-2A	52	5260	14.18	14.28	23.87	Pass
		60	5300	14.56	14.66	23.87	Pass
		64	5320	14.33	14.43	23.87	Pass
	U-NII-2C	100	5500	14.41	14.51	23.96	Pass
		120	5600	14.38	14.48	23.96	Pass
		140	5700	14.65	14.75	23.96	Pass
		144	5720	14.31	14.41	23.96	Pass
	U-NII-3	149	5745	14.27	14.37	30.00	Pass
		157	5785	14.25	14.35	30.00	Pass
		165	5825	14.66	14.76	30.00	Pass
IEEE 802.11n-HT20	U-NII-1	36	5180	13.17	13.28	24.00	Pass
		44	5220	13.11	13.22	24.00	Pass
		48	5240	13.04	13.15	24.00	Pass
	U-NII-2A	52	5260	13.02	13.13	23.99	Pass
		60	5300	12.96	13.07	23.99	Pass
		64	5320	12.74	12.85	23.99	Pass
	U-NII-2C	100	5500	12.78	12.89	24.00	Pass
		120	5600	12.84	12.95	24.00	Pass
		140	5700	13.04	13.15	24.00	Pass
		144	5720	12.66	12.77	24.00	Pass
	U-NII-3	149	5745	12.58	12.69	30.00	Pass
		157	5785	12.82	12.93	30.00	Pass
		165	5825	12.94	13.05	30.00	Pass
IEEE 802.11n-HT40	U-NII-1	38	5190	13.13	13.35	24.00	Pass
		46	5230	13.01	13.23	24.00	Pass
	U-NII-2A	54	5270	12.89	13.11	24.00	Pass
		62	5310	12.83	13.05	24.00	Pass
	U-NII-2C	102	5510	12.69	12.91	24.00	Pass
		118	5590	12.85	13.07	24.00	Pass
		134	5670	12.99	13.21	24.00	Pass
		142	5710	12.55	12.77	24.00	Pass
	U-NII-3	151	5755	12.64	12.86	30.00	Pass
		159	5795	12.82	13.04	30.00	Pass
IEEE 802.11ac-VHT20	U-NII-1	36	5180	12.66	12.77	24.00	Pass
		44	5220	12.61	12.72	24.00	Pass
		48	5240	12.56	12.67	24.00	Pass
	U-NII-2A	52	5260	12.51	12.62	23.99	Pass
		60	5300	12.49	12.60	23.99	Pass
		64	5320	12.43	12.54	23.99	Pass
	U-NII-2C	100	5500	12.29	12.40	24.00	Pass
		120	5600	12.41	12.52	24.00	Pass
		140	5700	12.59	12.70	24.00	Pass
		144	5720	12.22	12.33	24.00	Pass
	U-NII-3	149	5745	12.65	12.76	30.00	Pass
		157	5785	12.77	12.88	30.00	Pass
		165	5825	12.98	13.09	30.00	Pass
IEEE 802.11ac-VHT40	U-NII-1	38	5190	12.59	12.81	24.00	Pass
		46	5230	12.51	12.73	24.00	Pass
	U-NII-2A	54	5270	12.43	12.65	24.00	Pass
		62	5310	12.33	12.55	24.00	Pass
	U-NII-2C	102	5510	12.28	12.50	24.00	Pass
		118	5590	12.32	12.54	24.00	Pass
		134	5670	12.47	12.69	24.00	Pass
		142	5710	12.52	12.74	24.00	Pass
	U-NII-3	151	5755	12.66	12.88	30.00	Pass
		159	5795	12.78	13.00	30.00	Pass

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

IEEE 802.11ac-VHT80	U-NII-1	42	5210	12.61	13.04	24.00	Pass
	U-NII-2A	58	5290	12.42	12.85	24.00	Pass
	U-NII-2C	106	5530	12.27	12.70	24.00	Pass
		122	5610	12.32	12.75	24.00	Pass
		138	5690	12.50	12.93	24.00	Pass
	U-NII-3	155	5775	12.69	13.12	30.00	Pass

Remark:

1. Corr'd Power = Meas Power + Duty Cycle Factor

For U-NII-2A Band:

For IEEE 802.11a, the minimum 26 dB emission bandwidth is 19.38 MHz

$11 \text{ dBm} + 10\log_{10}(19.38) = 23.87 \text{ dBm} < 24 \text{ dBm} (250\text{mW})$

So the 23.87 dB limit applicable

For IEEE 802.11n-HT20/ac-VHT20, the minimum 26 dB emission bandwidth is 19.90 MHz

$11 \text{ dBm} + 10\log_{10}(19.90) = 23.99 \text{ dBm} < 24 \text{ dBm} (250\text{mW})$

So the 23.99 dB limit applicable

For IEEE 802.11n-HT40/ac-VHT40/ac-VHT80, the minimum 26 dB emission bandwidth is 39.89 MHz

$11 \text{ dBm} + 10\log_{10}(39.89) = 27.01 \text{ dBm} > 24 \text{ dBm} (250\text{mW})$

So the 24 dB limit applicable

For U-NII-2C Band:

For IEEE 802.11 a, the minimum 26 dB emission bandwidth is 19.78 MHz

$11 \text{ dBm} + 10\log_{10}(19.78) = 23.96 \text{ dBm} < 24 \text{ dBm} (250\text{mW})$

So the 23.96 dB limit applicable

For IEEE 802.11n-HT20/ac-VHT20, the minimum 26 dB emission bandwidth is 19.95 MHz

$11 \text{ dBm} + 10\log_{10}(19.95) = 24 \text{ dBm} (250\text{mW})$

So the 24 dB limit applicable

For IEEE 802.11n-HT40/ac-VHT40/ac-VHT80, the minimum 26 dB emission bandwidth is 40.02 MHz

$11 \text{ dBm} + 10\log_{10}(40.02) = 27.02 \text{ dBm} > 24 \text{ dBm} (250\text{mW})$

So the 24 dB limit applicable

5.6 PEAK POWER SPECTRAL DENSITY

Test Requirement: FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3)

Test Method: KDB 789033 D02 v02r01 Section F

Limits:

1. For the band 5.15-5.25 GHz.
 - (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
 - (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
 - (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
 - (iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure:

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum Analyzer.

Spectrum analyzer according to the following Settings:

1. For U-NII-1, U-NII-2A, U-NII-2C band:

Using method SA-2

- a) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b) Set RBW = 1 MHz, Set VBW $\geq$ 3 RBW, Detector = RMS
- c) Sweep time = auto, trigger set to "free run".
- d) Trace average at least 100 traces in power averaging mode.
- e) Record the max value and add 10 log (1/duty cycle)

2. For U-NII-3 band:

- a) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b) Set RBW = 500 kHz, Set VBW $\geq$ 3 RBW, Detector = RMS
- c) Use the peak marker function to determine the maximum power level in any 500 kHz band segment within the fundamental EBW.
- d) Sweep time = auto, trigger set to "free run".
- e) Trace average at least 100 traces in power averaging mode.
- f) Record the max value and add 10 log (1/duty cycle)

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Please refer to Appendix A

Antenna gain and the maximum output power limit.

Frequency Band	Antenna Gain (dBi)	PSD Limits (dBm/MHz or dBm/500kHz)
U-NII-1	0.48	11.0
U-NII-2A	0.86	11.0
U-NII-2C	-0.24	11.0
U-NII-3	0.01	30.0

5.7 RADIATED EMISSIONS AND BAND EDGE MEASUREMENT

Test Requirement: FCC 47 CFR Part 15 Subpart E Section 15.407 (b)(1)(2)(3)(4)(6)
FCC 47 CFR Part 15 Subpart C Section 15.209/205

Test Method: KDB 789033 D02 v02r01 Section G.3, G.4, G.5, and G.6

Receiver Setup:

Frequency	RBW
0.009 MHz-0.150 MHz	200/300 kHz
0.150 MHz -30 MHz	9/10 kHz
30 MHz-1 GHz	100/120 kHz
Above 1 GHz	1 MHz

Limits:

1. Limits of Radiated Emission and Band edge Measurement

Radiated emissions that fall in the restricted bands must comply with the general emissions limits in 15.209(a) as below table. Other emissions shall be at least 20 dB below the highest level of the desired power.

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009 MHz-0.490 MHz	2400/F(kHz)	--	--	300
0.490 MHz-1.705 MHz	24000/F(kHz)	--	--	30
1.705 MHz-30 MHz	30	--	--	30
30 MHz-88 MHz	100	40.0	Quasi-peak	3
88 MHz-216 MHz	150	43.5	Quasi-peak	3
216 MHz-960 MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1 GHz	500	54.0	Average	3

Remark:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

2. Limits of Unwanted Emission Out of the Restricted Bands

Applicable To	Limit	
789033 D02 General U-NII Test Procedures New Rules v01r04	Field Strength at 3 m	
	PK: 74 (dBμV/m)	AV: 54 (dBμV/m)
Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
FCC Part 15.407 (b)(1)	PK: -27 (dBm/MHz)	PK: 74 (dBμV/m)
FCC Part 15.407 (b)(2)	PK: -27 (dBm/MHz)	PK: 74 (dBμV/m)
FCC Part 15.407 (b)(3)	PK: -27 (dBm/MHz)	PK: 68.2 (dBμV/m)
FCC Part 15.407 (b)(4)	27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;	PK: 68.2 (dBμV/m)
	15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;	
	10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges;	
	-27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.	

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

Test Setup: Refer to section 4.5.1 for details.

Test Procedures:

1. The EUT was placed on the top of a rotating table 0.8 meters (for below 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
6. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Remark:

- a) The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
- b) The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
- c) The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for RMS Average (Duty cycle < 98 %) for Average detection (AV) at frequency above 1 GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
- d) The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz (Duty cycle $\geq 98 \%$) or $\geq 1/T$ (duty cycle is < 98%) for Average detection (AV) at frequency above 1 GHz.
- e) All modes of operation were investigated and the worst-case emissions are reported.


Equipment Used: Refer to section 3 for details.

Test Result: Pass

The measurement data as follows:

Radiated Emission Test Data (9 kHz ~ 30 MHz):

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

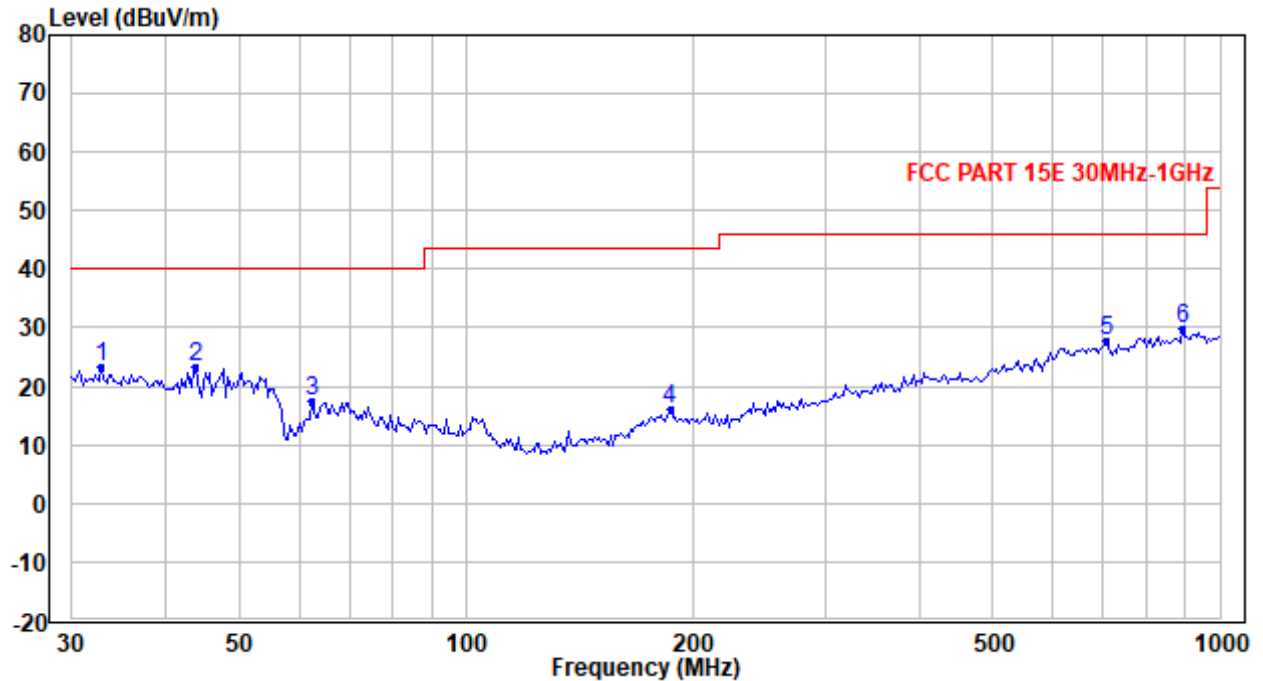Radiated Emission Test Data (30 MHz ~ 1 GHz):**Worst-Case Configuration****Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	32.870	28.70	-5.29	23.41	40.00	-16.59	QP
2	43.845	33.97	-10.54	23.43	40.00	-16.57	QP
3	62.304	35.17	-17.57	17.60	40.00	-22.40	QP
4	186.468	26.17	-10.20	15.97	43.50	-27.53	QP
5	708.694	26.13	1.51	27.64	46.00	-18.36	QP
6	893.656	25.48	4.21	29.69	46.00	-16.31	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

Vertical

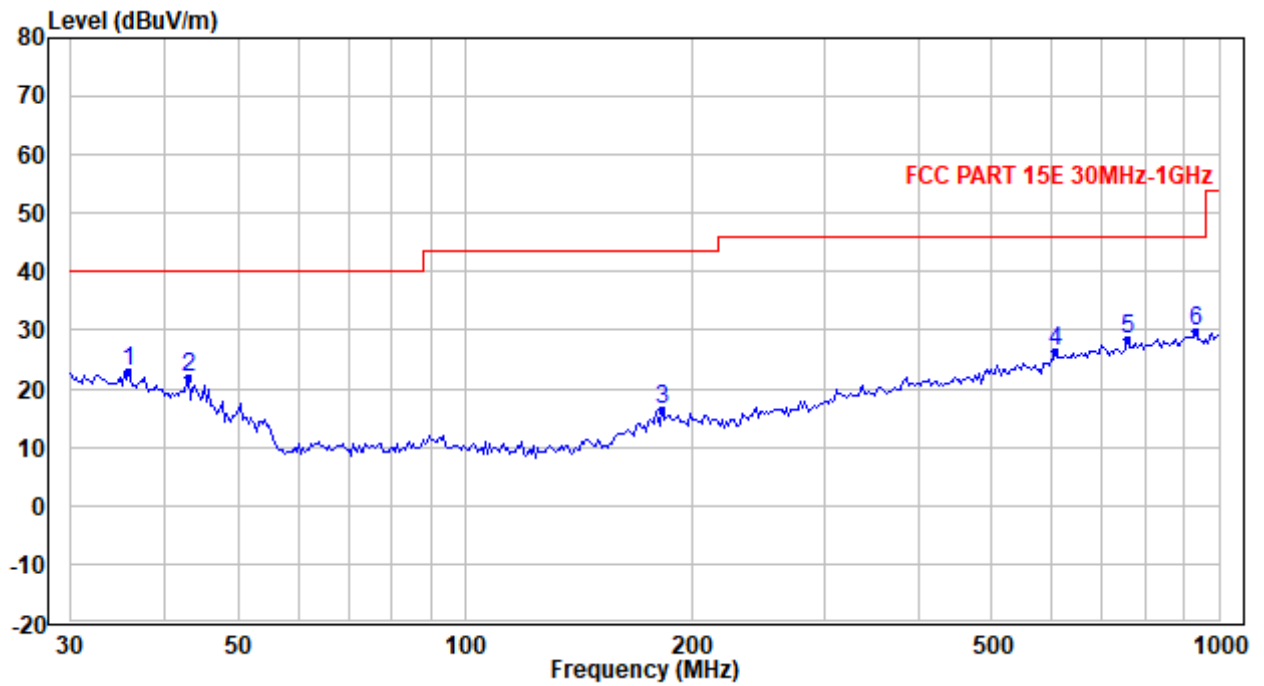

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	35.762	28.77	-5.68	23.09	40.00	-16.91	QP
2	42.931	31.21	-9.40	21.81	40.00	-18.19	QP
3	182.578	26.54	-9.98	16.56	43.50	-26.94	QP
4	607.181	26.62	-0.10	26.52	46.00	-19.48	QP
5	754.963	26.28	2.01	28.29	46.00	-17.71	QP
6	932.141	24.80	4.93	29.73	46.00	-16.27	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

Radiated Emission Test Data (Above 1GHz): Worst-Case Configuration								
No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11a_Channel 36								
1	10360.000	26.00	7.19	33.19	54	-20.81	Average	Horizontal
2	10360.000	38.85	7.19	46.04	68.2	-22.16	Peak	Horizontal
3	15540.000	23.99	11.93	35.92	54	-18.08	Average	Horizontal
4	15540.000	37.61	11.93	49.54	74	-24.46	Peak	Horizontal
5	10360.000	26.45	7.19	33.64	54	-20.36	Average	Vertical
6	10360.000	38.27	7.19	45.46	68.2	-22.74	Peak	Vertical
7	15540.000	23.99	11.93	35.92	54	-18.08	Average	Vertical
8	15540.000	36.30	11.93	48.23	74	-25.77	Peak	Vertical
IEEE 802.11a_Channel 44								
1	10440.000	26.30	7.23	33.53	54	-20.47	Average	Horizontal
2	10440.000	38.20	7.23	45.43	68.2	-22.77	Peak	Horizontal
3	15660.000	24.36	11.94	36.30	54	-17.70	Average	Horizontal
4	15660.000	36.66	11.94	48.60	74	-25.40	Peak	Horizontal
5	10440.000	26.64	7.23	33.87	54	-20.13	Average	Vertical
6	10440.000	39.88	7.23	47.11	68.2	-21.09	Peak	Vertical
7	15660.000	24.36	11.94	36.30	54	-17.70	Average	Vertical
8	15660.000	36.61	11.94	48.55	74	-25.45	Peak	Vertical
IEEE 802.11a_Channel 48								
1	10480.000	26.11	7.24	33.35	54	-20.65	Average	Horizontal
2	10480.000	38.92	7.24	46.16	68.2	-22.04	Peak	Horizontal
3	15720.000	24.00	11.96	35.96	54	-18.04	Average	Horizontal
4	15720.000	36.13	11.96	48.09	74	-25.91	Peak	Horizontal
5	10440.000	26.64	7.23	33.87	54	-20.13	Average	Vertical
6	10440.000	39.88	7.23	47.11	68.2	-21.09	Peak	Vertical
7	15660.000	24.36	11.94	36.30	54	-17.70	Average	Vertical
8	15660.000	36.61	11.94	48.55	74	-25.45	Peak	Vertical
IEEE 802.11a_Channel 52								
1	10520.000	25.14	7.29	32.43	54	-21.57	Average	Horizontal
2	10520.000	37.30	7.29	44.59	68.2	-23.61	Peak	Horizontal
3	15780.000	23.98	11.98	35.96	54	-18.04	Average	Horizontal
4	15780.000	35.86	11.98	47.84	74	-26.16	Peak	Horizontal
5	10520.000	25.30	7.29	32.59	54	-21.41	Average	Vertical
6	10520.000	37.86	7.29	45.15	68.2	-23.05	Peak	Vertical
7	15780.000	23.98	11.98	35.96	54	-18.04	Average	Vertical
8	15780.000	36.97	11.98	48.95	74	-25.05	Peak	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11a_Channel 60								
1	10600.000	25.55	7.44	32.99	54	-21.01	Average	Horizontal
2	10600.000	37.80	7.44	45.24	74	-28.76	Peak	Horizontal
3	15900.000	23.23	12.01	35.24	54	-18.76	Average	Horizontal
4	15900.000	35.92	12.01	47.93	74	-26.07	Peak	Horizontal
5	10600.000	25.47	7.44	32.91	54	-21.09	Average	Vertical
6	10600.000	37.63	7.44	45.07	74	-28.93	Peak	Vertical
7	15900.000	23.03	12.01	35.04	54	-18.96	Average	Vertical
8	15900.000	35.22	12.01	47.23	74	-26.77	Peak	Vertical
IEEE 802.11a_Channel 64								
1	10640.000	25.39	7.52	32.91	54	-21.09	Average	Horizontal
2	10640.000	37.53	7.52	45.05	74	-28.95	Peak	Horizontal
3	15960.000	23.23	12.01	35.24	54	-18.76	Average	Horizontal
4	15960.000	35.20	12.01	47.21	74	-26.79	Peak	Horizontal
5	10640.000	24.99	7.52	32.51	54	-21.49	Average	Vertical
6	10640.000	37.43	7.52	44.95	74	-29.05	Peak	Vertical
7	15960.000	23.13	12.01	35.14	54	-18.86	Average	Vertical
8	15960.000	35.52	12.01	47.53	74	-26.47	Peak	Vertical
IEEE 802.11a_Channel 100								
1	11000.000	26.02	8.22	34.24	54	-19.76	Average	Horizontal
2	11000.000	38.29	8.22	46.51	74	-27.49	Peak	Horizontal
3	16500.000	23.53	12.75	36.28	54	-17.72	Average	Horizontal
4	16500.000	35.90	12.75	48.65	68.2	-19.55	Peak	Horizontal
5	11000.000	25.94	8.22	34.16	54	-19.84	Average	Vertical
6	11000.000	38.62	8.22	46.84	74	-27.16	Peak	Vertical
7	16500.000	23.43	12.75	36.18	54	-17.82	Average	Vertical
8	16500.000	36.19	12.75	48.94	68.2	-19.26	Peak	Vertical
IEEE 802.11a_Channel 120								
1	11200.000	25.42	8.01	33.43	54	-20.57	Average	Horizontal
2	11200.000	37.73	8.01	45.74	74	-28.26	Peak	Horizontal
3	16800.000	23.42	12.89	36.31	54	-17.69	Average	Horizontal
4	16800.000	36.27	12.89	49.16	68.2	-19.04	Peak	Horizontal
5	11200.000	25.02	8.01	33.03	54	-20.97	Average	Vertical
6	11200.000	37.09	8.01	45.10	74	-28.90	Peak	Vertical
7	16800.000	23.32	12.89	36.21	54	-17.79	Average	Vertical
8	16800.000	35.58	12.89	48.47	68.2	-19.73	Peak	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11a_Channel 140								
1	11400.000	24.18	7.79	31.97	54	-22.03	Average	Horizontal
2	11400.000	36.57	7.79	44.36	74	-29.64	Peak	Horizontal
3	17100.000	22.99	13.26	36.25	54	-17.75	Average	Horizontal
4	17100.000	36.26	13.26	49.52	68.2	-18.68	Peak	Horizontal
5	11400.000	35.72	7.79	43.51	54	-10.49	Average	Vertical
6	17100.000	35.30	13.26	48.56	68.2	-19.64	Peak	Vertical
7	16800.000	23.32	12.89	36.21	54	-17.79	Average	Vertical
8	16800.000	35.58	12.89	48.47	68.2	-19.73	Peak	Vertical
IEEE 802.11a_Channel 144								
1	11440.000	23.97	7.75	31.72	54	-22.28	Average	Horizontal
2	11440.000	36.71	7.75	44.46	74	-29.54	Peak	Horizontal
3	17160.000	23.10	13.43	36.53	54	-17.47	Average	Horizontal
4	17160.000	34.67	13.43	48.10	68.2	-20.10	Peak	Horizontal
5	11440.000	23.97	7.75	31.72	54	-22.28	Average	Vertical
6	11440.000	36.98	7.75	44.73	74	-29.27	Peak	Vertical
7	17160.000	22.99	13.43	36.42	54	-17.58	Average	Vertical
8	17160.000	35.34	13.43	48.77	68.2	-19.43	Peak	Vertical
IEEE 802.11a_Channel 149								
1	11490.000	24.52	7.70	32.22	54	-21.78	Average	Horizontal
2	11490.000	35.84	7.70	43.54	74	-30.46	Peak	Horizontal
3	17235.000	22.52	13.65	36.17	54	-17.83	Average	Horizontal
4	17235.000	35.70	13.65	49.35	68.2	-18.85	Peak	Horizontal
5	11490.000	24.41	7.70	32.11	54	-21.89	Average	Vertical
6	11490.000	36.34	7.70	44.04	74	-29.96	Peak	Vertical
7	17235.000	22.41	13.65	36.06	54	-17.94	Average	Vertical
8	17235.000	35.17	13.65	48.82	68.2	-19.38	Peak	Vertical
IEEE 802.11a_Channel 157								
1	11570.000	24.81	7.79	32.60	54	-21.40	Average	Horizontal
2	11570.000	37.32	7.79	45.11	74	-28.89	Peak	Horizontal
3	17355.000	22.91	13.98	36.89	54	-17.11	Average	Horizontal
4	17355.000	35.55	13.98	49.53	68.2	-18.67	Peak	Horizontal
5	11570.000	24.81	7.79	32.60	54	-21.40	Average	Vertical
6	11570.000	36.72	7.79	44.51	74	-29.49	Peak	Vertical
7	17355.000	22.80	13.98	36.78	54	-17.22	Average	Vertical
8	17355.000	34.97	13.98	48.95	68.2	-19.25	Peak	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11a_Channel 165								
1	11650.000	25.66	7.91	33.57	54	-20.43	Average	Horizontal
2	11650.000	38.11	7.91	46.02	74	-27.98	Peak	Horizontal
3	17475.000	22.53	14.32	36.85	54	-17.15	Average	Horizontal
4	17475.000	34.46	14.32	48.78	68.2	-19.42	Peak	Horizontal
5	11650.000	25.51	7.91	33.42	54	-20.58	Average	Vertical
6	11650.000	38.77	7.91	46.68	74	-27.32	Peak	Vertical
7	17475.000	22.53	14.32	36.85	54	-17.15	Average	Vertical
8	17475.000	35.74	14.32	50.06	68.2	-18.14	Peak	Vertical
IEEE 802.11n-HT20_Channel 36								
1	10360.000	25.82	7.19	33.01	54	-20.99	Average	Horizontal
2	10360.000	39.32	7.19	46.51	68.2	-21.69	Peak	Horizontal
3	15540.000	23.89	11.93	35.82	54	-18.18	Average	Horizontal
4	15540.000	36.71	11.93	48.64	74	-25.36	Peak	Horizontal
5	10360.000	26.36	7.19	33.55	54	-20.45	Average	Vertical
6	10360.000	38.96	7.19	46.15	68.2	-22.05	Peak	Vertical
7	15540.000	23.61	11.93	35.54	54	-18.46	Average	Vertical
8	15540.000	37.10	11.93	49.03	74	-24.97	Peak	Vertical
IEEE 802.11n-HT20_Channel 44								
1	10440.000	26.01	7.23	33.24	54	-20.76	Average	Horizontal
2	10440.000	38.27	7.23	45.50	68.2	-22.70	Peak	Horizontal
3	15660.000	24.27	11.94	36.21	54	-17.79	Average	Horizontal
4	15660.000	36.44	11.94	48.38	74	-25.62	Peak	Horizontal
5	10440.000	39.25	7.23	46.48	54	-7.52	Average	Vertical
6	10440.000	26.77	7.23	34.00	68.2	-34.20	Peak	Vertical
7	15660.000	37.07	11.94	49.01	54	-4.99	Average	Vertical
8	15660.000	24.23	11.94	36.17	74	-37.83	Peak	Vertical
IEEE 802.11n-HT20_Channel 48								
1	10480.000	24.79	7.24	32.03	54	-21.97	Average	Horizontal
2	10480.000	36.53	7.24	43.77	68.2	-24.43	Peak	Horizontal
3	15720.000	23.91	11.96	35.87	54	-18.13	Average	Horizontal
4	15720.000	35.81	11.96	47.77	74	-26.23	Peak	Horizontal
5	10480.000	26.43	7.24	33.67	54	-20.33	Average	Vertical
6	10480.000	38.30	7.24	45.54	68.2	-22.66	Peak	Vertical
7	15720.000	23.82	11.96	35.78	54	-18.22	Average	Vertical
8	15720.000	36.11	11.96	48.07	74	-25.93	Peak	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11n-HT20_Channel 52								
1	10520.000	24.74	7.29	32.03	54	-21.97	Average	Horizontal
2	10520.000	37.15	7.29	44.44	68.2	-23.76	Peak	Horizontal
3	15780.000	23.89	11.98	35.87	54	-18.13	Average	Horizontal
4	15780.000	36.62	11.98	48.60	74	-25.40	Peak	Horizontal
5	10520.000	25.22	7.29	32.51	54	-21.49	Average	Vertical
6	10520.000	37.36	7.29	44.65	68.2	-23.55	Peak	Vertical
7	15780.000	23.89	11.98	35.87	54	-18.13	Average	Vertical
8	15780.000	36.27	11.98	48.25	74	-25.75	Peak	Vertical
IEEE 802.11n-HT20_Channel 60								
1	10600.000	25.39	7.44	32.83	54	-21.17	Average	Horizontal
2	10600.000	37.66	7.44	45.10	74	-28.90	Peak	Horizontal
3	15900.000	23.13	12.01	35.14	54	-18.86	Average	Horizontal
4	15900.000	35.94	12.01	47.95	74	-26.05	Peak	Horizontal
5	10600.000	25.47	7.44	32.91	54	-21.09	Average	Vertical
6	10600.000	37.91	7.44	45.35	74	-28.65	Peak	Vertical
7	15900.000	23.13	12.01	35.14	54	-18.86	Average	Vertical
8	15900.000	35.94	12.01	47.95	74	-26.05	Peak	Vertical
IEEE 802.11n-HT20_Channel 64								
1	10640.000	25.23	7.52	32.75	54	-21.25	Average	Horizontal
2	10640.000	37.70	7.52	45.22	74	-28.78	Peak	Horizontal
3	15960.000	23.13	12.01	35.14	54	-18.86	Average	Horizontal
4	15960.000	35.61	12.01	47.62	74	-26.38	Peak	Horizontal
5	10640.000	24.99	7.52	32.51	54	-21.49	Average	Vertical
6	10640.000	37.03	7.52	44.55	74	-29.45	Peak	Vertical
7	15960.000	23.03	12.01	35.04	54	-18.96	Average	Vertical
8	15960.000	35.90	12.01	47.91	74	-26.09	Peak	Vertical
IEEE 802.11n-HT20_Channel 100								
1	11000.000	25.94	8.22	34.16	54	-19.84	Average	Horizontal
2	11000.000	38.04	8.22	46.26	74	-27.74	Peak	Horizontal
3	16500.000	23.53	12.75	36.28	54	-17.72	Average	Horizontal
4	16500.000	35.59	12.75	48.34	68.2	-19.86	Peak	Horizontal
5	11000.000	26.09	8.22	34.31	54	-19.69	Average	Vertical
6	11000.000	38.02	8.22	46.24	74	-27.76	Peak	Vertical
7	16500.000	23.43	12.75	36.18	54	-17.82	Average	Vertical
8	16500.000	36.28	12.75	49.03	68.2	-19.17	Peak	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11n-HT20_Channel 120								
1	11200.000	25.42	8.01	33.43	54	-20.57	Average	Horizontal
2	11200.000	37.33	8.01	45.34	74	-28.66	Peak	Horizontal
3	16800.000	23.22	12.89	36.11	54	-17.89	Average	Horizontal
4	16800.000	35.31	12.89	48.20	68.2	-20.00	Peak	Horizontal
5	11200.000	25.11	8.01	33.12	54	-20.88	Average	Vertical
6	11200.000	37.23	8.01	45.24	74	-28.76	Peak	Vertical
7	16800.000	23.02	12.89	35.91	54	-18.09	Average	Vertical
8	16800.000	34.72	12.89	47.61	68.2	-20.59	Peak	Vertical
IEEE 802.11n-HT20_Channel 140								
1	11400.000	23.72	7.79	31.51	54	-22.49	Average	Horizontal
2	11400.000	35.95	7.79	43.74	74	-30.26	Peak	Horizontal
3	17100.000	22.99	13.26	36.25	54	-17.75	Average	Horizontal
4	17100.000	35.15	13.26	48.41	68.2	-19.79	Peak	Horizontal
5	11400.000	23.91	7.79	31.70	54	-22.30	Average	Vertical
6	11400.000	36.33	7.79	44.12	74	-29.88	Peak	Vertical
7	17100.000	22.67	13.26	35.93	54	-18.07	Average	Vertical
8	17100.000	35.03	13.26	48.29	68.2	-19.91	Peak	Vertical
IEEE 802.11n-HT20_Channel 144								
1	11440.000	23.69	7.75	31.44	54	-22.56	Average	Horizontal
2	11440.000	36.03	7.75	43.78	74	-30.22	Peak	Horizontal
3	17160.000	23.10	13.43	36.53	54	-17.47	Average	Horizontal
4	17160.000	35.85	13.43	49.28	68.2	-18.92	Peak	Horizontal
5	11440.000	23.88	7.75	31.63	54	-22.37	Average	Vertical
6	11440.000	36.01	7.75	43.76	74	-30.24	Peak	Vertical
7	17160.000	22.99	13.43	36.42	54	-17.58	Average	Vertical
8	17160.000	35.11	13.43	48.54	68.2	-19.66	Peak	Vertical
IEEE 802.11n-HT20_Channel 149								
1	11490.000	24.41	7.70	32.11	54	-21.89	Average	Horizontal
2	11490.000	36.45	7.70	44.15	74	-29.85	Peak	Horizontal
3	17235.000	22.19	13.65	35.84	54	-18.16	Average	Horizontal
4	17235.000	34.28	13.65	47.93	68.2	-20.27	Peak	Horizontal
5	11490.000	24.52	7.70	32.22	54	-21.78	Average	Vertical
6	11490.000	37.63	7.70	45.33	74	-28.67	Peak	Vertical
7	17235.000	22.30	13.65	35.95	54	-18.05	Average	Vertical
8	17235.000	34.91	13.65	48.56	68.2	-19.64	Peak	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11n-HT20_Channel 157								
1	11570.000	24.81	7.79	32.60	54	-21.40	Average	Horizontal
2	11570.000	37.40	7.79	45.19	74	-28.81	Peak	Horizontal
3	17355.000	22.69	13.98	36.67	54	-17.33	Average	Horizontal
4	17355.000	35.18	13.98	49.16	68.2	-19.04	Peak	Horizontal
5	11570.000	24.97	7.79	32.76	54	-21.24	Average	Vertical
6	11570.000	37.34	7.79	45.13	74	-28.87	Peak	Vertical
7	17355.000	22.91	13.98	36.89	54	-17.11	Average	Vertical
8	17355.000	35.91	13.98	49.89	68.2	-18.31	Peak	Vertical
IEEE 802.11n-HT20_Channel 165								
1	11650.000	24.66	7.91	32.57	54	-21.43	Average	Horizontal
2	11650.000	38.31	7.91	46.22	74	-27.78	Peak	Horizontal
3	17475.000	23.53	14.32	37.85	54	-16.15	Average	Horizontal
4	17475.000	35.78	14.32	50.10	68.2	-18.10	Peak	Horizontal
5	11650.000	25.61	7.91	33.52	54	-20.48	Average	Vertical
6	11650.000	39.77	7.91	47.68	74	-26.32	Peak	Vertical
7	17475.000	23.53	14.32	37.85	54	-16.15	Average	Vertical
8	17475.000	36.12	14.32	50.44	68.2	-17.76	Peak	Vertical
IEEE 802.11n-HT40_Channel 38								
1	10380.000	25.35	7.20	32.55	54	-21.45	Average	Horizontal
2	10380.000	37.62	7.20	44.82	68.2	-23.38	Peak	Horizontal
3	15570.000	23.53	11.92	35.45	54	-18.55	Average	Horizontal
4	15570.000	36.15	11.92	48.07	74	-25.93	Peak	Horizontal
5	10380.000	26.35	7.20	33.55	54	-20.45	Average	Vertical
6	10380.000	37.60	7.20	44.80	68.2	-23.40	Peak	Vertical
7	15570.000	23.62	11.92	35.54	54	-18.46	Average	Vertical
8	15570.000	36.91	11.92	48.83	74	-25.17	Peak	Vertical
IEEE 802.11n-HT40_Channel 46								
1	10460.000	26.71	7.23	33.94	54	-20.06	Average	Horizontal
2	10460.000	38.58	7.23	45.81	68.2	-22.39	Peak	Horizontal
3	15690.000	23.89	11.96	35.85	54	-18.15	Average	Horizontal
4	15690.000	36.29	11.96	48.25	74	-25.75	Peak	Horizontal
5	10460.000	26.84	7.23	34.07	54	-19.93	Average	Vertical
6	10460.000	39.08	7.23	46.31	68.2	-21.89	Peak	Vertical
7	15690.000	23.89	11.96	35.85	54	-18.15	Average	Vertical
8	15690.000	36.04	11.96	48.00	74	-26.00	Peak	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11n-HT40_Channel 54								
1	10540.000	24.48	7.32	31.80	54	-22.20	Average	Horizontal
2	10540.000	36.39	7.32	43.71	68.2	-24.49	Peak	Horizontal
3	15810.000	23.14	11.98	35.12	54	-18.88	Average	Horizontal
4	15810.000	35.97	11.98	47.95	74	-26.05	Peak	Horizontal
5	10540.000	24.48	7.32	31.80	54	-22.20	Average	Vertical
6	10540.000	37.25	7.32	44.57	68.2	-23.63	Peak	Vertical
7	15810.000	23.24	11.98	35.22	54	-18.78	Average	Vertical
8	15810.000	36.09	11.98	48.07	74	-25.93	Peak	Vertical
IEEE 802.11n-HT40_Channel 62								
1	10620.000	25.34	7.49	32.83	54	-21.17	Average	Horizontal
2	10620.000	38.17	7.49	45.66	74	-28.34	Peak	Horizontal
3	15930.000	22.81	12.02	34.83	54	-19.17	Average	Horizontal
4	15930.000	36.60	12.02	48.62	74	-25.38	Peak	Horizontal
5	10620.000	25.34	7.49	32.83	54	-21.17	Average	Vertical
6	10620.000	37.84	7.49	45.33	74	-28.67	Peak	Vertical
7	15930.000	22.92	12.02	34.94	54	-19.06	Average	Vertical
8	15930.000	35.56	12.02	47.58	74	-26.42	Peak	Vertical
IEEE 802.11n-HT40_Channel 102								
1	11020.000	26.11	8.20	34.31	54	-19.69	Average	Horizontal
2	11020.000	38.77	8.20	46.97	74	-27.03	Peak	Horizontal
3	16530.000	23.31	12.77	36.08	54	-17.92	Average	Horizontal
4	16530.000	35.45	12.77	48.22	68.2	-19.98	Peak	Horizontal
5	11020.000	26.18	8.20	34.38	54	-19.62	Average	Vertical
6	11020.000	40.10	8.20	48.30	74	-25.70	Peak	Vertical
7	16530.000	23.21	12.77	35.98	54	-18.02	Average	Vertical
8	16530.000	35.95	12.77	48.72	68.2	-19.48	Peak	Vertical
IEEE 802.11n-HT40_Channel 118								
1	11180.000	25.01	8.02	33.03	54	-20.97	Average	Horizontal
2	11180.000	37.78	8.02	45.80	74	-28.20	Peak	Horizontal
3	16770.000	23.03	12.88	35.91	54	-18.09	Average	Horizontal
4	16770.000	34.99	12.88	47.87	68.2	-20.33	Peak	Horizontal
5	11180.000	25.18	8.02	33.20	54	-20.80	Average	Vertical
6	11180.000	37.43	8.02	45.45	74	-28.55	Peak	Vertical
7	16770.000	23.03	12.88	35.91	54	-18.09	Average	Vertical
8	16770.000	35.71	12.88	48.59	68.2	-19.61	Peak	Vertical

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11n-HT40_Channel 134								
1	11340.000	24.00	7.86	31.86	54	-22.14	Average	Horizontal
2	11340.000	36.79	7.86	44.65	74	-29.35	Peak	Horizontal
3	17010.000	22.78	13.01	35.79	54	-18.21	Average	Horizontal
4	17010.000	35.86	13.01	48.87	68.2	-19.33	Peak	Horizontal
5	11340.000	24.09	7.86	31.95	54	-22.05	Average	Vertical
6	11340.000	37.55	7.86	45.41	74	-28.59	Peak	Vertical
7	17010.000	22.88	13.01	35.89	54	-18.11	Average	Vertical
8	17010.000	36.18	13.01	49.19	68.2	-19.01	Peak	Vertical
IEEE 802.11n-HT40_Channel 142								
1	11420.000	24.01	7.78	31.79	54	-22.21	Average	Horizontal
2	11420.000	36.34	7.78	44.12	74	-29.88	Peak	Horizontal
3	17130.000	22.48	13.35	35.83	54	-18.17	Average	Horizontal
4	17130.000	35.58	13.35	48.93	68.2	-19.27	Peak	Horizontal
5	11420.000	23.83	7.78	31.61	54	-22.39	Average	Vertical
6	11420.000	36.12	7.78	43.90	74	-30.10	Peak	Vertical
7	17130.000	22.48	13.35	35.83	54	-18.17	Average	Vertical
8	17130.000	34.83	13.35	48.18	68.2	-20.02	Peak	Vertical
IEEE 802.11n-HT40_Channel 151								
1	11510.000	22.41	7.70	30.11	54	-23.89	Average	Horizontal
2	11510.000	35.63	7.70	43.33	74	-30.67	Peak	Horizontal
3	17265.000	22.11	13.73	35.84	54	-18.16	Average	Horizontal
4	17265.000	36.31	13.73	50.04	68.2	-18.16	Peak	Horizontal
5	11510.000	22.41	7.70	30.11	54	-23.89	Average	Vertical
6	11510.000	36.00	7.70	43.70	74	-30.30	Peak	Vertical
7	17265.000	21.99	13.73	35.72	54	-18.28	Average	Vertical
8	17265.000	34.73	13.73	48.46	68.2	-19.74	Peak	Vertical
IEEE 802.11n-HT40_Channel 159								
1	11590.000	24.69	7.82	32.51	54	-21.49	Average	Horizontal
2	11590.000	37.29	7.82	45.11	74	-28.89	Peak	Horizontal
3	17385.000	22.40	14.06	36.46	54	-17.54	Average	Horizontal
4	17385.000	34.52	14.06	48.58	68.2	-19.62	Peak	Horizontal
5	11590.000	24.61	7.82	32.43	54	-21.57	Average	Vertical
6	11590.000	36.84	7.82	44.66	74	-29.34	Peak	Vertical
7	17385.000	22.51	14.06	36.57	54	-17.43	Average	Vertical
8	17385.000	34.55	14.06	48.61	68.2	-19.59	Peak	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11ac-VHT80_Channel 42								
1	10420.000	26.38	7.22	33.60	54	-20.40	Average	Horizontal
2	10420.000	38.28	7.22	45.50	68.2	-22.70	Peak	Horizontal
3	15630.000	23.81	11.94	35.75	54	-18.25	Average	Horizontal
4	15630.000	35.83	11.94	47.77	74	-26.23	Peak	Horizontal
5	10420.000	26.31	7.22	33.53	54	-20.47	Average	Vertical
6	10420.000	38.78	7.22	46.00	68.2	-22.20	Peak	Vertical
7	15630.000	23.91	11.94	35.85	54	-18.15	Average	Vertical
8	15630.000	36.27	11.94	48.21	74	-25.79	Peak	Vertical

IEEE 802.11ac-VHT80_Channel 58								
1	10580.000	23.97	7.39	31.36	54	-22.64	Average	Horizontal
2	10580.000	36.67	7.39	44.06	68.2	-24.14	Peak	Horizontal
3	15870.000	22.91	12.00	34.91	54	-19.09	Average	Horizontal
4	15870.000	35.74	12.00	47.74	74	-26.26	Peak	Horizontal
5	10580.000	24.06	7.39	31.45	54	-22.55	Average	Vertical
6	10580.000	36.67	7.39	44.06	68.2	-24.14	Peak	Vertical
7	15870.000	23.02	12.00	35.02	54	-18.98	Average	Vertical
8	15870.000	35.06	12.00	47.06	74	-26.94	Peak	Vertical

IEEE 802.11ac-VHT80_Channel 106								
1	11060.000	26.16	8.15	34.31	54	-19.69	Average	Horizontal
2	11060.000	38.75	8.15	46.90	74	-27.10	Peak	Horizontal
3	16590.000	22.28	12.80	35.08	54	-18.92	Average	Horizontal
4	16590.000	34.88	12.80	47.68	68.2	-20.52	Peak	Horizontal
5	11060.000	26.16	8.15	34.31	54	-19.69	Average	Vertical
6	11060.000	38.65	8.15	46.80	74	-27.20	Peak	Vertical
7	16590.000	22.28	12.80	35.08	54	-18.92	Average	Vertical
8	16590.000	35.06	12.80	47.86	68.2	-20.34	Peak	Vertical

IEEE 802.11ac-VHT80_Channel 122								
1	11220.000	24.80	7.99	32.79	54	-21.21	Average	Horizontal
2	11220.000	37.42	7.99	45.41	74	-28.59	Peak	Horizontal
3	16830.000	22.91	12.90	35.81	54	-18.19	Average	Horizontal
4	16830.000	35.78	12.90	48.68	68.2	-19.52	Peak	Horizontal
5	11220.000	24.88	7.99	32.87	54	-21.13	Average	Vertical
6	11220.000	37.52	7.99	45.51	74	-28.49	Peak	Vertical
7	16830.000	23.01	12.90	35.91	54	-18.09	Average	Vertical
8	16830.000	35.55	12.90	48.45	68.2	-19.75	Peak	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11ac-VHT80_Channel 138								
1	11380.000	23.61	7.81	31.42	54	-22.58	Average	Horizontal
2	11380.000	35.43	7.81	43.24	74	-30.76	Peak	Horizontal
3	17070.000	22.55	13.17	35.72	54	-18.28	Average	Horizontal
4	17070.000	35.07	13.17	48.24	68.2	-19.96	Peak	Horizontal
5	11380.000	23.70	7.81	31.51	54	-22.49	Average	Vertical
6	11380.000	36.38	7.81	44.19	74	-29.81	Peak	Vertical
7	17070.000	22.44	13.17	35.61	54	-18.39	Average	Vertical
8	17070.000	34.96	13.17	48.13	68.2	-20.07	Peak	Vertical



No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11ac-VHT80_Channel 155								
1	11550.000	22.12	7.76	29.88	54	-24.12	Average	Horizontal
2	11550.000	34.61	7.76	42.37	74	-31.63	Peak	Horizontal
3	17325.000	21.71	13.90	35.61	54	-18.39	Average	Horizontal
4	17325.000	34.29	13.90	48.19	68.2	-20.01	Peak	Horizontal
5	11550.000	22.24	7.76	30.00	54	-24.00	Average	Vertical
6	11550.000	34.17	7.76	41.93	74	-32.07	Peak	Vertical
7	17325.000	21.82	13.90	35.72	54	-18.28	Average	Vertical
8	17325.000	34.01	13.90	47.91	68.2	-20.29	Peak	Vertical

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit

Band Edge Measurements (Radiated): Worst-Case Configuration

IEEE 802.11a

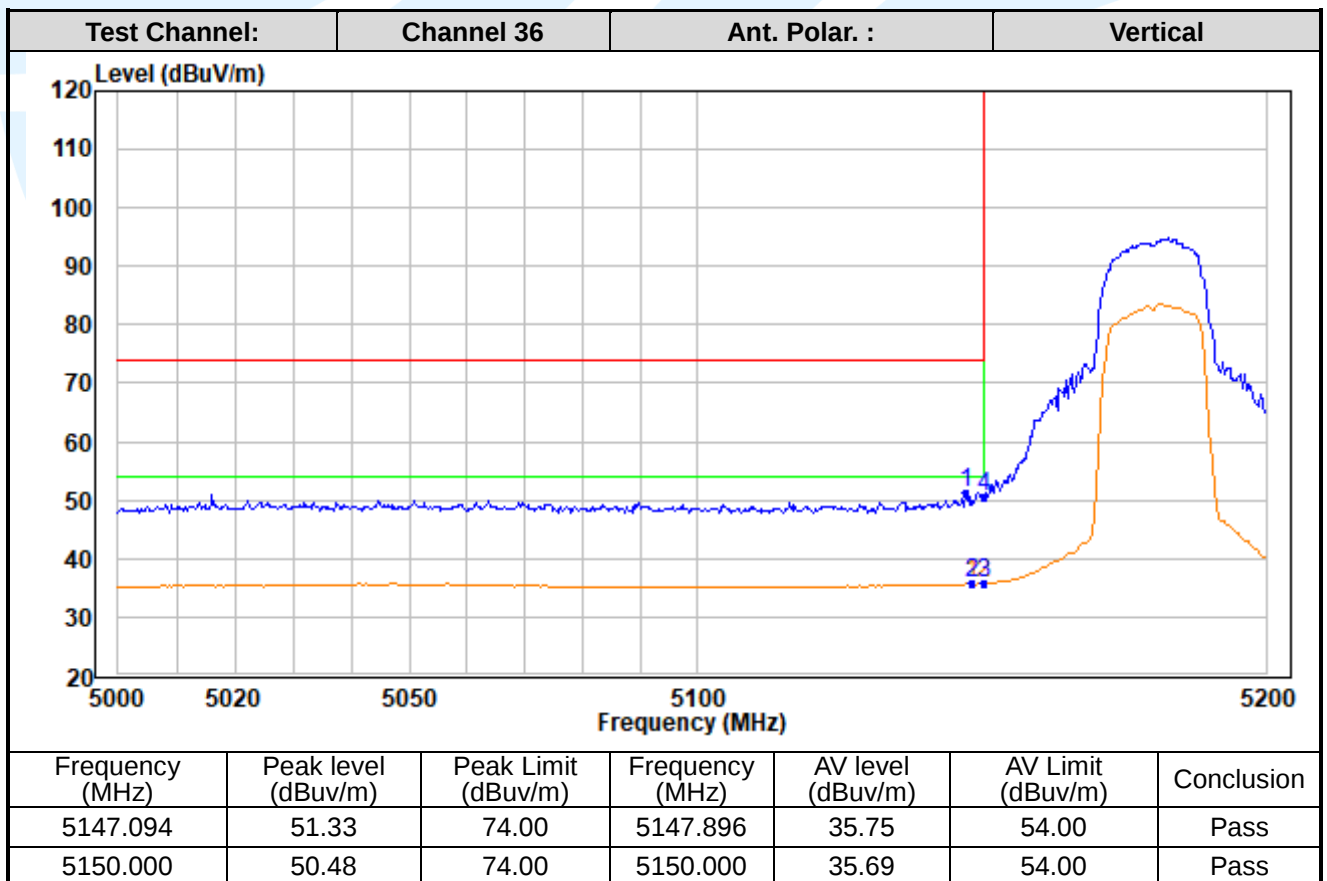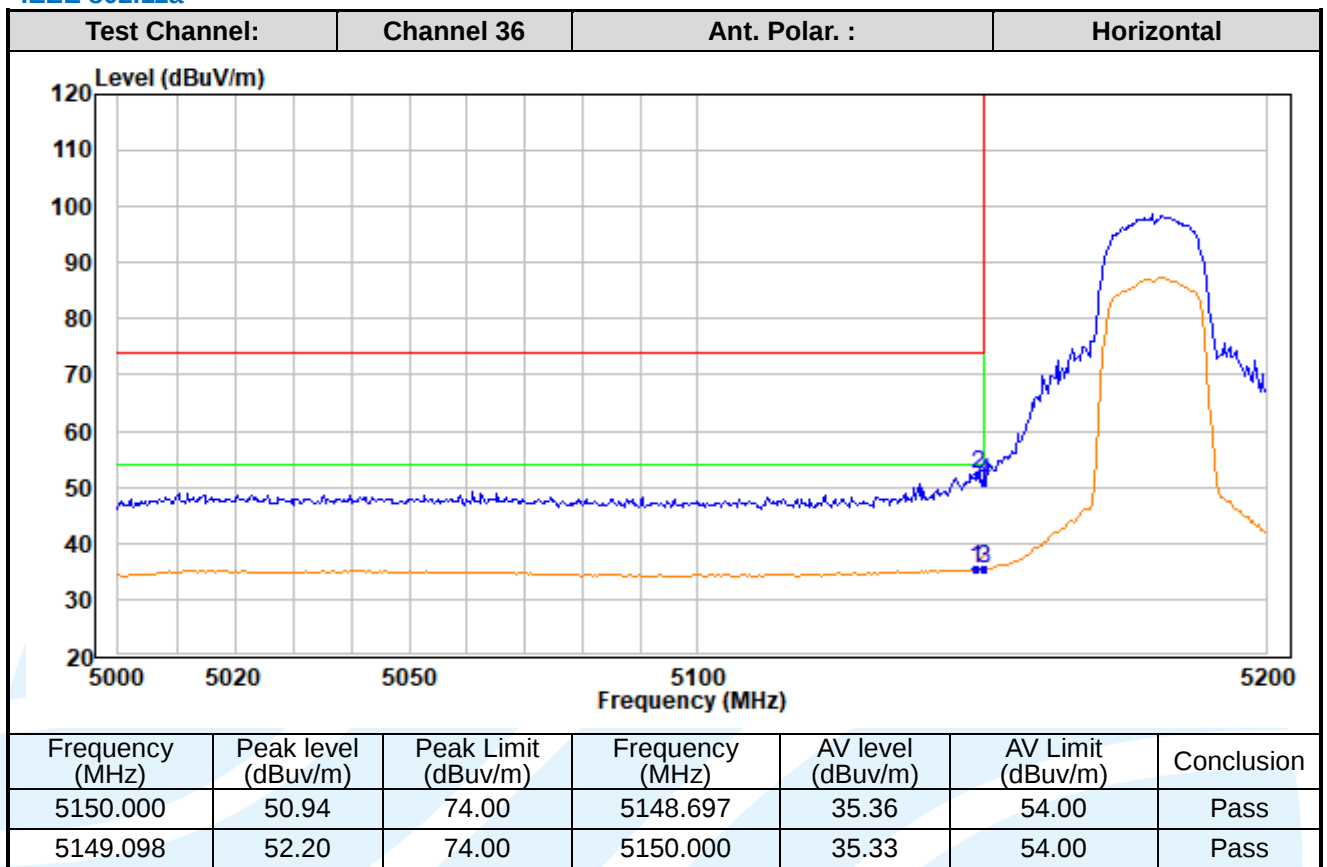

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

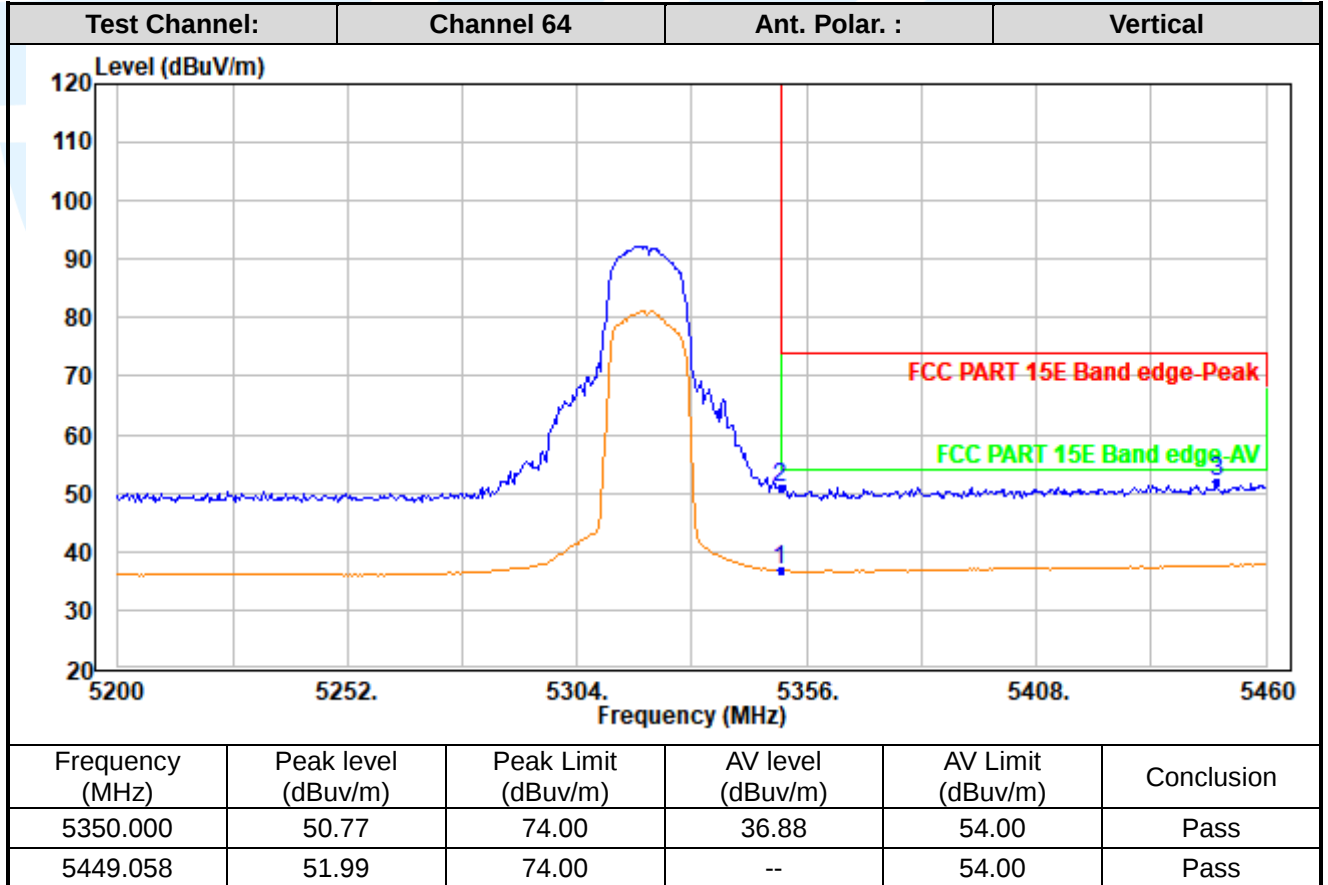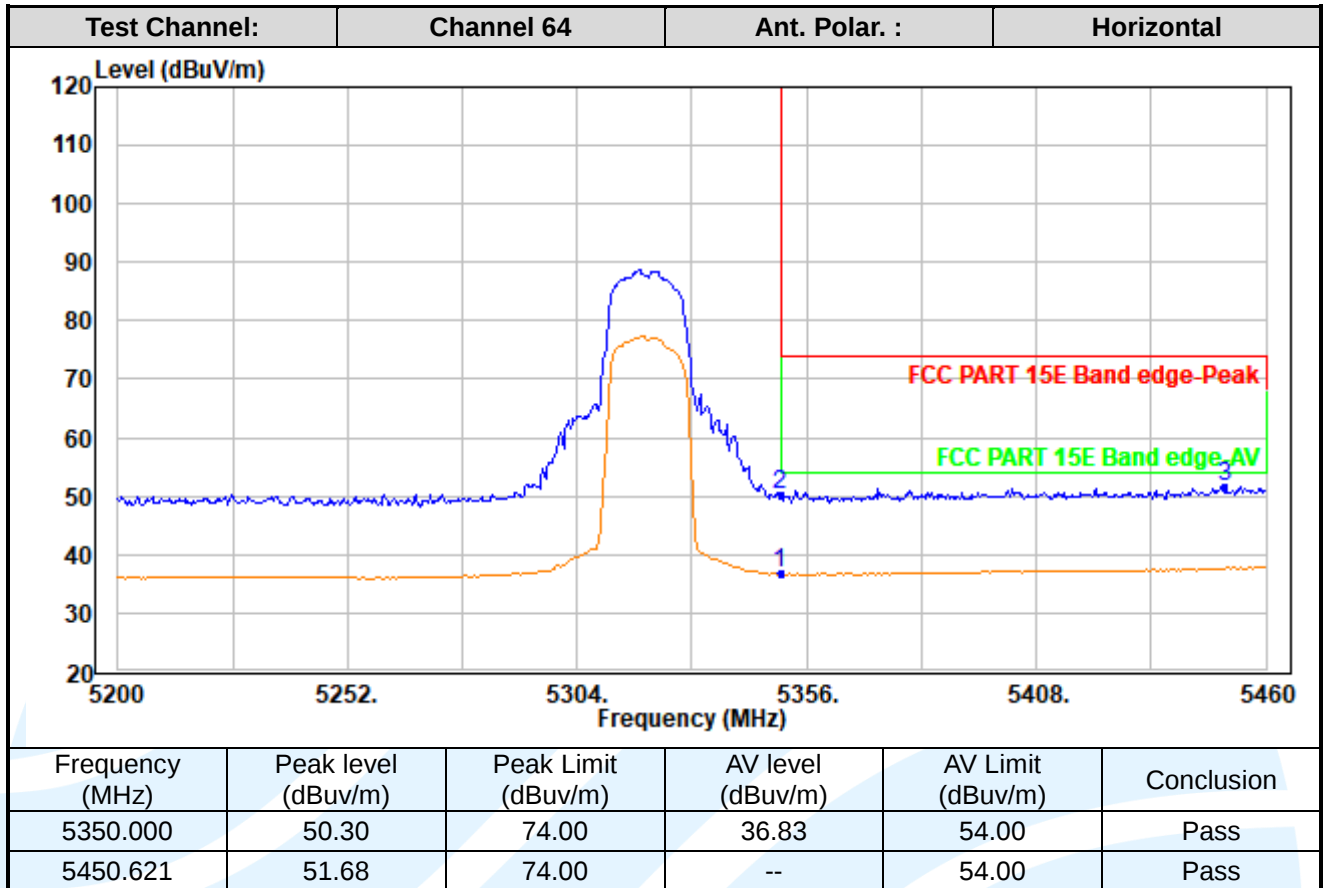

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

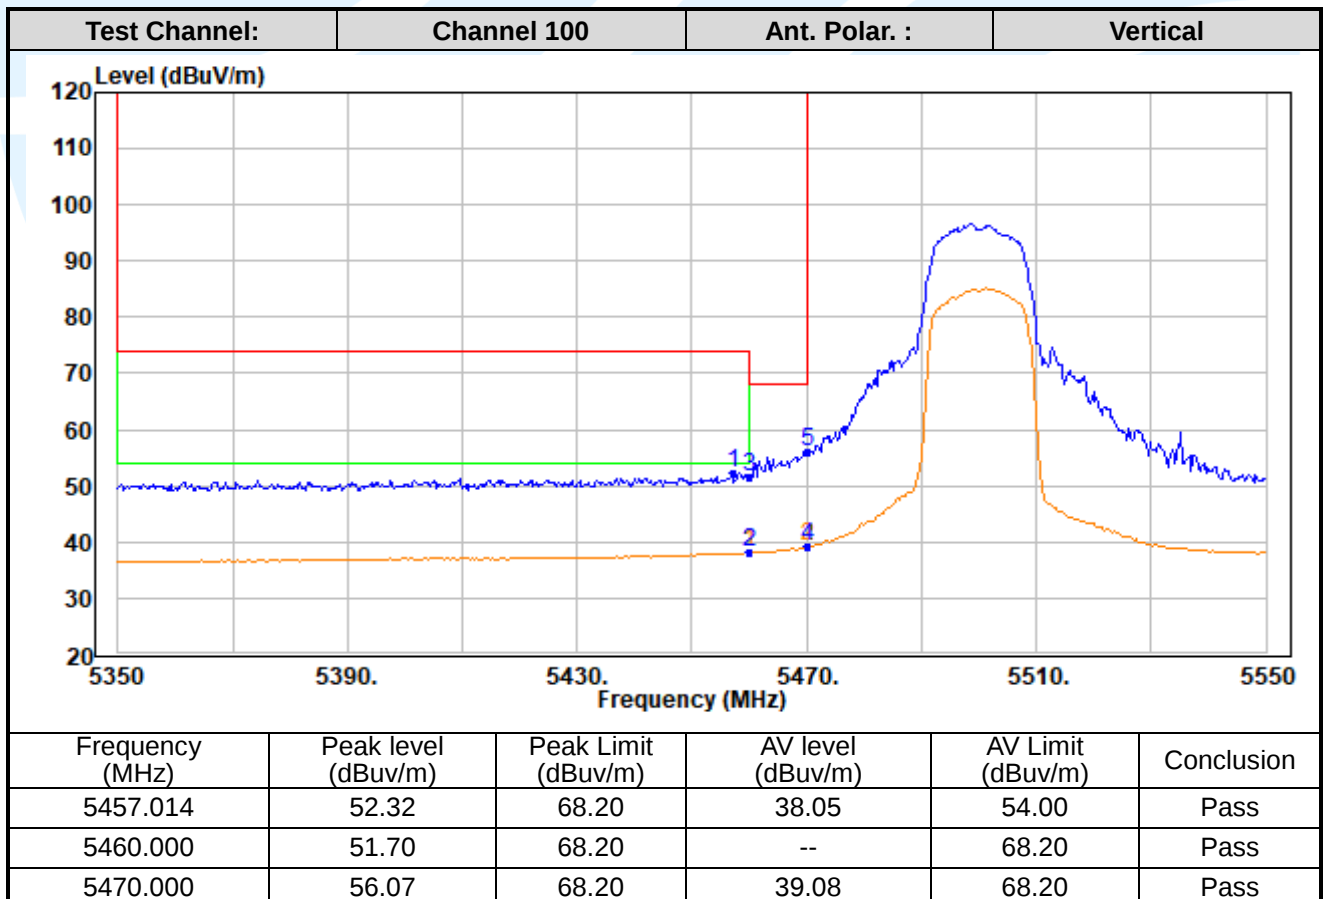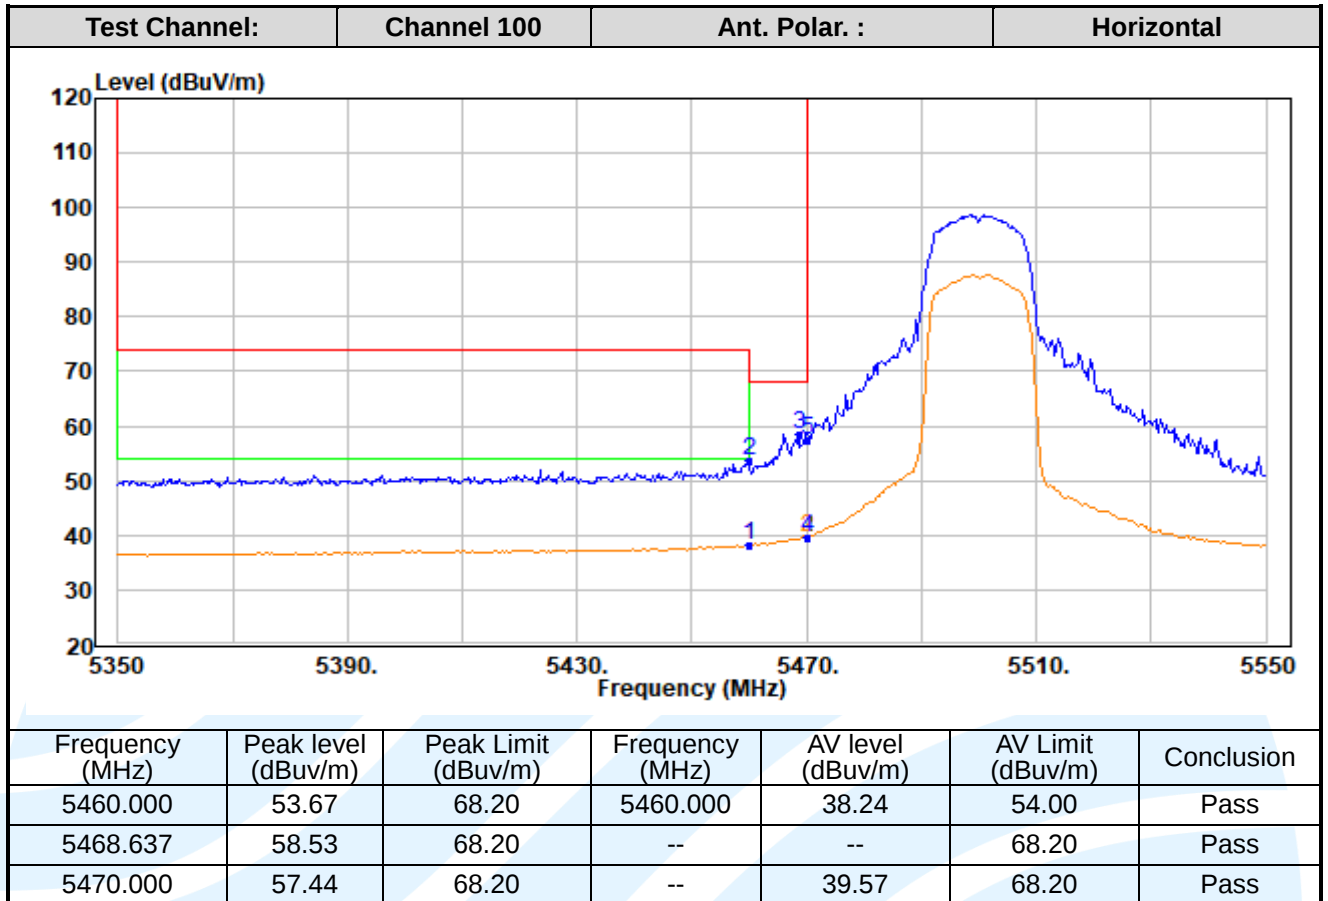

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

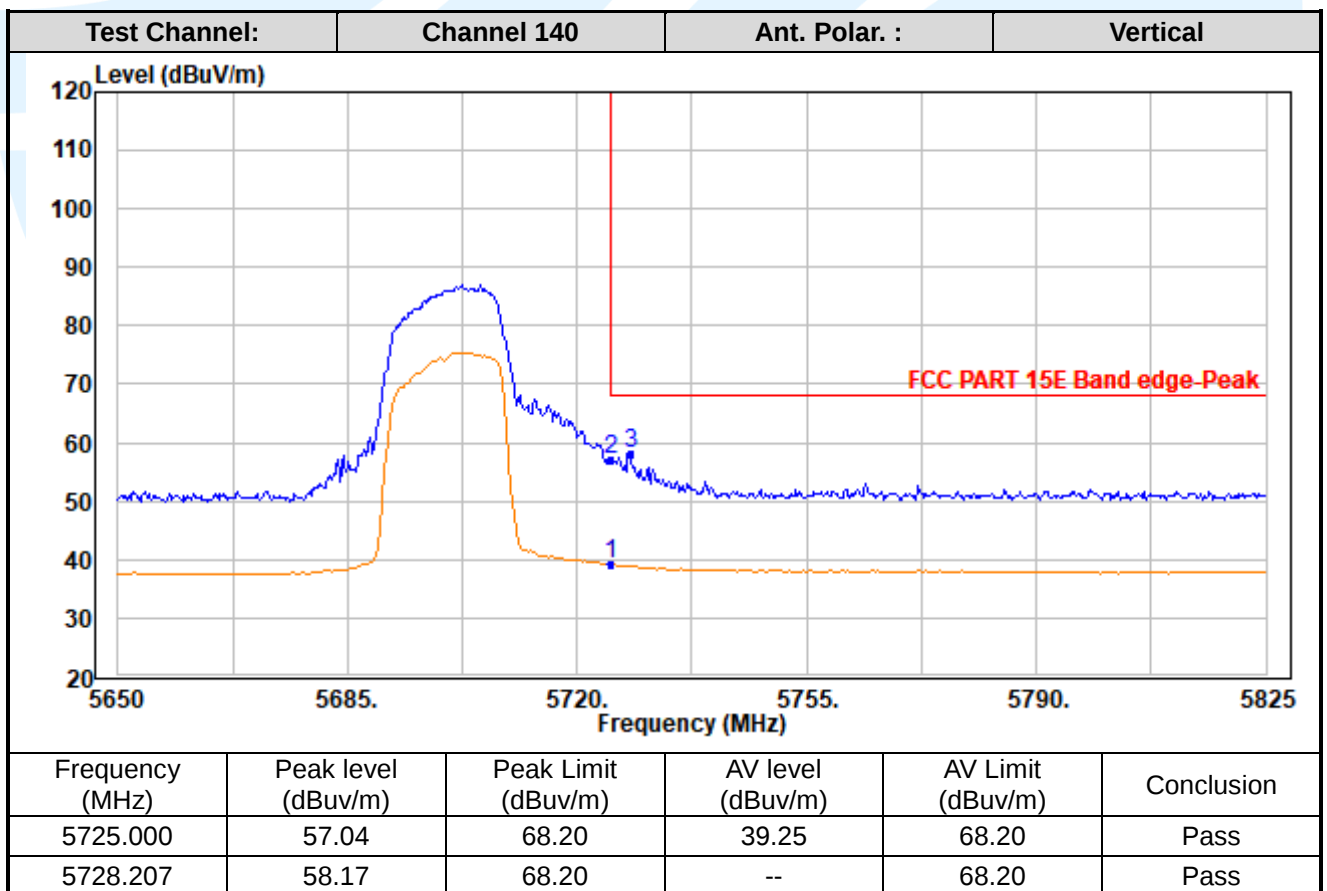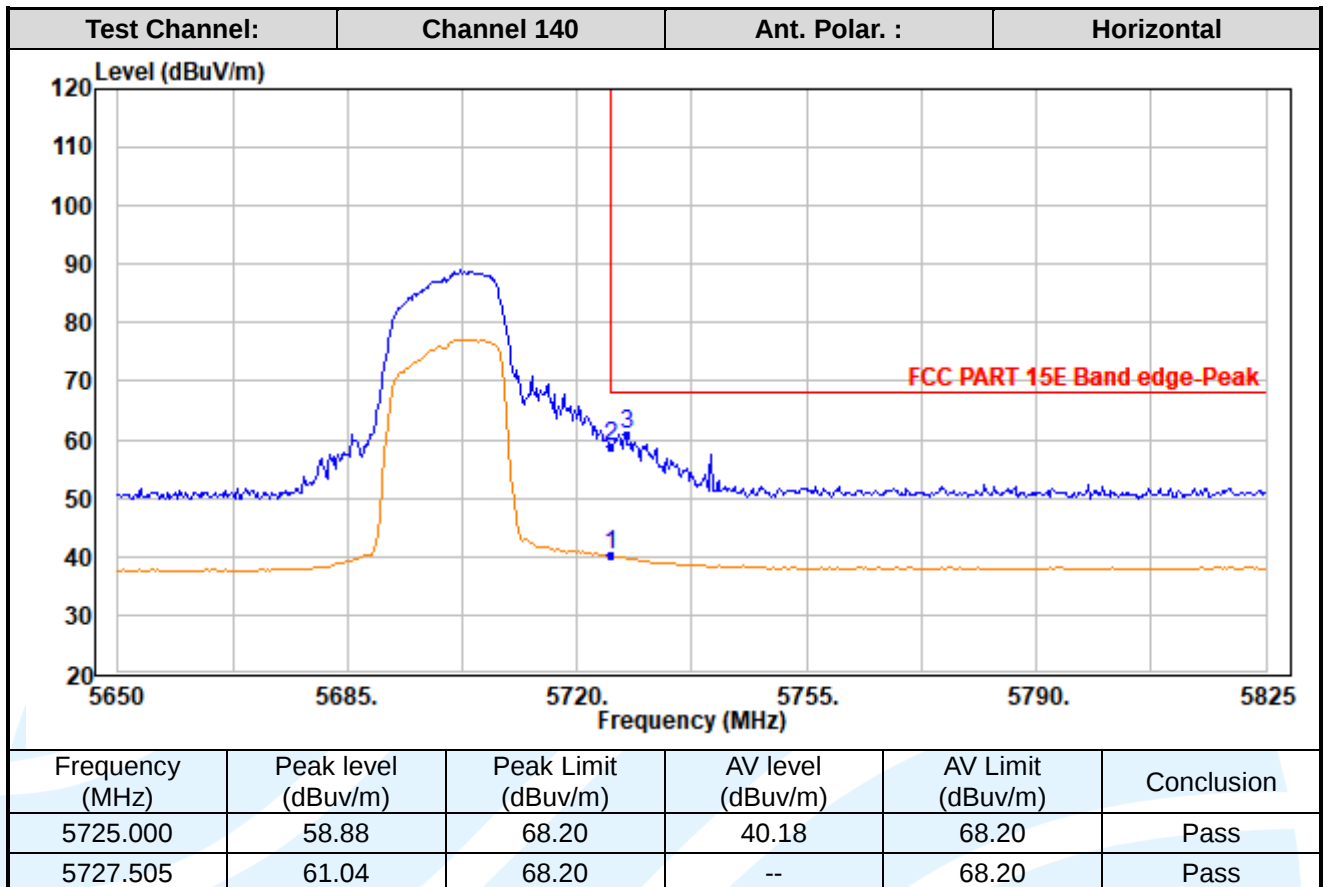

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

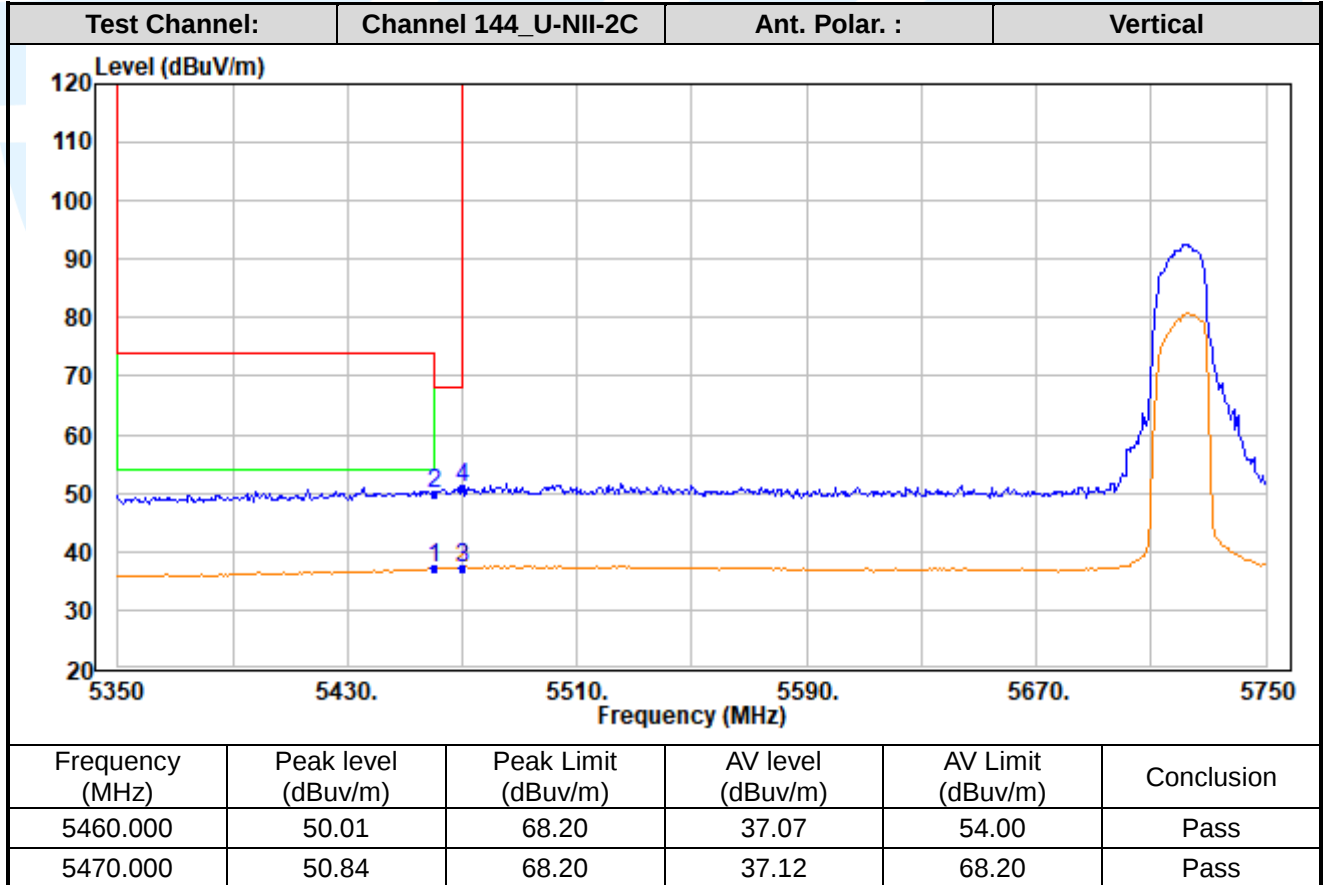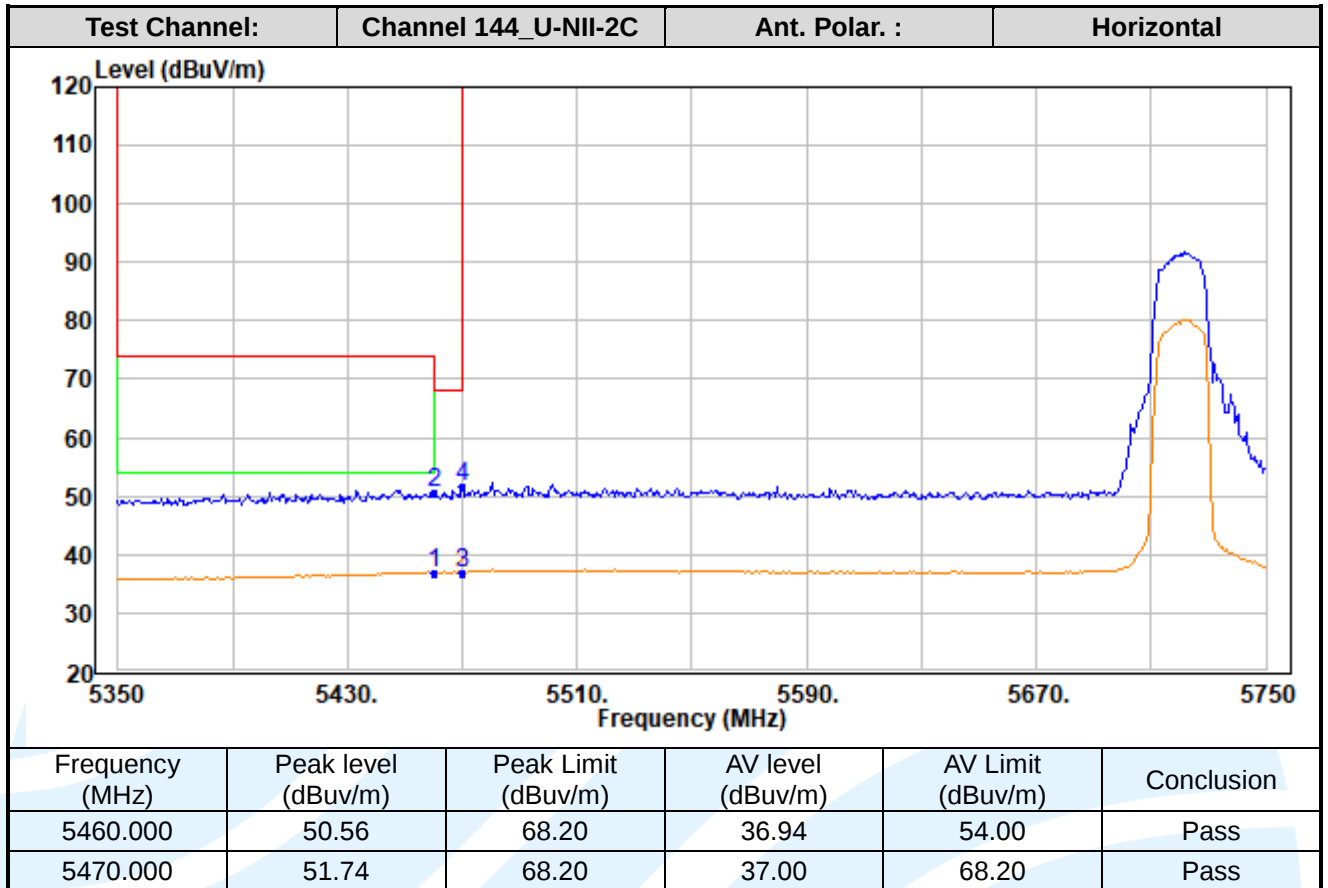

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

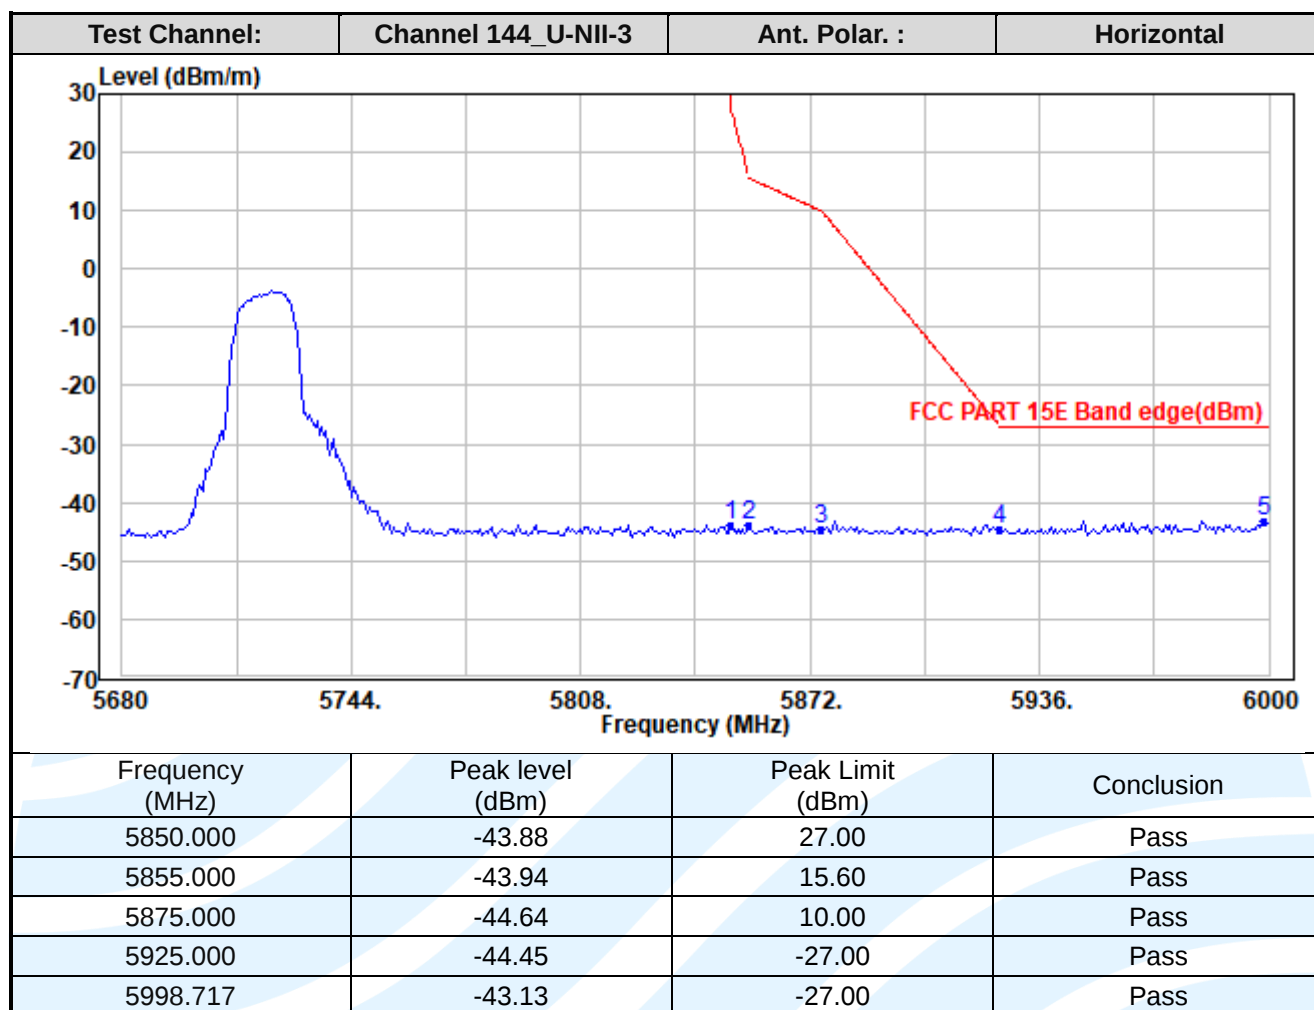

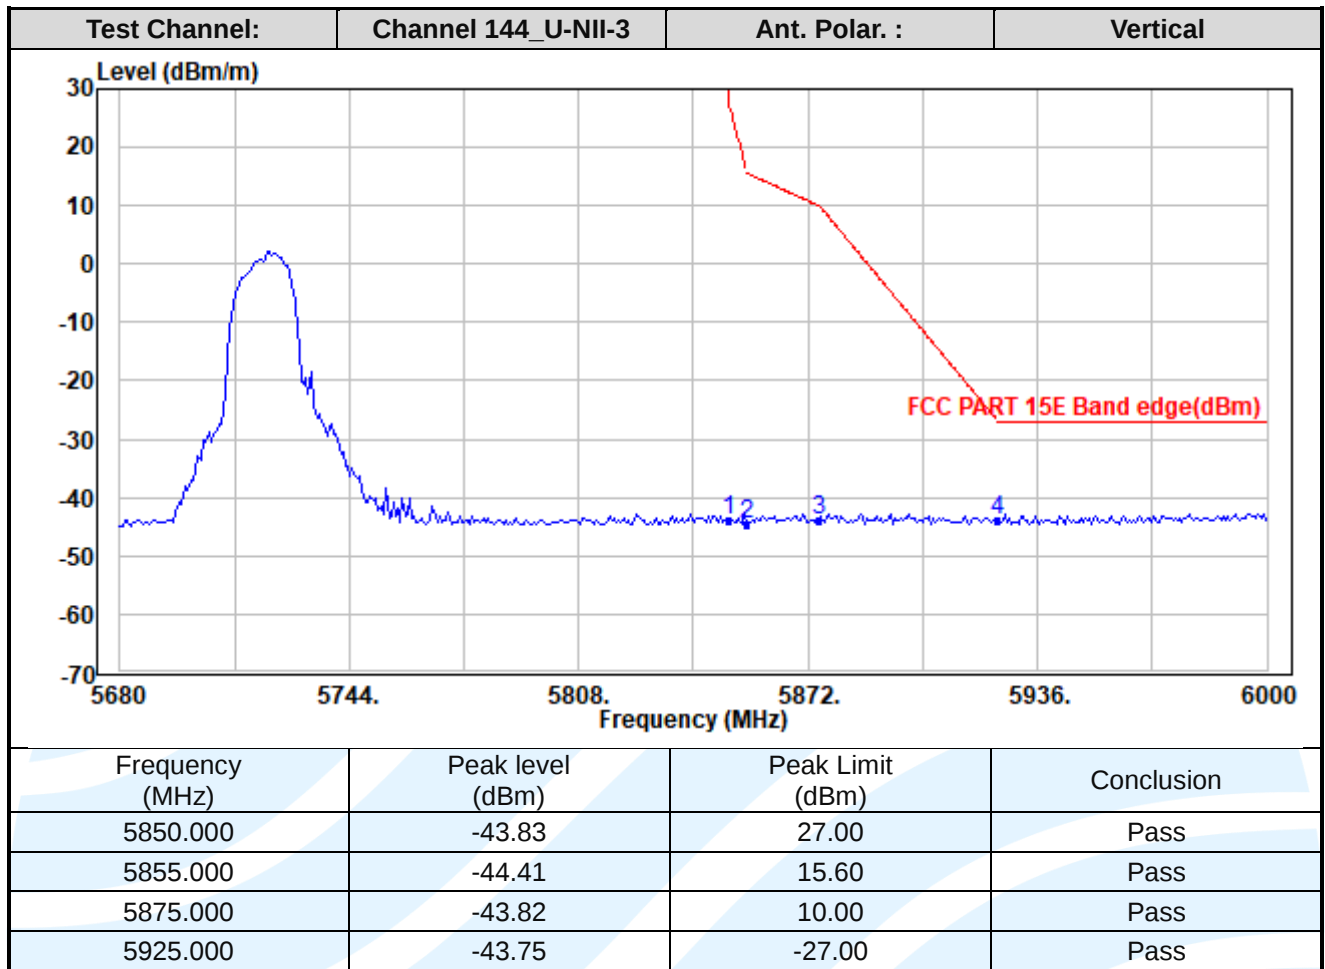

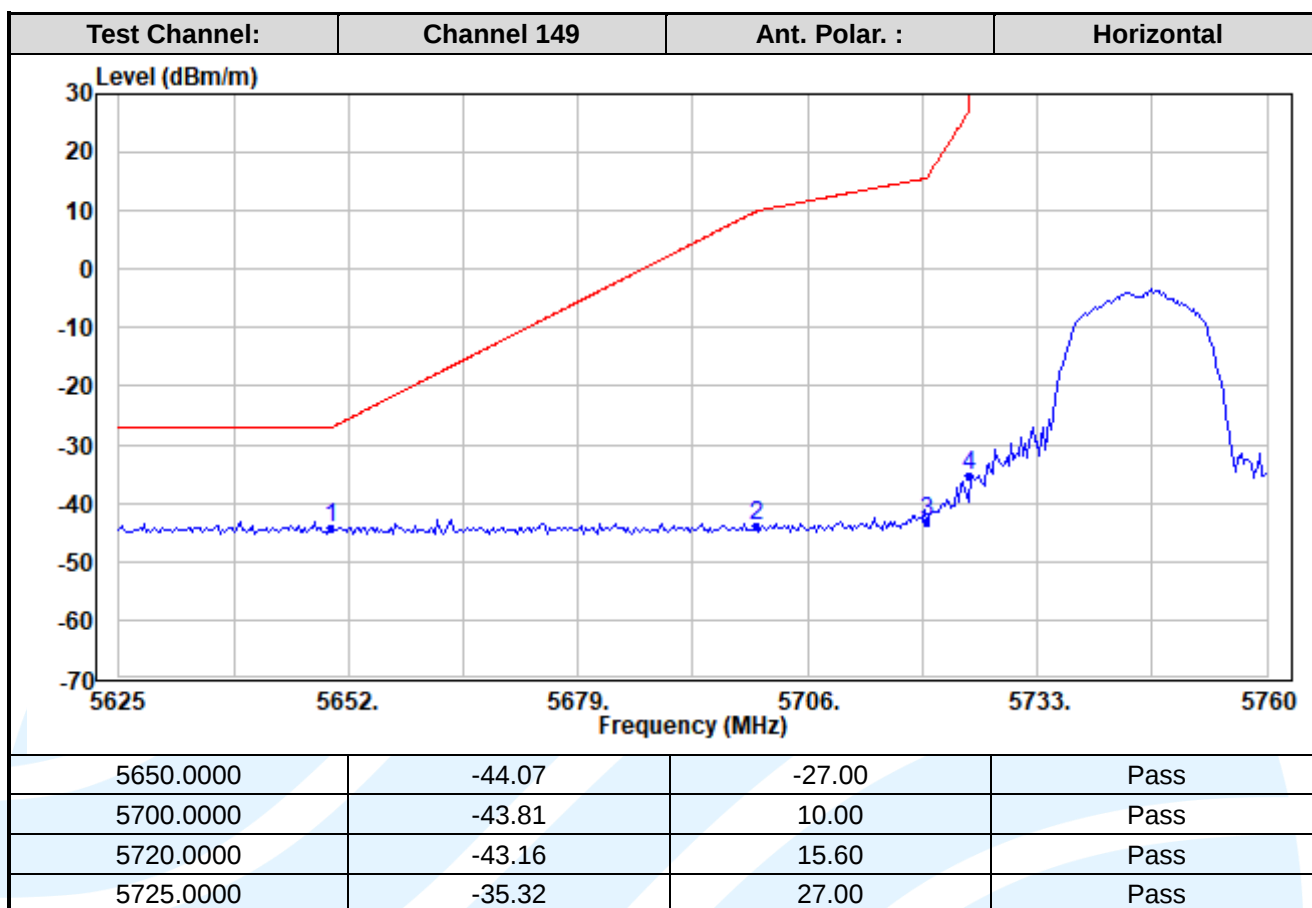

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

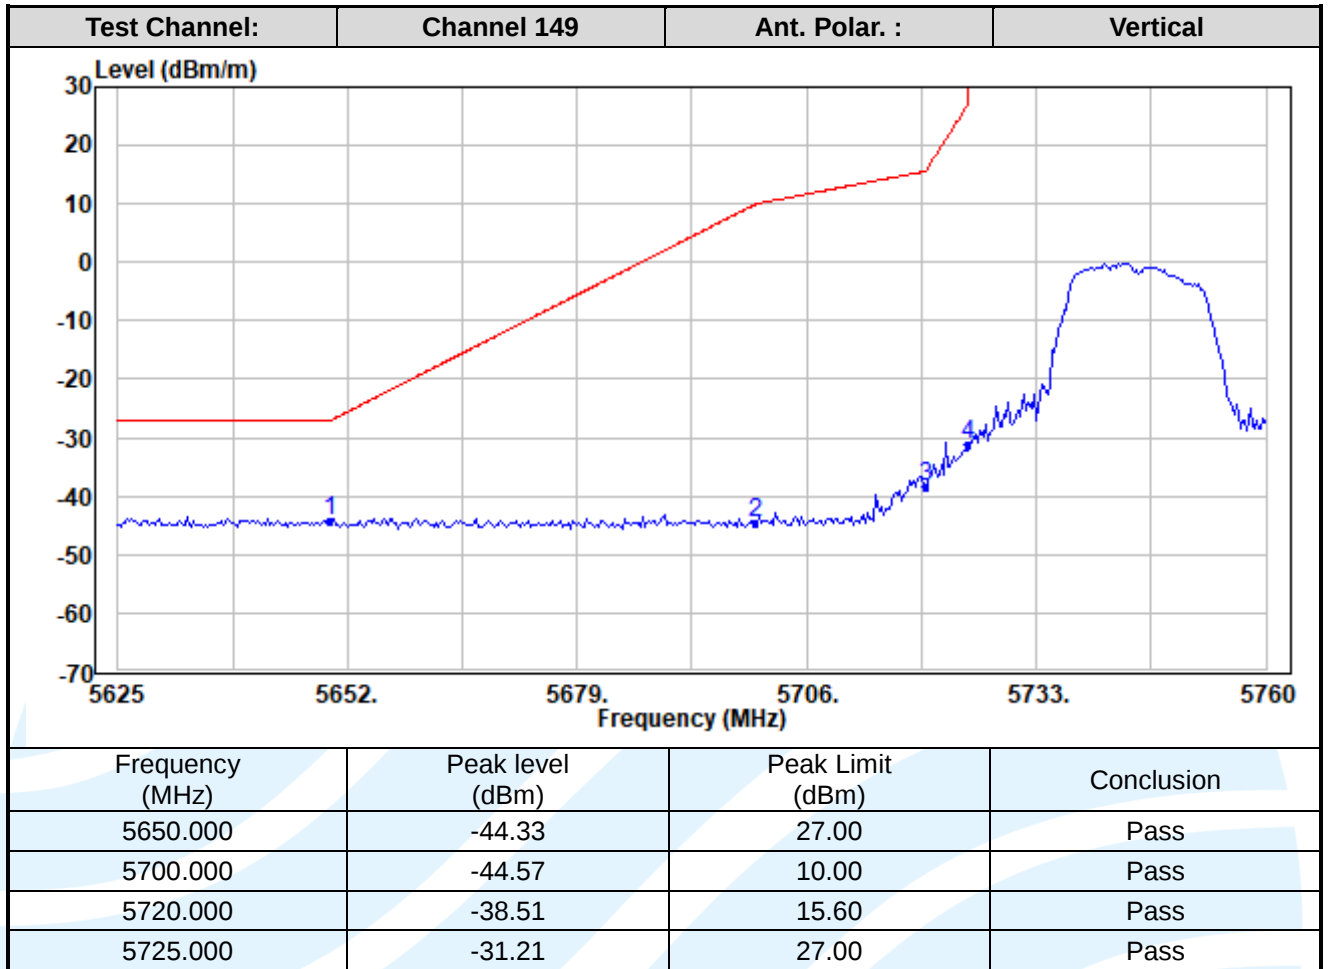

Shenzhen UnionTrust Quality and Technology Co., Ltd.


Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com
<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

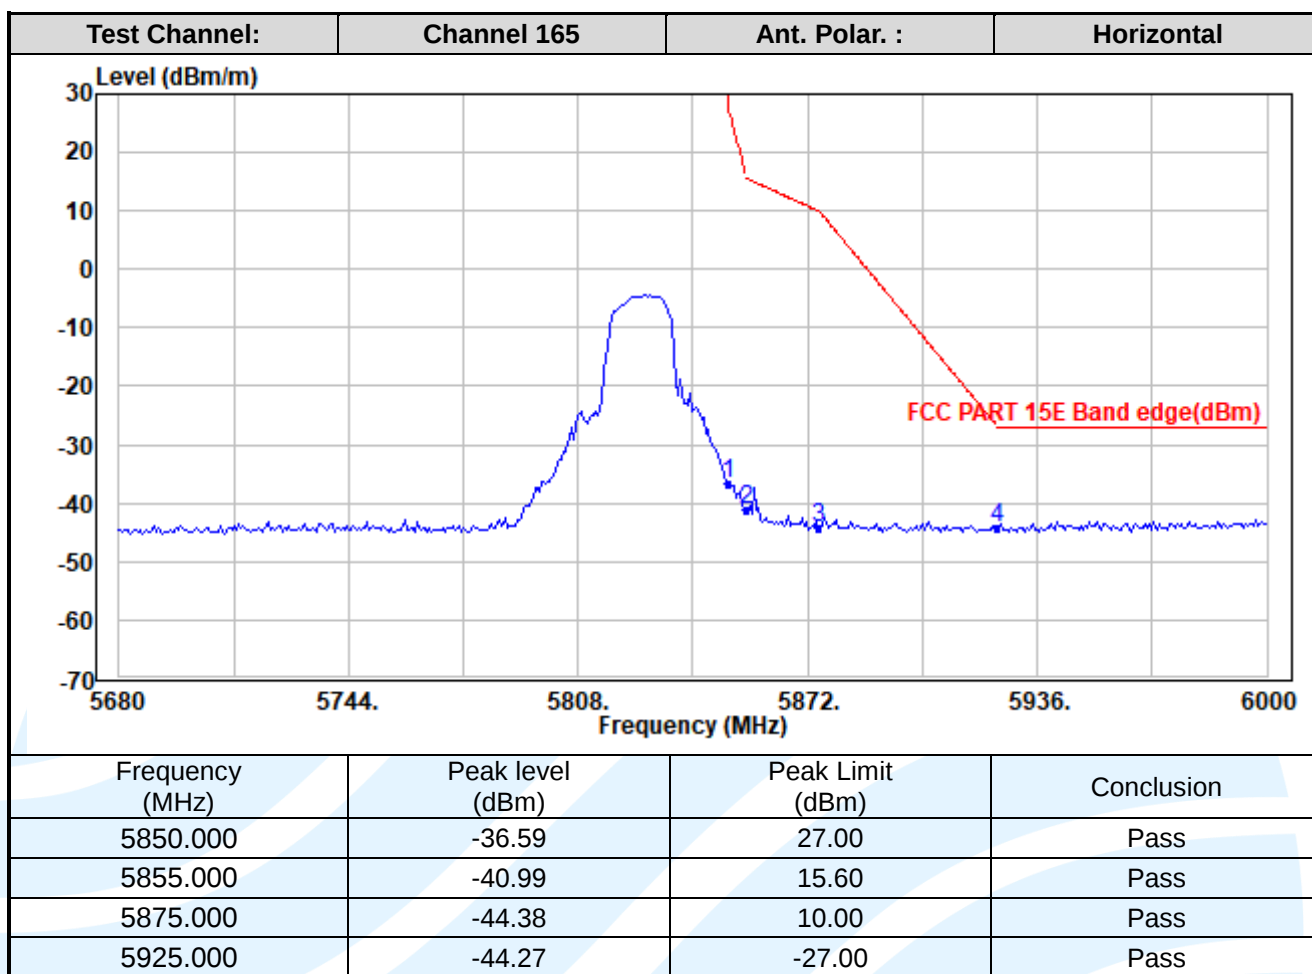

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

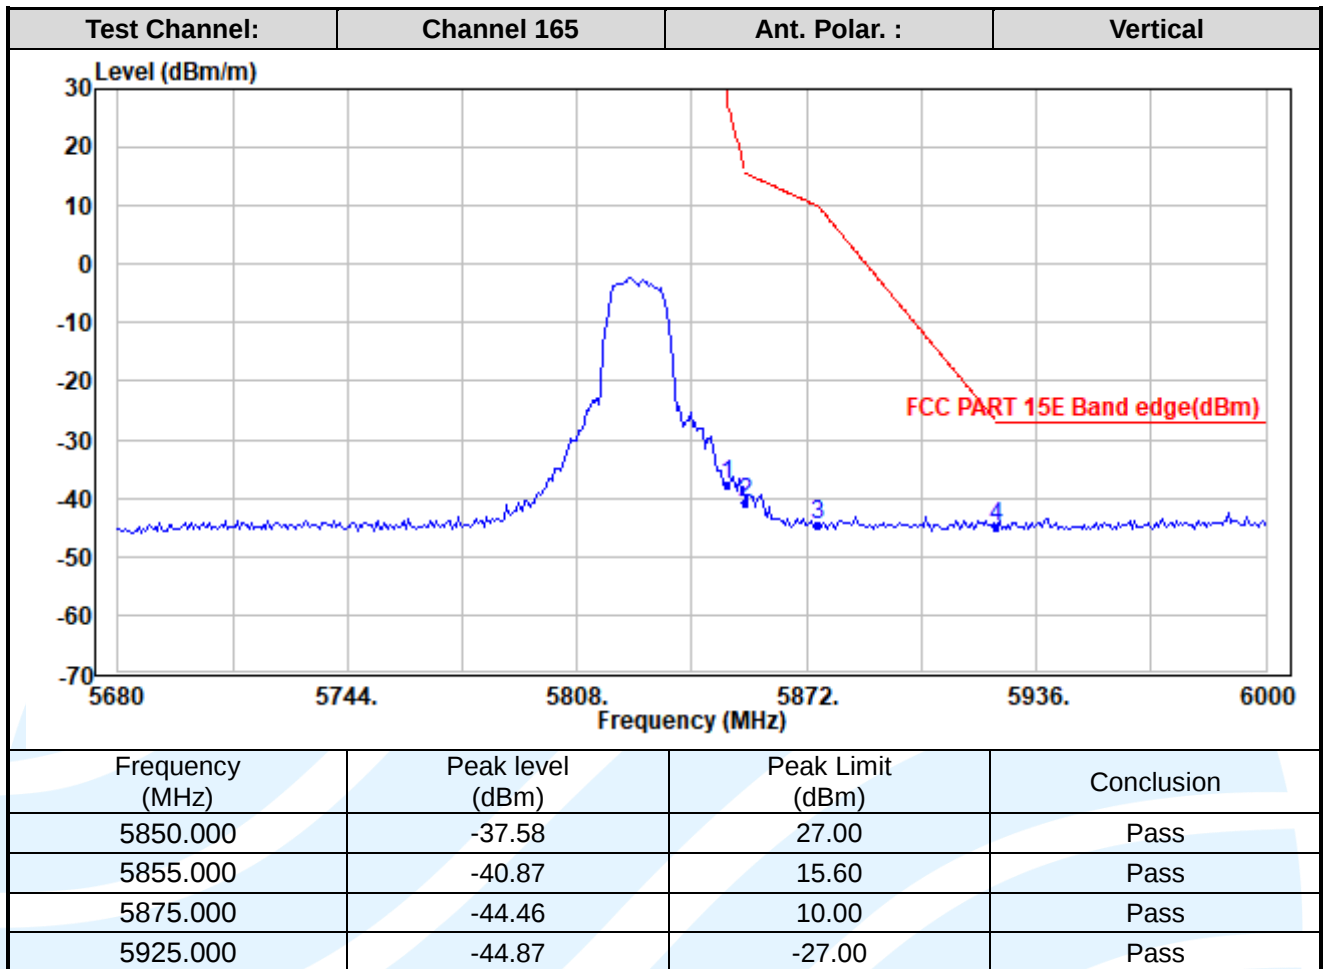

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com
<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

IEEE 802.11ac-VHT20

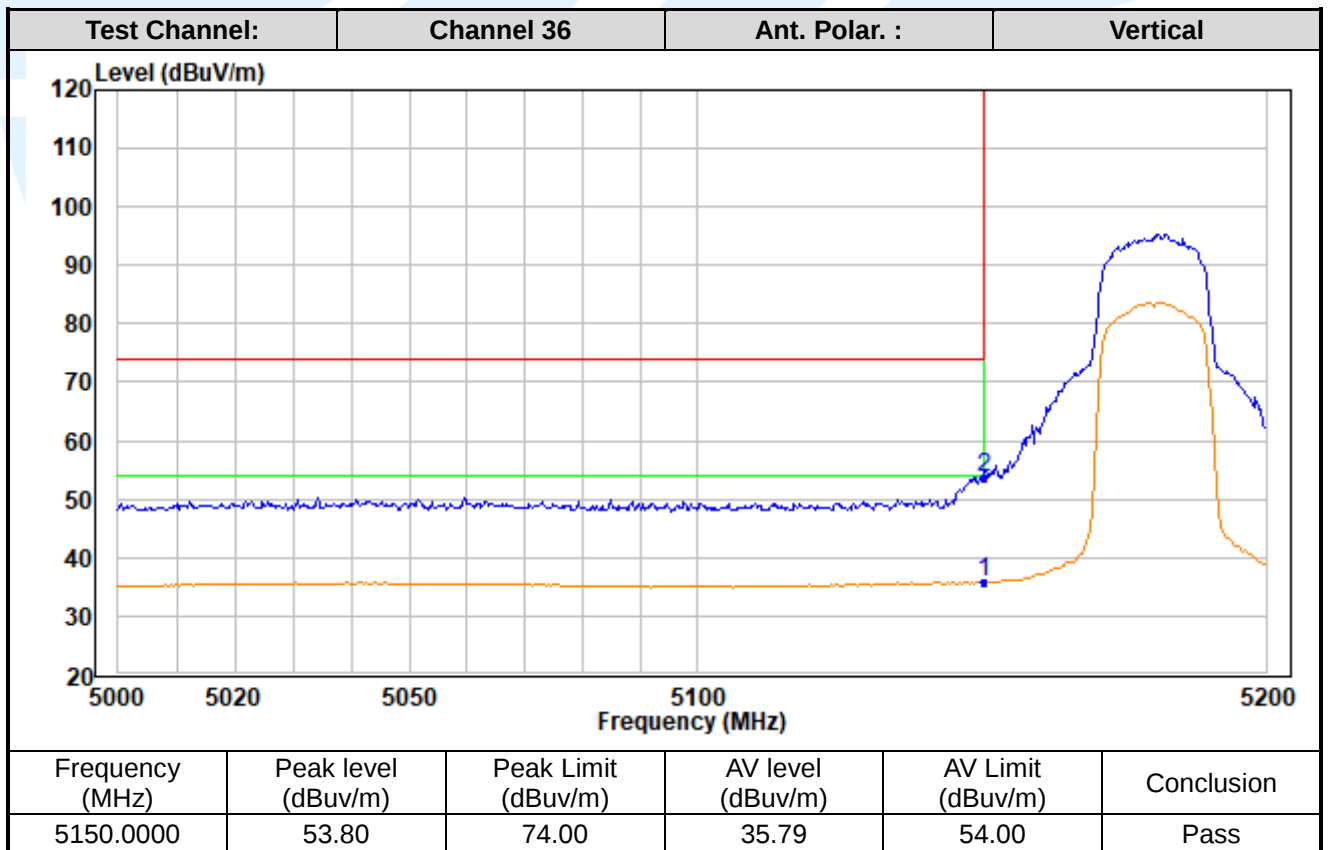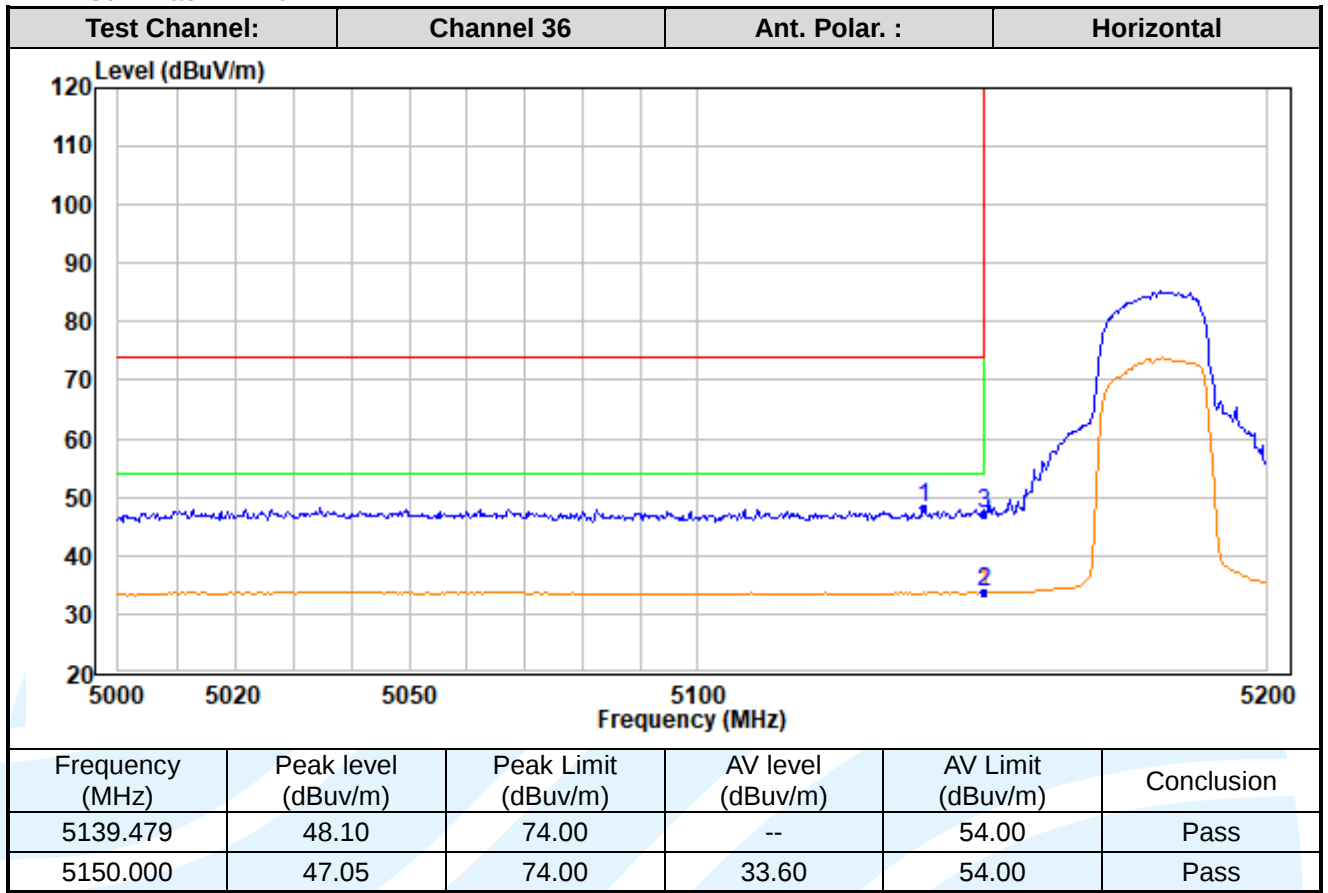

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

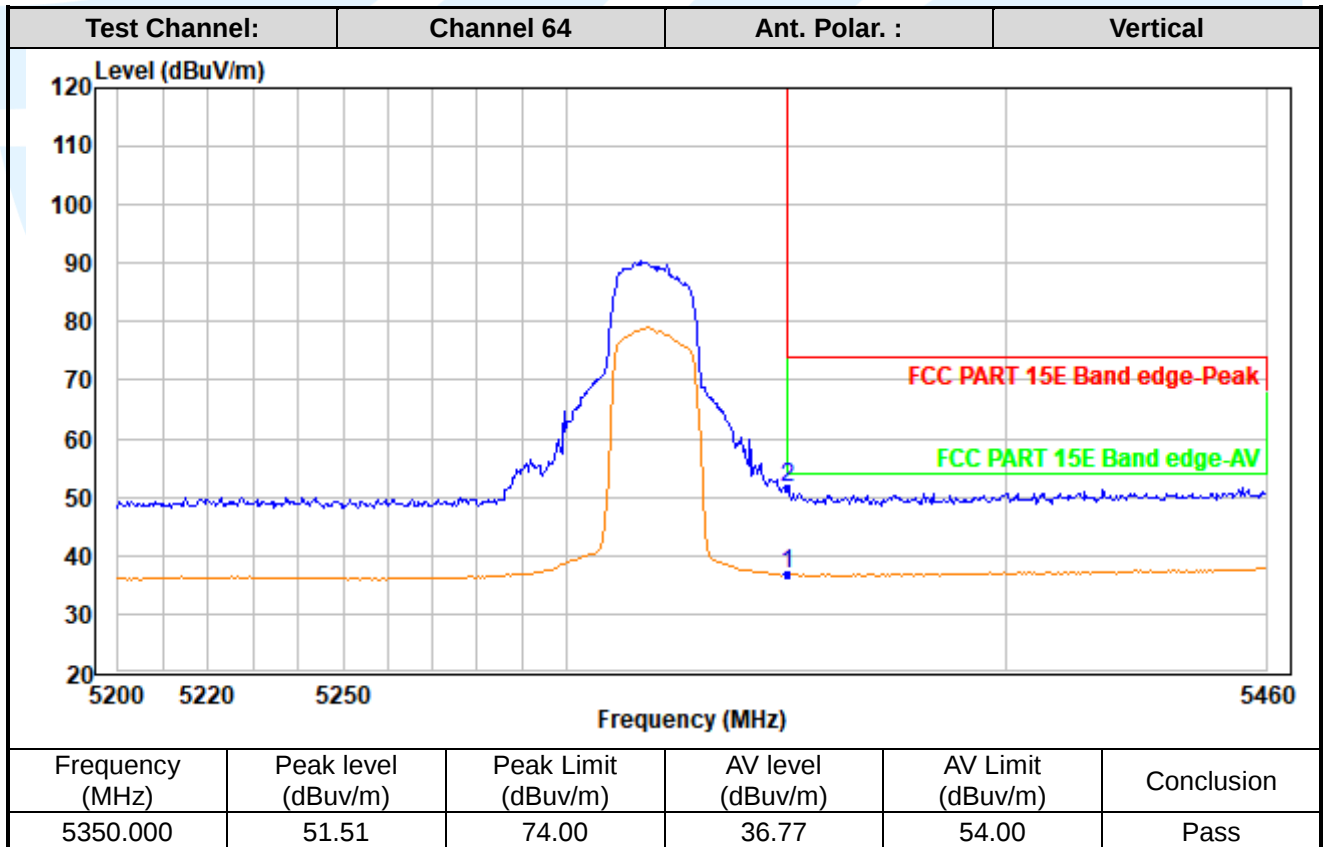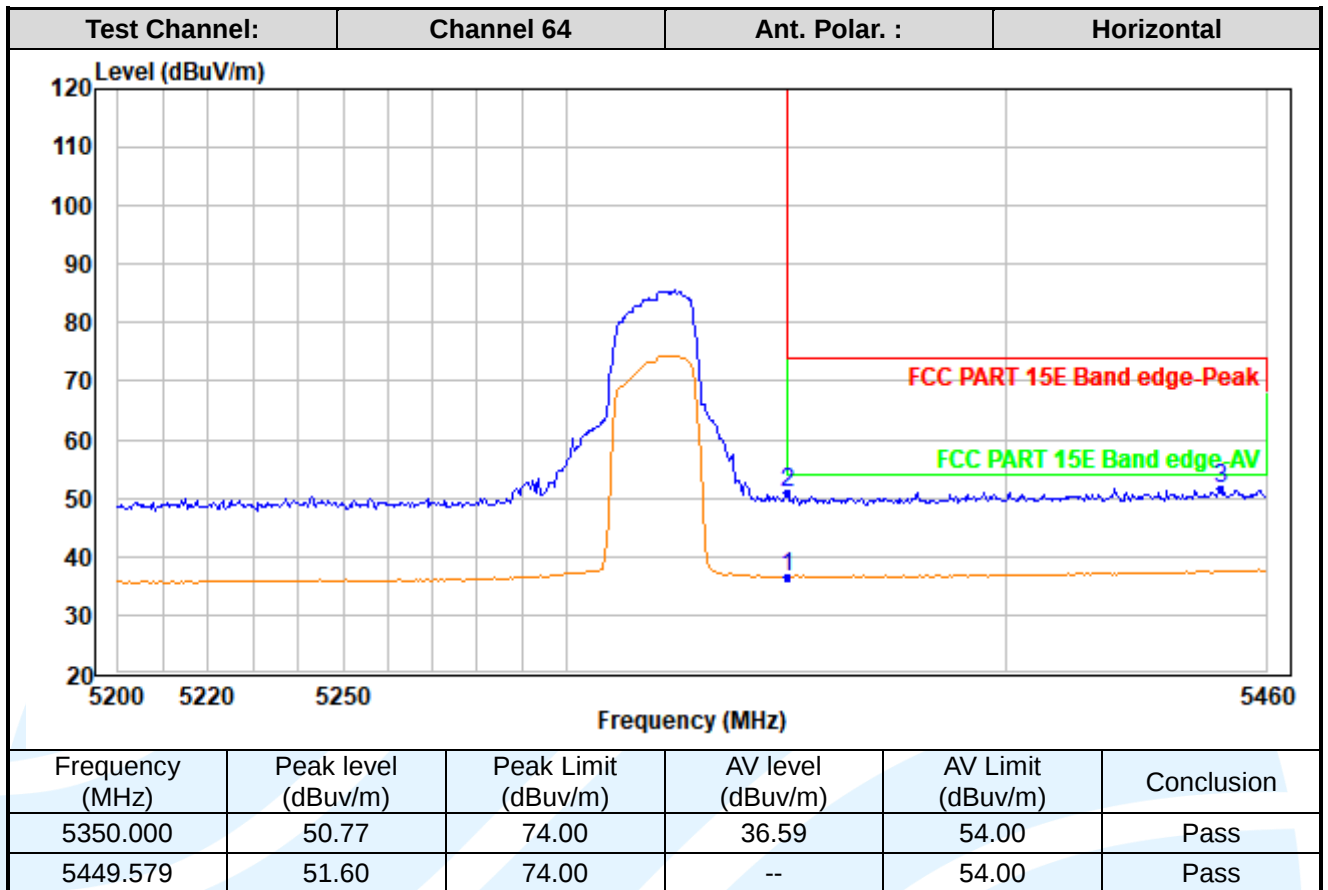

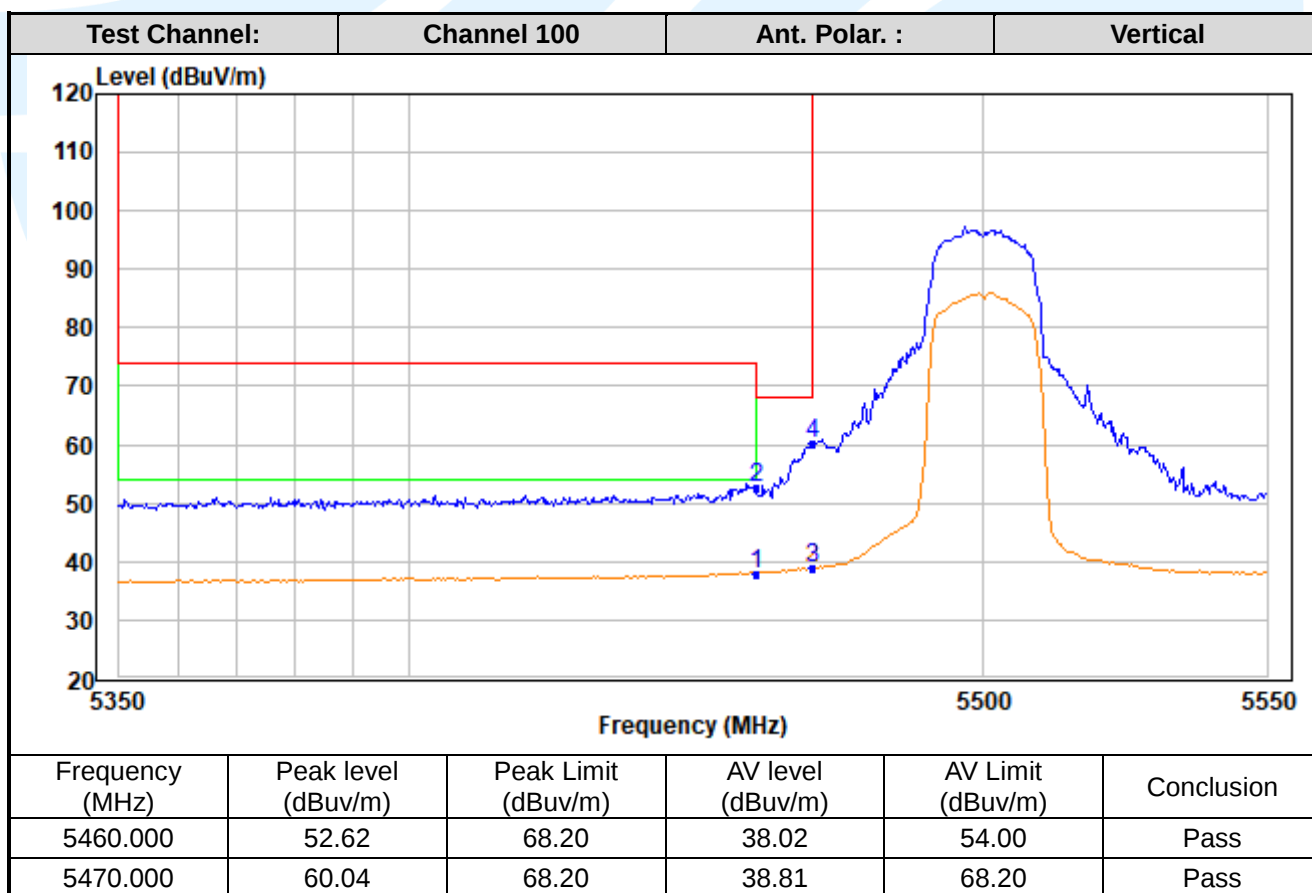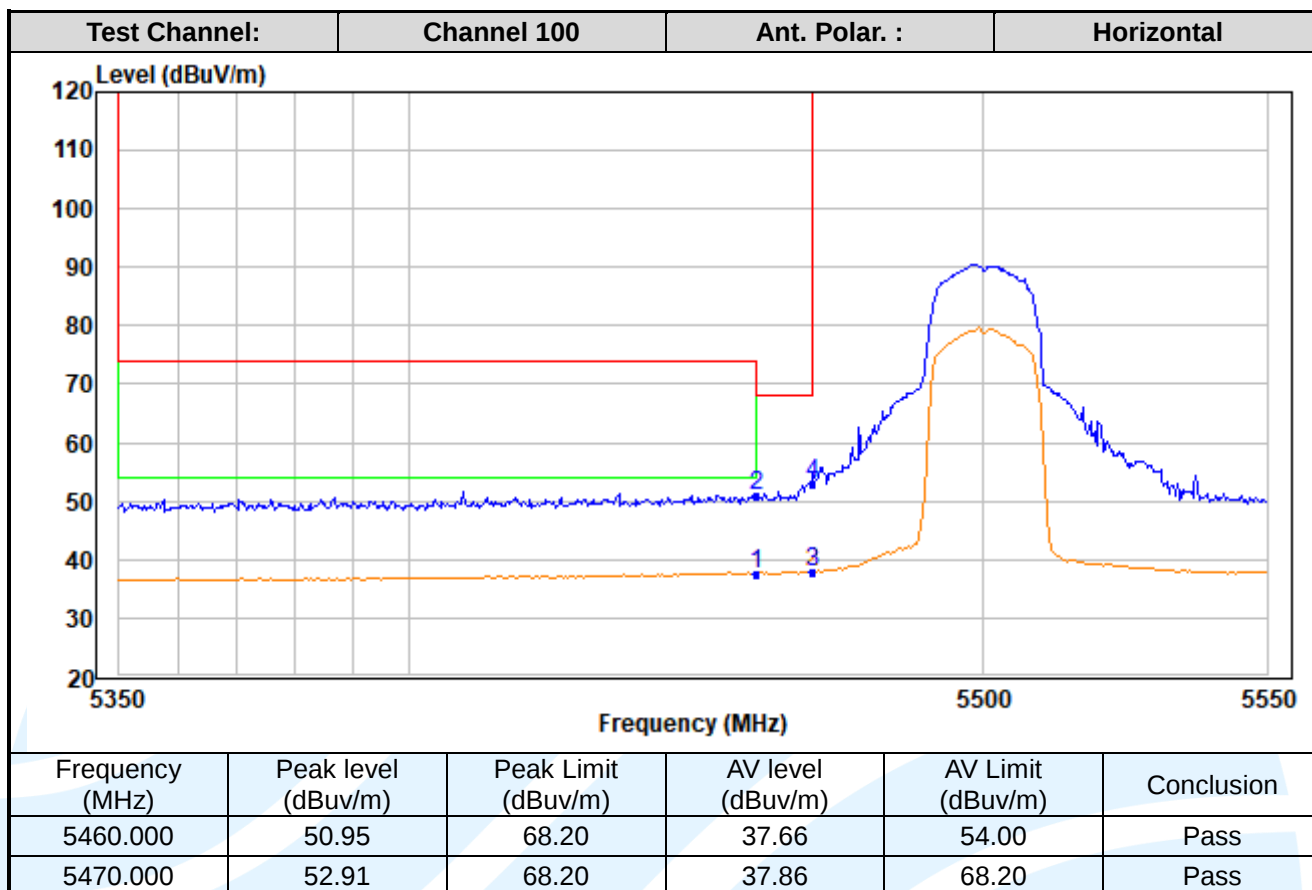

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

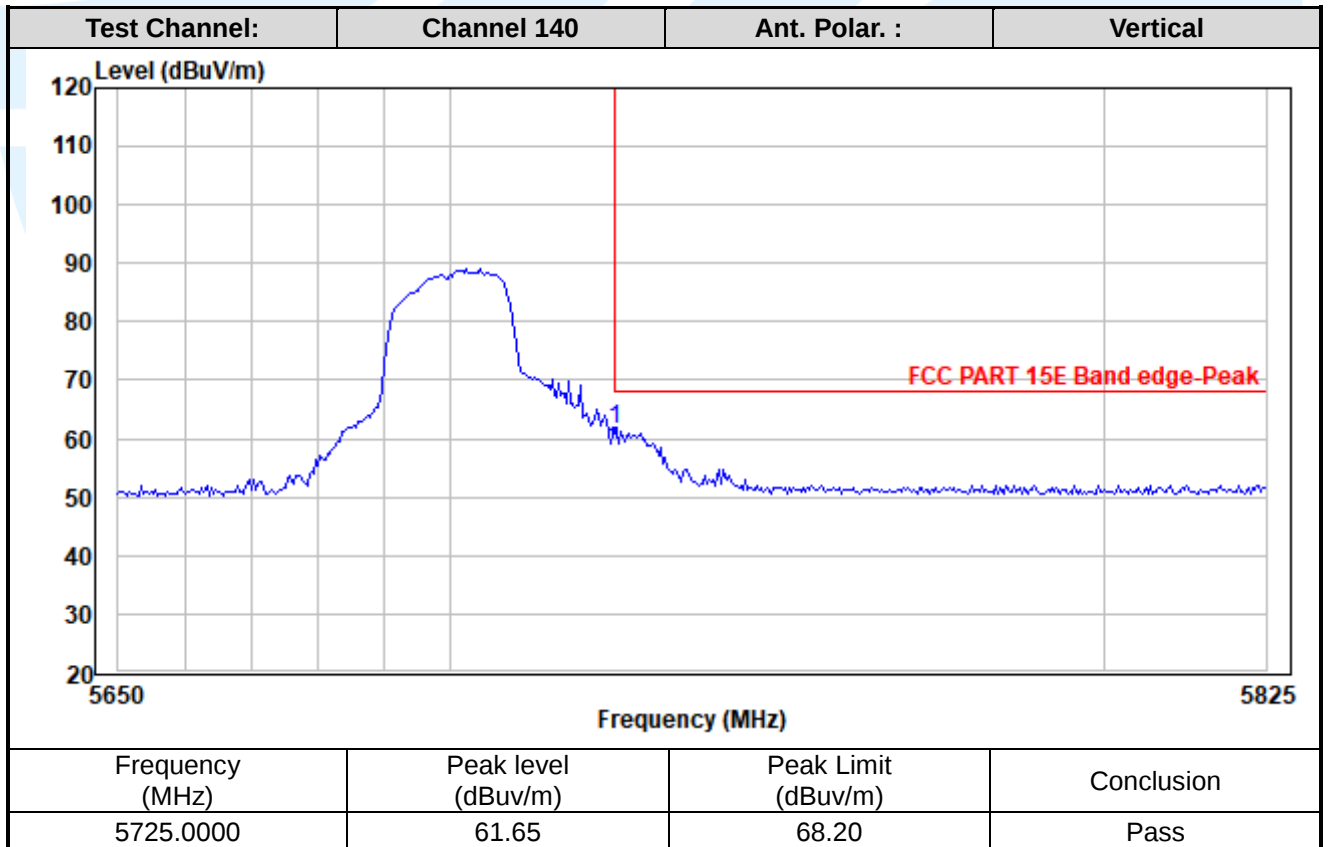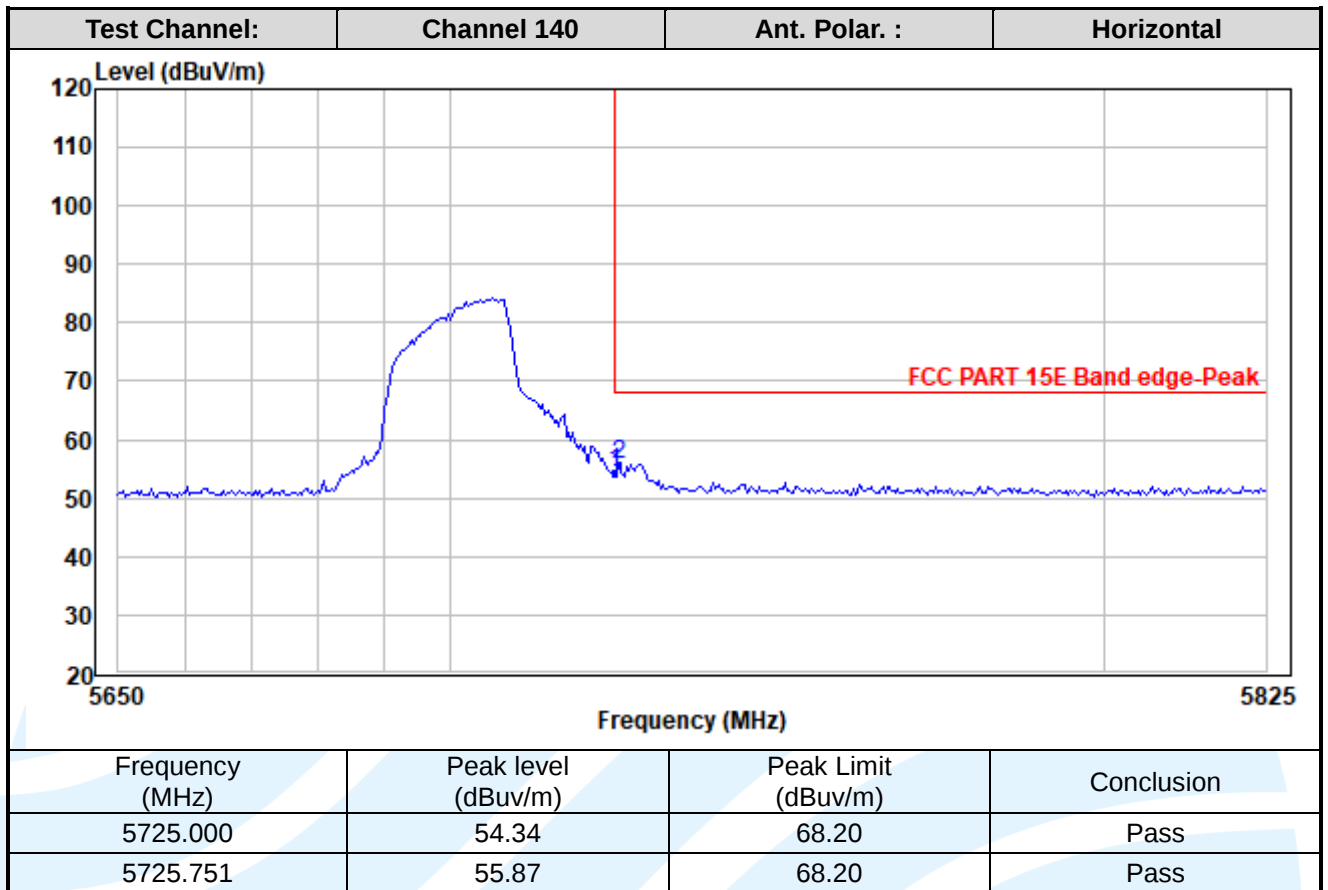

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

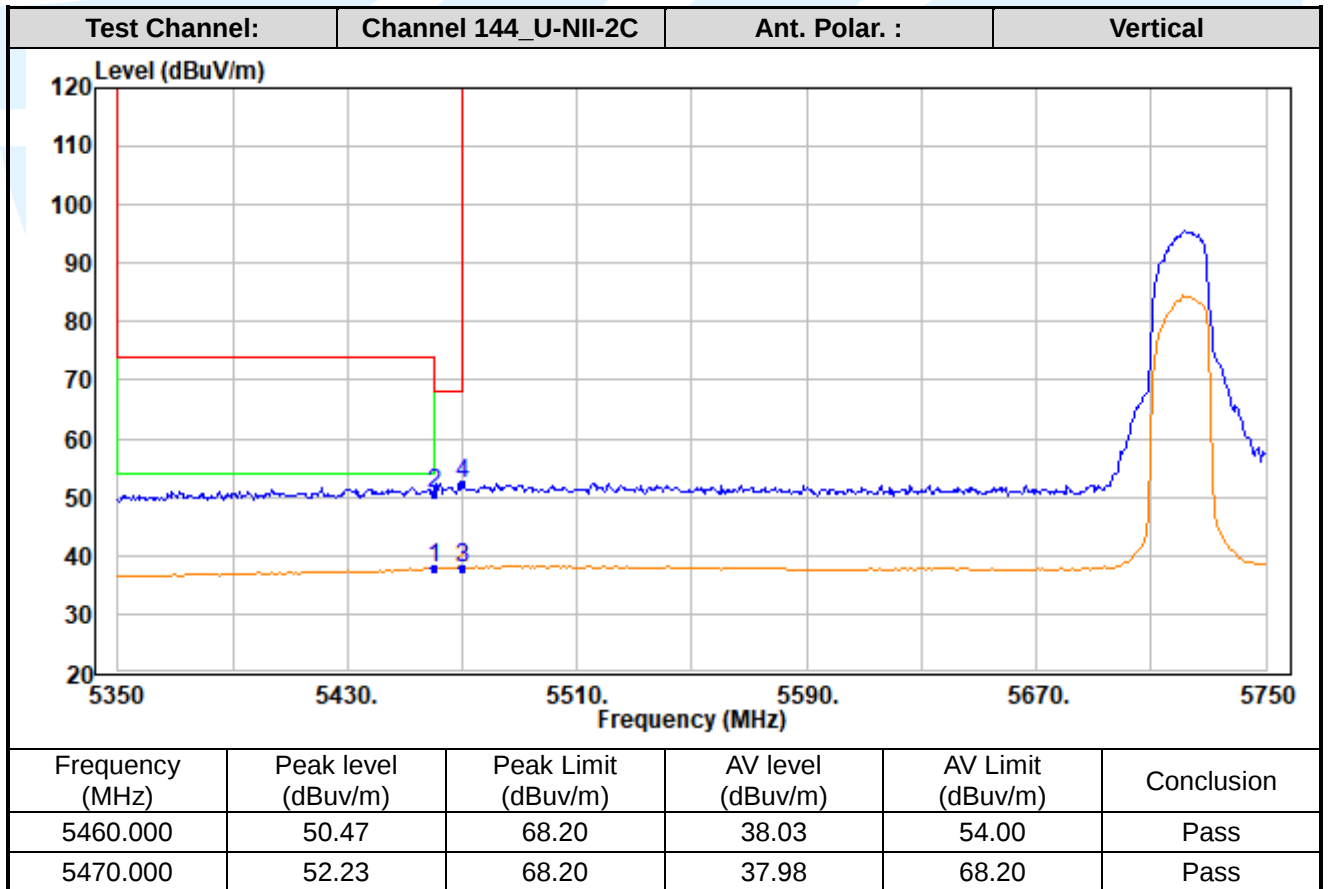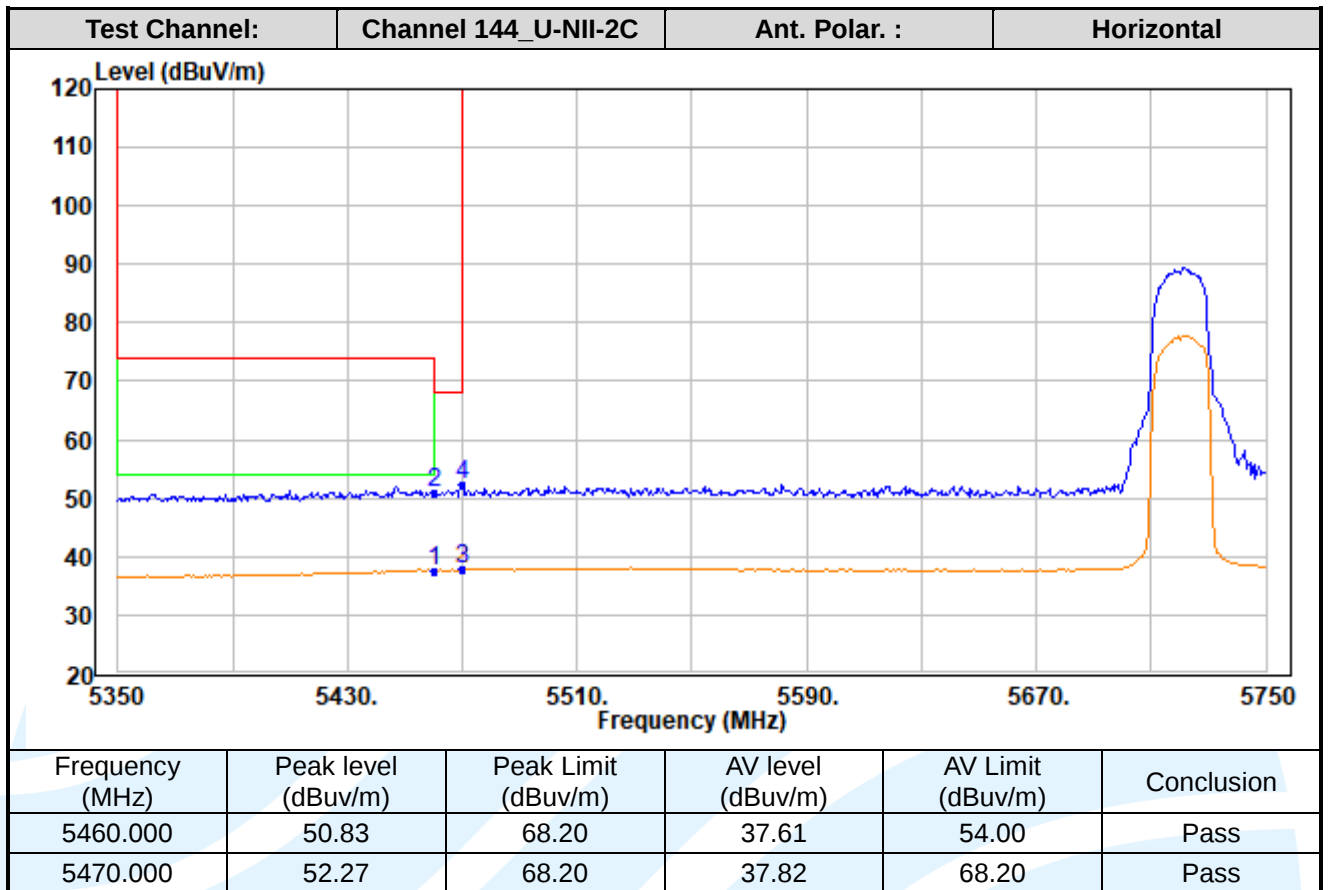

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

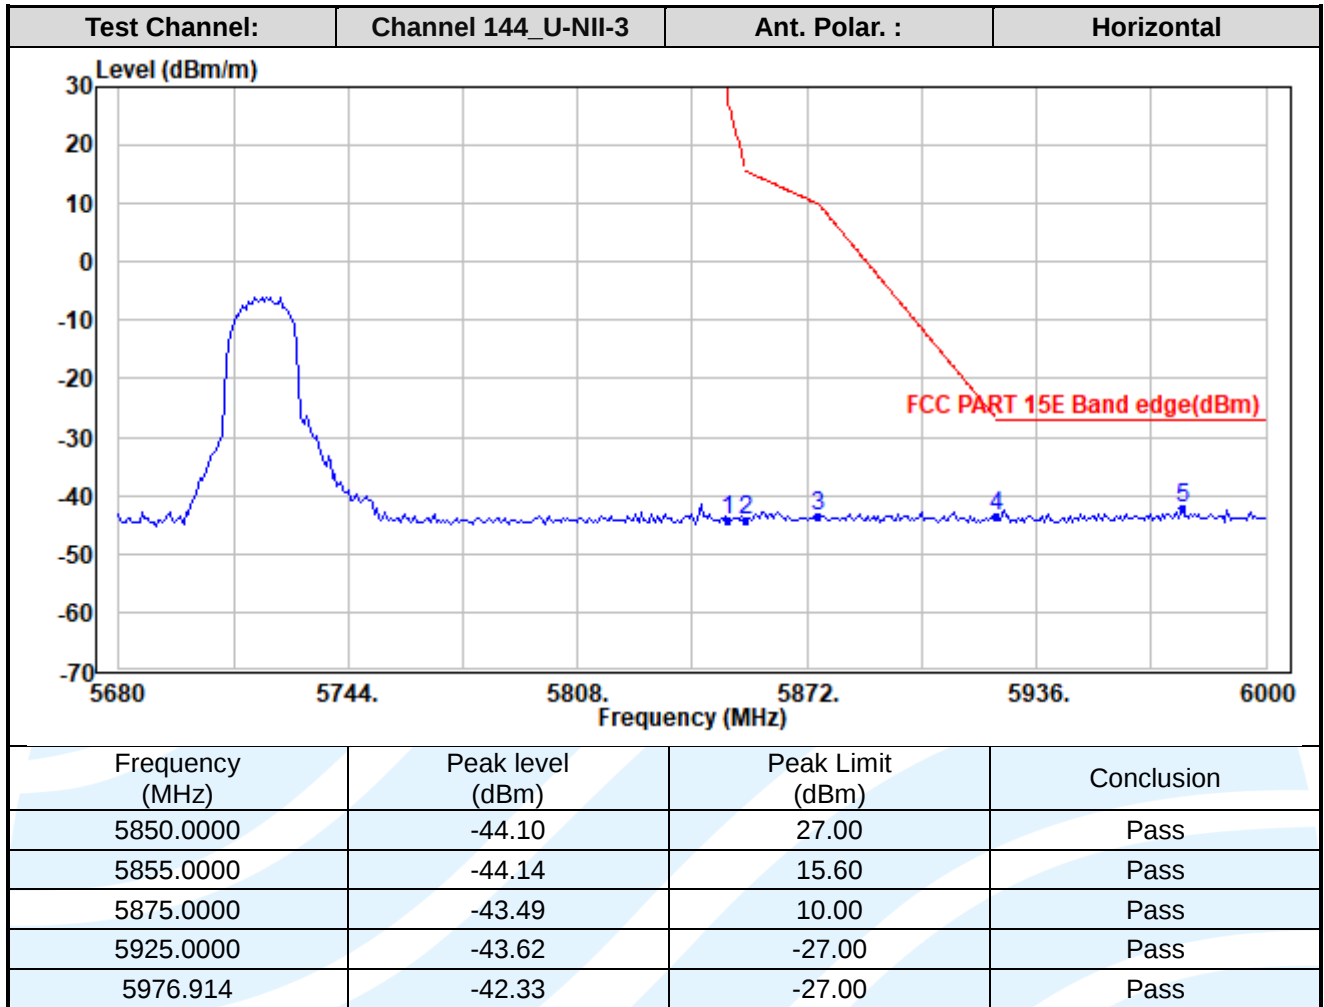

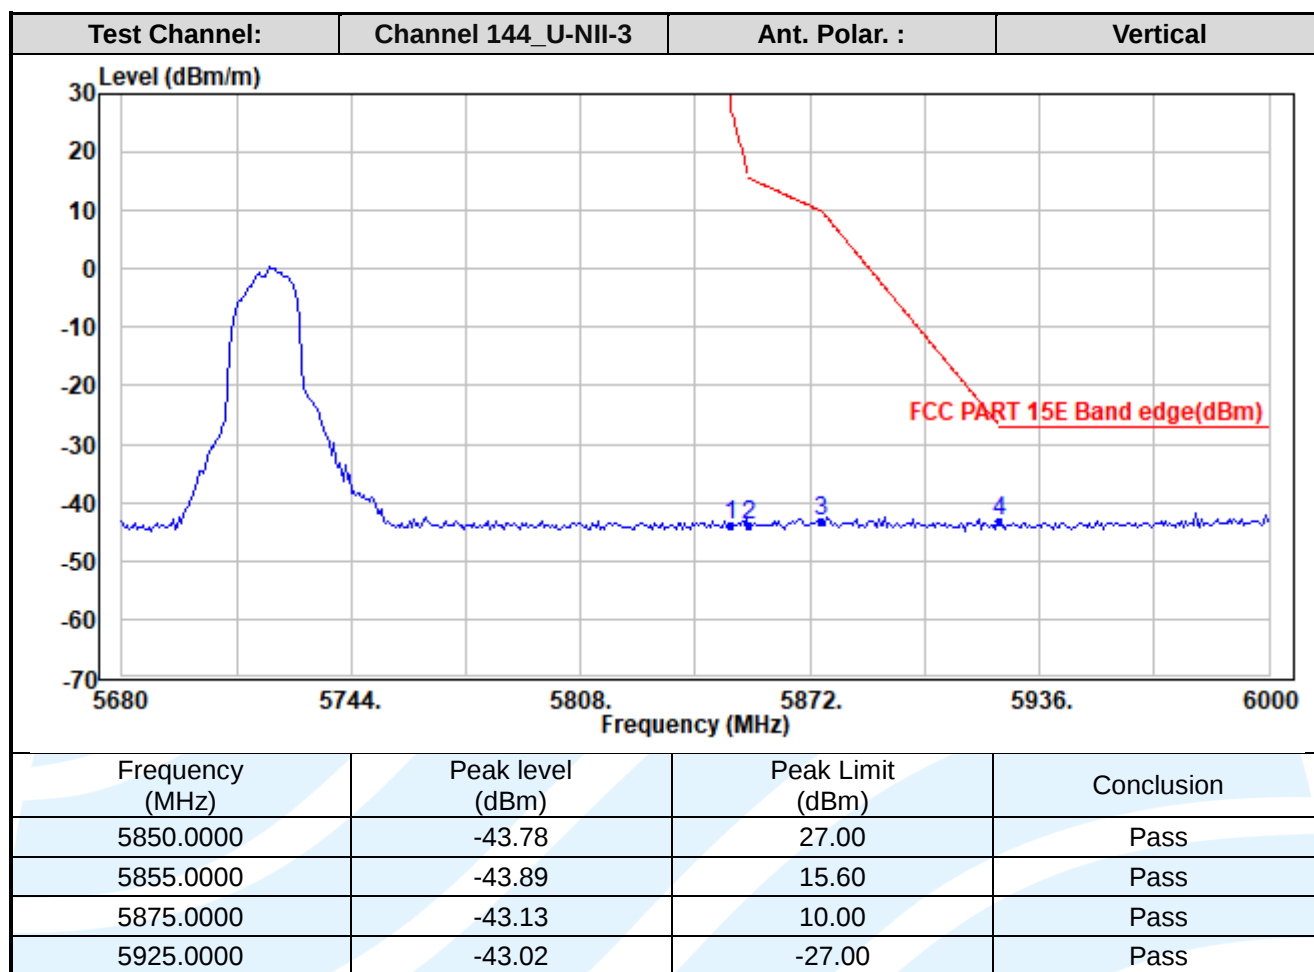

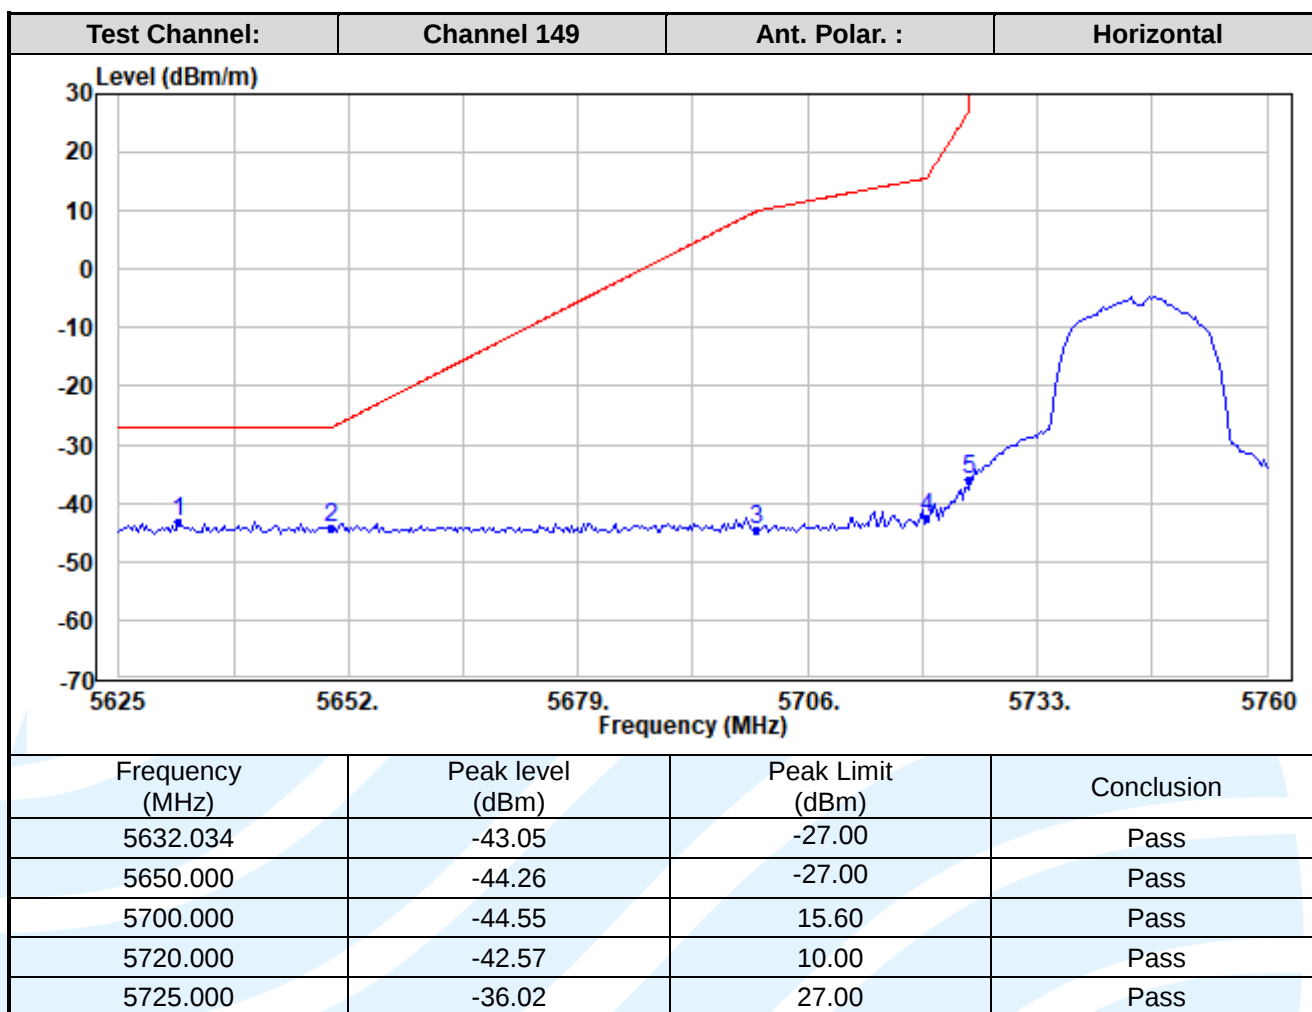

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

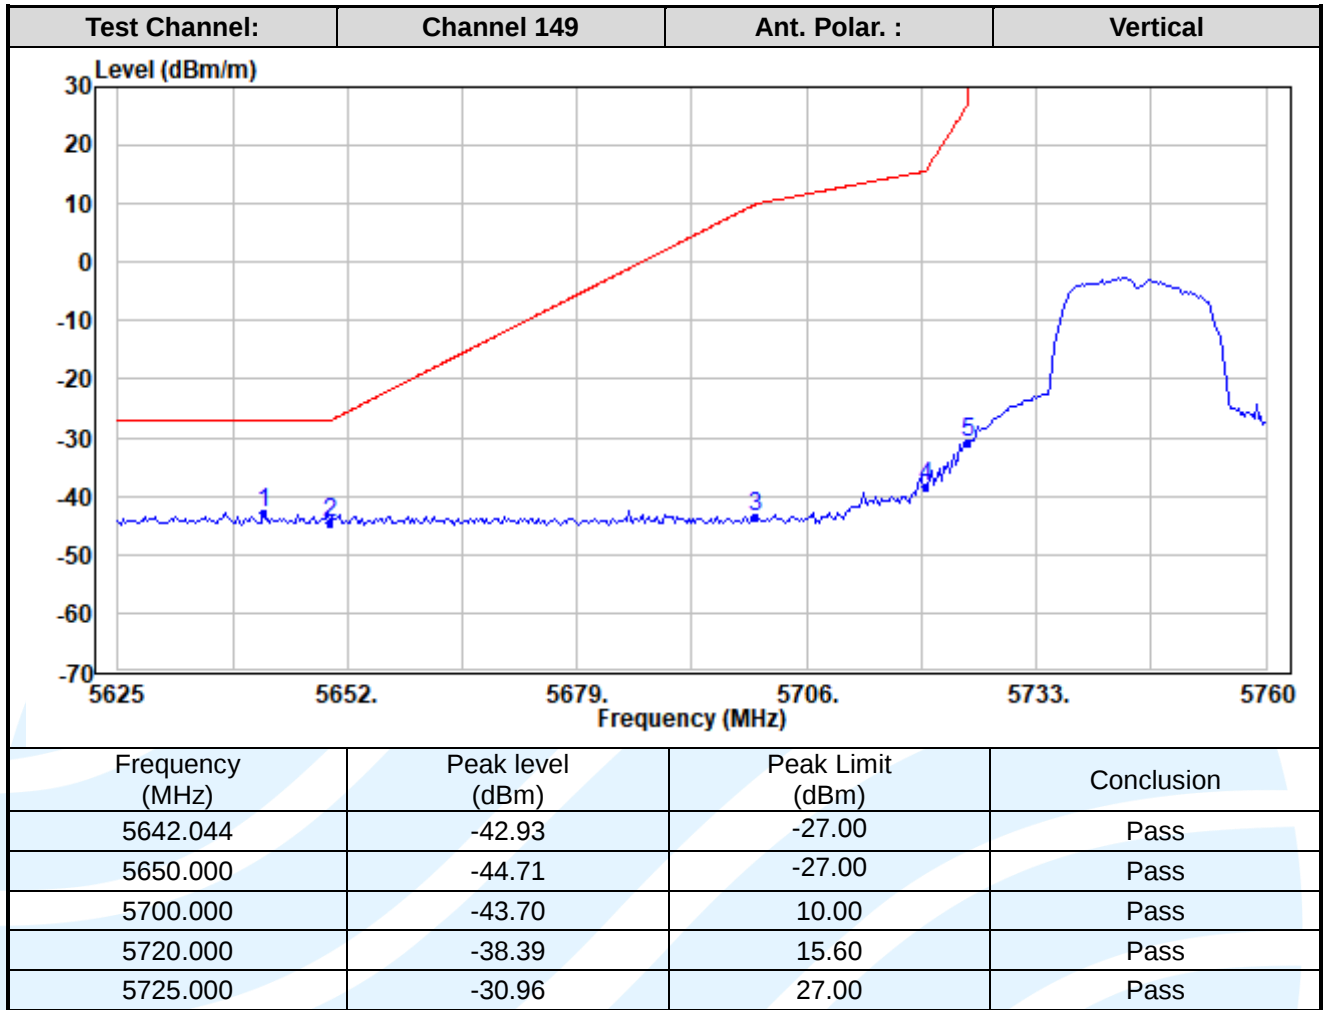

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

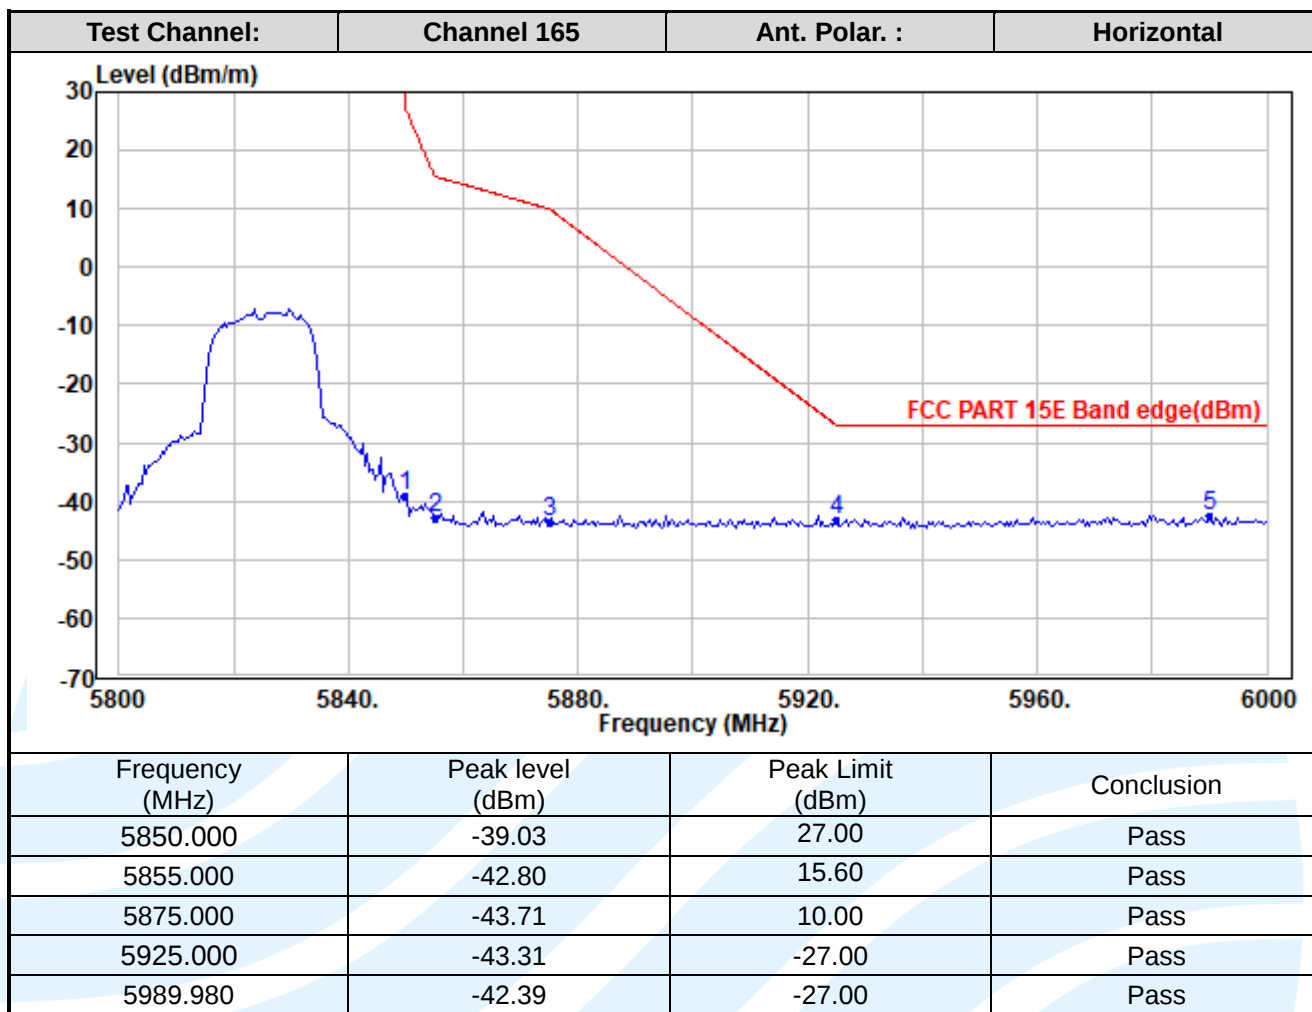

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886



E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

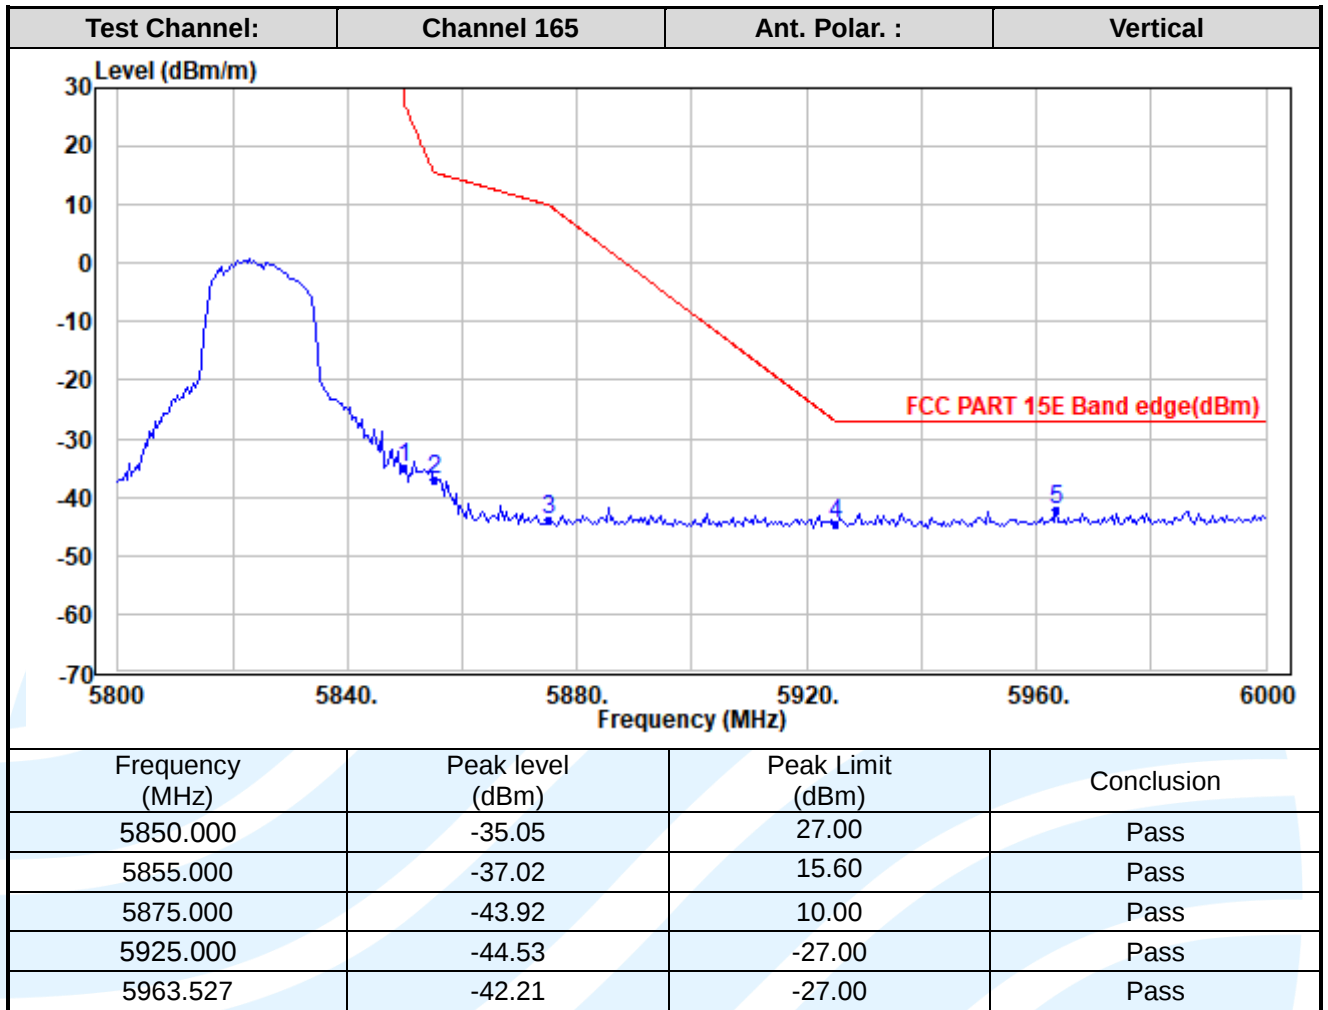

IEEE 802.11ac-VHT40

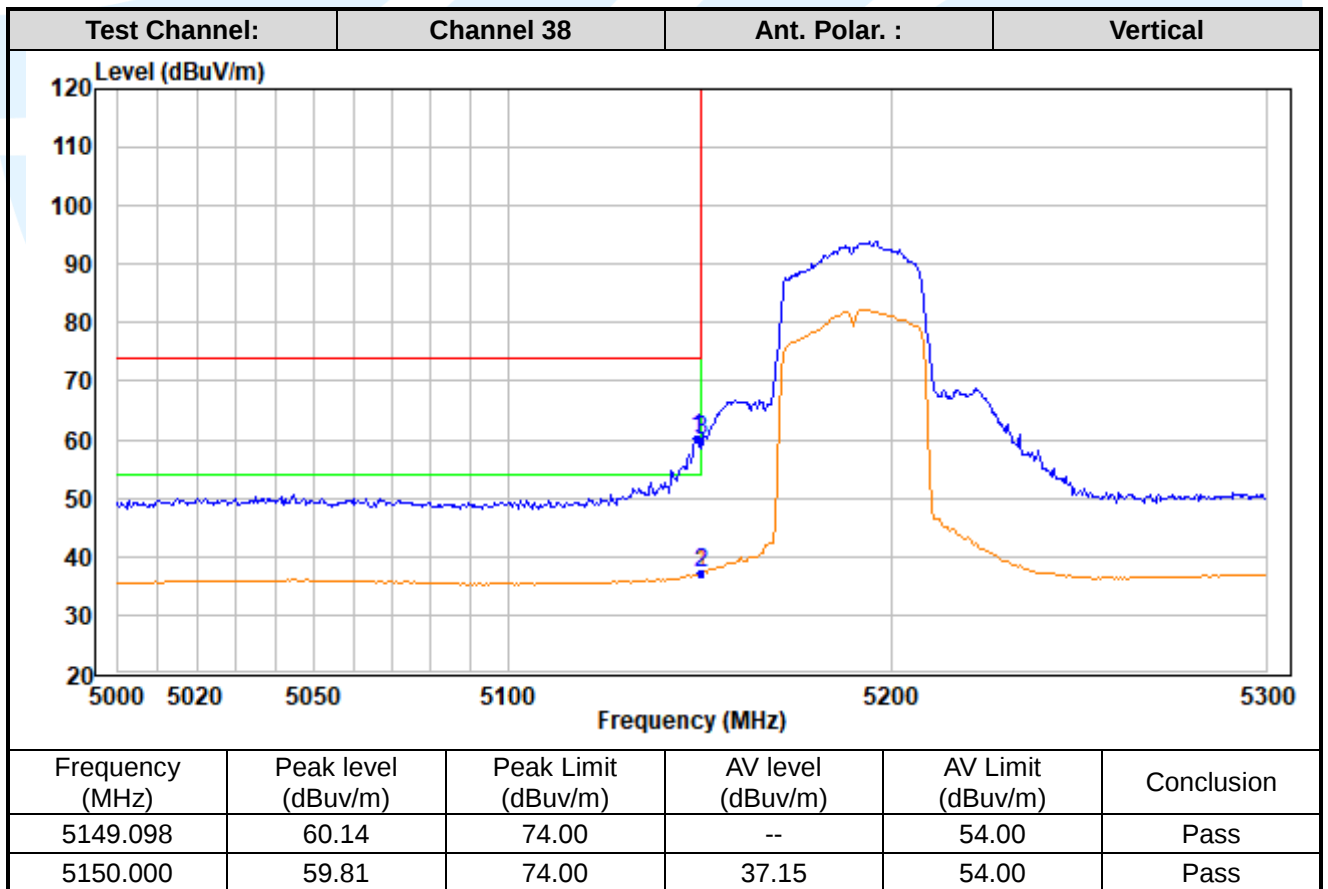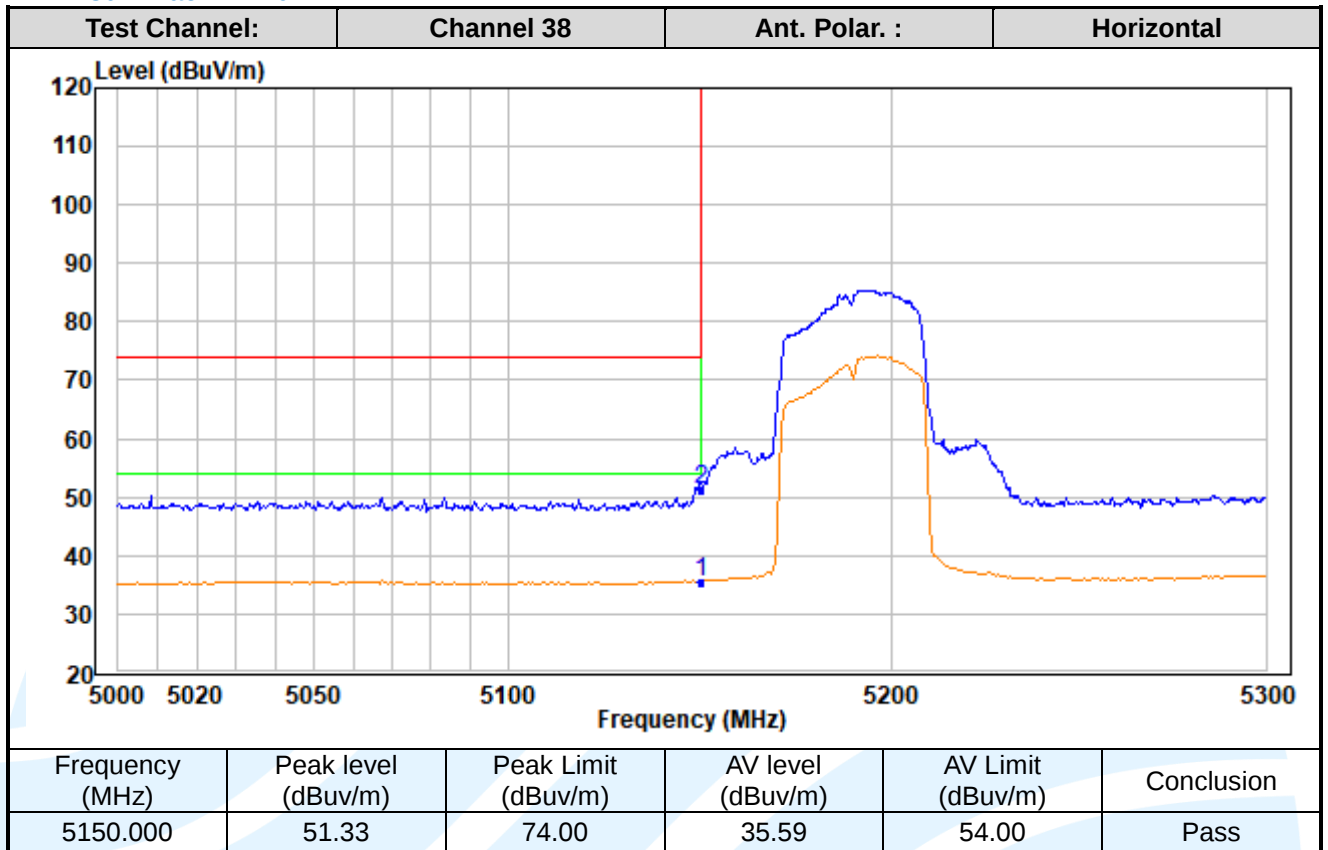

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

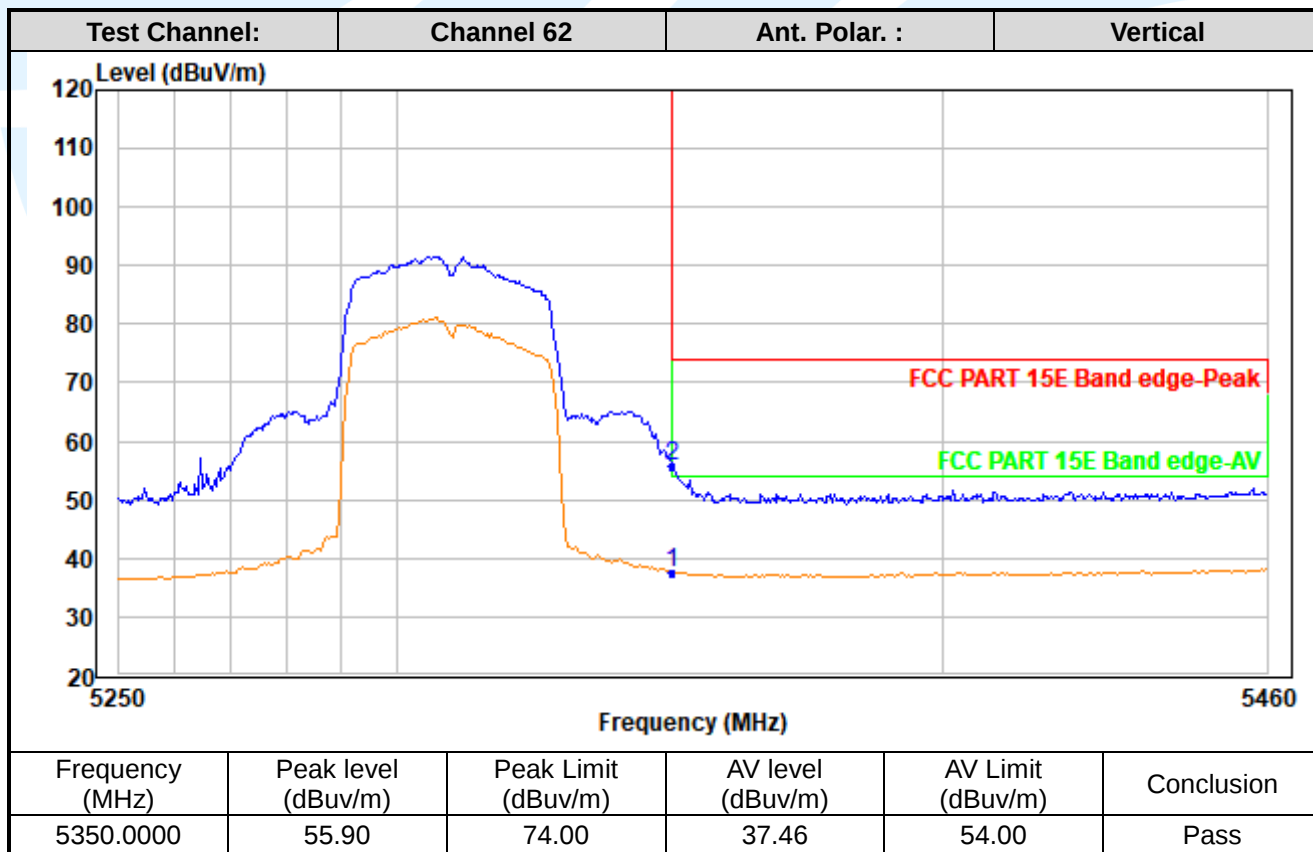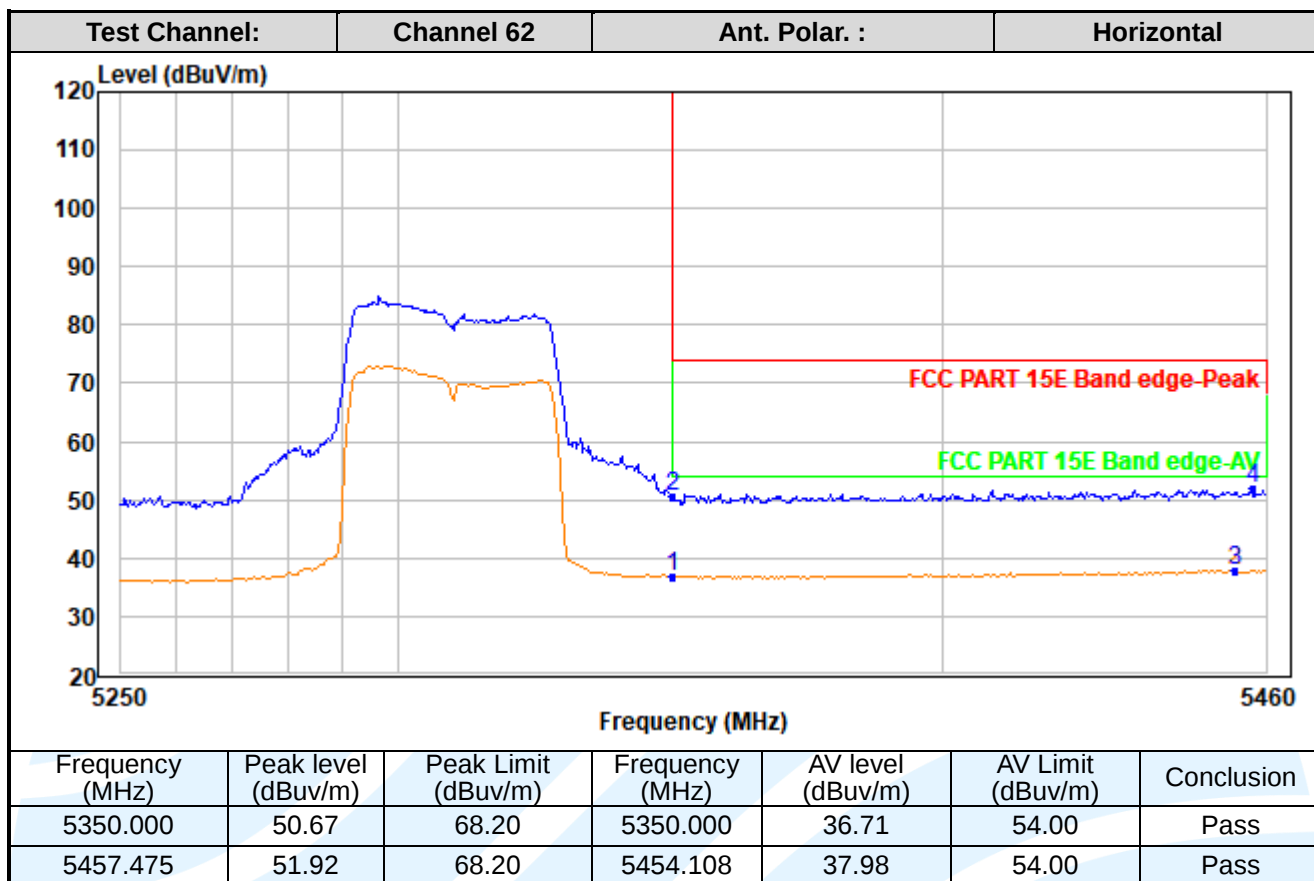

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

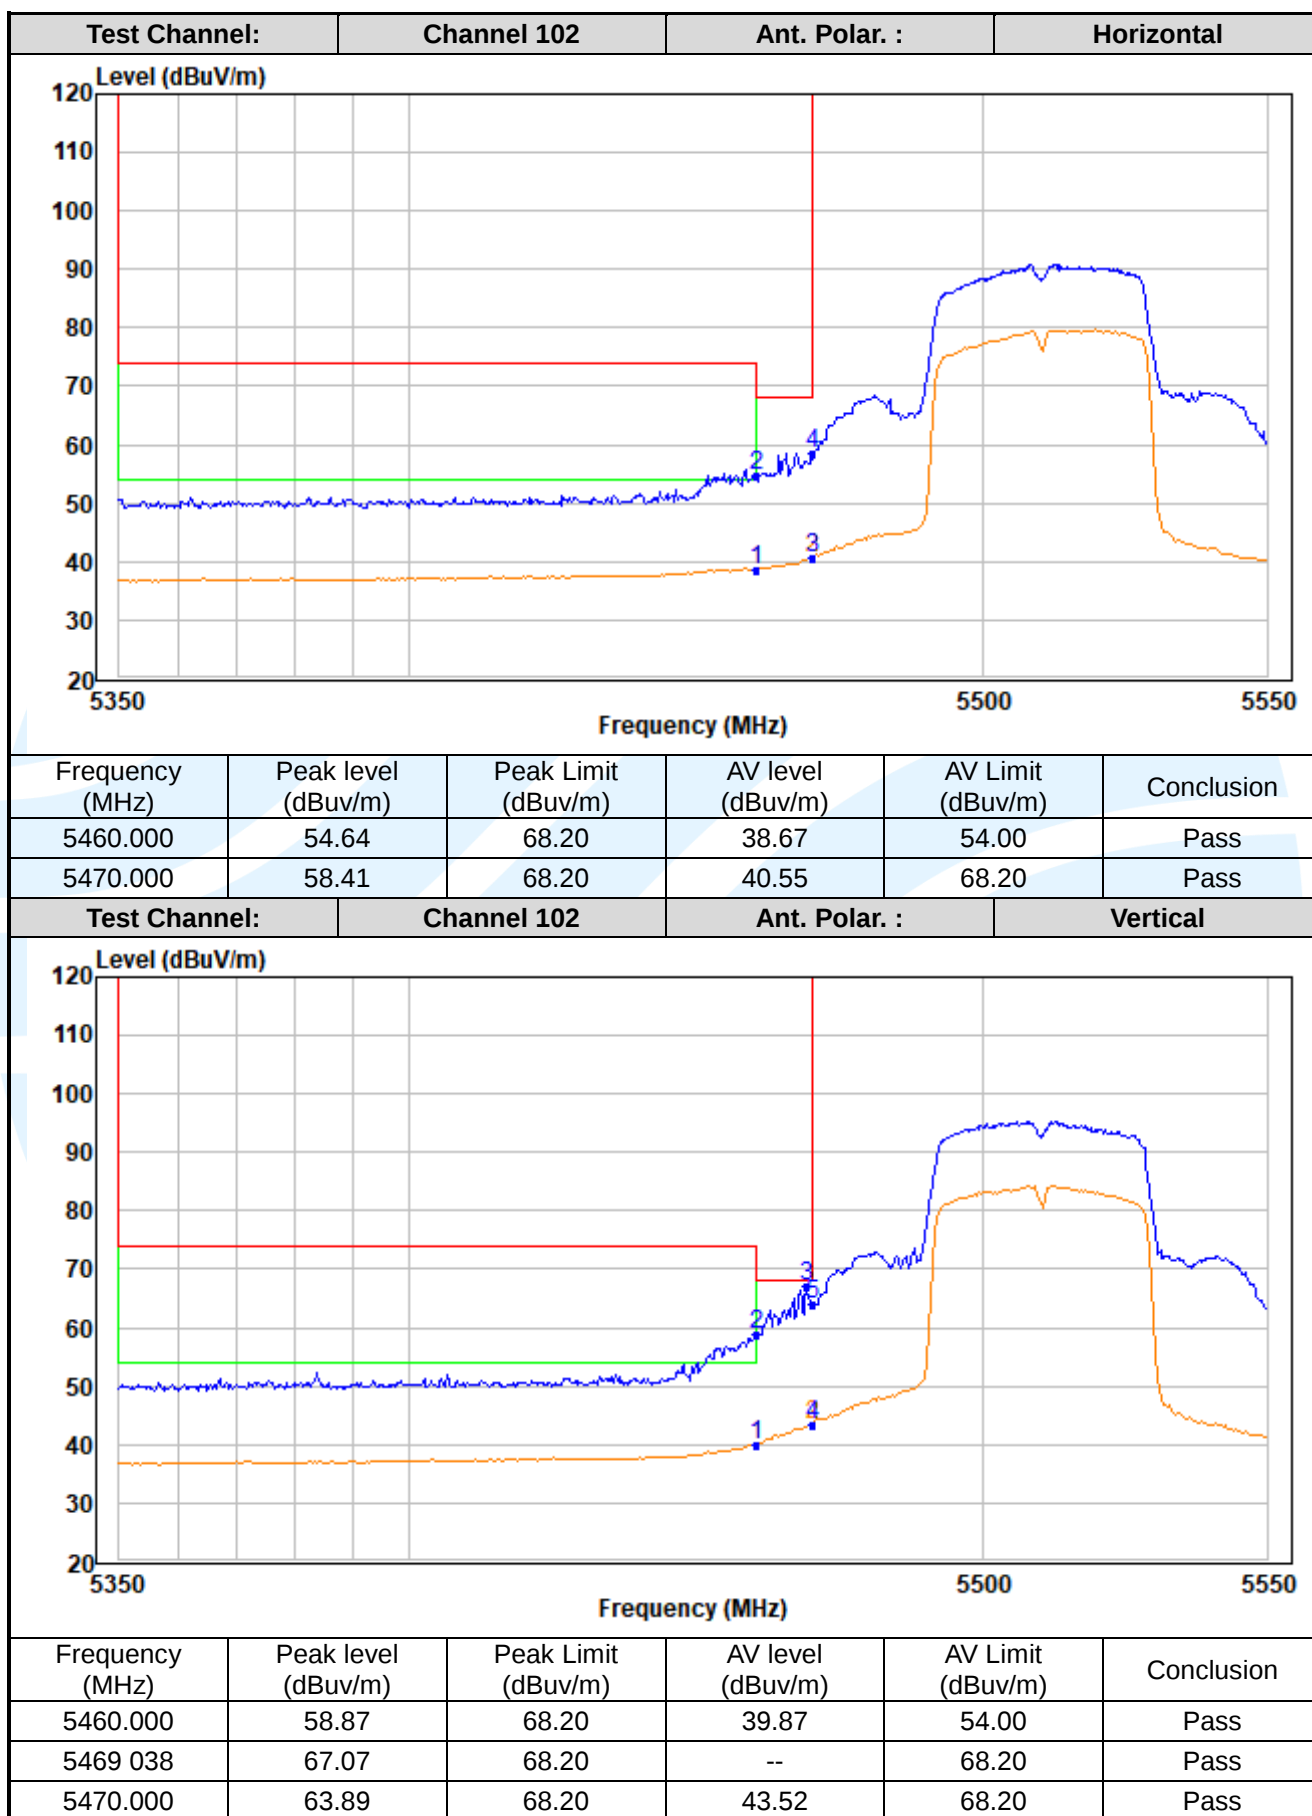

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

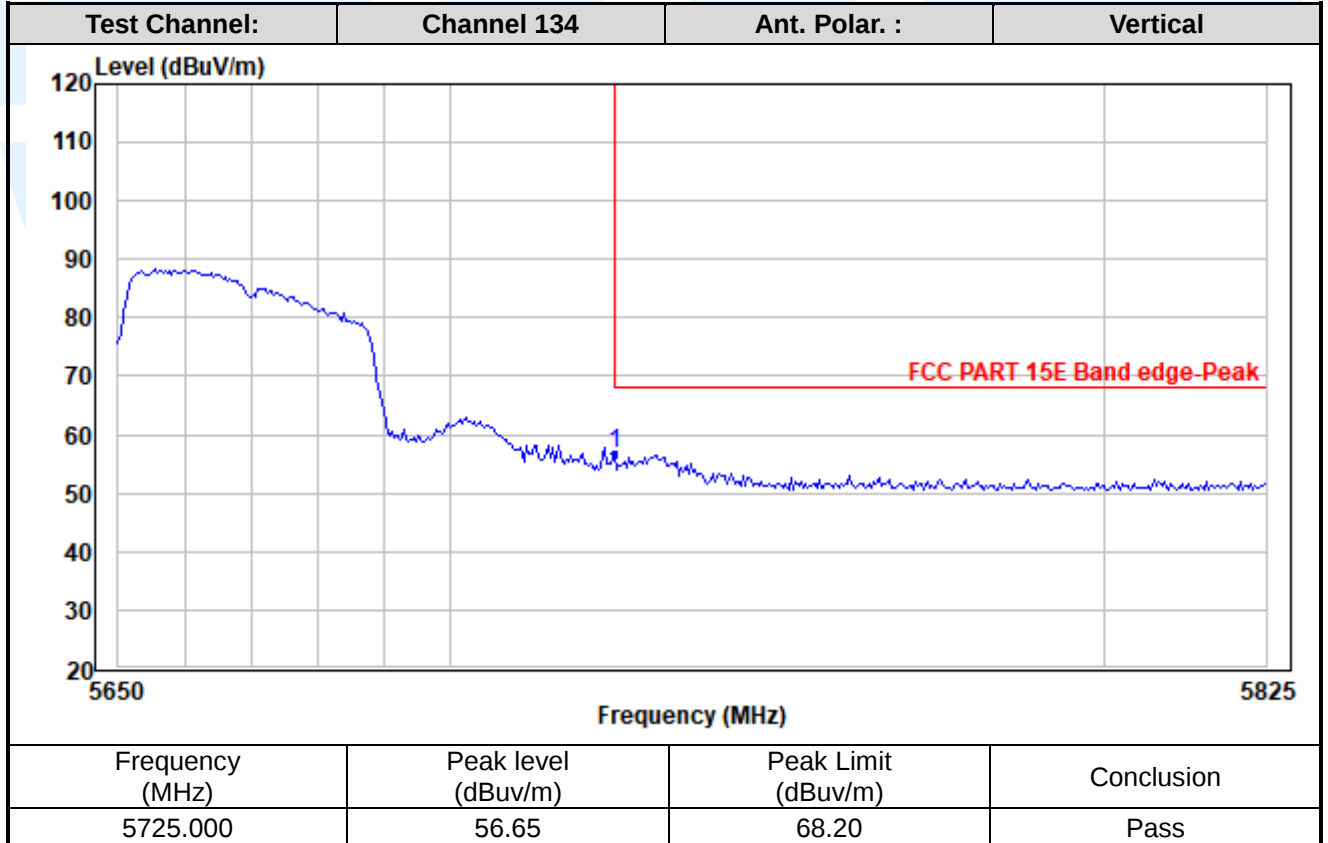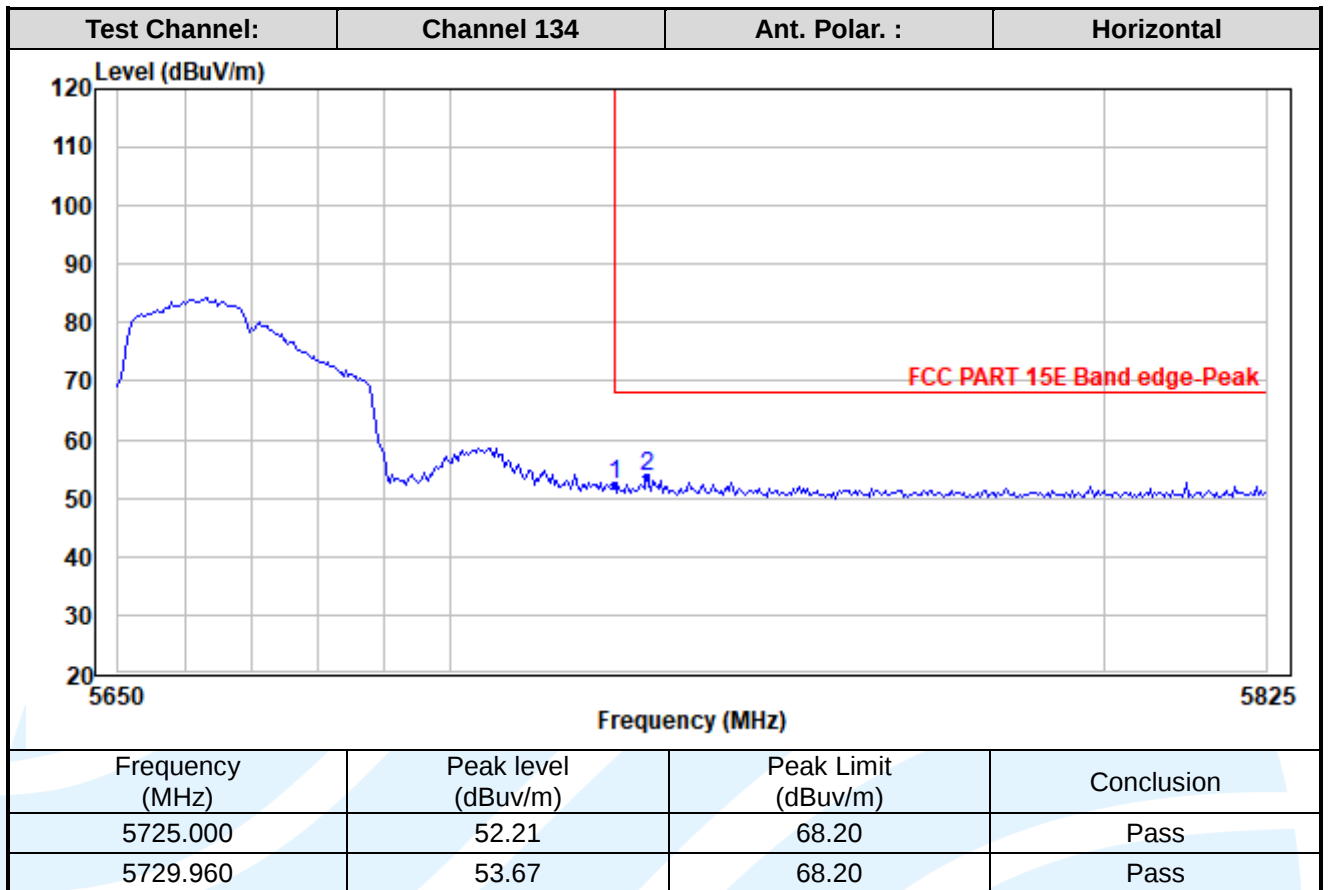

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

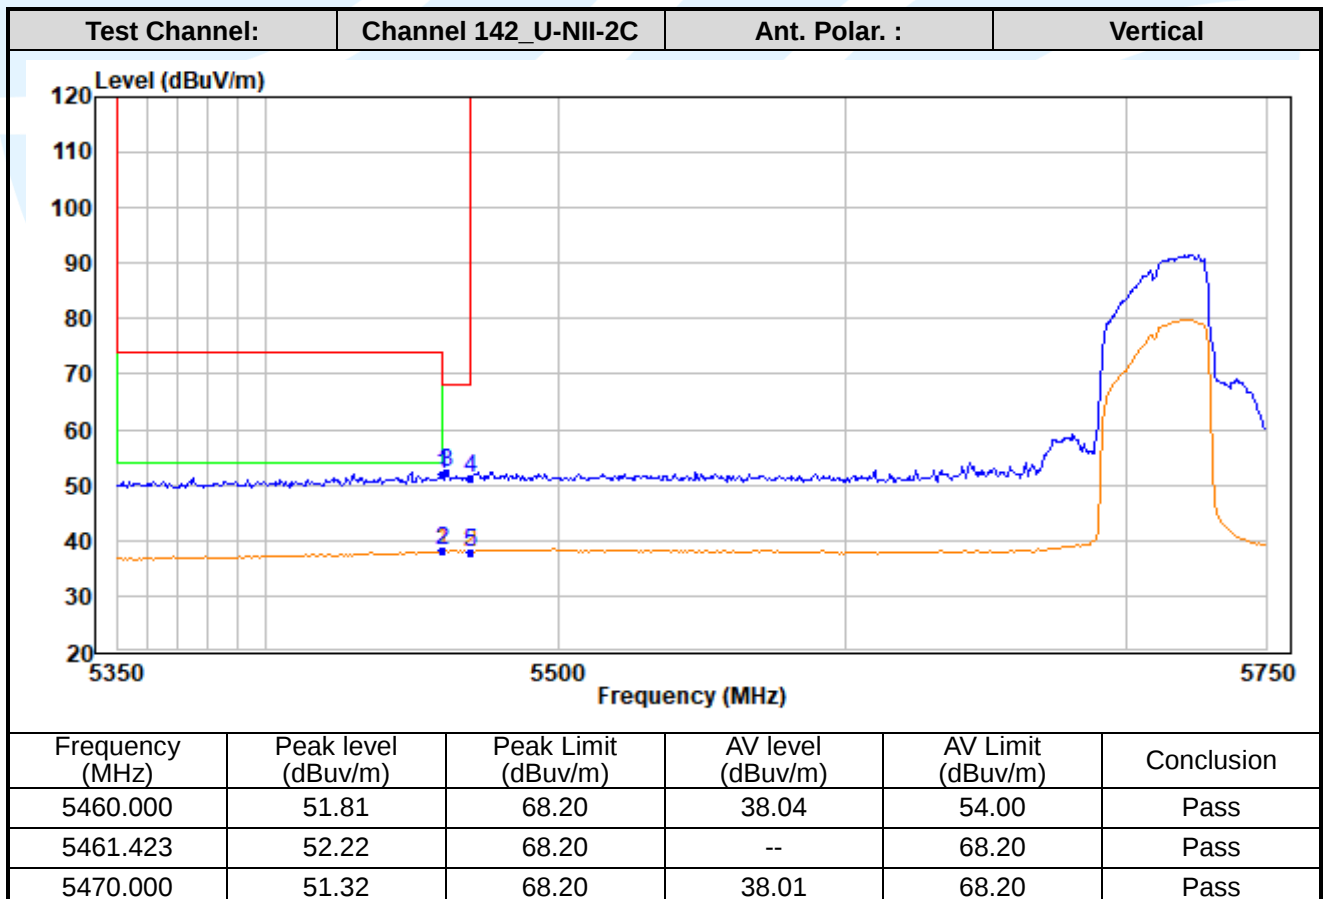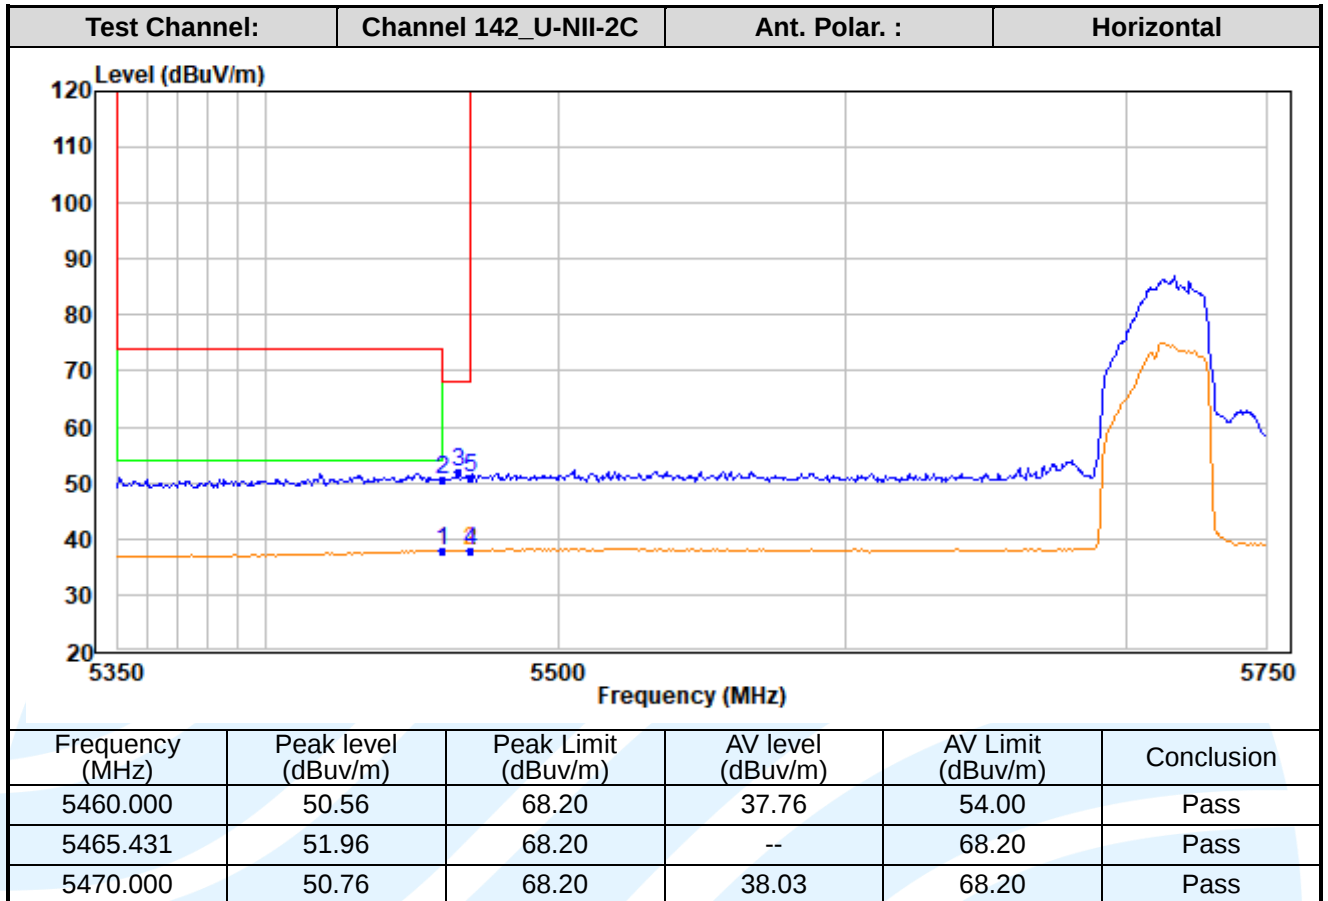

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

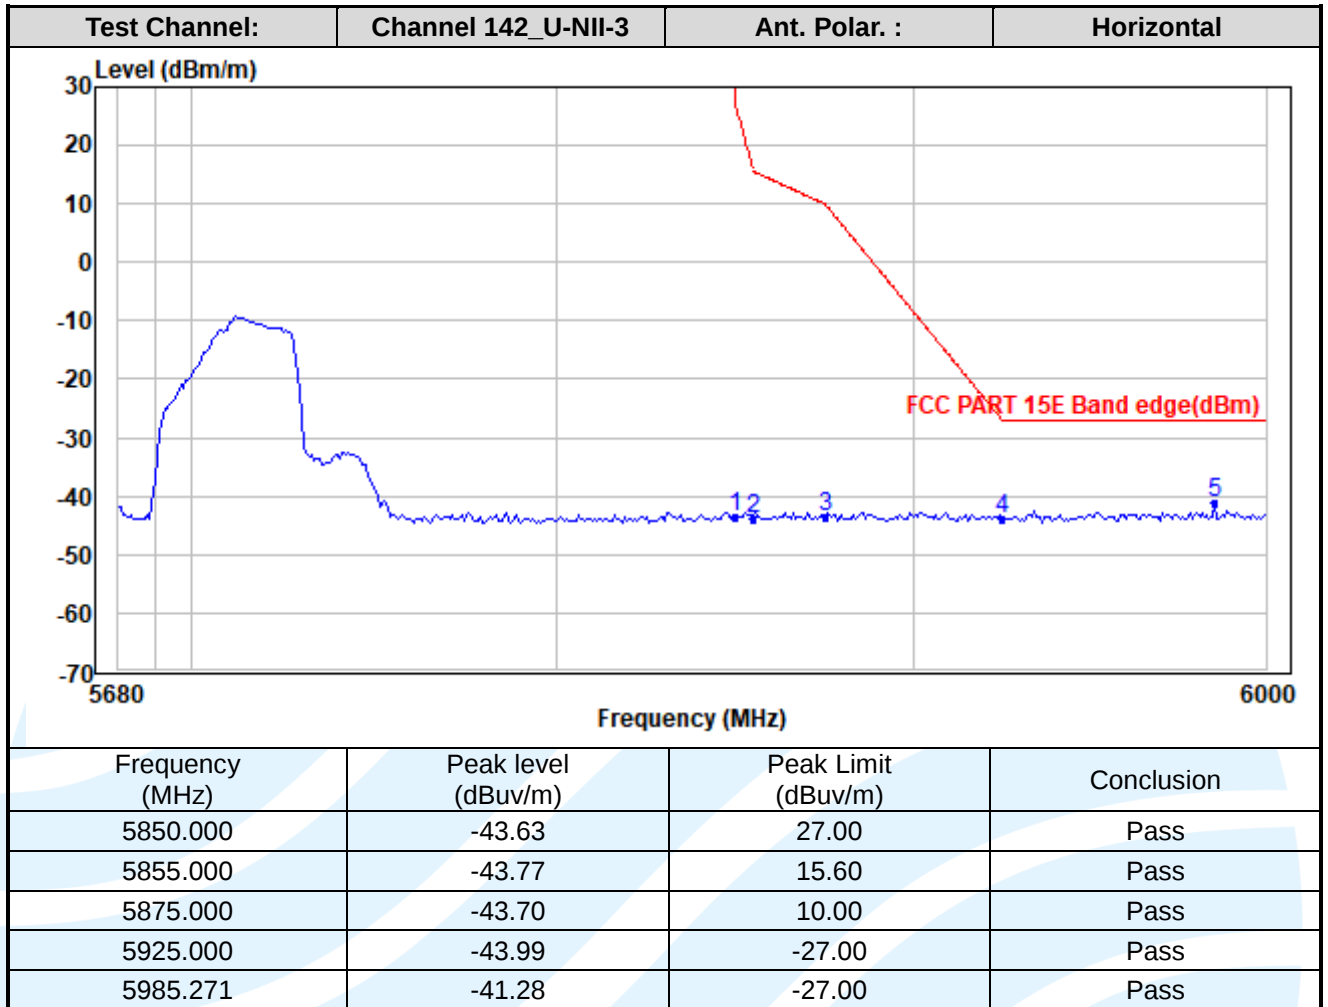

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886


E-mail: info@uttlab.com


<http://www.uttlab.com>


UTTR-RF-FCCPART15.407-V1.2

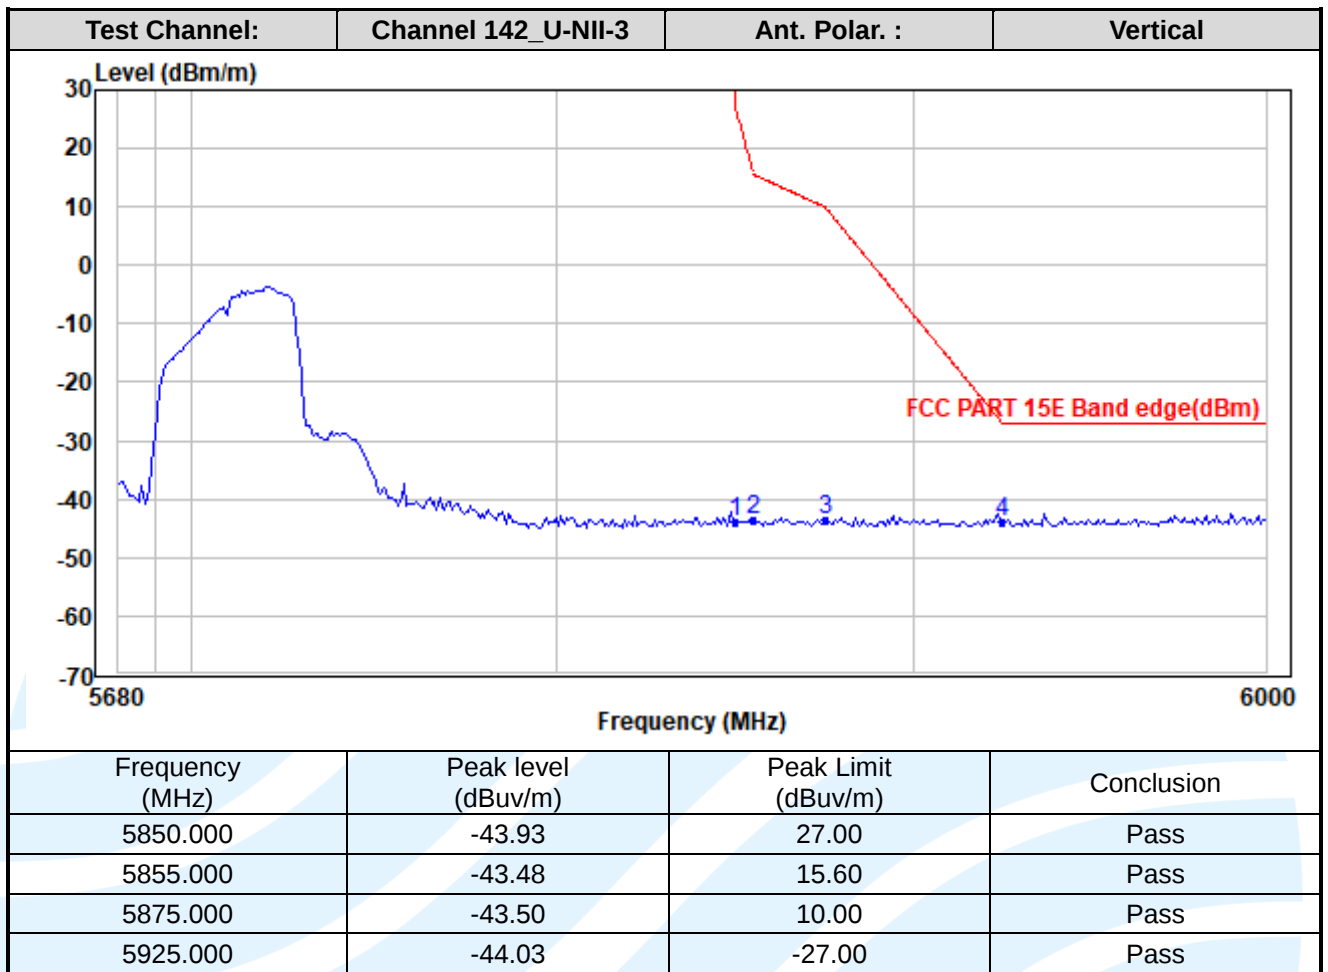

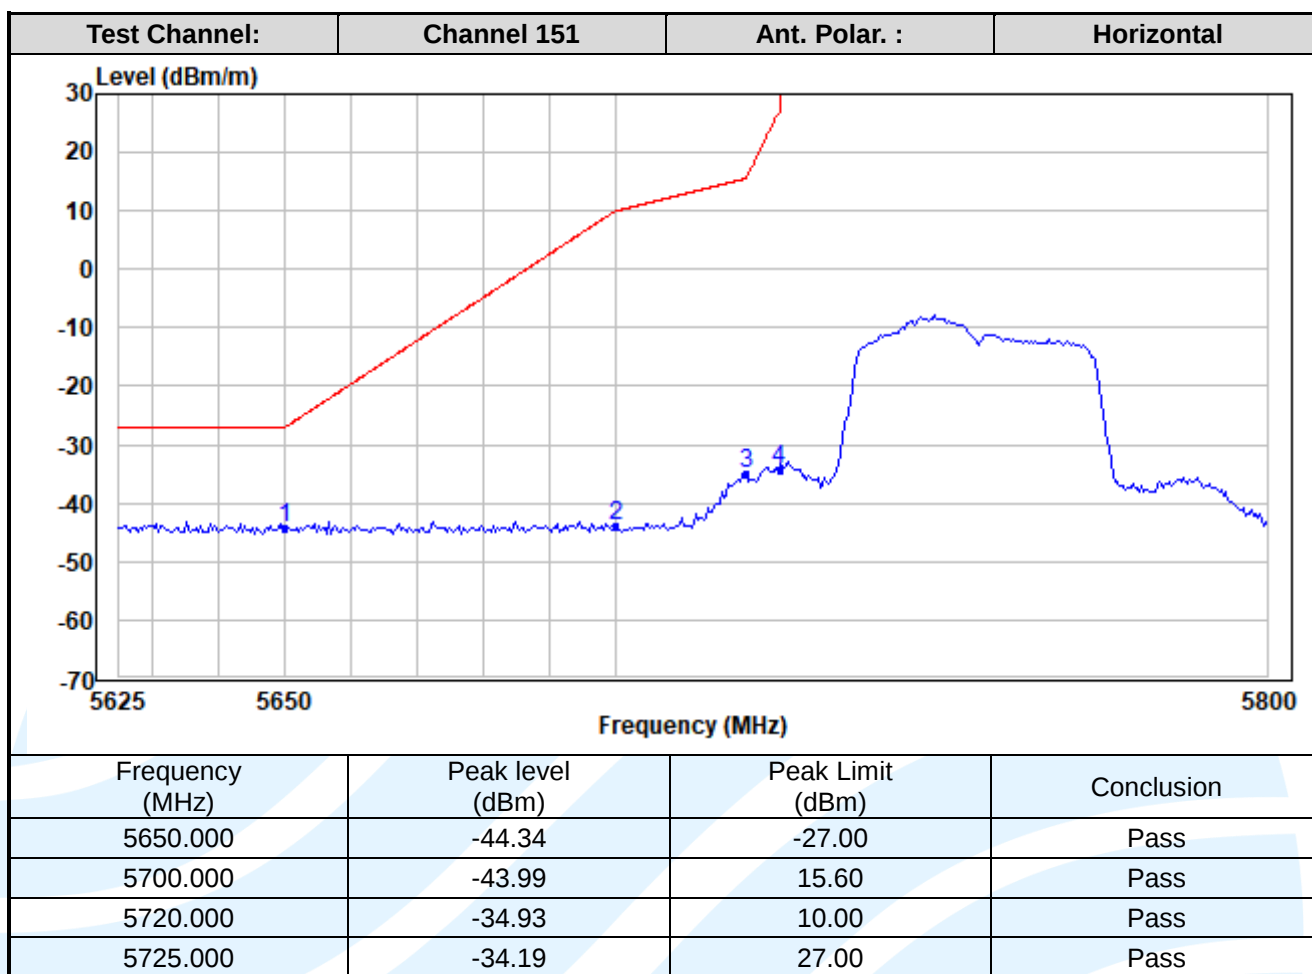


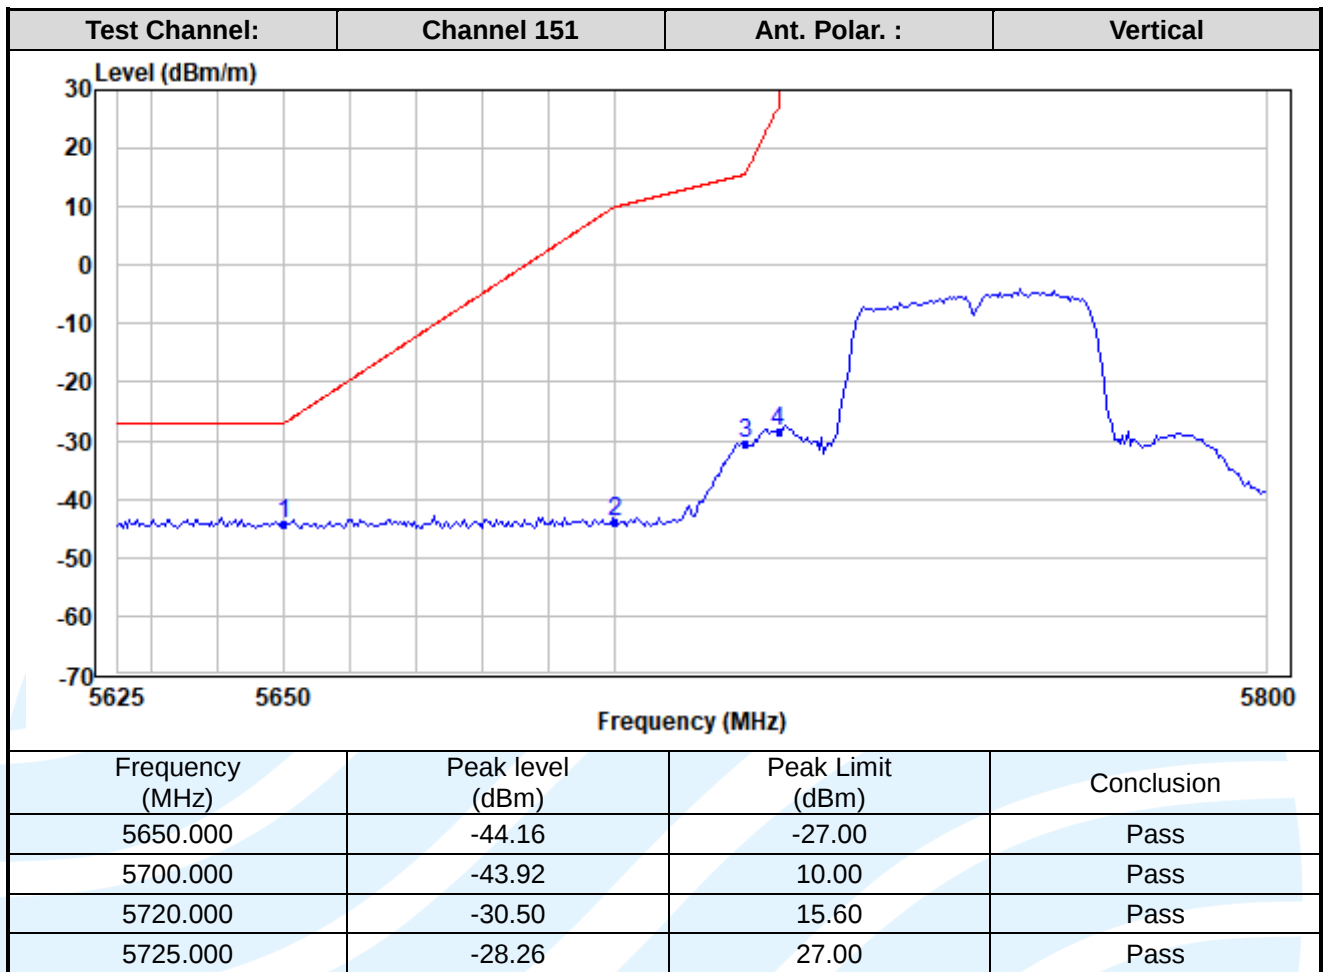

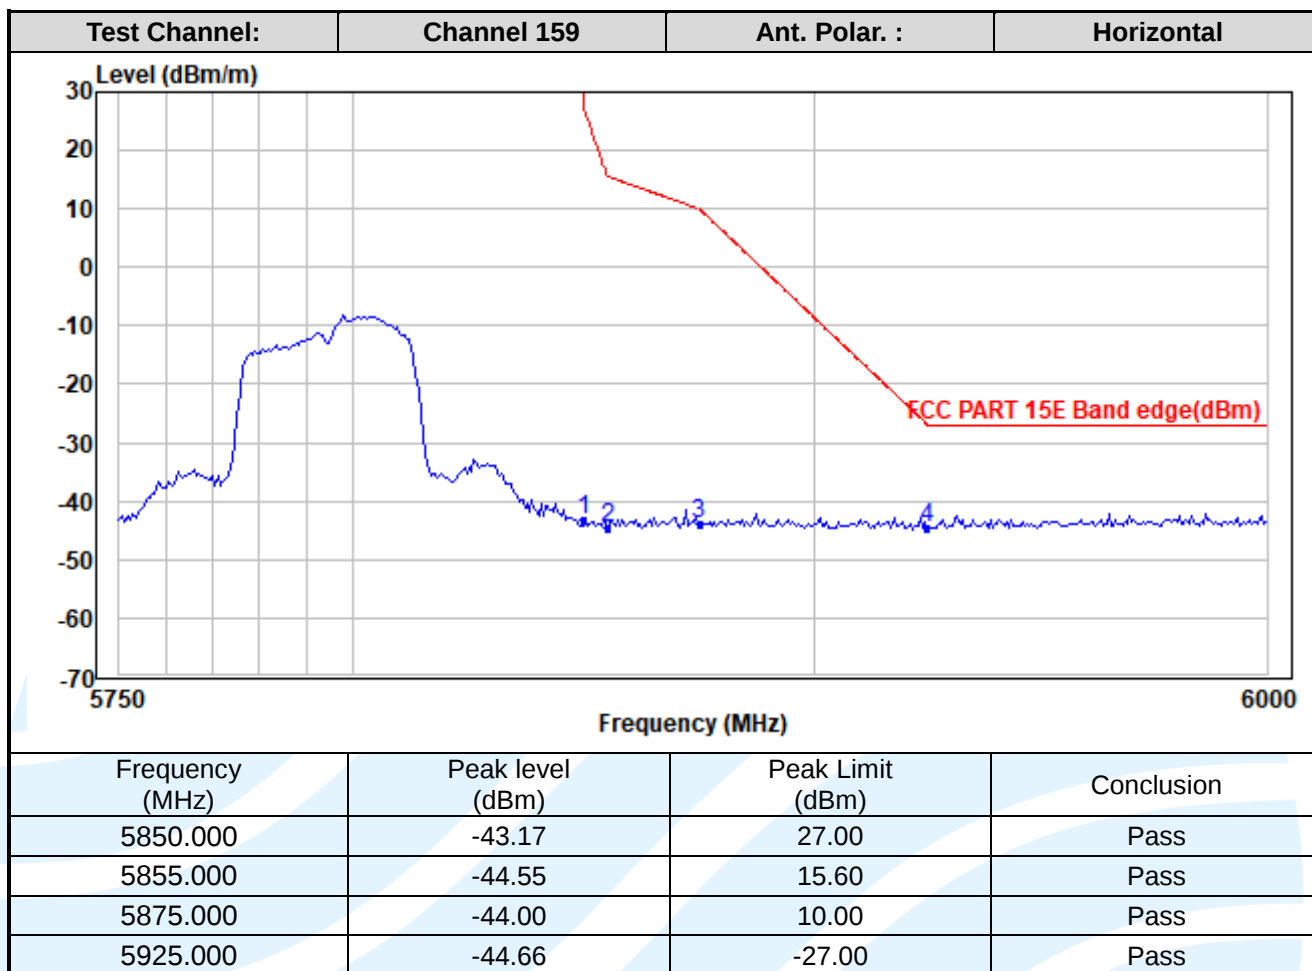

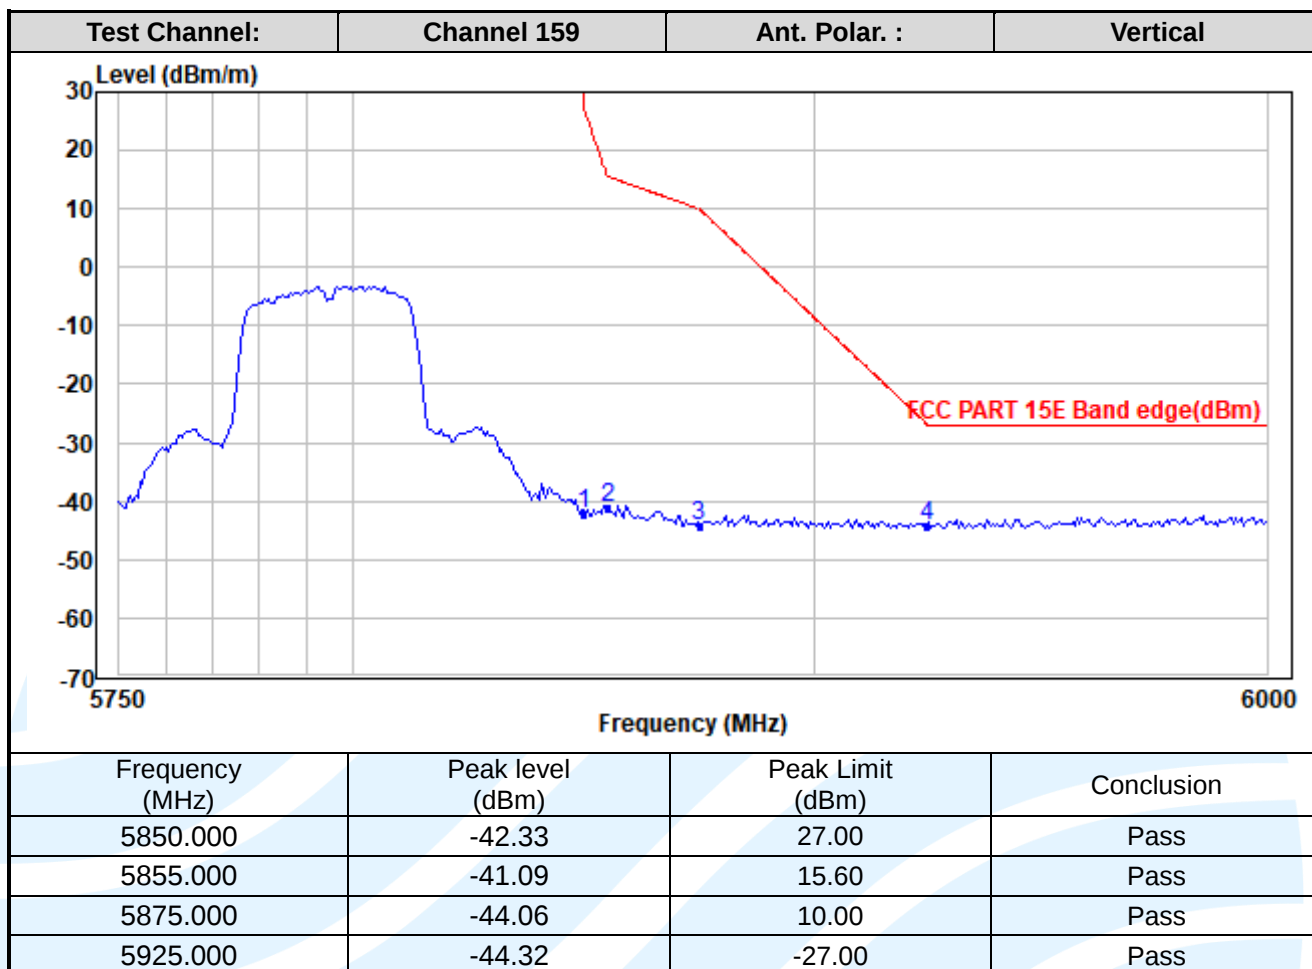

IEEE 802.11ac-VHT80

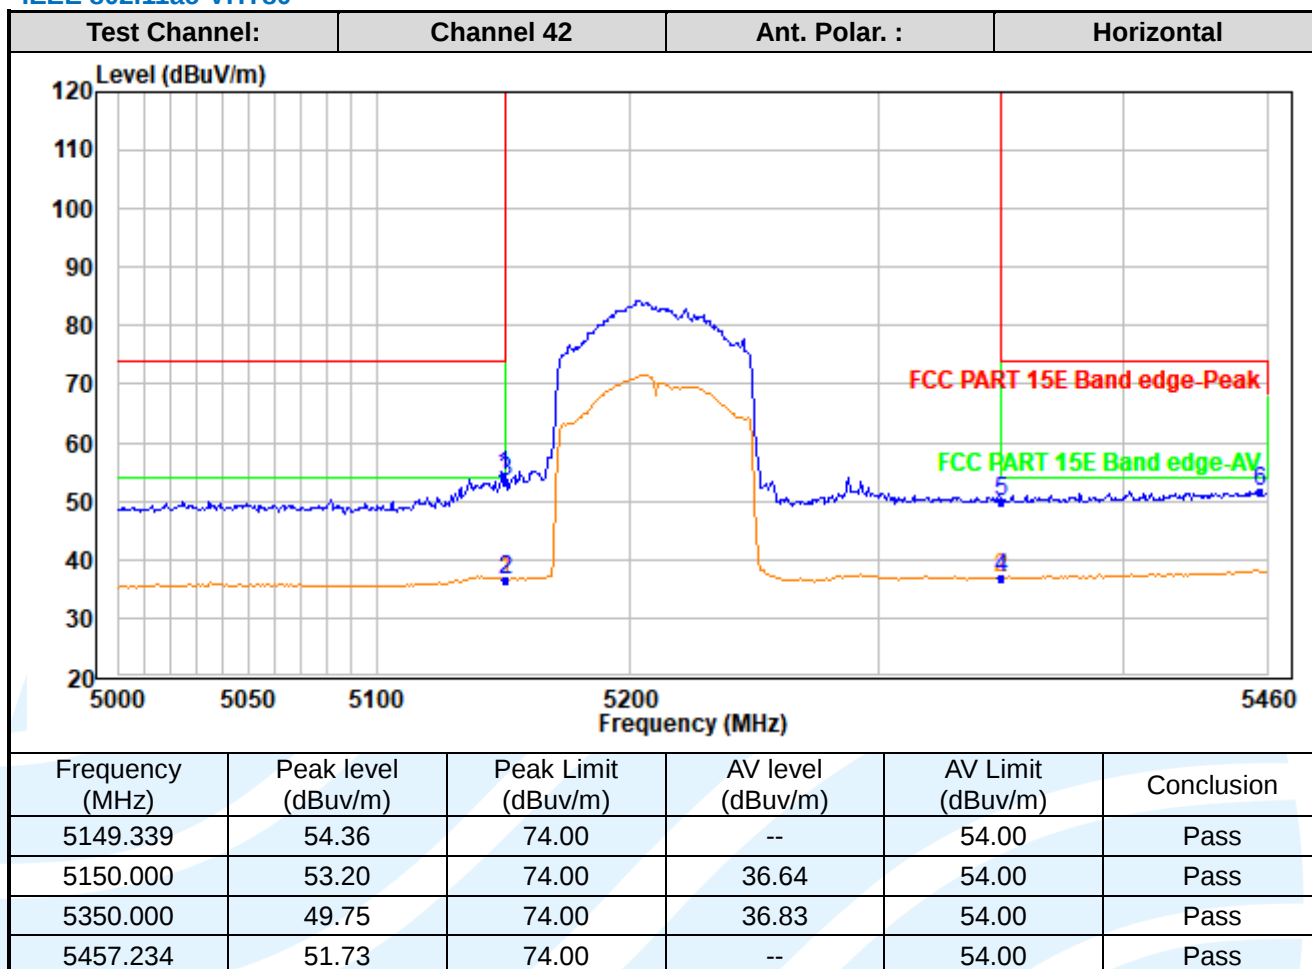

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

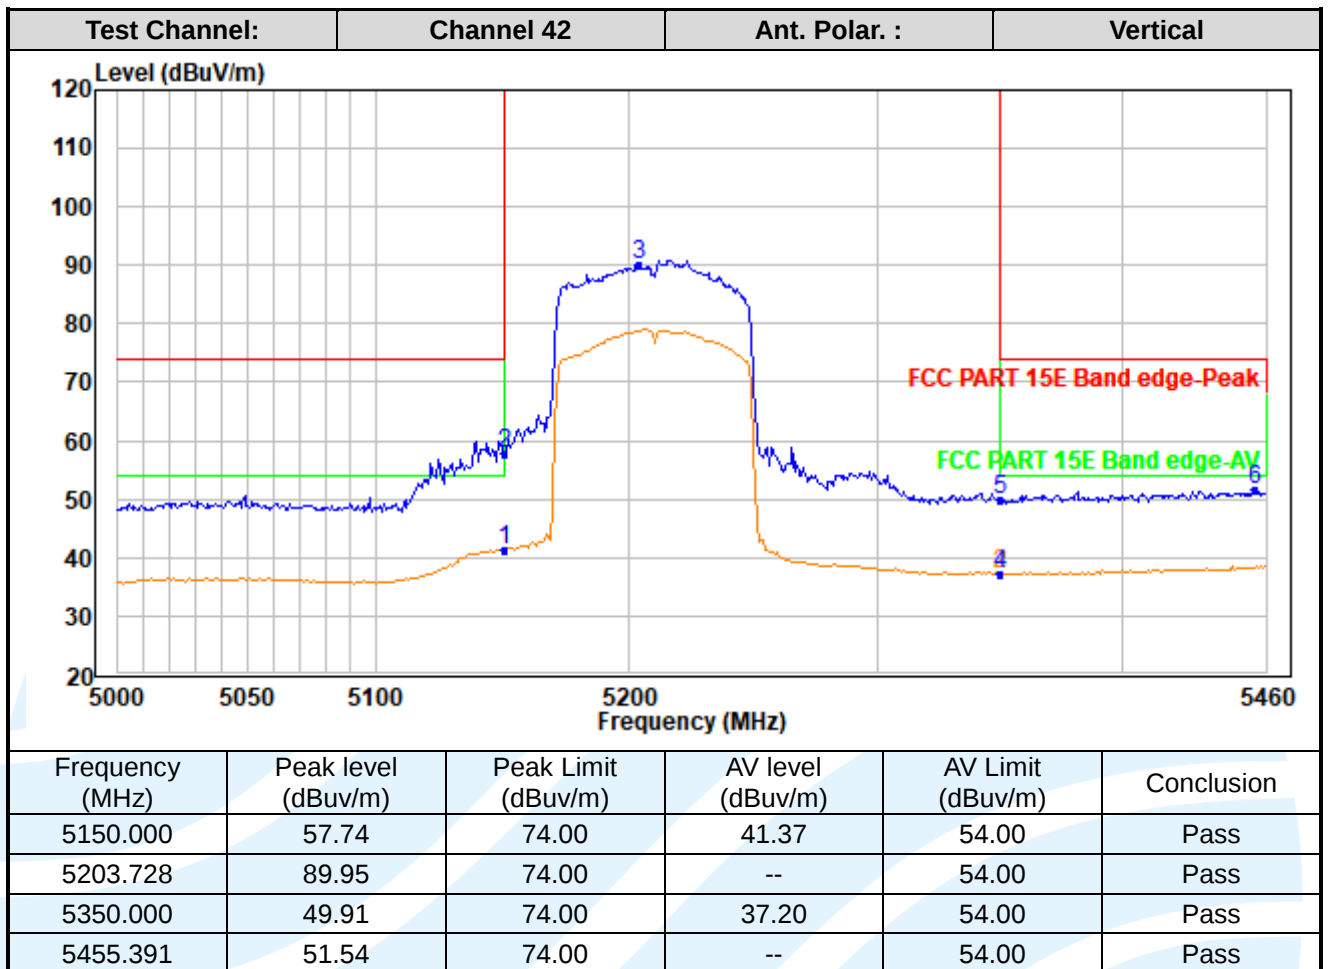

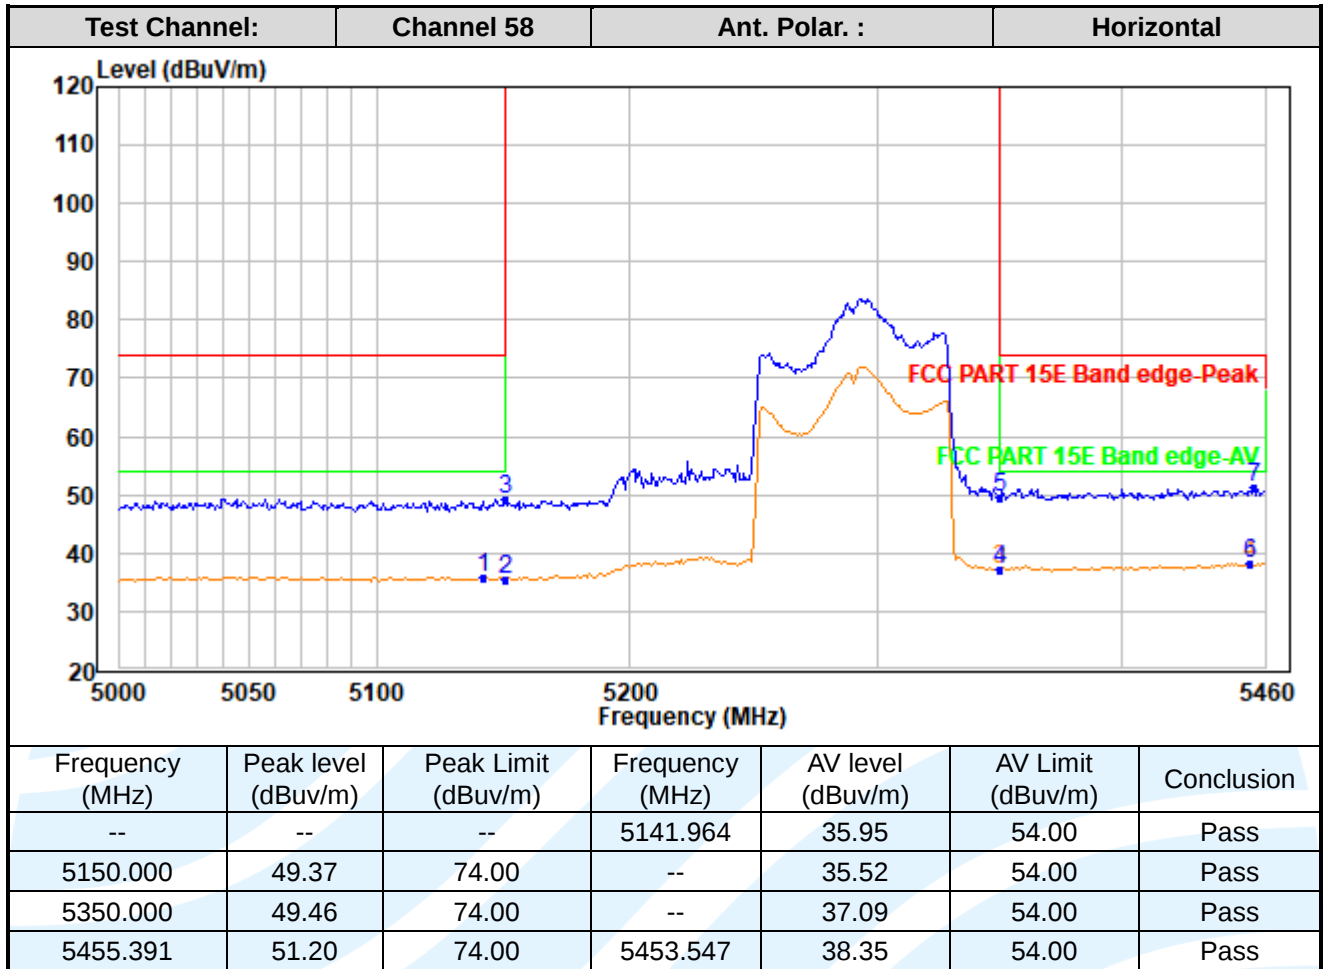

Shenzhen UnionTrust Quality and Technology Co., Ltd.


Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com
<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

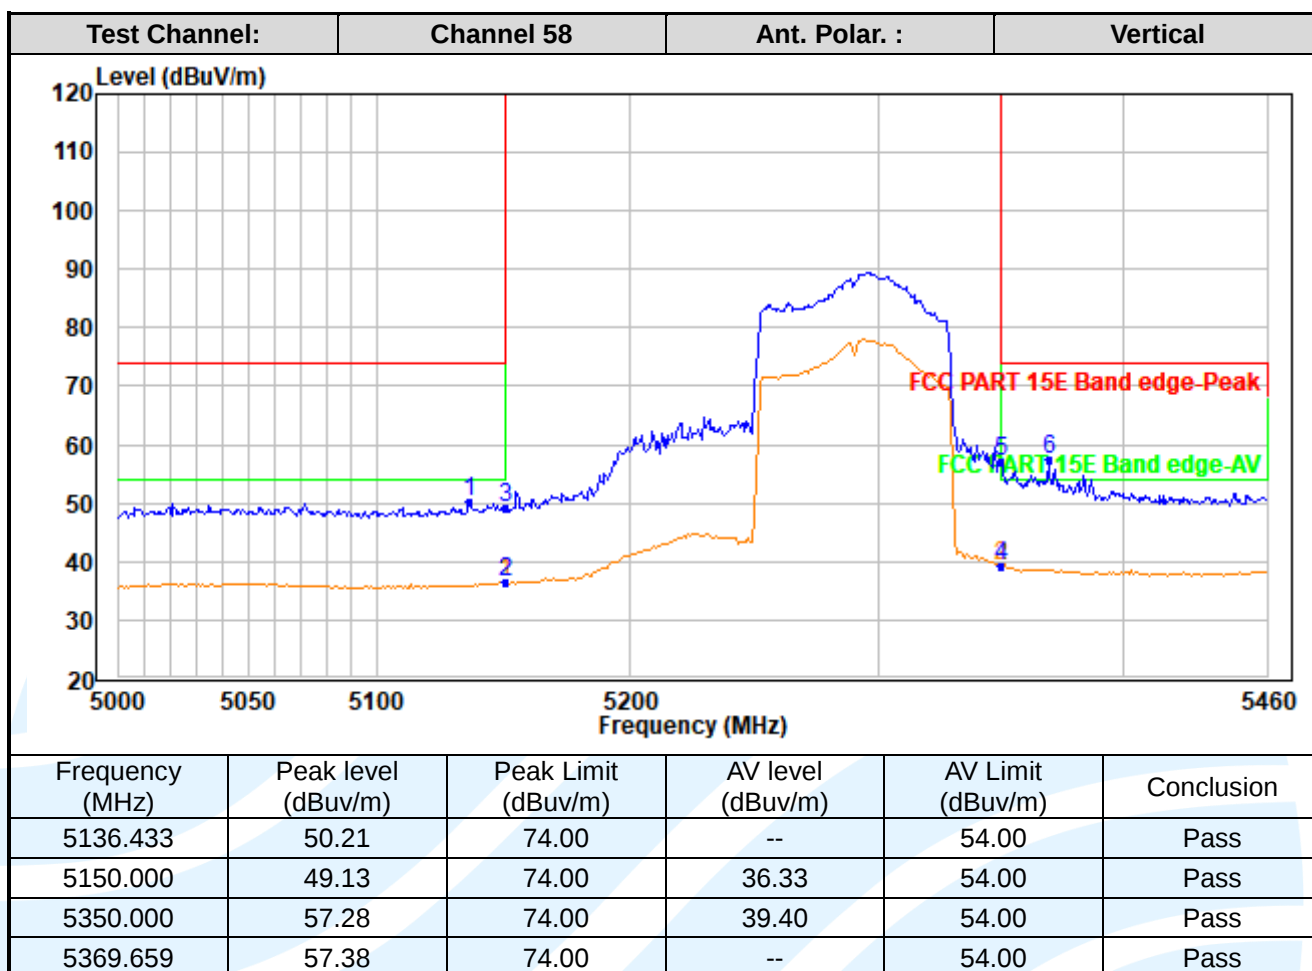

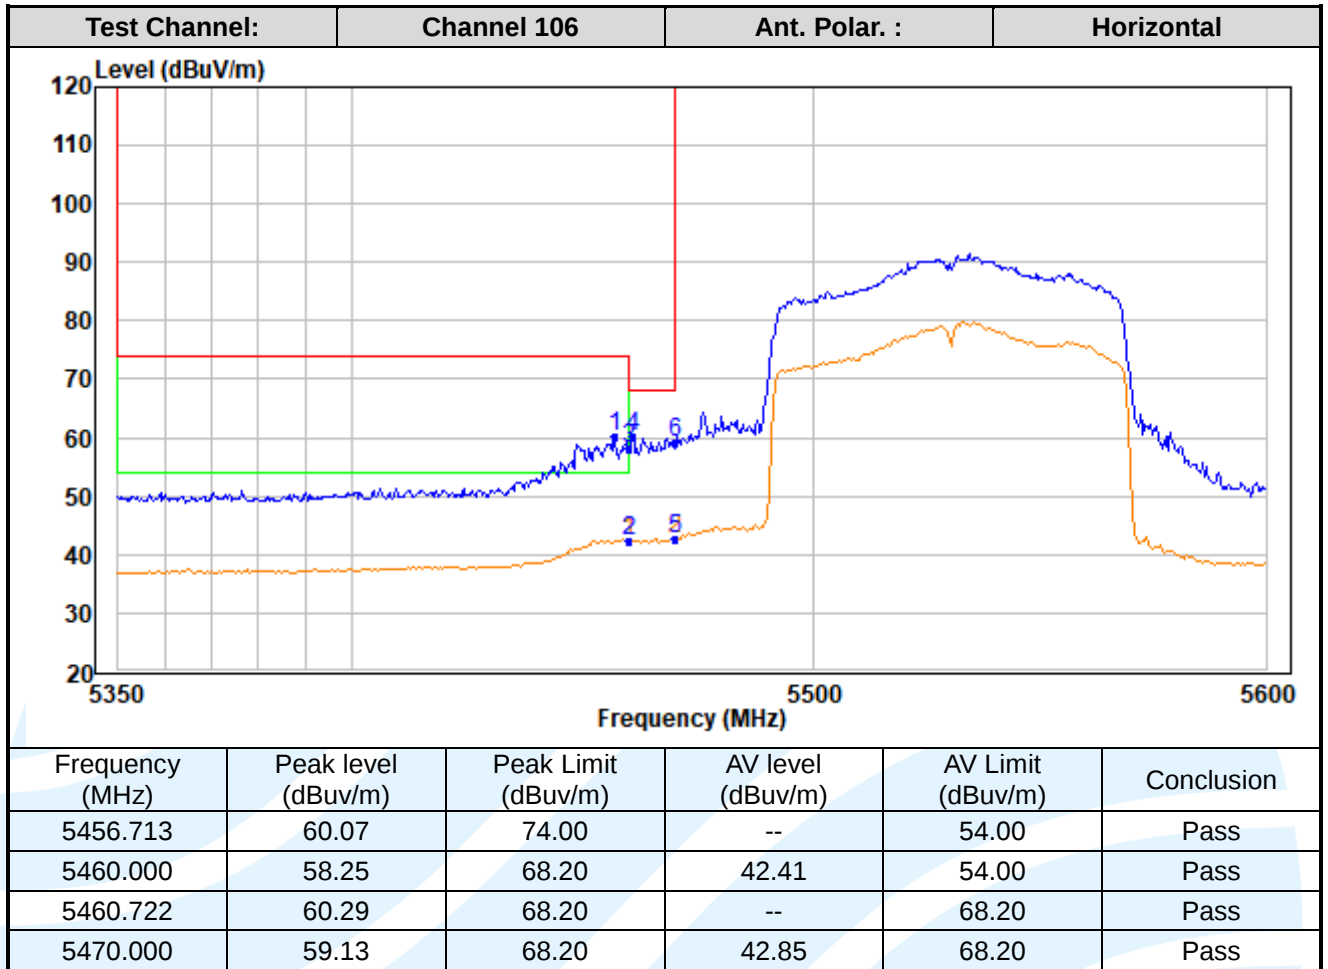

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888



Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

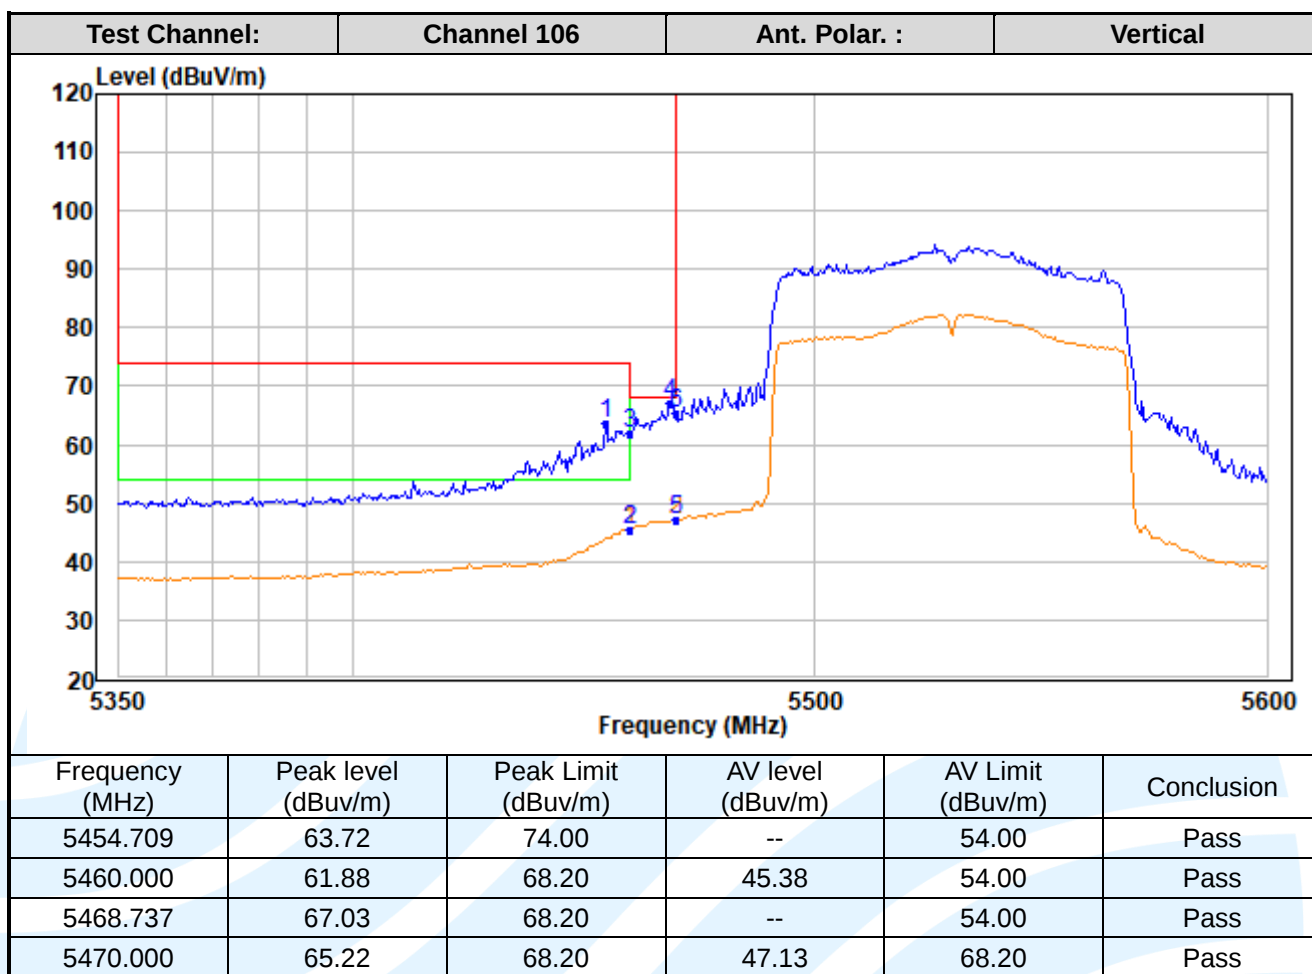

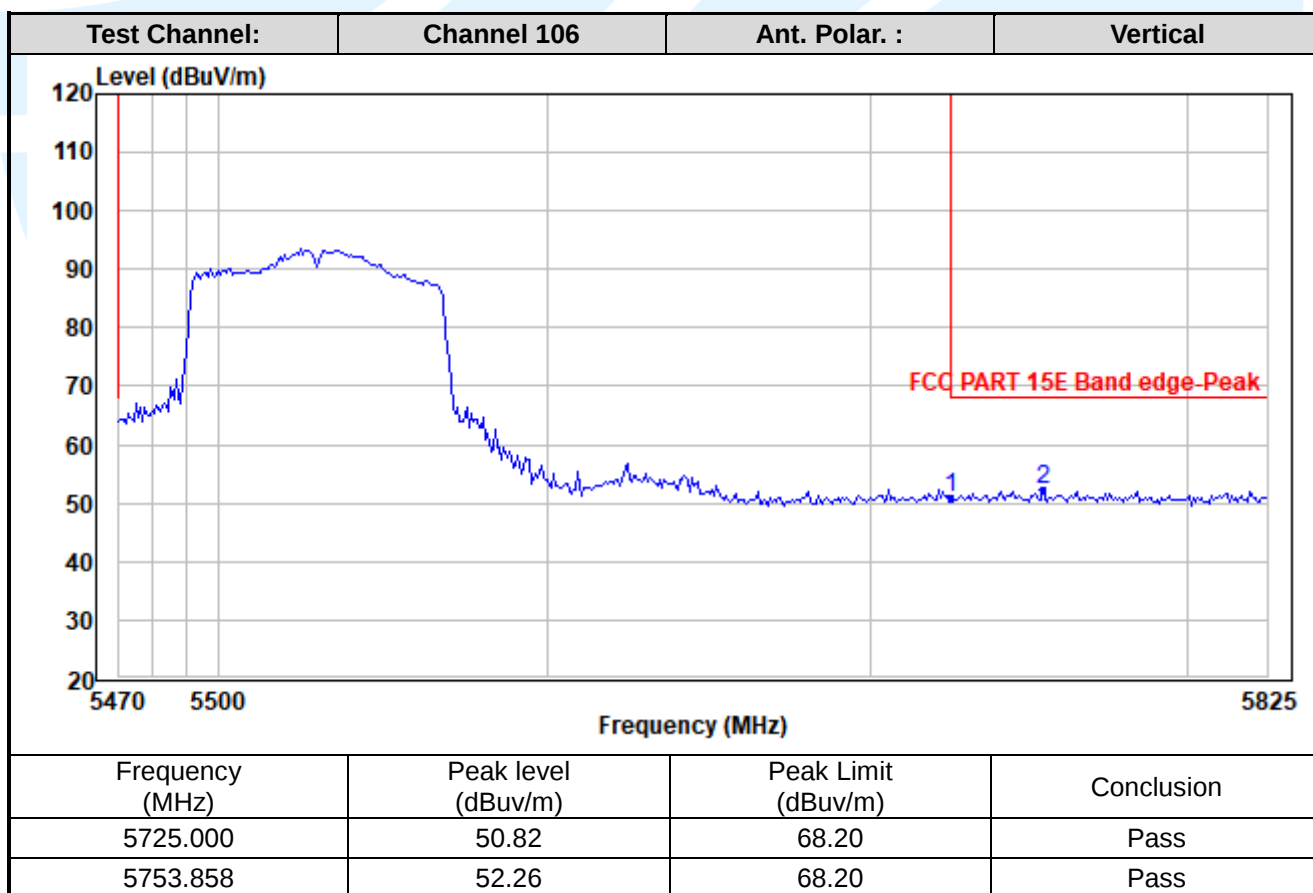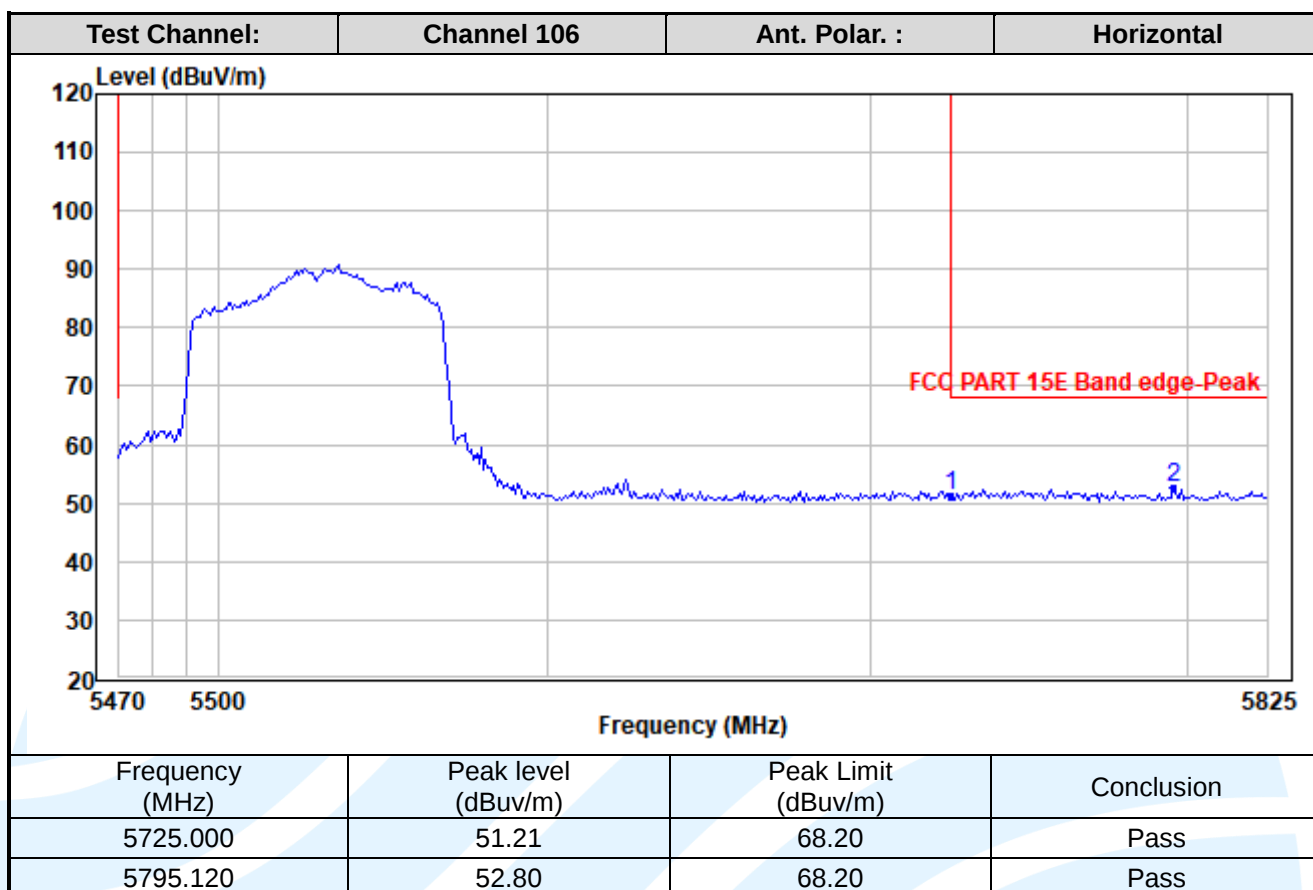

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

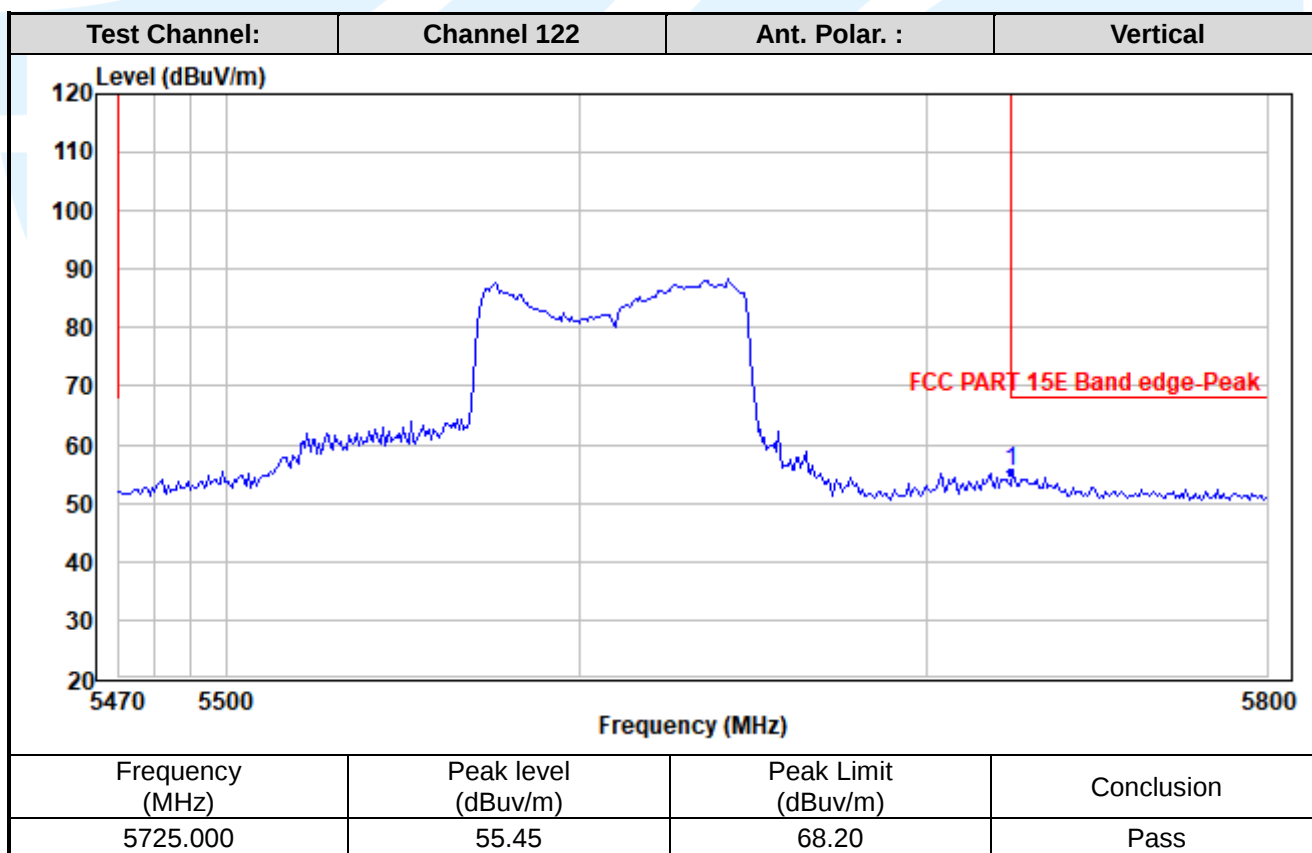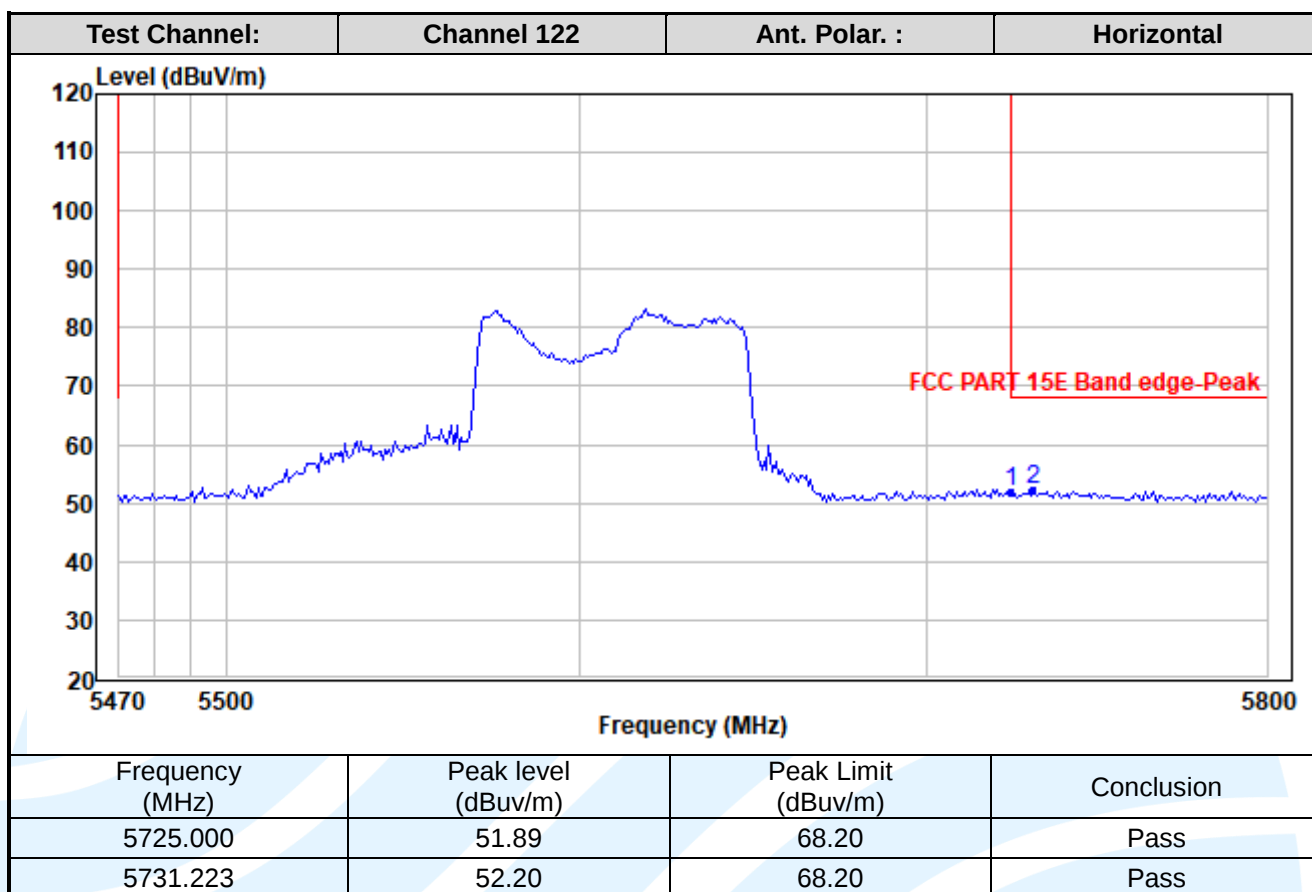

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

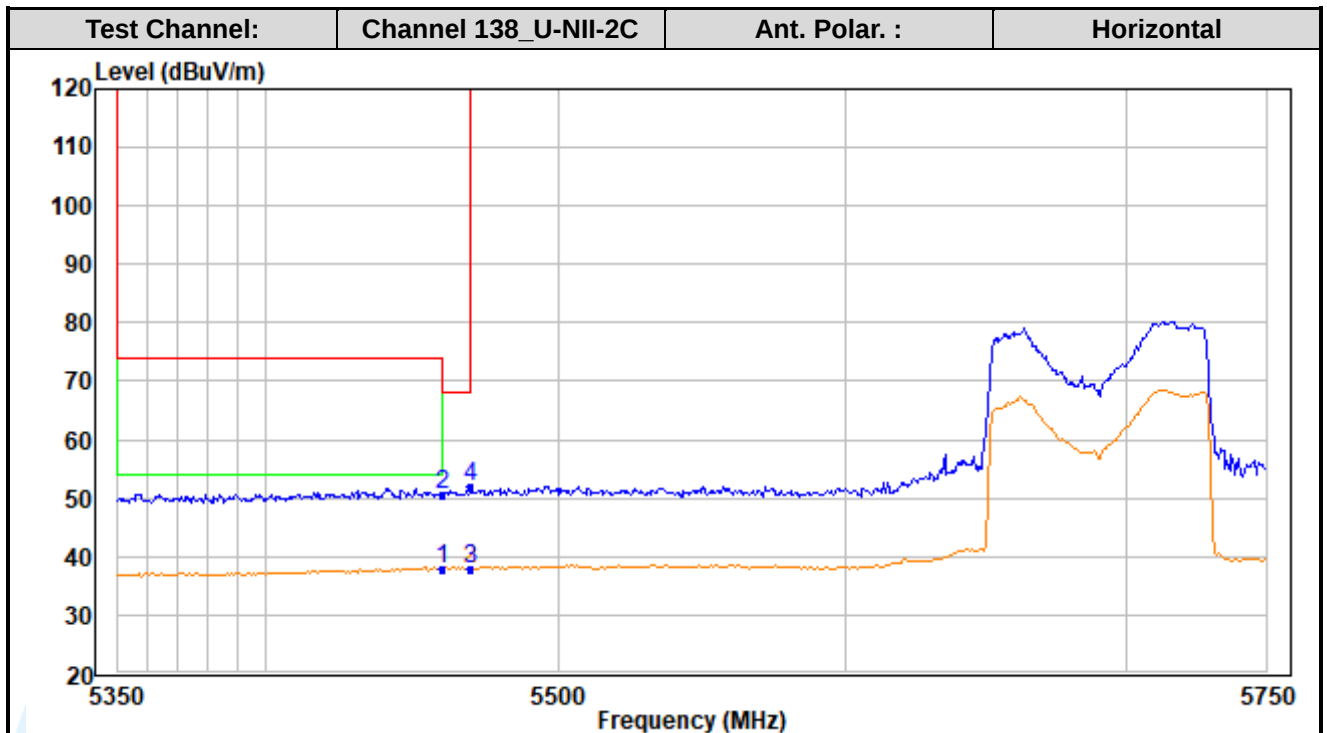

Frequency (MHz)	Peak level (dBuV/m)	Peak Limit (dBuV/m)	AV level (dBuV/m)	AV Limit (dBuV/m)	Conclusion
5460.000	50.71	74.00	38.01	54.00	Pass
5470.000	51.92	74.00	37.96	54.00	Pass

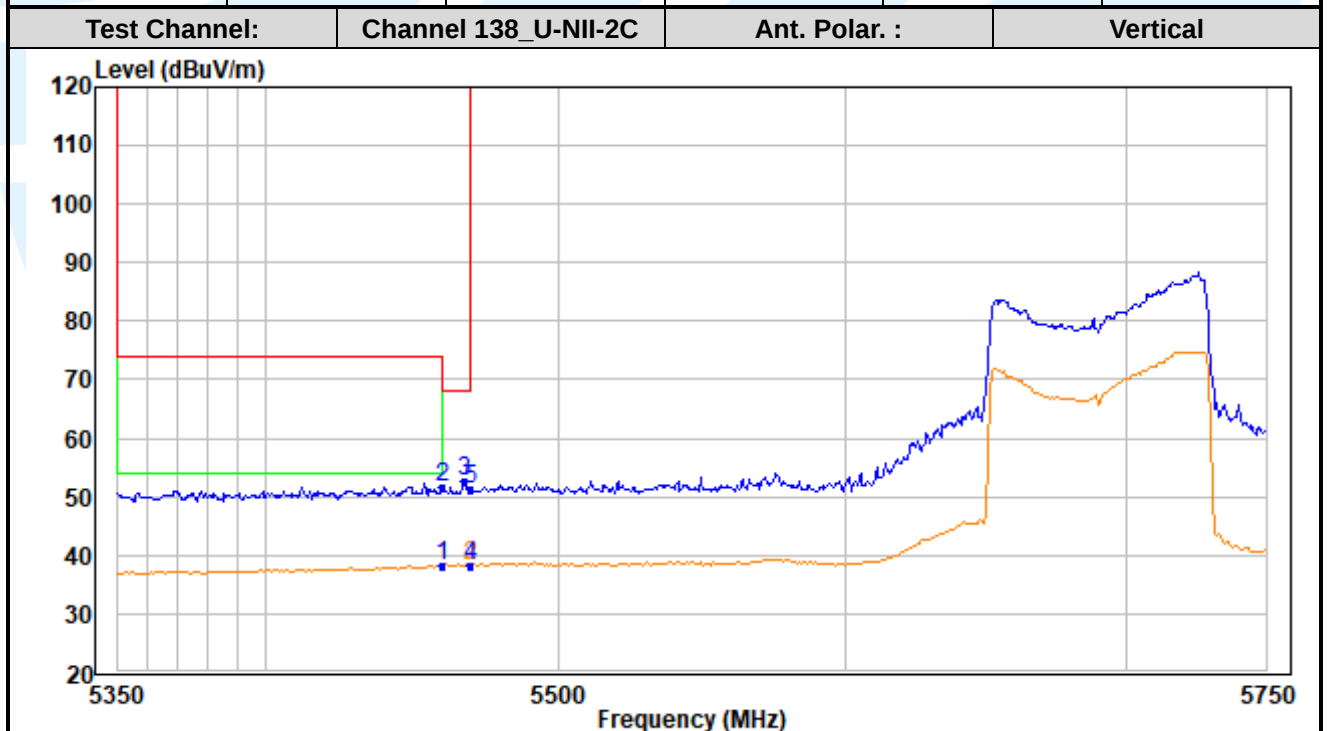

Frequency (MHz)	Peak level (dBuV/m)	Peak Limit (dBuV/m)	AV level (dBuV/m)	AV Limit (dBuV/m)	Conclusion
5460.000	51.72	68.20	38.14	54.00	Pass
5467.835	52.50	68.20	--	54.00	Pass
5470.000	51.43	68.20	38.38	54.00	Pass

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

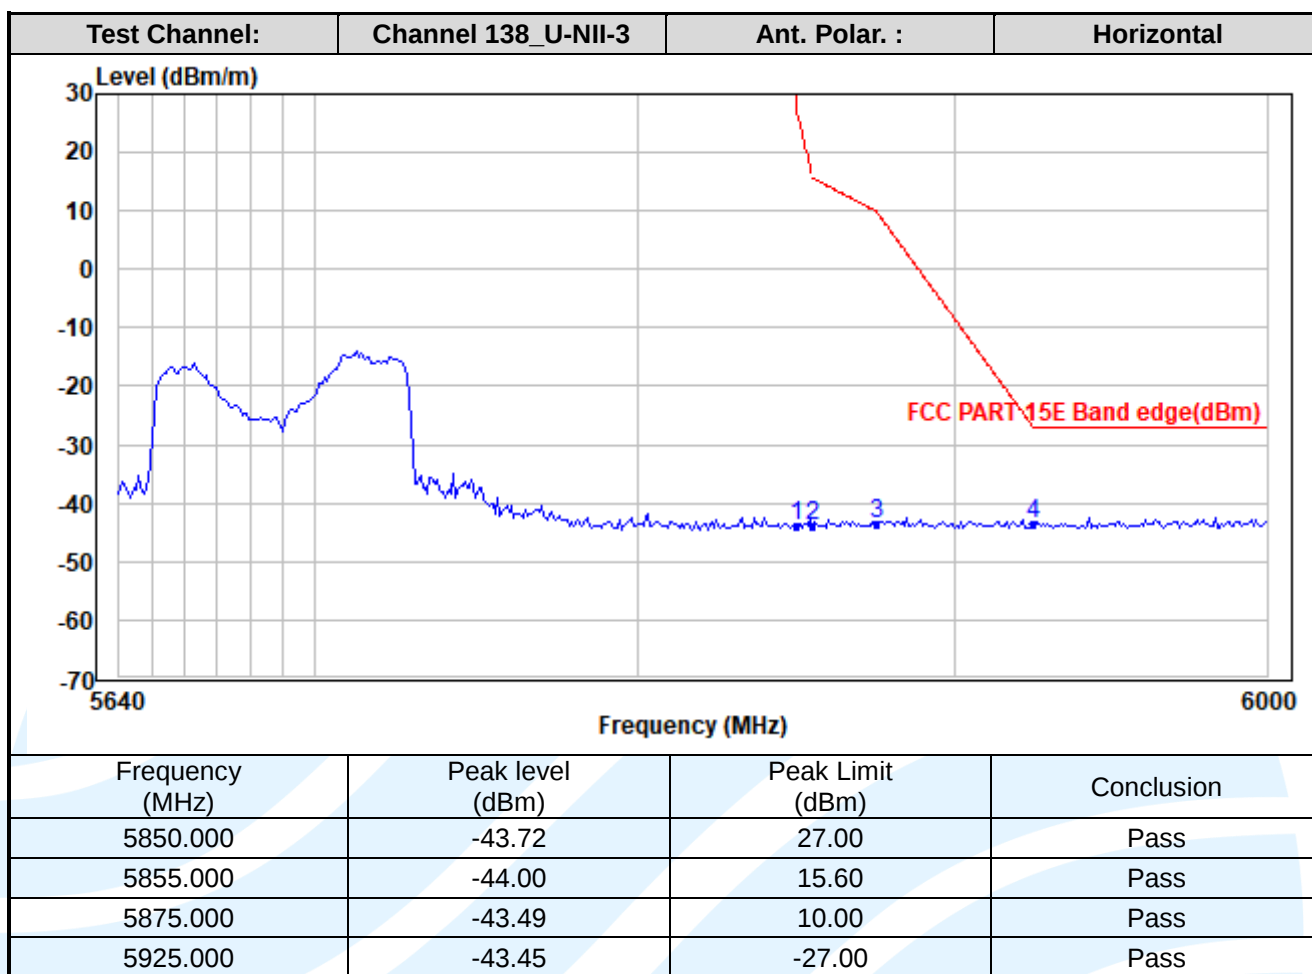

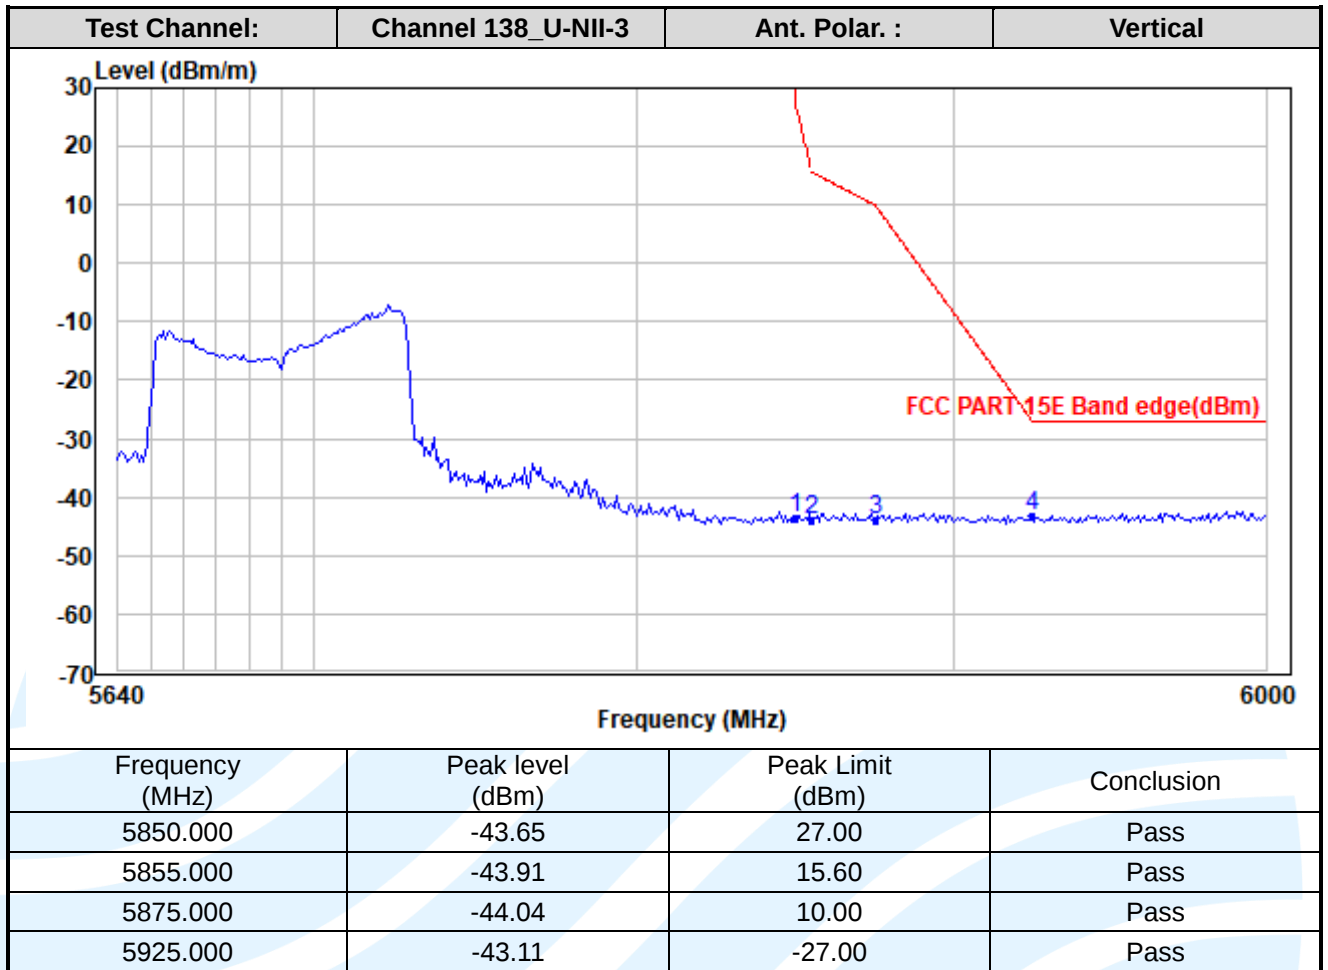

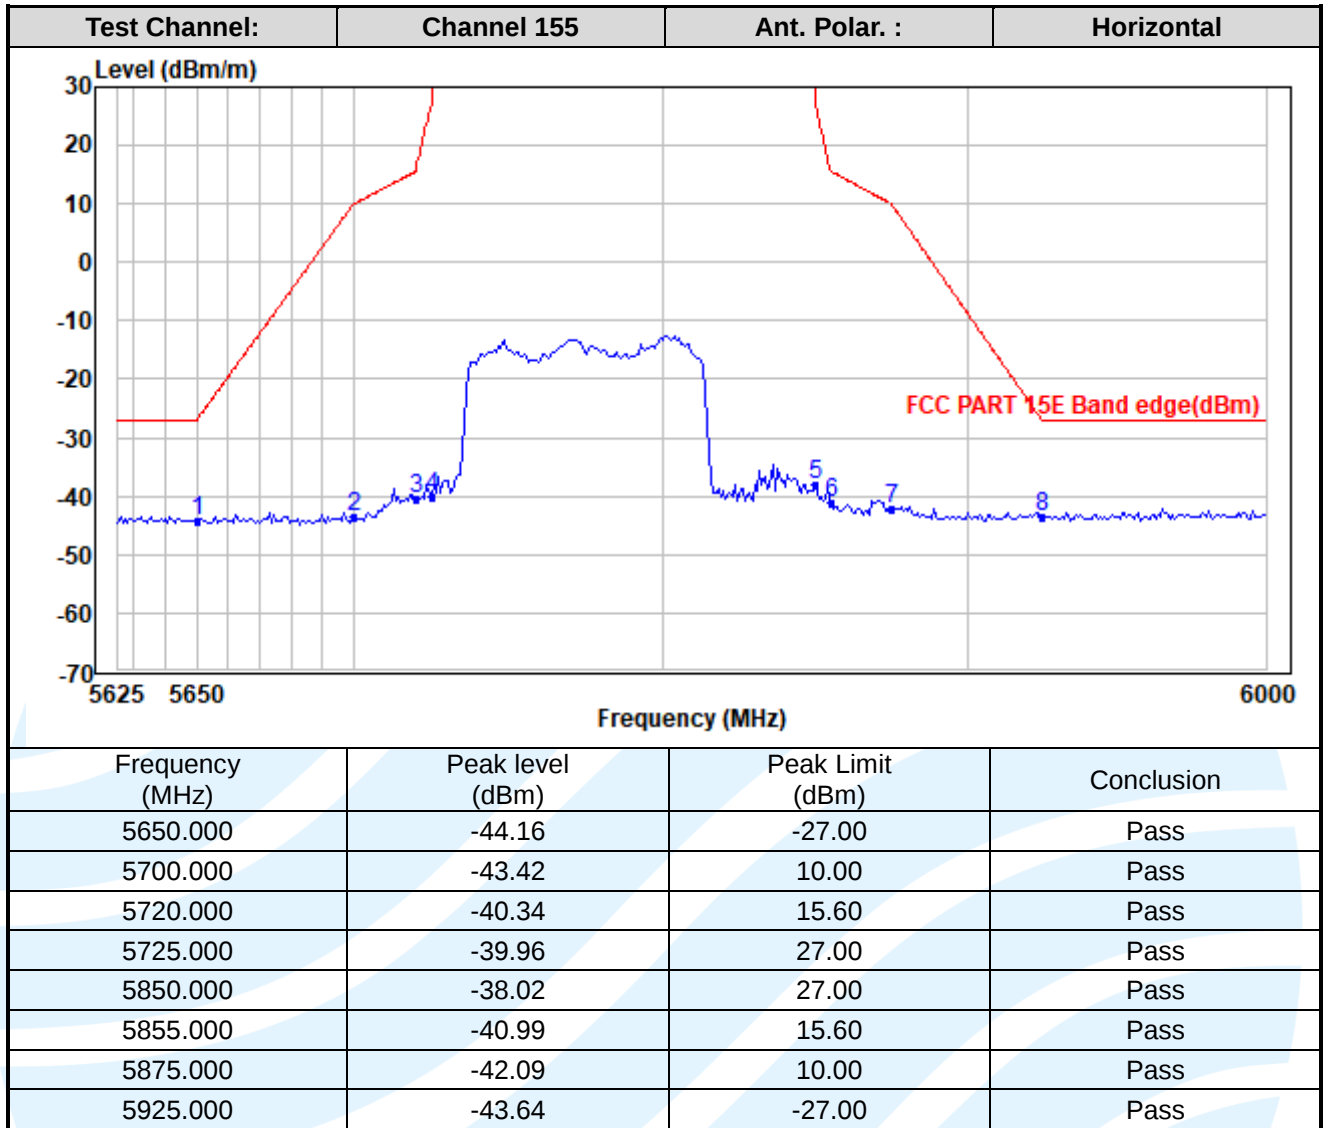

Shenzhen UnionTrust Quality and Technology Co., Ltd.


Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com
<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

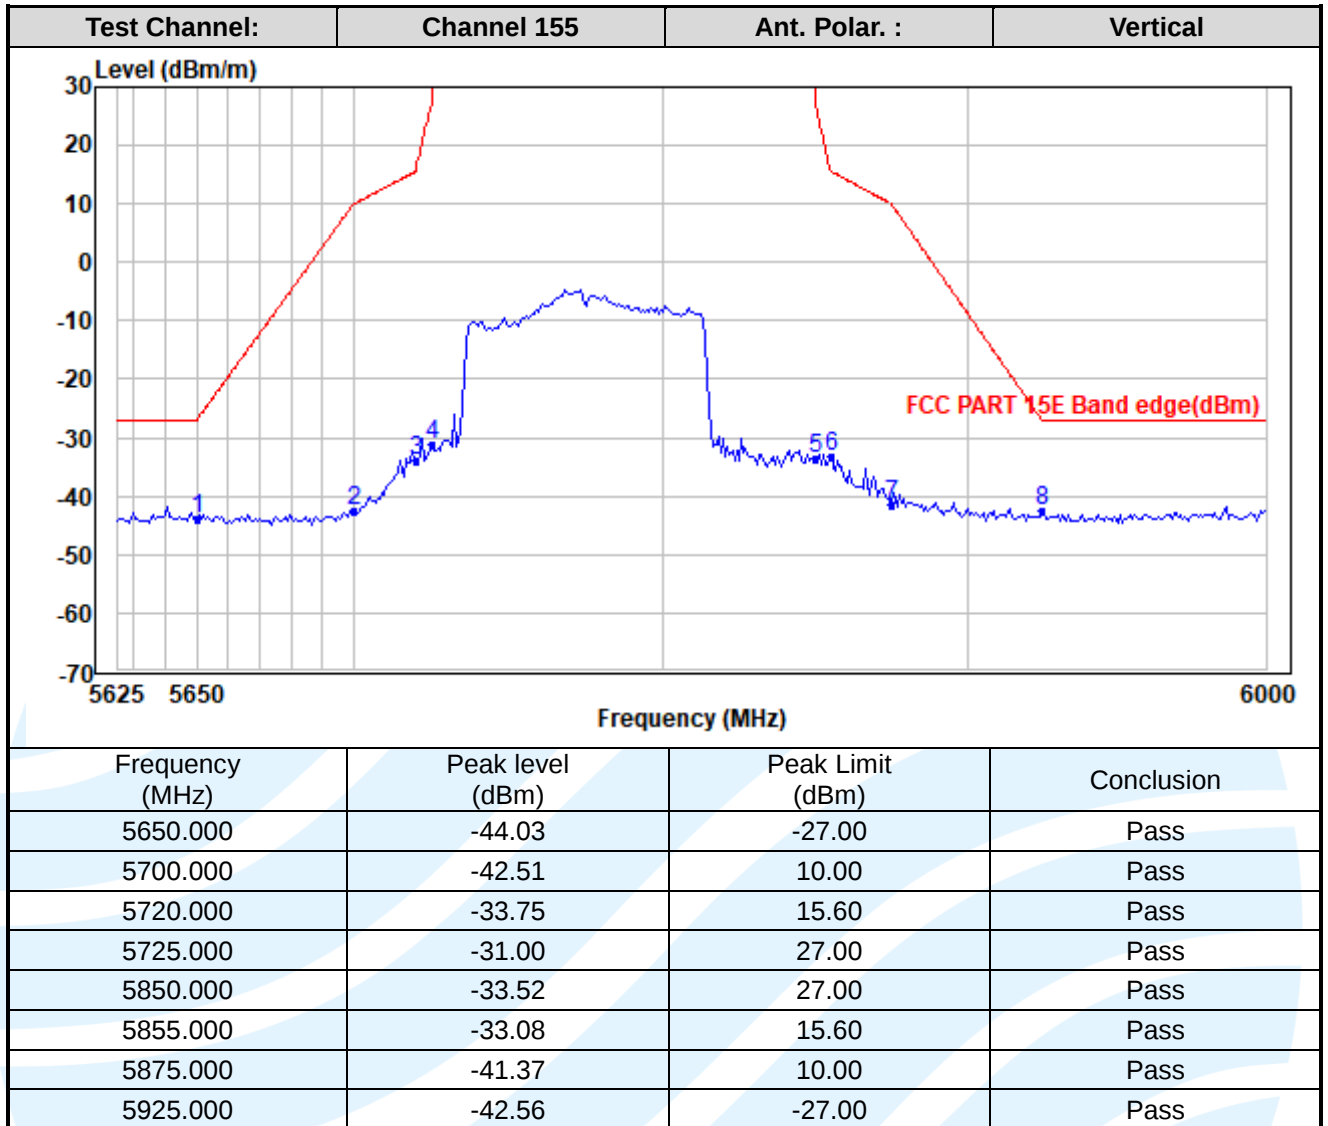

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

5.8 DYNAMIC FREQUENCY SELECTION

Test Requirement: FCC 47 CFR Part 15 Subpart E Section 15.407 (h)

Test Method: KDB 905462 D03 Client Without DFS New Rules v01r02

EUT Operating Mode:

DFS Operational mode	Operating Frequency Range	
	5250 MHz to 5350 MHz	5470 MHz to 5725 MHz
Slave without radar Interference detection function	✓	✓

Applicability:

The following table from KDB905462 and the lists of the applicable requirements for the DFS testing.

Applicability of DFS Requirements Prior to Use of a Channel:

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	✓	Not required	Yes
DFS Detection Threshold	✓	Not required	Yes
Channel Availability Check Time	✓	Not required	Not required
U-NII Detection Bandwidth	✓	Not required	Yes

Applicability of DFS requirements during normal operation:

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required
Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection:

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP ≥ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64dBm

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

DFS Radar Signal Parameter Values:

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds (See Note 1.)
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. (See Notes 1 and 2.)
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. (See Note 3.)

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

DFS Radar Signal Parameter:

Radar Type 0 was used in the evaluation of the Client device for the purpose of measuring the Channel Move Time and the Channel Closing Transmission Time

Table 1-Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
0	1	1428	18	See Note 1.	See Note 1.
1	1	Test A Test B	$\text{Roundup} \left\{ \left(\frac{1}{360} \right) \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.

Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a

Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.

If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

The aggregate is the average of the percentage of successful detections of short pulse radar types

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

1-4

Table 2-Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Table 3-Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	0.333	300	70%	30

In-Service Monitoring: Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period

Limit of In-Service Monitoring:

Reference to DFS Radar Signal Parameter Values.

Test Procedures:

- One frequency will be chosen from the Operating Channels of the EUT within the 5250-5350 MHz or 5470-5725 MHz bands. For 802.11 devices, the test frequency must contain control signals. This can be verified by disabling channel loading and monitoring the spectrum analyzer. If no control signals are detected, another frequency must be selected within the emission bandwidth where control signals are detected.
- In case the EUT is a Master Device, a U-NII device operating as a Client Device will be used and it is assumed that the Client will associate with the EUT (Master). For radiated tests, the emissions of the Radar Waveform generator will be directed towards the Master Device. If the Master Device has antenna gain, the main beam of the antenna will be directed toward the radar emitter. Vertical polarization is used for testing.
- The TCP protocol unicast data stream was generated by the iperf software command line with at least 17% activity ratio over any 100ms period.
- Timing plots are reported with calculations demonstrating a minimum channel loading of approximately 17% or greater. For example, channel loading can be estimated by setting the spectrum analyzer for zero span and approximate the Time On/ (Time On + Off Time).
- At time T_0 the Radar Waveform generator sends a Burst of pulses for one of the Short Pulse Radar Types 1-4 at DFS Detection Threshold levels on the Operating Channel. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the EUT during the observation time (Channel Move Time). Measure and record the Channel Move Time and Channel Closing Transmission Time if radar detection occurs.
- When operating as a Master Device, monitor the EUT for more than 30 minutes following instant T_2 to verify that the EUT does not resume any transmissions on this Channel. Perform this test once and record the measurement result.

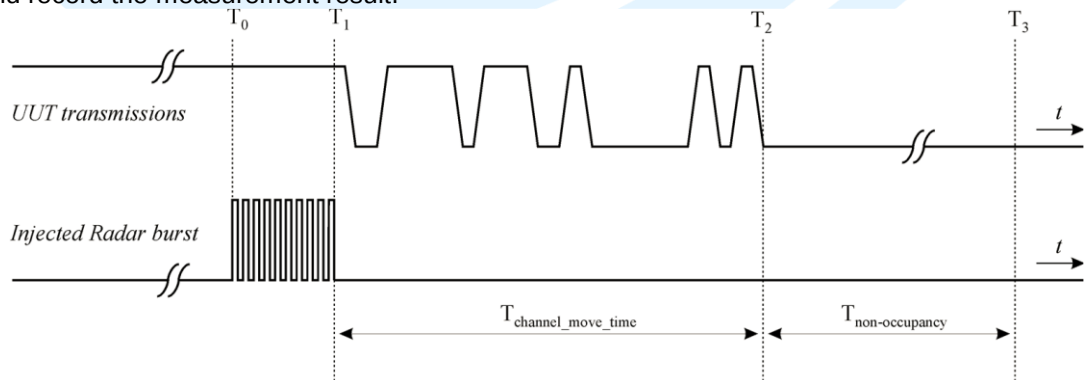


Figure 17: Channel Closing Transmission Time, Channel Move Time and Non-Occupancy Period

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

Conducted test setup

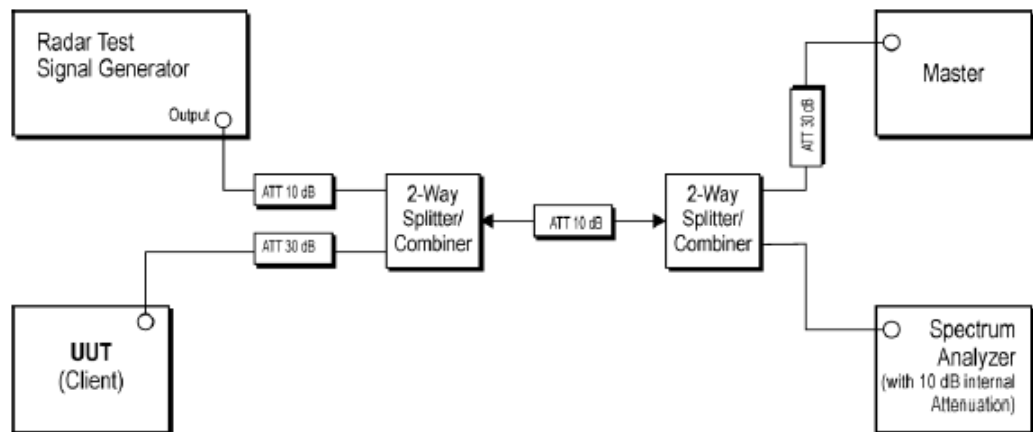

Setup for Client with injection at the Master

Equipment Used: Refer to section 3 for details.


Test Result: Result of Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period for Client Beacon Test



The measurement data as follows:

BW / Channel	Test Item	Test Result	Limit	Pass/Fail
20 MHz / 5300 MHz	Channel Move Time	0.8170 s	< 10s	Pass
	Channel Closing Transmission Time	7.2 ms	< 200+60ms	Pass
	Non-Occupancy Period	No transmission	30 minutes	Pass
20 MHz / 5500 MHz	Channel Move Time	0.7364 s	< 10s	Pass
	Channel Closing Transmission Time	5.7 ms	< 200+60ms	Pass
	Non-Occupancy Period	No transmission	30 minutes	Pass
80 MHz / 5290 MHz	Channel Move Time	0.7940 s	< 10s	Pass
	Channel Closing Transmission Time	6.3 ms	< 200+60ms	Pass
	Non-Occupancy Period	No transmission	30 minutes	Pass
80 MHz / 5530 MHz	Channel Move Time	0.8384 s	< 10s	Pass
	Channel Closing Transmission Time	8.1 ms	< 200+60ms	Pass
	Non-Occupancy Period	No transmission	30 minutes	Pass


Radars Waveform calibration Plot

Reference DFS test signal

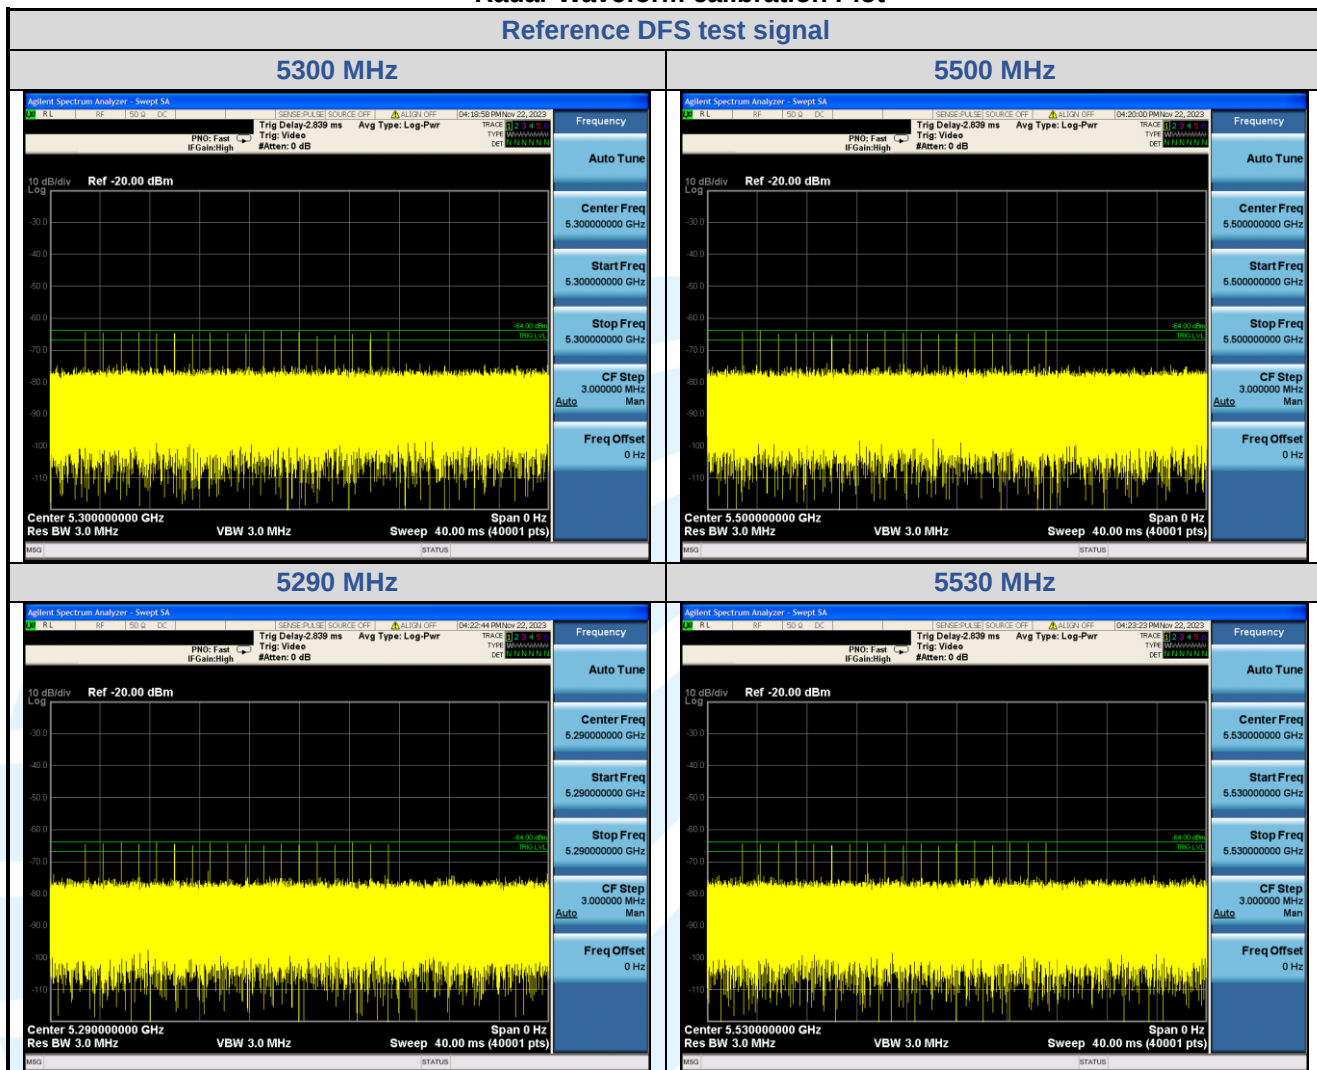

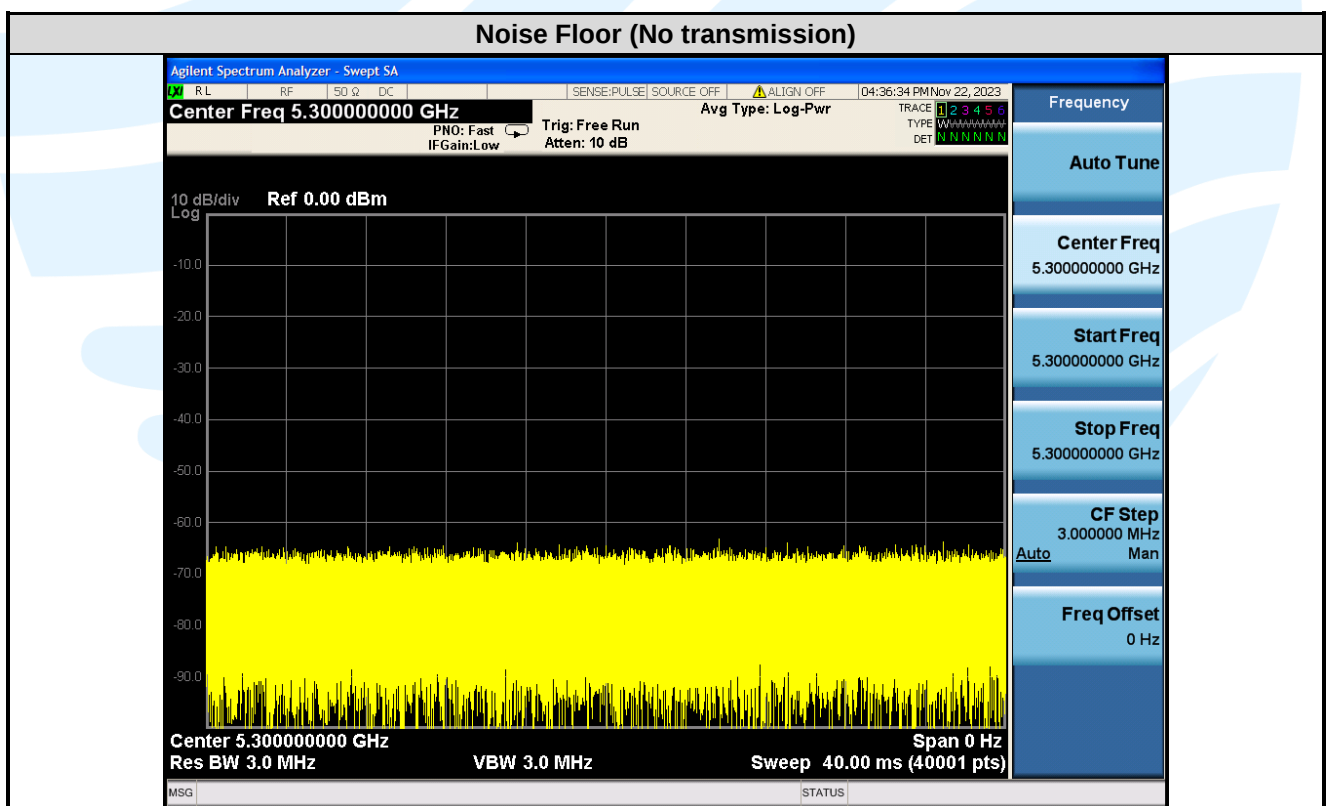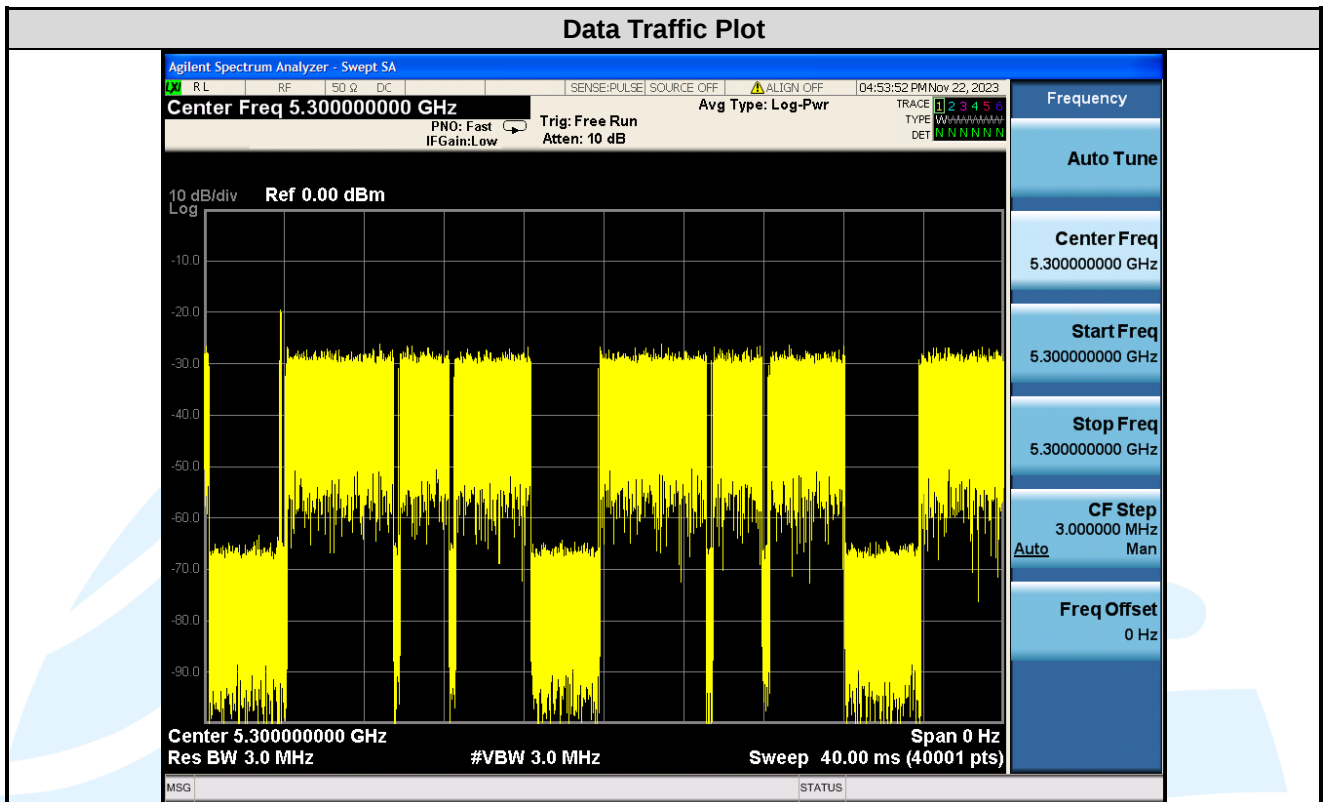


Channel Move Time & Channel Closing Transmission Time 802.11a_5300 MHz

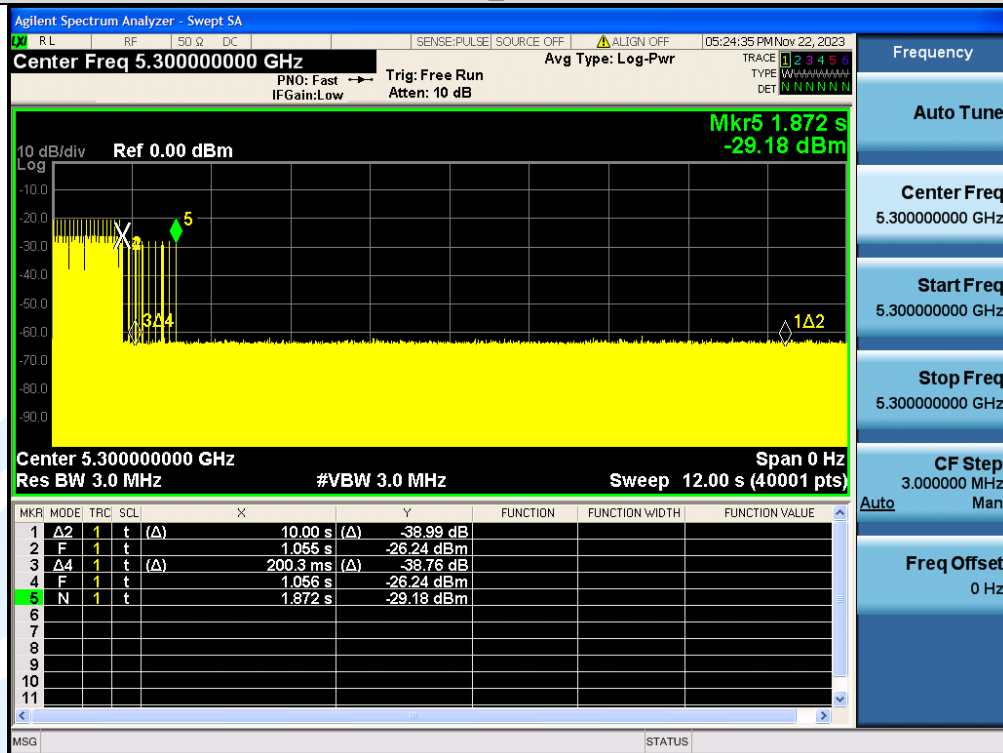


Note:

- 1) Mark1 Time: 1055 ms, Mark2 Time: 101055 ms, Ontime Points: 24
- 2) Dwell = S/B = 12000ms/40001 = 0.3 ms, C = N x Dwell = 24 x 0.3 = 7.2 ms
- 3) CMT = 1.872 s - 1.055 s = 0.8170 s

Non-Occupancy Period_802.11a_CH60_5300 MHz

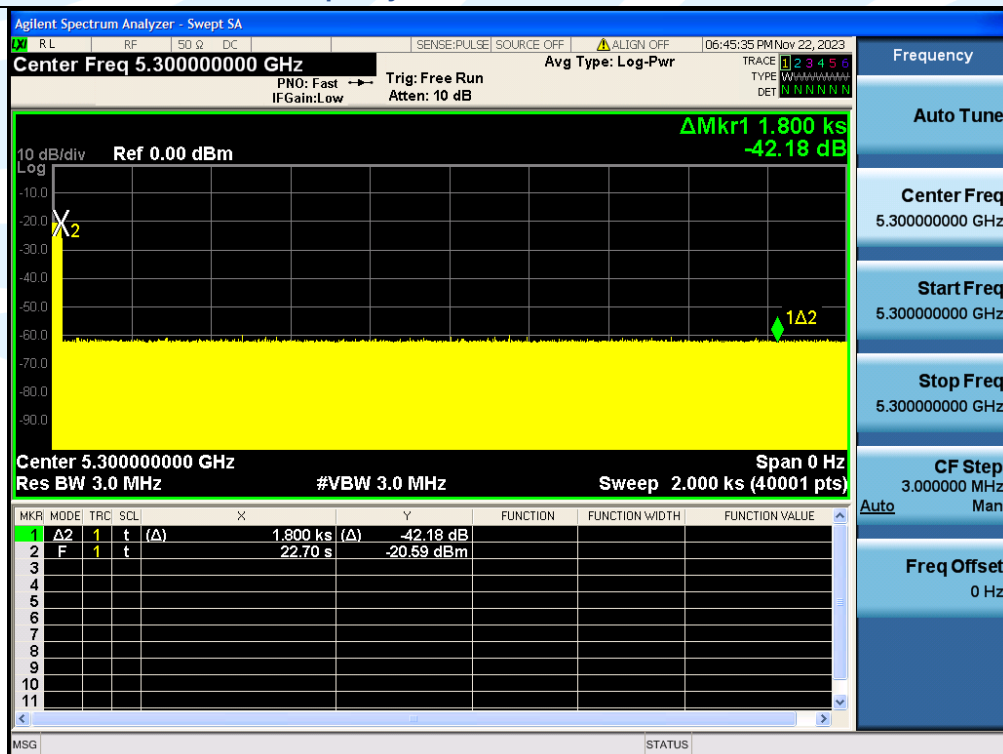


Channel Move Time & Channel Closing Transmission Time 802.11a_5500 MHz

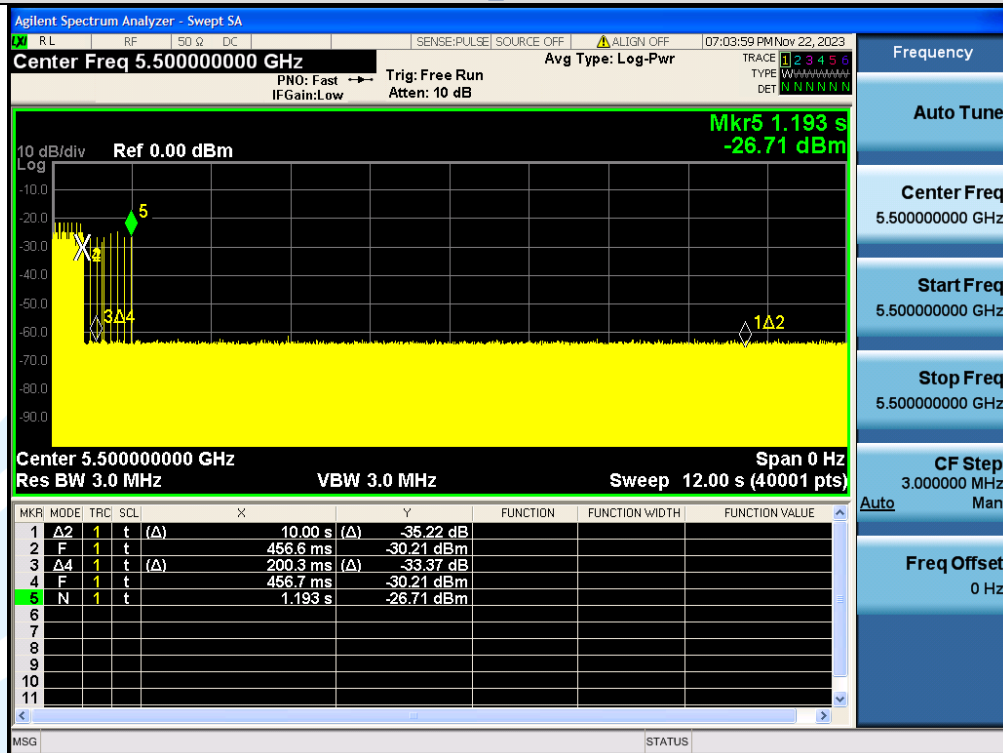

Note:

- 1) Mark1 Time: 456.6 ms, Mark2 Time: 10456.6 ms, Ontime Points: 19
- 2) Dwell = S/B = 12000ms/40001 = 0.3 ms, C = N x Dwell = 19 x 0.3 = 5.7 ms
- 3) CMT = 1.193 s - 0.4566 s = 0.7364 s

Non-Occupancy Period_802.11a_CH100_5500 MHz

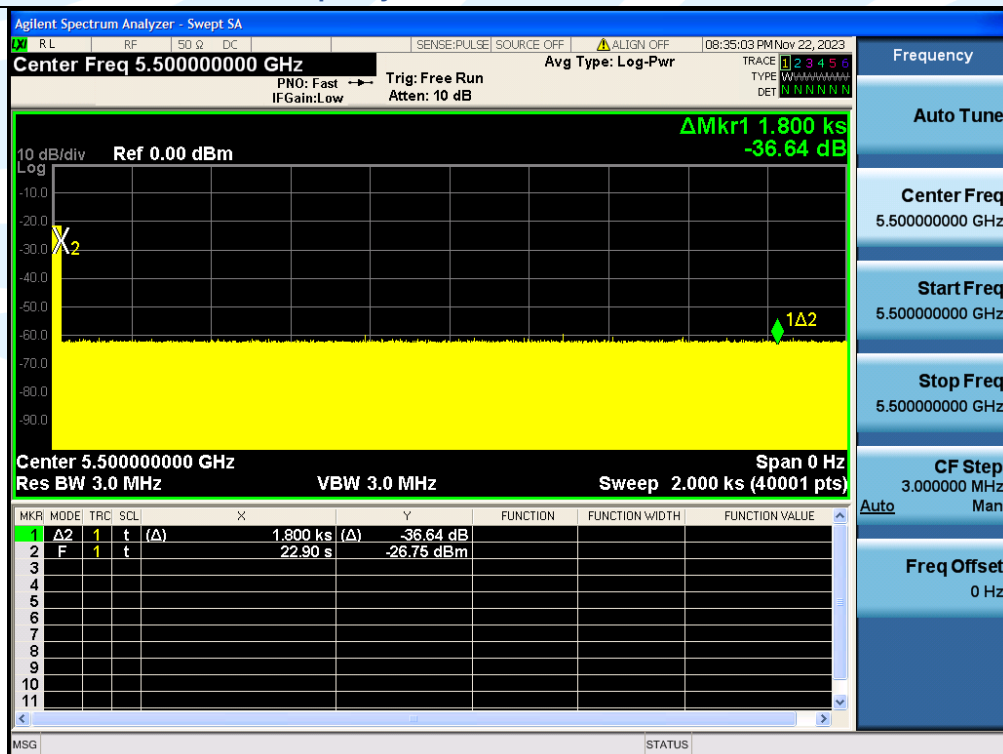


Channel Move Time & Channel Closing Transmission Time 802.11ac_5290 MHz




Note:

- 4) Mark1 Time: 657.0 ms, Mark2 Time: 10657 ms, Ontime Points: 21
- 5) Dwell = S/B = 12000ms/40001 = 0.3 ms, C = N x Dwell = 21 x 0.3 = 6.3 ms
- 6) CMT = 1.451 s – 0.657 s = 0.7940 s

Non-Occupancy Period_802.11ac_CH58_5290 MHz

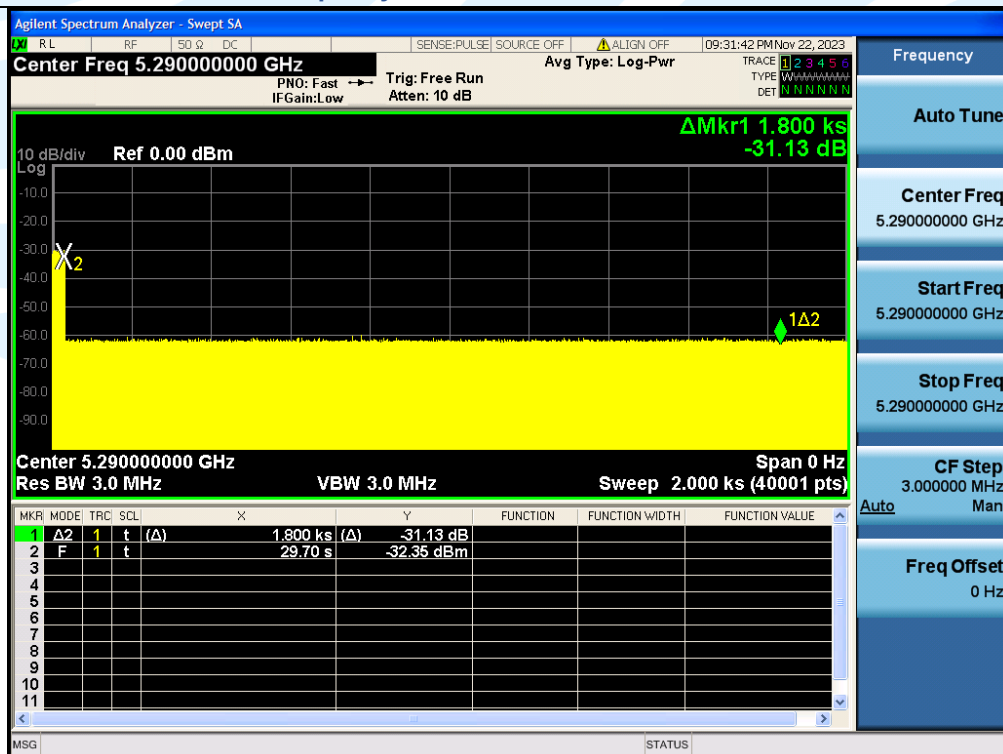


Channel Move Time & Channel Closing Transmission Time 802.11ac_5530 MHz

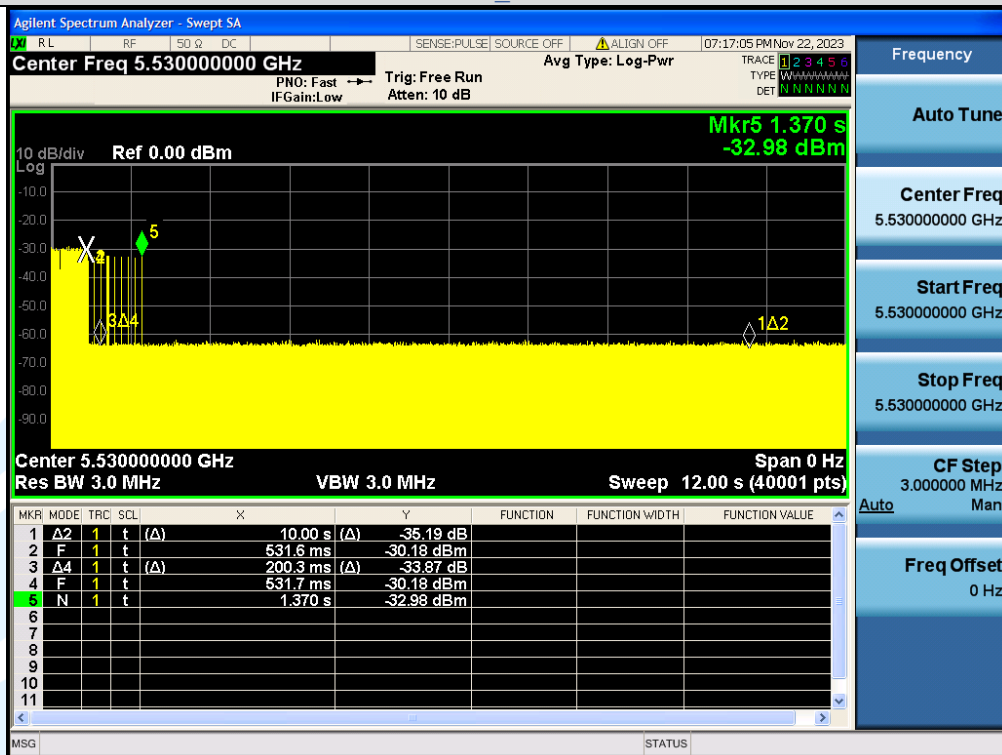

Note:

- 7) Mark1 Time: 531.6 ms, Mark2 Time: 10531.6ms, OnTime Points: 27
- 8) Dwell = S/B = 12000ms/40001 = 0.3 ms, C = N x Dwell = 27 x 0.3 = 8.1 ms
- 9) CMT = 1.370 s - 0.5316 s = 0.8384 s

Non-Occupancy Period_802.11ac_CH106_5530 MHz

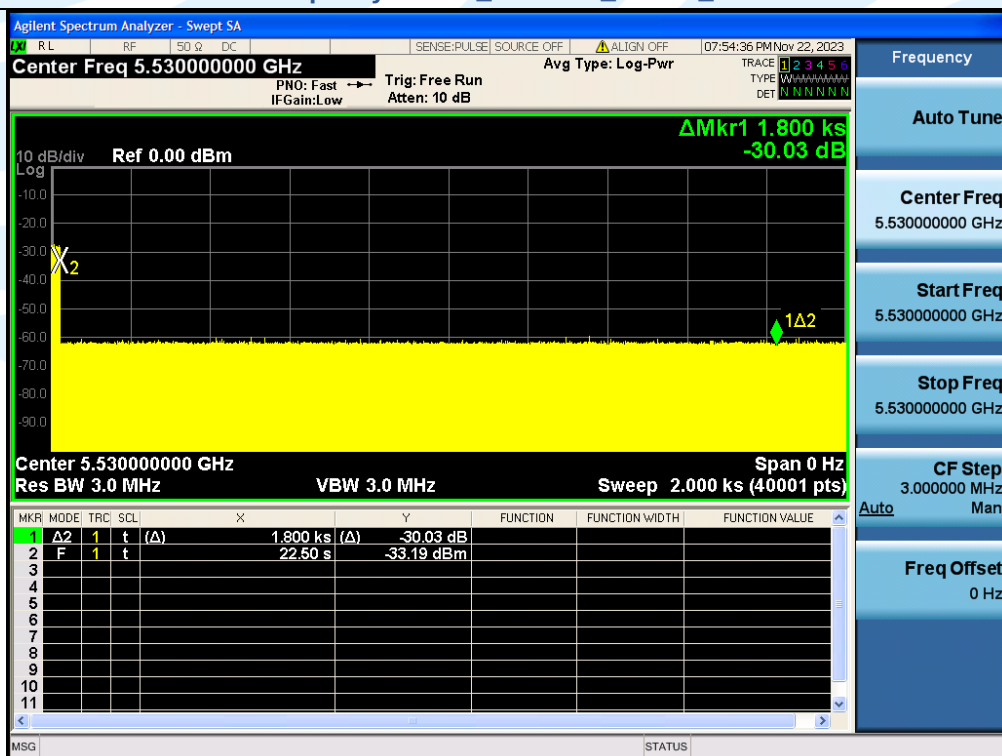

5.9 AC POWER LINE CONDUCTED EMISSION

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.207

Test Method: ANSI C63.10-2013 Section 6.2

Limits:

Frequency range (MHz)	Limits (dB(μV))	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

Remark:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

Test Setup: Refer to section 4.4.2 for details.

Test Procedures:

Test frequency range :150KHz-30MHz

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Equipment Used: Refer to section 3 for details.


Test Result: Pass

The worst measurement data as follows:

Quasi Peak and Average:

Test Mode: WIFI Link

Live Line

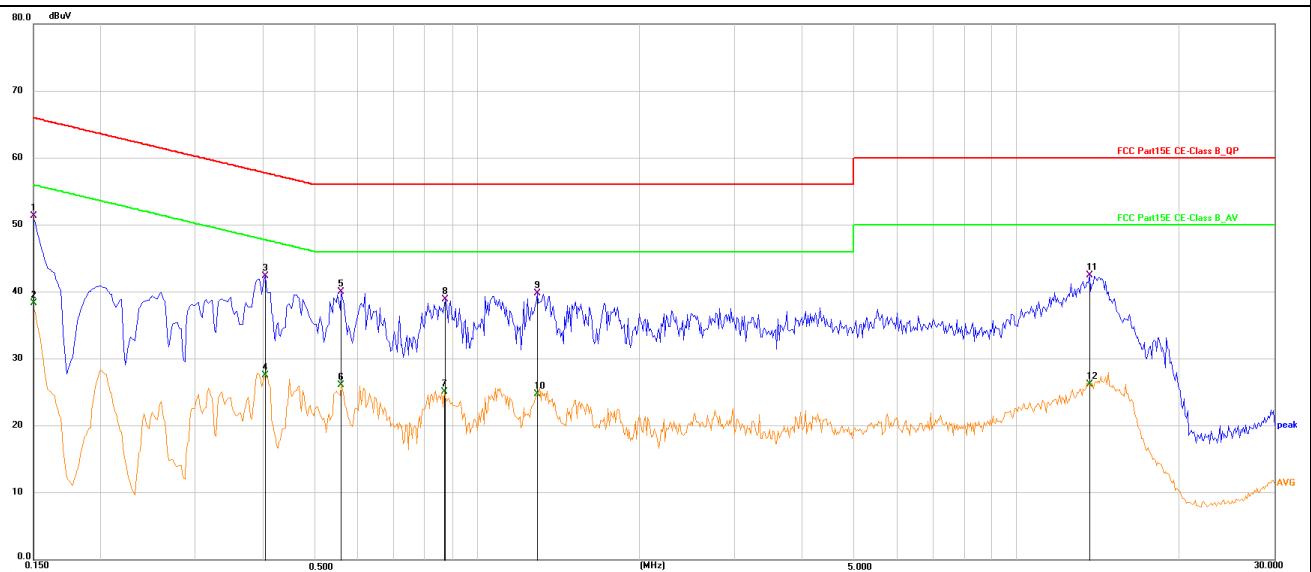

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	41.18	10.20	51.38	66.00	-14.62	QP
2	0.1500	28.07	10.20	38.27	56.00	-17.73	Average
3	0.4020	32.21	10.12	42.33	57.81	-15.48	QP
4	0.4020	17.40	10.12	27.52	47.81	-20.29	Average
5	0.5594	29.82	10.20	40.02	56.00	-15.98	QP
6	0.5594	15.86	10.20	26.06	46.00	-19.94	Average
7	0.8700	14.75	10.29	25.04	46.00	-20.96	Average
8	0.8745	28.59	10.28	38.87	56.00	-17.13	QP
9	1.2930	29.48	10.31	39.79	56.00	-16.21	QP
10	1.2930	14.39	10.31	24.70	46.00	-21.30	Average
11	13.6545	31.97	10.50	42.47	60.00	-17.53	QP
12	13.6545	15.75	10.50	26.25	50.00	-23.75	Average

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

Neutral Line

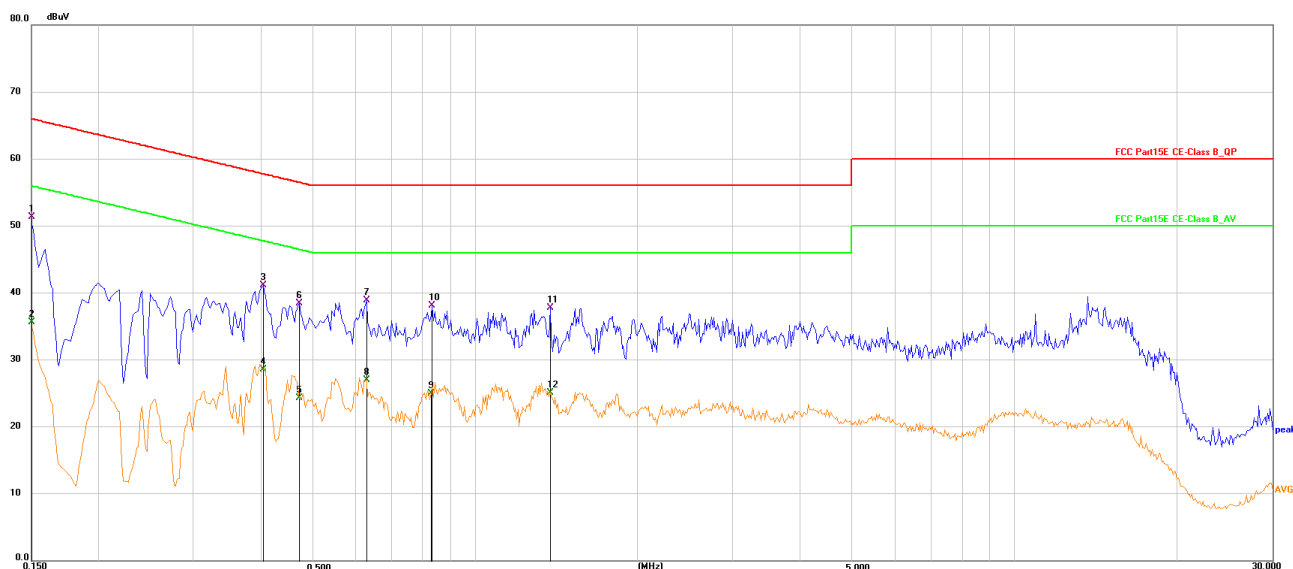

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	41.17	10.19	51.36	66.00	-14.64	QP
2	0.1500	25.45	10.19	35.64	56.00	-20.36	Average
3	0.4020	30.88	10.19	41.07	57.81	-16.74	QP
4	0.4020	18.40	10.19	28.59	47.81	-19.22	Average
5	0.4694	14.08	10.26	24.34	46.52	-22.18	Average
6	0.4695	28.19	10.26	38.45	56.52	-18.07	QP
7	0.6270	28.66	10.25	38.91	56.00	-17.09	QP
8	0.6270	16.75	10.25	27.00	46.00	-19.00	Average
9	0.8295	14.72	10.22	24.94	46.00	-21.06	Average
10	0.8340	27.89	10.21	38.10	56.00	-17.90	QP
11	1.3740	27.58	10.22	37.80	56.00	-18.20	QP
12	1.3740	14.91	10.22	25.13	46.00	-20.87	Average

Remark:

1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit
4. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.
5. All possible modes of operation were investigated, and testing at two nominal voltages of 240V~50Hz and 120V~60Hz, only the worst case emissions reported.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.2

APPENDIX A RF TEST DATA

A.1 26DB BANDWIDTH

For U-NII-1, U-NII-2A, U-NII-2C band

Mode	Channel	Ant.	Center Frequency (MHz)	26 dB Bandwidth (MHz)	RBW/EBW
IEEE 802.11a	36	0	5180	19.64	1.19
	44		5220	20.96	1.15
	48		5240	19.85	1.12
	52		5260	20.73	1.13
	60		5300	19.38	1.13
	64		5320	21.46	1.05
	100		5500	19.78	1.12
	120		5600	23.21	1.00
	140		5700	21.30	1.16
	144		5720	19.87	1.11
IEEE 802.11n_20	36	0	5180	20.11	1.14
	44		5220	20.01	1.11
	48		5240	20.14	1.1
	52		5260	20.00	1.15
	60		5300	20.11	1.11
	64		5320	19.97	1.12
	100		5500	19.95	1.15
	120		5600	20.05	1.13
	140		5700	19.96	1.12
	144		5720	20.07	1.14
IEEE 802.11n_40	38	0	5190	40.13	1.07
	46		5230	40.75	1.04
	54		5270	40.08	1.07
	62		5310	40.82	1.04
	102		5510	40.27	1.07
	118		5590	40.48	1.09
	134		5670	41.57	1.06
	142		5710	40.34	1.06
IEEE 802.11ac_20	36	0	5180	20.18	1.11
	44		5220	20.00	1.12
	48		5240	20.04	1.11
	52		5260	19.90	1.12
	60		5300	20.17	1.11
	64		5320	20.13	1.12
	100		5500	20.22	1.09
	120		5600	19.98	1.12
	140		5700	20.12	1.11
	144		5720	20.15	1.11
IEEE 802.11ac_40	38	0	5190	40.13	1.05
	46		5230	40.18	1.06
	54		5270	39.89	1.07
	62		5310	40.01	1.06
	102		5510	40.50	1.05
	118		5590	40.20	1.06
	134		5670	40.02	1.07
	142		5710	40.28	1.05
IEEE 802.11ac_80	42	0	5210	81.00	1.02
	58		5290	80.92	1.02
	106		5530	80.38	1.03
	122		5610	80.44	1.04
	138		5690	94.68	1.06

Test Graphs

