


TEST REPORT

Application No.: BTEK241111036A01-T05
Applicant: MAXNERVA TECHNOLOGY SERVICES LTD
Address of Applicant: Room 1001,10/F Houston Centre, 63 Mody Road, Tsim Sha Tsui East, Kowloon,Hong Kong SAR,China
Manufacturer: MAXNERVA TECHNOLOGY SERVICES LTD
Address of Manufacturer: Room 1001,10/F Houston Centre, 63 Mody Road, Tsim Sha Tsui East, Kowloon,Hong Kong SAR,China
Equipment Under Test (EUT):
EUT Name: MULTIMEDIA PROJECTOR
Test Model.: P138
Adding Model(s): IN3028SL, IN3038SL
Trade Mark: **InFocus**
FCC ID: 2BDYA-P138
Standard(s) : 47 CFR Part 15, Subpart E 15.407
789033 D02 General UNII Test Procedures New Rules v02r01
ANSI C63.10:2013
Date of Receipt Sample(s): 2024-11-13
Date of Test: 2024-11-14 to 2024-12-17
Date of Issue: 2024-12-18

Test Result:**Pass***

* In the configuration tested, the EUT complied with the standards specified above.



Lion Cai/ Approved & Authorized
EMC Laboratory Manager



Revision Record			
Version	Issue Date	Revisions	Remarks
V0	2024-12-18	Initial	Valid

Authorized for issue by:			
			
		Karl Liu / File Editor	
			
		June Li/Reviewer	

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.



2 Test Summary

Standard	Item	Requirement	Result
47 CFR Part 15, Subpart E 15.407	Antenna Requirement	47 CFR Part 15, Subpart C 15.203	Pass
	Transmission in the Absence of Data	47 CFR Part 15, Subpart E 15.407 (c)	Pass

Standard	Item	Requirement	Result
47 CFR Part 15, Subpart E 15.407	Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)	Pass
	Duty Cycle	KDB 789033 D02 II B 1	Pass
	99% Bandwidth	N/A	Pass
	26dB Emission bandwidth	47 CFR Part 15, Subpart E 15.407 (a)	Pass
	Minimum 6 dB bandwidth (5.725-5.85 GHz band)	47 CFR Part 15, Subpart E 15.407 (e)	Pass
	Maximum Conducted output power	47 CFR Part 15, Subpart E 15.407 (a)	Pass
	Power spectrum density	47 CFR Part 15, Subpart E 15.407 (a)	Pass
	Radiated Emissions	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
	Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
	Frequency Stability	47 CFR Part 15, Subpart E 15.407 (g)	Pass
	Transmitter Power Control	47 CFR Part 15, Subpart E 15.407 (h)(1)	N/A

Note:

N/A Mean's not Application.

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.



3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information.....	5
4.1 Details of E.U.T.	5
4.2 EUT Test Mode and Test Condition	6
4.3 Measurement Uncertainty	7
4.4 Test Location.....	7
4.5 Deviation from Standards.....	7
4.6 Abnormalities from Standard Conditions	7
5 Equipment List	8
6 Radio Spectrum Technical Requirement	10
6.1 Antenna Requirement	10
6.1.1 Test Requirement:	10
6.1.2 Conclusion	10
6.2 Transmission in the Absence of Data	10
6.2.1 Test Requirement:	10
6.2.2 Conclusion	10
7 Radio Spectrum Matter Test Results	11
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	11
7.1.1 Test Setup Diagram	11
7.1.2 Measurement Procedure and Data.....	11
7.2 Duty Cycle	14
7.2.1 Test Setup Diagram	14
7.2.2 Measurement Procedure and Data.....	14
7.3 Emission Bandwidth and Occupied Bandwidth.....	15
7.3.1 Test Setup Diagram	15
7.3.2 Measurement Procedure and Data.....	15
7.4 Maximum Conducted output power	16
7.4.1 Test Setup Diagram	16
7.4.2 Measurement Procedure and Data.....	16
7.5 Power Spectrum Density.....	17
7.5.1 Test Setup Diagram	17
7.5.2 Measurement Procedure and Data.....	17
7.6 Radiated Spurious Emissions	18
7.6.1 Test Setup Diagram	19
7.6.2 Measurement Procedure and Data.....	20
7.7 Frequency Stability	29
7.7.1 Test Setup Diagram	29
7.7.2 Measurement Procedure and Data.....	29
7.8 Transmitter Power Control	30
7.8.1 Test Setup Diagram	30
7.8.2 Measurement Procedure and Data.....	30
8 Test Setup Photo	31
9 EUT Constructional Details (EUT Photos)	31



4 General Information

4.1 Details of E.U.T.

Power supply:	WITCHING ADAPTER Model:MSS-Z6320WR190-120C0-E Input:AC100-240V~ 50/60Hz 2.0A max. Output:120.0W.19.0V 6.32A		
Support Standards:	802.11a, 802.11n(HT20) ,802.11n-HT40, 802.11ac-VHT20, 802.11ac-VHT40,802.11ac-VHT80		
Operation Frequency	U-NII-1:5180-5240MHz U-NII-3: 5745-5825MHz		
Modulation Type:	OFDM		
Channel Spacing:	802.11a/n(HT20)/ac(VHT20): 20MHz 802.11n(HT40)/ac(VHT40): 40MHz ac(VHT80): 80MHz		
DFS Function:	Slave		
TPC Function:	No Support TPC function		
Antenna Type:	Modules 1 7663:FPC Antenna Modules 2 GTV:PCB Antenna		
Antenna Gain:	Modules 1 7663:	U-NII-1:5180-5240MHz ANT1:2.86dBi ANT2:2.86dBi	U-NII-3: 5745-5825MHz ANT1:3.28dBi ANT2:3.28dBi
	Modules 2 GTV:	U-NII-1:5180-5240MHz ANT1:2.86dBi ANT2:2.86dBi	U-NII-3: 5745-5825MHz ANT1:3.28dBi ANT2:3.28dBi
Model(s) Difference Statement	☐ Singel Model.		
	☒ Multi-Models: Model No.: P138, IN3028SL,IN3038SL Only the model P138 was tested. According to the declaration from the applicant, the electrical circuit design, layout, components used, internal wiring and functions of other models are identical for the above models, with only difference on Model No		
Sample No.:	BTEK241111036A01-T05		



4.2 EUT Test Mode and Test Condition

Test Conditions	
Temperature:	21.3 °C
Relative Humidity:	51 %
ATM Pressure:	1010 mbar

Test Mode

Test Channel and Frequency list						
Operating band	20MHz		40MHz		80MHz	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII-1	36	5180	38	5190	42	5210
	40	5200	46	5230		
	44	5220				
	48	5240				
U-NII-2A	52	5260	54	5270	56	5290
	56	5280	62	5310		
	60	5300				
	64	5320				
U-NII-2C	100	5500	102	5510	106	5530
	104	5520	110	5550	122	5610
	108	5540	118	5590		
	112	5560	126	5630		
	116	5580	134	5670		
	120	5600				
	124	5620				
	128	5640				
	132	5660				
	136	5680				
	140	5700				
U-NII-3	149	5745	151	5755	155	5755
	153	5765	159	5795		
	157	5785				
	161	5805				
	165	5825				

Test Software	QAtest MFC Application
Test Software version	0.0.2.6



4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	$\pm 3.1\text{dB}$
Duty Cycle	$\pm 0.37\%$
99% Bandwidth	$\pm 3\%$
26dB Emission bandwidth	$\pm 3\%$
Minimum 6 dB bandwidth (5.725-5.85 GHz band)	$\pm 3\%$
Maximum Conducted output power	$\pm 0.75\text{dB}$
Peak Power spectrum density	$\pm 2.84\text{dB}$
Radiated Emissions (Below 1GHz)	$\pm 6.0\text{dB}$ for 3m; $\pm 5.0\text{dB}$ for 10m
Radiated Emissions (Above 1GHz)	$\pm 4.6\text{dB}$ (1-18GHz); $\pm 4.8\text{dB}$ (18-40GHz)
Radiated Emissions which fall in the restricted bands	$\pm 6.0\text{dB}$ (below 1GHz); $\pm 4.6\text{dB}$ (above 1GHz);
Frequency Stability	$\pm 7.25 \times 10^{-8}$
Transmitter Power Control	$\pm 0.75\text{dB}$

4.4 Test Location

All tests were performed at:

Shenzhen BANTEK Testing Co., Ltd.

A5&A6, Building B1&B2, No.45 Gangtou Road, Bogang Community, Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Tel: +86 0755-2334 4200 Fax: +86 0755-2334 4200

FCC Registration Number: 264293

Designation Number: CN1356

No tests were sub-contracted.

4.5 Deviation from Standards

None

4.6 Abnormalities from Standard Conditions

None



5 Equipment List

Conducted Test					
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Shielding Room	YIHENG ENELECTRONIC	9*5*3.3	YH-BT-220304-04	2022-03-03	2025-03-02
EMI Test Receiver	Rohde&Schwarz	ESCI	101021	2024-06-11	2025-06-10
Measurement Software	Fara	EZ EMC Ver. FA-03A2	N/A	N/A	N/A
LISN	Rohde&Schwarz	ENV216	101472	2024-06-11	2025-06-10
LISN	Schwarzbeck	NSLK 8128	05127	2024-06-11	2025-06-10

RF Conducted					
Equipment	Manufacturer	Model No	Serial No	Cal Date	Cal Due Date
Shielding Room	YIHENG ENELECTRONIC	5.5*3.1*3	YH-BT-220304-03	2022-03-03	2025-03-02
EXA Signal Analyzer	KEYSIGHT	N9020A	MY54230486	2024-06-11	2025-06-10
DC Power Supply	E3632A	E3642A	KR75304416	2024-06-11	2025-06-10
Attenuator	RswTech	SMA-JK-6dB	N/A	2024-06-11	2025-06-10
Attenuator	RswTech	SMA-JK-3dB	N/A	2024-06-11	2025-06-10
RF Control Unit	Techy	TR1029-1	N/A	2024-06-11	2025-06-10
RF Sensor Unit	Techy	TR1029-2	N/A	2024-06-11	2025-06-10
WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	141258	2024-06-11	2025-06-10
MXG Vector Signal Generator	Agilent	N5182A	US46240522	2024-06-11	2025-06-10
Programmable Temperature&Humidity Chamber	GRT	GR-HWX1000	GR22051001	2024-06-11	2025-06-10
Measurement Software	TACHOY	RF TestSoft	N/A	N/A	N/A

RSE					
Equipment	Manufacturer	Model No	Serial No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	YIHENG ENELECTRONIC	966	YH-BT-220304-01	2022-05-06	2025-05-05
EMI Test Receiver	Rohde&Schwarz	ESCI	100694	2024-06-11	2025-06-10
TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	01324	2024-06-16	2025-06-15
Pre-Amplifier	Schwarzbeck	BBV 9745	#180	2024-06-11	2025-06-10
Measurement Software	Fara	EZ EMC Ver. FA-03A2	N/A	2024-06-11	2025-06-10
EXA Signal Analyzer	Keysight	N9020A	MY54440290	2024-06-11	2025-06-10
Horn Antenna	Schwarzbeck	BBHA 9120D	02695	2024-06-15	2025-06-14
Pre-Amplifier	Tonscend	TAP0118045	AP20K806109	2024-06-11	2025-06-10
Horn Antenna	SCHWARZBECK	BBHA9170	1157	2024-06-15	2025-06-14
Low Noise Pre-amplifier	SKET	LNPA-1840G-50	SK2022032902	2024-06-11	2025-06-10
Signal analyzer	ROHDE&SCHWARZ	FSQ40	100010	2024-06-11	2025-06-10



Loop Antenna	ETS	6502	00201177	2024-06-15	2025-06-14
Cable	BTEK	LMR400UF-NMNM-7.00M	/	2024-06-15	2025-06-14
Cable	BTEK	LMR400UF-NMNM-2.50M	/	2024-06-15	2025-06-14
Cable	BTEK	LMR400UF-NMNM-3.00M	/	2024-06-15	2025-06-14
Cable	BTEK	SFT205PUR-MNSWSM-7.00M	/	2024-06-15	2025-06-14
Cable	BTEK	SFT205PUR-MNSWSM-2.50M	/	2024-06-15	2025-06-14
Cable	BTEK	SFT205PUR-MNSWSM-2.50M	/	2024-06-15	2025-06-14
Cable	BTEK	SFT205PUR-MNSWSM-0.30M	/	2024-06-15	2025-06-14



6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

6.1.2 Conclusion

This product has an integral antenna, fulfill the requirement of this section.

6.2 Transmission in the Absence of Data

6.2.1 Test Requirement:

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

6.2.2 Conclusion

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)


Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

7.1.1 Test Setup Diagram

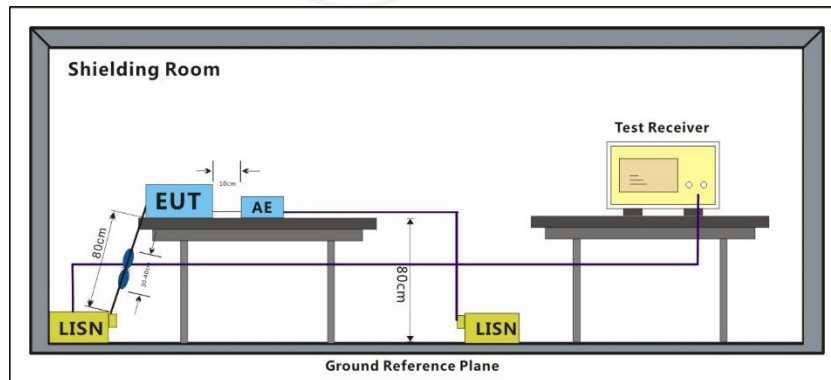


7.1.2 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor




Test Mode	Communication-TX	Polarity:	Neutral
-----------	------------------	-----------	---------

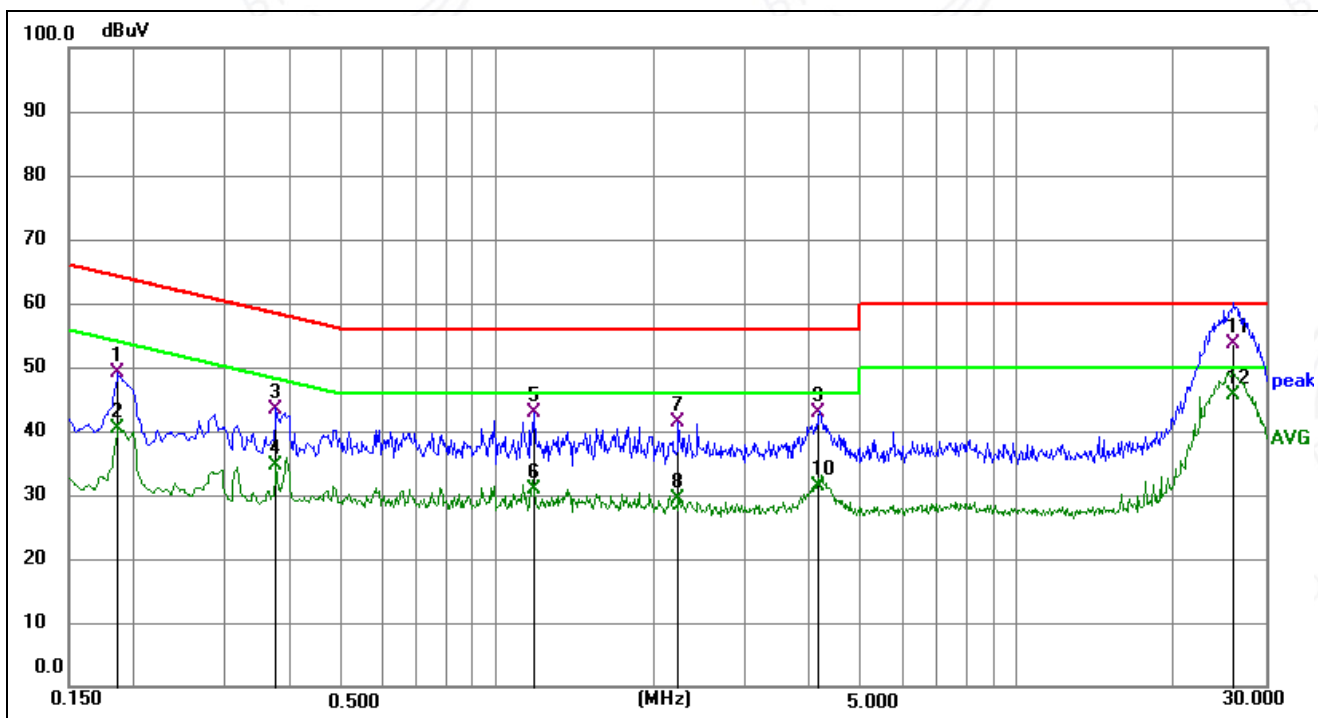

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1860	29.16	19.93	49.09	64.21	-15.12	QP	P	
2	0.1860	20.41	19.93	40.34	54.21	-13.87	AVG	P	
3	0.3750	23.56	19.94	43.50	58.39	-14.89	QP	P	
4	0.3750	14.78	19.94	34.72	48.39	-13.67	AVG	P	
5	1.1805	22.65	20.11	42.76	56.00	-13.24	QP	P	
6	1.1805	10.76	20.11	30.87	46.00	-15.13	AVG	P	
7	2.2335	21.16	20.18	41.34	56.00	-14.66	QP	P	
8	2.2335	9.16	20.18	29.34	46.00	-16.66	AVG	P	
9	4.1774	22.75	20.25	43.00	56.00	-13.00	QP	P	
10	4.1774	11.09	20.25	31.34	46.00	-14.66	AVG	P	
11	26.1026	31.09	22.53	53.62	60.00	-6.38	QP	P	
12 *	26.1026	23.03	22.53	45.56	50.00	-4.44	AVG	P	



Test Mode	Communication-TX	Polarity:	Line
-----------	------------------	-----------	------

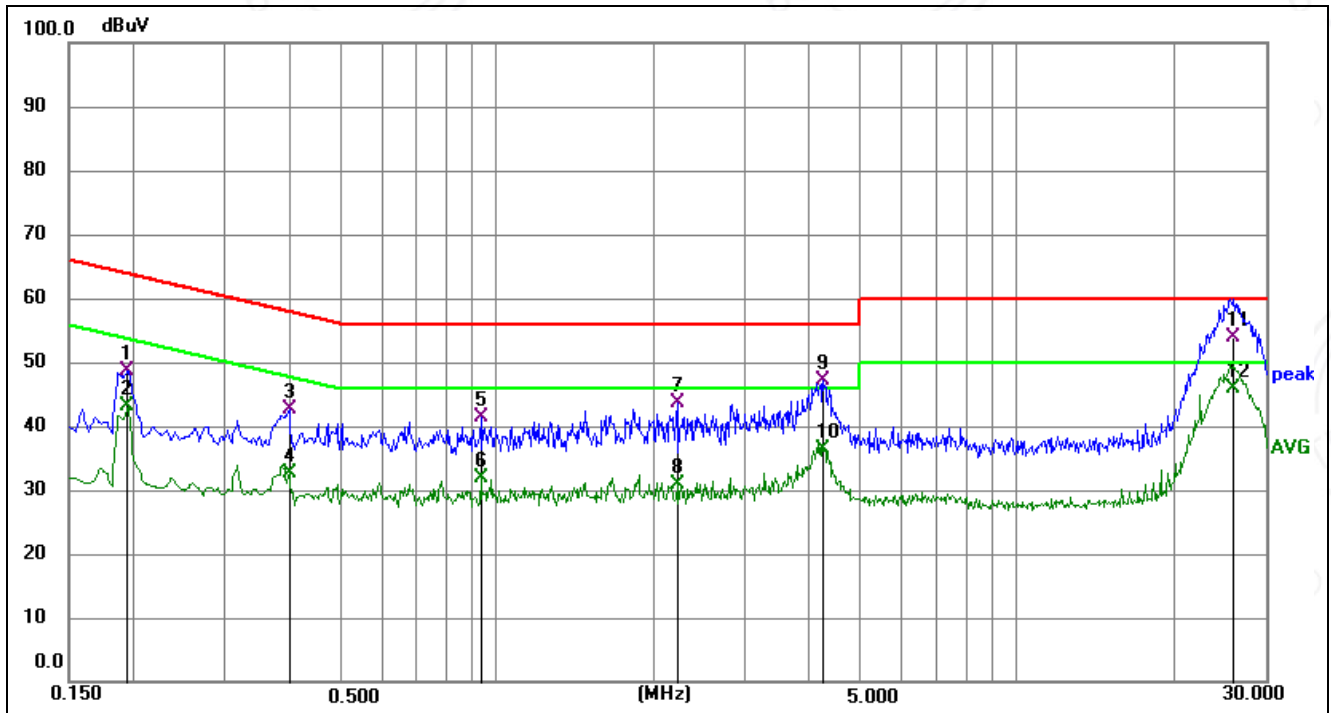

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1949	28.80	19.86	48.66	63.83	-15.17	QP	P	
2	0.1949	23.18	19.86	43.04	53.83	-10.79	AVG	P	
3	0.3975	22.85	19.88	42.73	57.91	-15.18	QP	P	
4	0.3975	12.81	19.88	32.69	47.91	-15.22	AVG	P	
5	0.9330	21.29	20.00	41.29	56.00	-14.71	QP	P	
6	0.9330	11.83	20.00	31.83	46.00	-14.17	AVG	P	
7	2.2200	23.39	20.19	43.58	56.00	-12.42	QP	P	
8	2.2200	10.63	20.19	30.82	46.00	-15.18	AVG	P	
9	4.2315	26.79	20.32	47.11	56.00	-8.89	QP	P	
10	4.2315	16.07	20.32	36.39	46.00	-9.61	AVG	P	
11	25.9958	31.14	22.64	53.78	60.00	-6.22	QP	P	
12 *	25.9958	23.15	22.64	45.79	50.00	-4.21	AVG	P	




7.2 Duty Cycle

Test Requirement KDB 789033 D02 II B 1

Test Method: KDB 789033 D02 B 1

Limit: /

7.2.1 Test Setup Diagram

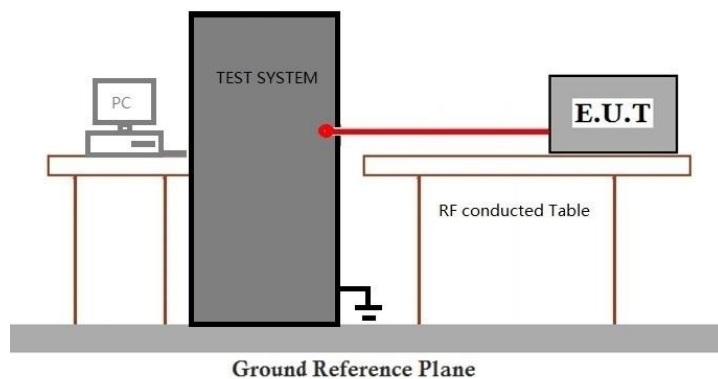

7.2.2 Measurement Procedure and Data

Please Refer to Appendix for Details



7.3 Emission Bandwidth and Occupied Bandwidth


Test Requirement Subpart E 15.407 (a), (e)

Test Method: KDB 789033 D02 C

Limit:

99% Bandwidth	/
26dB Emission bandwidth	/
Minimum 6 dB bandwidth	≥500kHz(Only for 5725-5850MHz)

7.3.1 Test Setup Diagram

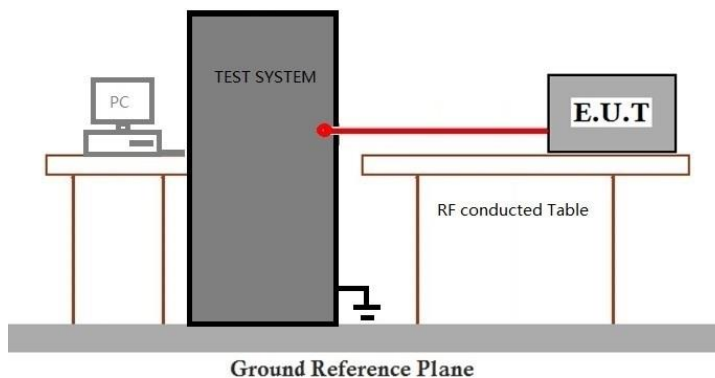

7.3.2 Measurement Procedure and Data

Please Refer to Appendix for Details



7.4 Maximum Conducted output power


Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: KDB 789033 D02 II E

Limit:

Frequency Band (MHz)	Limit
5150-5250	≤1W(30dBm) for master device
	≤250mW(24dBm) for client device
5250-5350	≤250mW(24dBm) or 11dBm+10logB*
5470-5725	≤250mW(24dBm) or 11dBm+10logB*
5725-5850	≤1W(30dBm)
Remark:* Where B is the 26dB emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.	

7.4.1 Test Setup Diagram

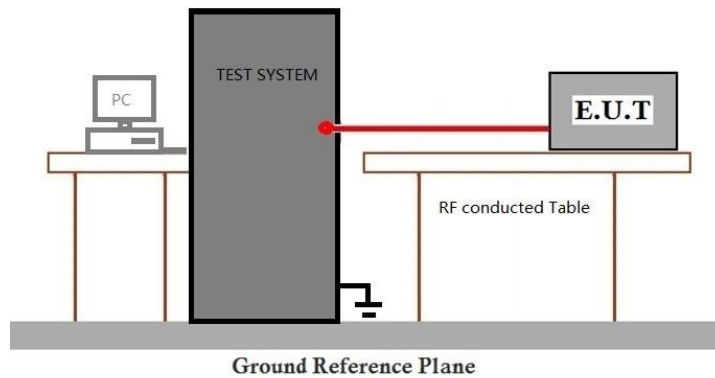

7.4.2 Measurement Procedure and Data

Please Refer to Appendix for Details



7.5 Power Spectrum Density


Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: KDB 789033 D02 F

Limit:

Frequency Band (MHz)	Limit
5150-5250	≤17dBm in 1MHz for master device
	≤11dBm in 1MHz for client device
5250-5350	≤11dBm in 1MHz for client device
5470-5725	≤11dBm in 1MHz for client device
5725-5850	≤30dBm in 500 kHz
Remark: The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.	

7.5.1 Test Setup Diagram

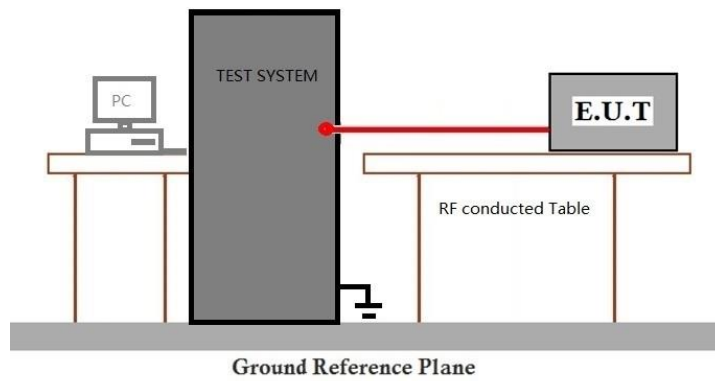

7.5.2 Measurement Procedure and Data

Please Refer to Appendix for Details



7.6 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: KDB 789033 D02 II G

Limit:

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:




(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(5) Unwanted spurious emissions falls in restricted bands shall comply with the general field strength limits as below table,

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3
Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.		
EIRP (dBm)		Field Strength at 3m (dBμV/m)
- 27		68.3
Remark: $E = \frac{1000000 \sqrt{30P}}{3} \mu V/m, \text{ where } P \text{ is the eirp (Watts)}$		



7.6.1 Test Setup Diagram

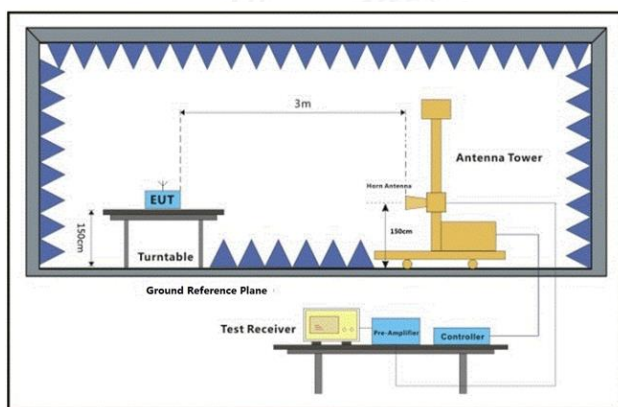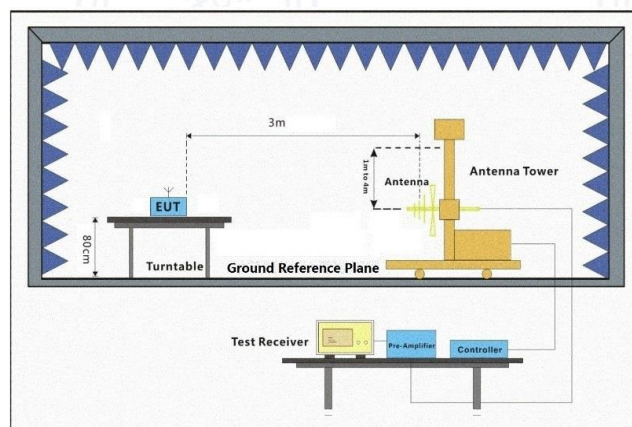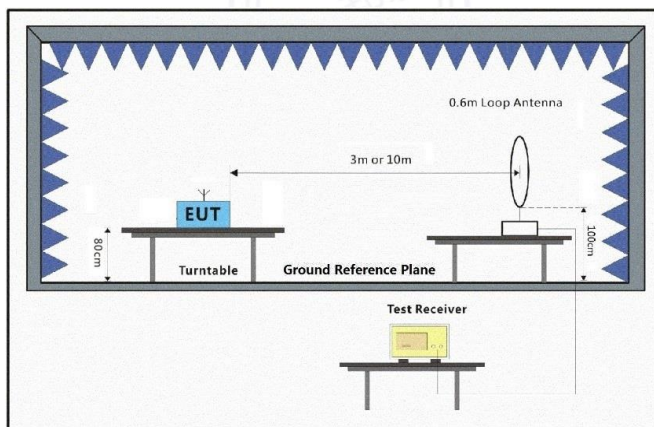

Above 1GHz



7.6.2 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
 - e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
 - f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
 - g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
 - h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
 - i. Repeat above procedures until all frequencies measured was complete.
-
- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
 - e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
 - f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
 - g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
 - h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
 - i. Repeat above procedures until all frequencies measured was complete.




Spurious Emissions Below 1GHz



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	116.1321	50.75	-16.62	34.13	43.50	-9.37	QP	100	360	P	
2 !	142.8243	56.86	-14.95	41.91	43.50	-1.59	QP	100	360	P	
3 !	191.7450	55.87	-16.15	39.72	43.50	-3.78	QP	100	360	P	
4 *	213.7634	58.75	-16.68	42.07	43.50	-1.43	QP	100	360	P	
5 !	256.5211	56.87	-16.02	40.85	46.00	-5.15	QP	100	360	P	
6	357.9287	49.68	-13.46	36.22	46.00	-9.78	QP	100	360	P	



Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

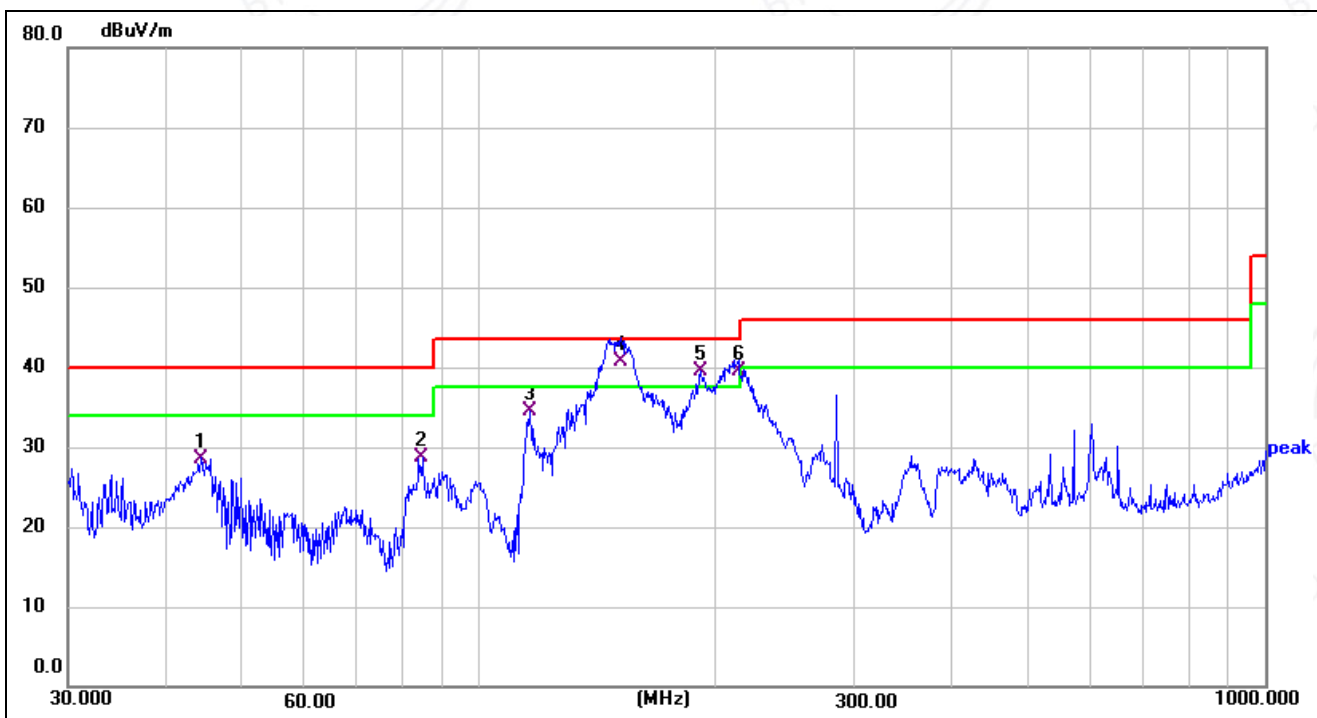

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	44.2752	43.15	-14.55	28.60	40.00	-11.40	QP	100	0	P	
2	84.7019	48.45	-19.74	28.71	40.00	-11.29	QP	100	0	P	
3	116.1321	51.17	-16.62	34.55	43.50	-8.95	QP	100	0	P	
4 *	151.5972	54.94	-14.33	40.61	43.50	-2.89	QP	100	0	P	
5 !	191.7450	55.58	-16.15	39.43	43.50	-4.07	QP	100	0	P	
6 !	213.7634	56.10	-16.68	39.42	43.50	-4.08	QP	100	0	P	

Remark:

1) All mode had been tested, only the worst mode 802.11a is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Reading Level + Factor

3) Scan from 9kHz to 1 GHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.



**Above 1GHz
Modules 1 7663:**

UNII-1_20M_5180MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2914.414	70.01	-29.1	40.91	68.2	-27.29	peak	P
2	4276.725	68.46	-28.32	40.14	68.2	-28.06	peak	P
3	6087.097	65.64	-26.08	39.56	68.2	-28.64	peak	P
4	8645.612	69.25	-24.53	44.72	68.2	-23.48	peak	P
5	11048.389	69.05	-23.29	45.76	68.2	-22.44	peak	P
6	14217.346	70.59	-20.77	49.82	68.2	-18.38	peak	P

UNII-1_20M_5180MHz_Vertical

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2972.746	65.68	-29.61	36.07	68.2	-32.13	peak	P
2	4314.453	70.31	-29.87	40.44	68.2	-27.76	peak	P
3	6352.479	67.56	-25.91	41.65	68.2	-26.55	peak	P
4	8575.473	68.87	-25.39	43.48	68.2	-24.72	peak	P
5	11284.574	66.48	-23.24	43.24	68.2	-24.96	peak	P
6	14955.967	70.53	-21.24	49.29	68.2	-18.91	peak	P

UNII-1_20M_5240MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2914.079	70.12	-30.33	39.79	68.2	-28.41	peak	P
2	4275.751	69.53	-28.33	41.20	68.2	-27.00	peak	P
3	6086.474	66.01	-25.62	40.39	68.2	-27.81	peak	P
4	8645.417	70.27	-24.17	46.10	68.2	-22.10	peak	P
5	11047.062	68.79	-23.53	45.26	68.2	-22.94	peak	P
6	14219.084	70.03	-21	49.03	68.2	-19.17	peak	P

UNII-1_20M_5240MHz_Vertical

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2974.369	66.61	-29.61	37.00	68.2	-31.20	peak	P
2	4312.192	69.20	-29.58	39.62	68.2	-28.58	peak	P
3	6352.754	67.48	-24.45	43.03	68.2	-25.17	peak	P
4	8576.734	71.25	-24.58	46.67	68.2	-21.53	peak	P
5	11286.467	67.39	-23.97	43.42	68.2	-24.78	peak	P
6	14955.688	70.70	-20.92	49.78	68.2	-18.42	peak	P



UNII-3_20M_5745MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2914.054	69.35	-30.17	39.18	68.2	-29.02	peak	P
2	4277.307	67.12	-28.54	38.58	68.2	-29.62	peak	P
3	6084.159	63.81	-25.83	37.98	68.2	-30.22	peak	P
4	8644.967	69.78	-24.46	45.32	68.2	-22.88	peak	P
5	11046.389	66.65	-24.25	42.40	68.2	-25.80	peak	P
6	14217.707	70.45	-20.76	49.69	68.2	-18.51	peak	P

UNII-3_20M_5745MHz_Vertical

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2973.236	67.05	-28.63	38.42	68.2	-29.78	peak	P
2	4313.045	68.16	-29.63	38.53	68.2	-29.67	peak	P
3	6353.761	66.42	-26.23	40.19	68.2	-28.01	peak	P
4	8575.630	69.82	-25.63	44.19	68.2	-24.01	peak	P
5	11285.808	66.69	-23.37	43.32	68.2	-24.88	peak	P
6	14954.954	71.94	-19.72	52.22	68.2	-15.98	peak	P

UNII-3_20M_5785MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2914.837	69.69	-29.53	40.16	68.2	-28.04	peak	P
2	4278.055	67.87	-29.52	38.35	68.2	-29.85	peak	P
3	6084.893	64.65	-24.79	39.86	68.2	-28.34	peak	P
4	8645.884	71.05	-25.1	45.95	68.2	-22.25	peak	P
5	11047.783	67.96	-23.12	44.84	68.2	-23.36	peak	P
6	14218.130	70.44	-21.78	48.66	68.2	-19.54	peak	P

UNII-3_20M_5785MHz_Vertical

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2972.303	65.85	-29.59	36.26	68.2	-31.94	peak	P
2	4313.822	69.19	-28.13	41.06	68.2	-27.14	peak	P
3	6353.565	68.84	-25.99	42.85	68.2	-25.35	peak	P
4	8576.828	70.34	-24.68	45.66	68.2	-22.54	peak	P
5	11286.972	68.77	-23.52	45.25	68.2	-22.95	peak	P
6	14955.406	70.41	-20.97	49.44	68.2	-18.76	peak	P



UNII-3_20M_5825MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2913.836	69.88	-30.02	39.86	68.2	-28.34	peak	P
2	4277.783	66.70	-28.54	38.16	68.2	-30.04	peak	P
3	6085.129	65.09	-24.55	40.54	68.2	-27.66	peak	P
4	8644.163	69.63	-25.46	44.17	68.2	-24.03	peak	P
5	11045.627	68.95	-22.83	46.12	68.2	-22.08	peak	P
6	14218.519	71.28	-22.01	49.27	68.2	-18.93	peak	P

UNII-3_20M_5825MHz_Vertical

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2973.473	67.35	-29.22	38.13	68.2	-30.07	peak	P
2	4314.443	69.52	-29.29	40.23	68.2	-27.97	peak	P
3	6353.981	67.89	-26	41.89	68.2	-26.31	peak	P
4	8576.864	69.33	-24.37	44.96	68.2	-23.24	peak	P
5	11286.891	68.17	-24.13	44.04	68.2	-24.16	peak	P
6	14955.451	71.67	-20.39	51.28	68.2	-16.92	peak	P

Worst Case 802.11a mode

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-36.02	-27
Highest	Above 5350	-39.31	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-40.96	-27
	5715 to 5725	-38.69	-17
Highest	5850 to 5860	-42.36	-17
	Above 5860	-41.02	-27
Note: the data just list the worst cases			



Modules 2 GTV:
UNII-1_20M_5180MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2914.205	70.79	-29.1	41.69	68.2	-26.51	peak	P
2	4276.316	68.71	-28.32	40.39	68.2	-27.81	peak	P
3	6085.631	65.12	-26.08	39.04	68.2	-29.16	peak	P
4	8645.729	68.63	-24.53	44.10	68.2	-24.10	peak	P
5	11047.593	68.57	-23.29	45.28	68.2	-22.92	peak	P
6	14217.720	71.93	-20.77	51.16	68.2	-17.04	peak	P

UNII-1_20M_5180MHz_Vertical

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2973.667	65.87	-29.61	36.26	68.2	-31.94	peak	P
2	4313.742	70.14	-29.87	40.27	68.2	-27.93	peak	P
3	6352.358	67.11	-25.91	41.20	68.2	-27.00	peak	P
4	8576.113	69.85	-25.39	44.46	68.2	-23.74	peak	P
5	11285.825	66.25	-23.24	43.01	68.2	-25.19	peak	P
6	14956.289	71.20	-21.24	49.96	68.2	-18.24	peak	P

UNII-1_20M_5240MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2914.237	70.29	-30.33	39.96	68.2	-28.24	peak	P
2	4277.270	69.02	-28.33	40.69	68.2	-27.51	peak	P
3	6086.642	64.50	-25.62	38.88	68.2	-29.32	peak	P
4	8645.274	69.96	-24.17	45.79	68.2	-22.41	peak	P
5	11046.243	68.79	-23.53	45.26	68.2	-22.94	peak	P
6	14217.760	71.20	-21	50.20	68.2	-18.00	peak	P

UNII-1_20M_5240MHz_Vertical

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2972.586	67.87	-29.61	38.26	68.2	-29.94	peak	P
2	4311.573	69.67	-29.58	40.09	68.2	-28.11	peak	P
3	6353.025	67.82	-24.45	43.37	68.2	-24.83	peak	P
4	8576.104	71.00	-24.58	46.42	68.2	-21.78	peak	P
5	11285.330	68.52	-23.97	44.55	68.2	-23.65	peak	P
6	14955.843	71.71	-20.92	50.79	68.2	-17.41	peak	P



UNII-3_20M_5745MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2971.788	69.41	-30.17	39.24	68.2	-28.96	peak	P
2	4312.961	67.74	-28.54	39.20	68.2	-29.00	peak	P
3	6354.345	62.86	-25.83	37.03	68.2	-31.17	peak	P
4	8576.366	70.50	-24.46	46.04	68.2	-22.16	peak	P
5	11285.374	67.32	-24.25	43.07	68.2	-25.13	peak	P
6	14957.670	69.90	-20.76	49.14	68.2	-19.06	peak	P

UNII-3_20M_5745MHz_Vertical

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2972.772	67.15	-28.63	38.52	68.2	-29.68	peak	P
2	4313.614	67.75	-29.63	38.12	68.2	-30.08	peak	P
3	6353.035	66.10	-26.23	39.87	68.2	-28.33	peak	P
4	8576.394	69.25	-25.63	43.62	68.2	-24.58	peak	P
5	11286.041	67.55	-23.37	44.18	68.2	-24.02	peak	P
6	14956.282	71.94	-19.72	52.22	68.2	-15.98	peak	P

UNII-3_20M_5785MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2973.231	70.05	-29.53	40.52	68.2	-27.68	peak	P
2	4313.127	67.75	-29.52	38.23	68.2	-29.97	peak	P
3	6353.950	65.57	-24.79	40.78	68.2	-27.42	peak	P
4	8577.403	71.83	-25.1	46.73	68.2	-21.47	peak	P
5	11285.403	68.64	-23.12	45.52	68.2	-22.68	peak	P
6	14956.977	70.12	-21.78	48.34	68.2	-19.86	peak	P

UNII-3_20M_5785MHz_Vertical

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2971.778	65.75	-29.59	36.16	68.2	-32.04	peak	P
2	4312.825	68.56	-28.13	40.43	68.2	-27.77	peak	P
3	6353.952	69.63	-25.99	43.64	68.2	-24.56	peak	P
4	8577.336	70.58	-24.68	45.90	68.2	-22.30	peak	P
5	11285.384	69.10	-23.52	45.58	68.2	-22.62	peak	P
6	14956.406	70.59	-20.97	49.62	68.2	-18.58	peak	P



UNII-3_20M_5825MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2913.370	69.79	-30.02	39.77	68.2	-28.43	peak	P
2	4277.072	66.44	-28.54	37.90	68.2	-30.30	peak	P
3	6085.039	64.84	-24.55	40.29	68.2	-27.91	peak	P
4	8644.152	70.05	-25.46	44.59	68.2	-23.61	peak	P
5	11046.114	68.32	-22.83	45.49	68.2	-22.71	peak	P
6	14218.491	72.27	-22.01	50.26	68.2	-17.94	peak	P

UNII-3_20M_5825MHz_Vertical

No.	Frequency (MHz)	Reading (dBuv)	Factor (dB/m)	Level (dBuv/m)	Limit (dBuv/m)	Margin(dB)	Detector	P/F
1	2973.585	67.11	-29.22	37.89	68.2	-30.31	peak	P
2	4313.579	69.75	-29.29	40.46	68.2	-27.74	peak	P
3	6353.679	67.78	-26	41.78	68.2	-26.42	peak	P
4	8576.298	69.66	-24.37	45.29	68.2	-22.91	peak	P
5	11286.940	68.90	-24.13	44.77	68.2	-23.43	peak	P
6	14954.825	70.76	-20.39	50.37	68.2	-17.83	peak	P

Worst Case 802.11a mode

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-36.61	-27
Highest	Above 5350	-39.27	-27

Note: the data just list the worst cases

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-41.91	-27
	5715 to 5725	-38.17	-17
Highest	5850 to 5860	-43.03	-17
	Above 5860	-40.70	-27

Note: the data just list the worst cases

Remark:

1) All mode had been tested, only the worst mode 802.11a is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Reading Level + Factor

3) Testing is carried out with frequency rang 1GHz to 40GHz, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


4) If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.



7.7 Frequency Stability

Test Requirement 47 CFR Part 15, Subpart E 15.407 (g)
Test Method: ANSI C63.10 (2013) Section 6.8
Limit: /

7.7.1 Test Setup Diagram

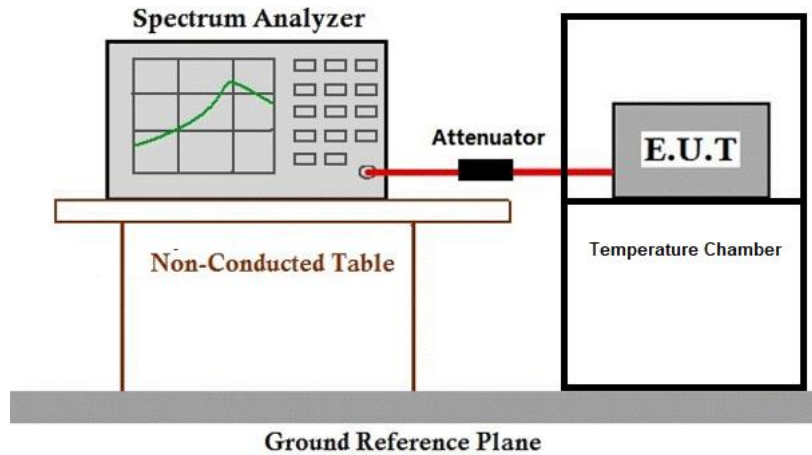

7.7.2 Measurement Procedure and Data

Please Refer to Appendix for Details




7.8 Transmitter Power Control

Test Requirement 47 CFR Part 15, Subpart E 15.407 (g)

Test Method: ANSI C63.10 (2013) Section 6.8

Limit: Able to lower EIRP below 24dBm when Max_EIRP $\geq$ 500 mW (27 dBm).

7.8.1 Test Setup Diagram

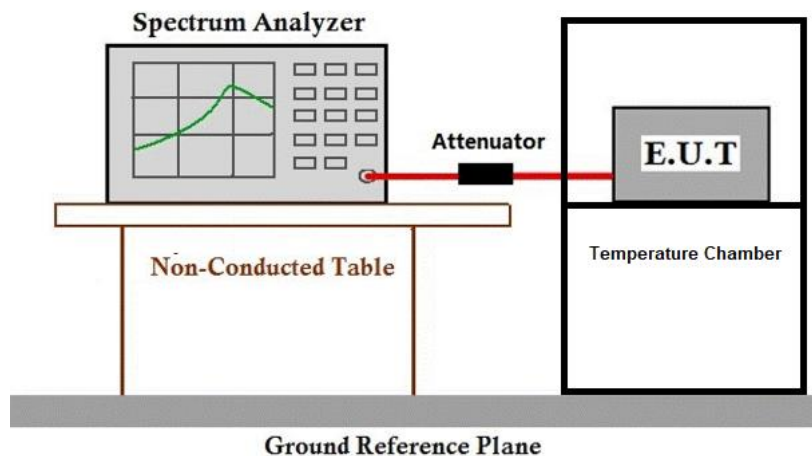

7.8.2 Measurement Procedure and Data

Not Application. The Max_EIRP < 500mW(27dBm)



8 Test Setup Photo

Please refer to the Appendix Test Setup Photos

9 EUT Constructional Details (EUT Photos)

Please refer to the Appendix EUT Photos

- End of the Report -

