



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

TEST REPORT

FCC PART 15 SUBPART E 15.407

Report Reference No.: CTL2311171011-WF04

Compiled by:
(position+printed name+signature)

Happy Guo
(File administrators)

Tested by:
(position+printed name+signature)

Jack Wang
(Test Engineer)

Approved by:
(position+printed name+signature)

Ivan Xie
(Manager)



Product Name: MINI PC

Model/Type reference: M6GE

List Model(s): N/A

Trade Mark: FREAPP

FCC ID: 2BDZD-M6GE

Applicant's name: Yichang Tuyi Trading Co., Ltd.

Address of applicant: yichangshi yilingqu dongchengshiyuanqu fazhandadao 200hao
Bdong1-201

Test Firm: Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm: Zone A, 1st Floor, Warehouse 2, Baisha Logistics Company, No.
3011 Shahe West Road, Nanshan District, Shenzhen

Test specification:

Standard: 47 CFR FCC Part 15 Subpart E 15.407

TRF Originator: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF: Dated 2011-01

Date of receipt of test item: Nov. 21, 2023

Date of Test Date: Nov. 22, 2023-Dec. 08, 2023

Date of Issue: Dec. 08, 2023

Result: Pass

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

| | | |
|--------------------------|---------------------------|--------------------------------|
| Test Report No. : | CTL2311171011-WF04 | Dec. 08, 2023 Date of issue |
|--------------------------|---------------------------|--------------------------------|

Equipment under Test : MINI PC

Sample No : CTL2311171011

Model /Type : M6GE

Listed Models : N/A

Applicant : **Yichang Tuyi Trading Co., Ltd.**

Address : yichangshi yilingqu dongchengshiyanqu fazhandadao 200hao Bdong1-201

Manufacturer : **Shenzhen Youcheng Electronics Co., Ltd**

Address : 3 / F, building 2, No. 387, Huating Road, Langkou community, Dalang street, Longhua District, Shenzhen

| | |
|--------------------|---------------|
| Test result | Pass * |
|--------------------|---------------|

* In the configuration tested, the EUT complied with the standards specified page 5.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

** Modified History **

Table of Contents

| | Page |
|---|-----------|
| 1. SUMMARY | 5 |
| 1.1. TEST STANDARDS | 5 |
| 1.2. TEST DESCRIPTION | 5 |
| 1.3. TEST FACILITY | 6 |
| 1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY | 6 |
| 1.5. AUXILIARY TEST EQUIPMENT INFORMATION | 7 |
| 2. GENERAL INFORMATION | 8 |
| 2.1. ENVIRONMENTAL CONDITIONS | 8 |
| 2.2. GENERAL DESCRIPTION OF EUT | 8 |
| 2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY | 9 |
| 2.4. EQUIPMENTS USED DURING THE TEST | 错误！未定义书签。 |
| 2.5. RELATED SUBMITTAL(S) / GRANT (S) | 11 |
| 2.6. MODIFICATIONS | 11 |
| 3. TEST CONDITIONS AND RESULTS | 12 |
| 3.1. CONDUCTED EMISSIONS TEST | 12 |
| 3.2. RADIATED EMISSIONS | 15 |
| 5745MHz 802.11N (HT20) | 26 |
| 5795MHz 802.11N (HT40) | 32 |
| 3.3. MAXIMUM CONDUCTED AVERAGE OUTPUT POWER | 36 |
| 3.4. POWER SPECTRAL DENSITY | 37 |
| 3.5. EMISSION BANDWIDTH (26dBm BANDWIDTH) | 39 |
| 3.6. MINIMUM EMISSION BANDWIDTH (6dBm BANDWIDTH) | 40 |
| 3.7. FREQUENCY STABILITY | 41 |
| 3.8. ANTENNA REQUIREMENT | 42 |
| 4. TEST SETUP PHOTOS OF THE EUT | 43 |
| 5. PHOTOS OF THE EUT | 44 |

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

FCC Rules Part 15 Subpart E—Unlicensed National Information Infrastructure Devices

ANSI C63.10: 2013: American National Standard for Testing Unlicensed Wireless Devices

KDB789033 D02: General UNII Test Procedures New Rules v02r01

v01r03 and KDB 662911 D01 Multiple Transmitter Output v02r01 is required to be used for this kind of FCC 15.407 UII device.

1.2. Test Description

| FCC Requirement | | |
|----------------------------------|---|-----------------------|
| FCC Part 15.207 | AC Power Conducted Emission | PASS |
| FCC Part 15.407(a) | Emission Bandwidth(26dB Bandwidth) | N/A _{Note1} |
| FCC Part 15.407(e) | Minimum Emission Bandwidth(6dB Bandwidth) | PASS _{Note2} |
| FCC Part 15.407(a) | Maximum Conducted Output Power | PASS |
| FCC Part 15.407(a) | Peak Power Spectral Density | PASS |
| FCC Part 15.407(g) | Frequency Stability | PASS |
| FCC Part 15.407(b) | Undesirable emission | PASS |
| FCC Part 15.407(b)/15.205/15.209 | Radiated Emissions | PASS |
| FCC Part 15.203 | Antenna Requirement | PASS |

Note 1: Apply to Band1, Band2A, Band2C only.

Note 2: Apply to band3 only.

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co.,Ltd.

Zone A, 1st Floor, Warehouse 2, Baisha Logistics Company, No. 3011 Shahe West Road, Nanshan District, Shenzhen

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L7497

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 4343.01

Shenzhen CTL Testing Technology Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: 9618B

CAB identifier: CN0041

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9618B on Jan. 22, 2019.

FCC-Registration No.: 399832

Designation No.: CN1216

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832, December 08, 2017.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

| Test | Measurement Uncertainty | Notes |
|------------------------------|--|-------|
| Transmitter power Radiated | ±2.20 dB | (1) |
| Radiated Emission 9KHz~30MHz | ±3.66dB | (1) |
| Radiated Emission 30~1000MHz | ±4.10dB | (1) |
| Radiated Emission Above 1GHz | ±4.32dB | (1) |
| Emission Bandwidth | ±1.9% | (1) |
| Maximum Conduct Output Power | ± 1.18 dB | (1) |
| Power Spectral Density | ±0.98 dB | (1) |
| Band Edge | ±1.21dB | (1) |
| Unwanted Emissions | 9kHz-7GHz:±1.09dB 7GHz-26.5GHz: ±3.27dB | (1) |
| Frequency Stability | ±1.9% | (1) |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

1.5. Auxiliary test equipment information

| Manufacturer | Description | Model | Serial Number |
|--|-------------|---------|------------------|
| TPV Display Technology (Xiamen) Co. LTD | LCD TV | T1951MD | LYSL3YA000234 NG |

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

| | |
|---------------------|---------|
| Normal Temperature: | 25°C |
| Relative Humidity: | 55 % |
| Air Pressure: | 101 kPa |

2.2. General Description of EUT

| | | | | |
|-----------------------|---|---------------------|--------------|---------------|
| Product Name: | MINI PC | | | |
| Model/Type reference: | M6GE | | | |
| Power supply: | Input: AC100-240V~ 50/60Hz 1.0A Max Output: DC12V-3.0A 36W | | | |
| 5G WIFI : | | | | |
| Supported type: | 20MHz system | 40MHz system | 80MHz system | 160MHz system |
| | 802.11a 802.11n 802.11ac | 802.11n 802.11ac | 802.11ac | N/A |
| Operation frequency: | 5745-5825MHz | 5755MHz,5795MHz | 5775MHz | N/A |
| Modulation: | OFDM | OFDM | OFDM | N/A |
| Channel number: | 5 | 2 | 1 | N/A |
| Channel separation: | 20MHz | 40MHz | 80MHz | N/A |
| Antenna type: | Ant 1: FPC Antenna Ant 2: FPC Antenna | | | |
| Antenna gain: | Ant 1: 2.78dBi Ant 2: 3.22dBi MIMO(Antenna 1+Antenna 2) Directional Gain (dBi): 6.23dBi | | | |

Note1: For more details, please refer to the user's manual of the EUT.

Note2: Antenna gain provided by the applicant.

Note3: This report is only for 5G WIFI.

Note4: Directional gain = GANT MAX + 10 log(NANT/NSS) dBi, where NSS = the number of independent spatial streams of data and GANT MAX is the gain of the antenna having the highest gain (in dBi)

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing.

All test performed at the low, middle and high of operational frequency range of each mode.

Operation Frequency List WIFI on 5G Band:

| Operating band | 20MHz | | 40MHz | | 80MHz | | | |
|------------------------------|---------|-----------------|---------|-----------------|---------|-----------------|--|--|
| | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | | |
| U-NII 1 (5150MHz-5250MHz) | 36 | 5180 | 38 | 5190 | 42 | 5210 | | |
| | 40 | 5200 | | 46 | | | | |
| | 44 | 5220 | | | | | | |
| | 48 | 5240 | 46 | 5230 | | | | |
| | 136 | 5680 | | | | | | |
| | 140 | 5700 | | | | | | |
| U-NII 3 (5725MHz-5850MHz) | 149 | 5745 | 151 | 5755 | 155 | 5775 | | |
| | 153 | 5765 | | | | | | |
| | 157 | 5785 | 159 | 5795 | | | | |
| | 161 | 5805 | | | | | | |
| | 165 | 5825 | -- | -- | -- | -- | | |

Note:

1. "--"Means no channel(s) available any more.
2. The line display in grey is those Channels/Frequencies select to test in this report for each operation mode.

Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

| Test Items | Mode | Data Rate |
|--|------------------------------|-----------|
| Maximum Conducted Output Power Power Spectral Density Emission Bandwidth(26dBm Bandwidth) Minimum Emission Bandwidth(6dBm Bandwidth) Undesirable emission Frequency Stability | 11a/OFDM | 6 Mbps |
| | 11n(20MHz), 11ac(20MHz)/OFDM | 7.2 Mbps |
| | 11n(40MHz), 11ac(40MHz)/OFDM | 15.0Mbps |
| | 11ac(80MHz)/OFDM | 65.0Mbps |
| | | |

2.4. Equipments Used during the Test

| Conducted Emission | | | | | | |
|--------------------|-------------------|-----------------|-----------|--------------|------------|------------|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal.Due |
| | EMI Test Receiver | ROHDE & SCHWARZ | ESCI | 1166.5950.03 | 2023/05/04 | 2024/05/03 |
| | LISN | ROHDE & SCHWARZ | ESH2-Z5 | 860014/010 | 2023/05/04 | 2024/05/03 |
| | Limitator | ROHDE & SCHWARZ | ESH3-Z2 | 100408 | 2023/05/04 | 2024/05/03 |

| Software: | | | | | | |
|-------------------|--|--|----------|--|--|--|
| Name of Software: | | | Version: | | | |
| ES-K1 | | | V1.71 | | | |

| Radiated Emissions and Band Edge | | | | | |
|----------------------------------|----------------------|------------|--------------|------------------|----------------------|
| Test Equipment | Manufacturer | Model No. | Serial No. | Calibration Date | Calibration Due Date |
| Active Loop Antenna | Da Ze | ZN30900A | / | 2021/05/13 | 2024/05/12 |
| Double cone logarithmic antenna | Schwarzbeck | VULB 9168 | 824 | 2023/02/13 | 2026/02/12 |
| Horn Antenna | Sunol Sciences Corp. | DRH-118 | A062013 | 2021/12/23 | 2024/12/22 |
| Horn Antenna | Ocean Microwave | OBH1004 00 | 26999002 | 2021/12/22 | 2024/12/21 |
| Amplifier | MRT-AP01M 06 | MRT | S-001 | 2023/05/04 | 2024/05/03 |
| Amplifier | Agilent | 8449B | 3008A02306 | 2023/05/04 | 2024/05/03 |
| Amplifier | Brief&Smart | LNA-4018 | 2104197 | 2023/05/05 | 2024/05/04 |
| EMI Test Receiver | ROHDE & SCHWARZ | ESCI | 1166.5950.03 | 2023/05/04 | 2024/05/03 |
| Spectrum Analyzer | RS | FSP | 1164.4391.38 | 2023/05/05 | 2024/05/04 |

| Test software | | | | | |
|--------------------|--|--|----------|--|--|
| Name of Software | | | Version | | |
| EZ_EMC(Below 1GHz) | | | V1.1.4.2 | | |
| EZ_EMC(Above 1GHz) | | | V1.1.4.2 | | |

| Maximum Conducted Average Output Power & Power Spectral Density & Emission Bandwidth & Frequency Stability | | | | | |
|--|--------------|-----------|------------|------------------|----------------------|
| Test Equipment | Manufacturer | Model No. | Serial No. | Calibration Date | Calibration Due Date |
| Spectrum Analyzer | Keysight | N9020A | MY53420874 | 2023/05/04 | 2024/05/03 |
| Temperature/Humidity Meter | Ji Yu | MC501 | / | 2023/05/09 | 2024/05/08 |

| Name of Software | Version |
|------------------|---------|
| TST-PASS | V2.0 |

2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

According to FCC CFR Title 47 Part 15 Subpart C Section 15.207, AC Power Line Conducted Emissions Limits for Licence-Exempt Radio Apparatus as below:

| Frequency range (MHz) | Limit (dBuV) | |
|-----------------------|--------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

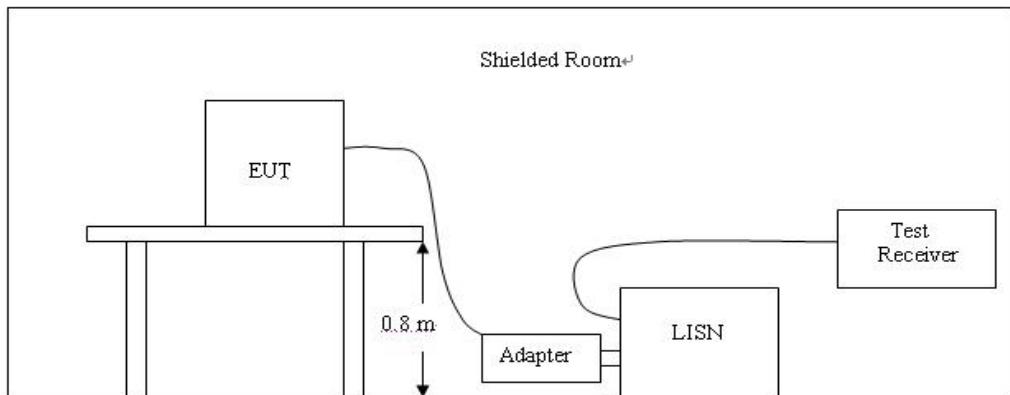


TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a Laser Projector op system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

Remark: 802.11a / 802.11n (HT20) / 802.11ac (HT20) / 802.11n (HT40) / 802.11ac (HT40) / 802.11ac (HT80) mode all have been tested, only worse case is reported

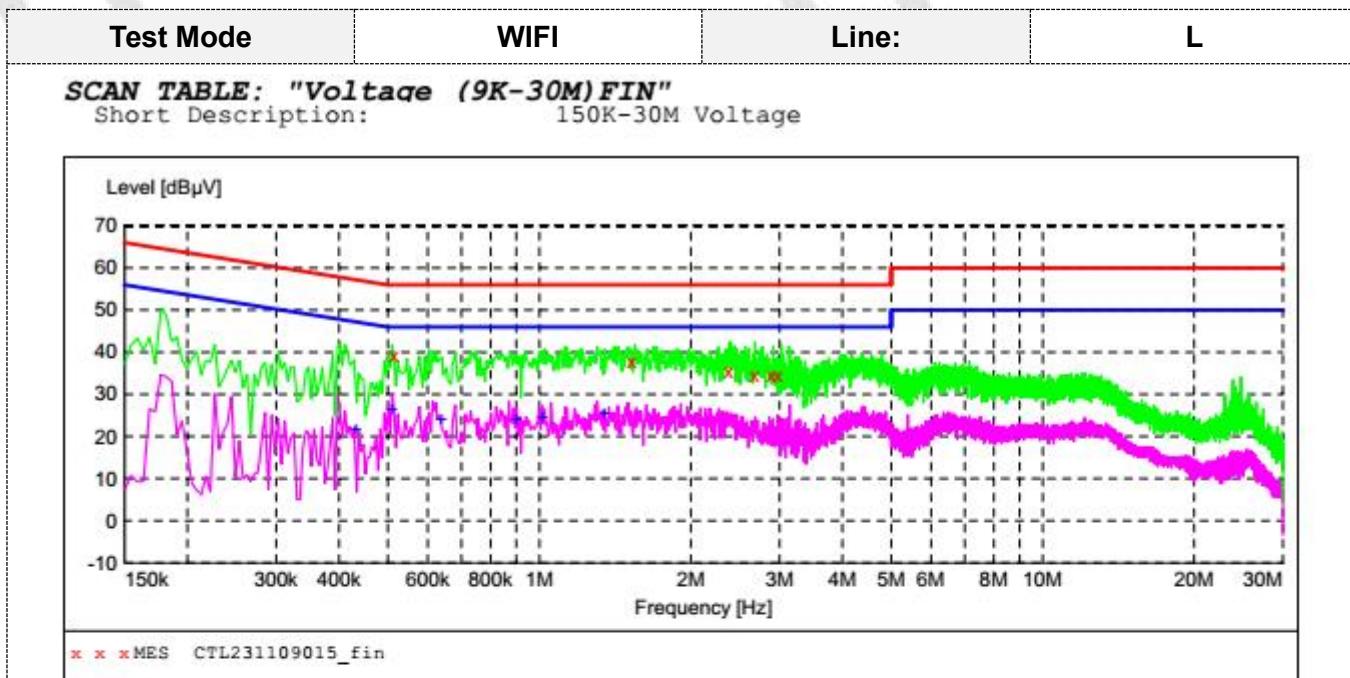

MEASUREMENT RESULT: "CTL231109015_fin"


12/6/2023 9:58AM

| Frequency MHz | Level dB μ V | Transd dB | Limit dB μ V | Margin dB | Detector | Line | PE |
|------------------|---------------------|--------------|---------------------|--------------|----------|------|-----|
| 0.514500 | 39.00 | 10.0 | 56 | 17.0 | QP | L1 | GND |
| 1.527000 | 37.60 | 10.1 | 56 | 18.4 | QP | L1 | GND |
| 2.373000 | 35.50 | 10.1 | 56 | 20.5 | QP | L1 | GND |
| 2.679000 | 34.60 | 10.1 | 56 | 21.4 | QP | L1 | GND |
| 2.890500 | 34.40 | 10.1 | 56 | 21.6 | QP | L1 | GND |
| 2.985000 | 34.40 | 10.1 | 56 | 21.6 | QP | L1 | GND |

MEASUREMENT RESULT: "CTL231109015_fin2"

12/6/2023 9:58AM

| Frequency MHz | Level dB μ V | Transd dB | Limit dB μ V | Margin dB | Detector | Line | PE |
|------------------|---------------------|--------------|---------------------|--------------|----------|------|-----|
| 0.433500 | 21.70 | 10.0 | 47 | 25.5 | AV | L1 | GND |
| 0.510000 | 26.20 | 10.0 | 46 | 19.8 | AV | L1 | GND |
| 0.640500 | 24.00 | 10.0 | 46 | 22.0 | AV | L1 | GND |
| 0.901500 | 24.00 | 10.1 | 46 | 22.0 | AV | L1 | GND |
| 1.014000 | 24.30 | 10.1 | 46 | 21.7 | AV | L1 | GND |
| 1.347000 | 25.60 | 10.1 | 46 | 20.4 | AV | L1 | GND |

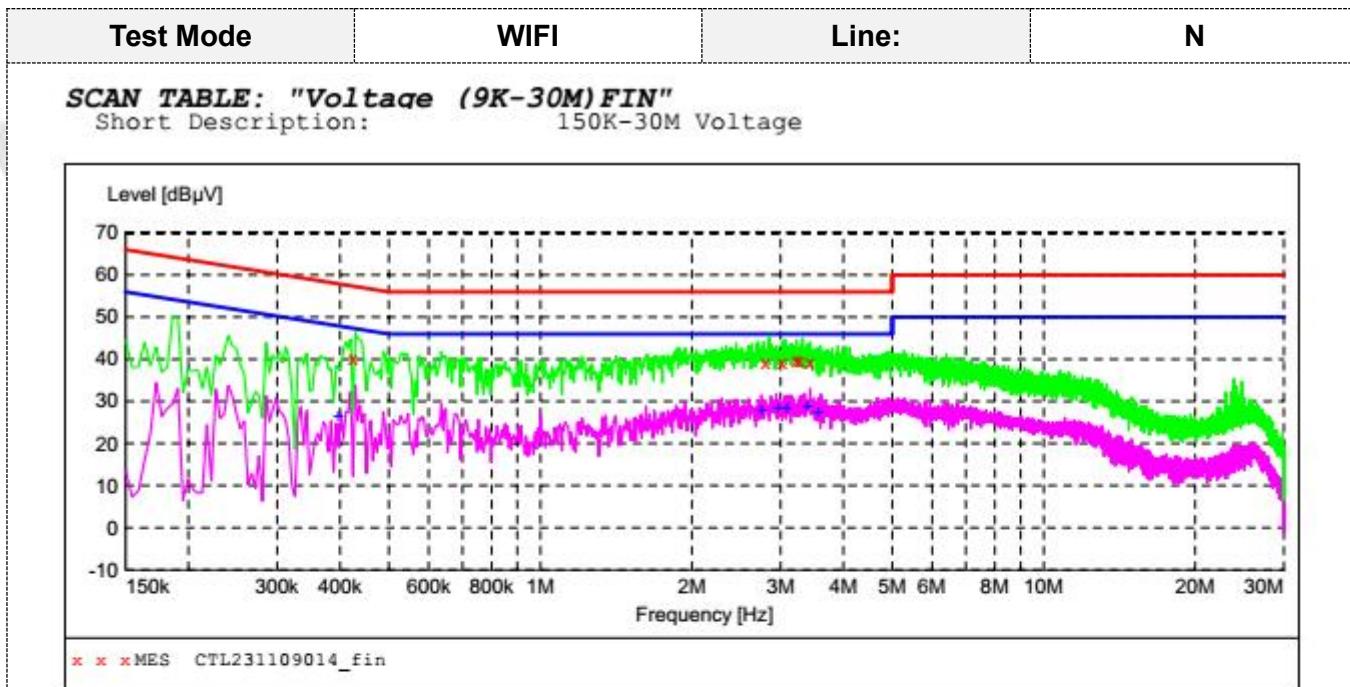**MEASUREMENT RESULT: "CTL231109014_fin"**

12/6/2023 9:55AM

| Frequency MHz | Level dB μ V | Transd dB | Limit dB μ V | Margin dB | Detector | Line | PE |
|------------------|---------------------|--------------|---------------------|--------------|----------|------|-----|
| 0.424500 | 40.40 | 10.0 | 57 | 17.0 | QP | N | GND |
| 2.805000 | 39.50 | 10.1 | 56 | 16.5 | QP | N | GND |
| 3.025500 | 39.50 | 10.1 | 56 | 16.5 | QP | N | GND |
| 3.228000 | 39.70 | 10.1 | 56 | 16.3 | QP | N | GND |
| 3.273000 | 39.80 | 10.1 | 56 | 16.2 | QP | N | GND |
| 3.430500 | 39.20 | 10.1 | 56 | 16.8 | QP | N | GND |

MEASUREMENT RESULT: "CTL231109014_fin2"

12/6/2023 9:55AM

| Frequency MHz | Level dB μ V | Transd dB | Limit dB μ V | Margin dB | Detector | Line | PE |
|------------------|---------------------|--------------|---------------------|--------------|----------|------|-----|
| 0.397500 | 26.50 | 10.0 | 48 | 21.4 | AV | N | GND |
| 2.760000 | 28.00 | 10.1 | 46 | 18.0 | AV | N | GND |
| 2.976000 | 28.30 | 10.1 | 46 | 17.7 | AV | N | GND |
| 3.093000 | 28.50 | 10.1 | 46 | 17.5 | AV | N | GND |
| 3.394500 | 28.60 | 10.1 | 46 | 17.4 | AV | N | GND |
| 3.574500 | 27.60 | 10.1 | 46 | 18.4 | AV | N | GND |

3.2. Radiated Emissions

Limit

The maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Undesirable emission limits

| Requirement | Limit(EIRP) | Limit (Field strength at 3m) <small>Note1</small> |
|--------------|-----------------|---|
| 15.407(b)(1) | PK:-27(dBm/MHz) | PK:68.2(dB μ V/m) |
| 15.407(b)(2) | | |
| 15.407(b)(3) | | |
| 15.407(b)(4) | | |

Note1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}, \text{ where P is the eirp (Watts)}$$

(5) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209


(6) In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


| Frequency (MHz) | Distance (Meters) | Radiated (dB μ V/m) | Radiated (μ V/m) |
|-----------------|-------------------|----------------------------------|-----------------------|
| 0.009-0.49 | 3 | 20log(2400/F(KHz))+40log(300/3) | 2400/F(KHz) |
| 0.49-1.705 | 3 | 20log(24000/F(KHz))+ 40log(30/3) | 24000/F(KHz) |
| 1.705-30 | 3 | 20log(30)+ 40log(30/3) | 30 |
| 30-88 | 3 | 40.0 | 100 |
| 88-216 | 3 | 43.5 | 150 |
| 216-960 | 3 | 46.0 | 200 |
| Above 960 | 3 | 54.0 | 500 |

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

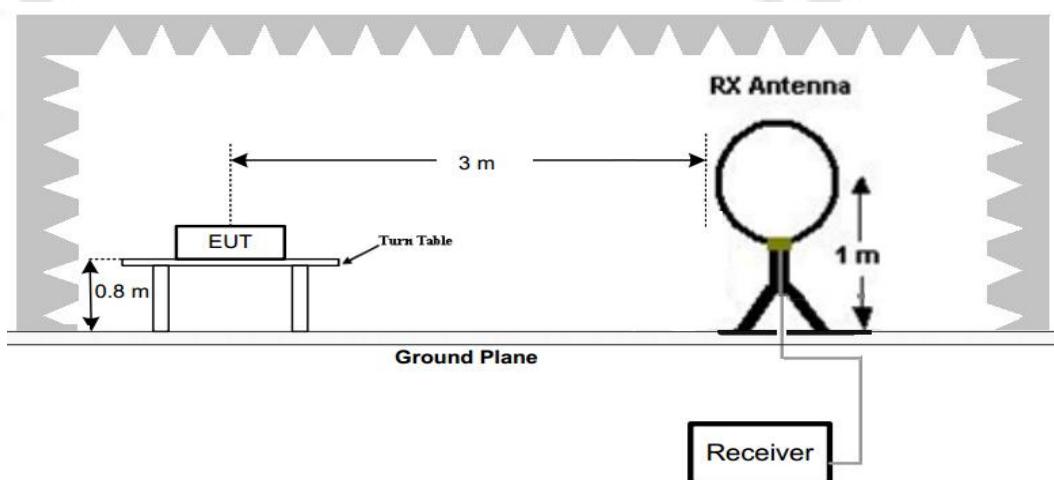

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

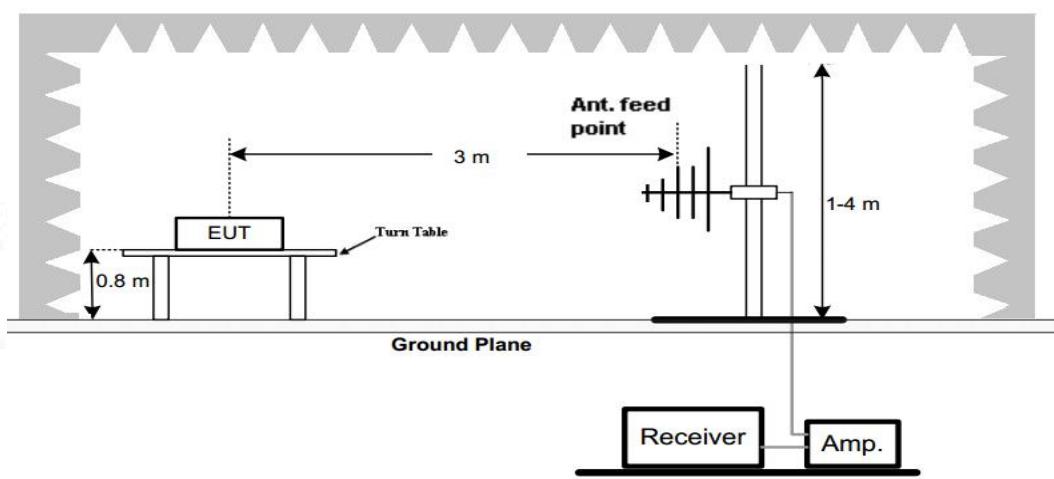

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

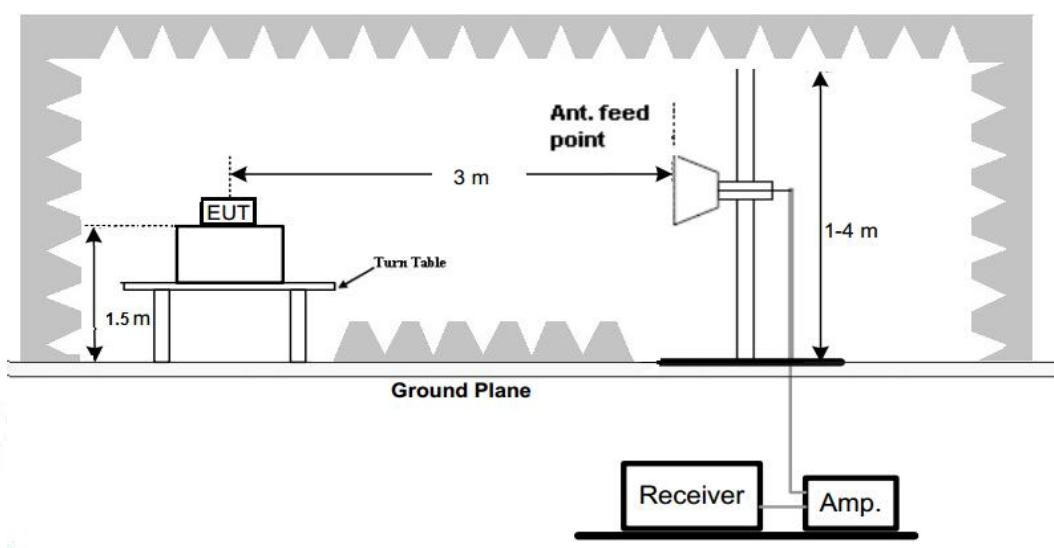

Test Procedure

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 40GHz.
6. The distance between test antenna and EUT as following table states:

| Test Frequency range | Test Antenna Type | Test Distance |
|----------------------|---------------------|---------------|
| 9KHz-30MHz | Active Loop Antenna | 3 |
| 30MHz-1GHz | Bilog Antenna | 3 |
| 1GHz-18GHz | Horn Antenna | 3 |
| 18GHz-25GHz | Horn Antenna | 1 |

7. Setting test receiver/spectrum as following table states:


| Test Frequency range | Test Receiver/Spectrum Setting | Detector |
|----------------------|---|----------|
| 9KHz-150KHz | RBW=200Hz/VBW=3KHz,Sweep time=Auto | QP |
| 150KHz-30MHz | RBW=9KHz/VBW=100KHz,Sweep time=Auto | QP |
| 30MHz-1GHz | RBW=120KHz/VBW=1000KHz,Sweep time=Auto | QP |
| 1GHz-40GHz | Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto | Peak |


TEST RESULTS

Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. All 802.11a / 802.11n (HT20) / 802.11ac (HT20) / 802.11n (HT40) / 802.11ac (HT40) / 802.11ac (HT80) modes have been tested for below 1GHz test, only the worst case 802.11n (HT20) low channel of U-NII 1 band was recorded.
3. All 802.11a / 802.11n (HT20) / 802.11ac (HT20) / 802.11n (HT40) / 802.11ac (HT40) / 802.11ac (HT80) modes have been tested for above 1GHz test, only the worst case 802.11n (HT20) was recorded.
4. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

For 30MHz-1GHz

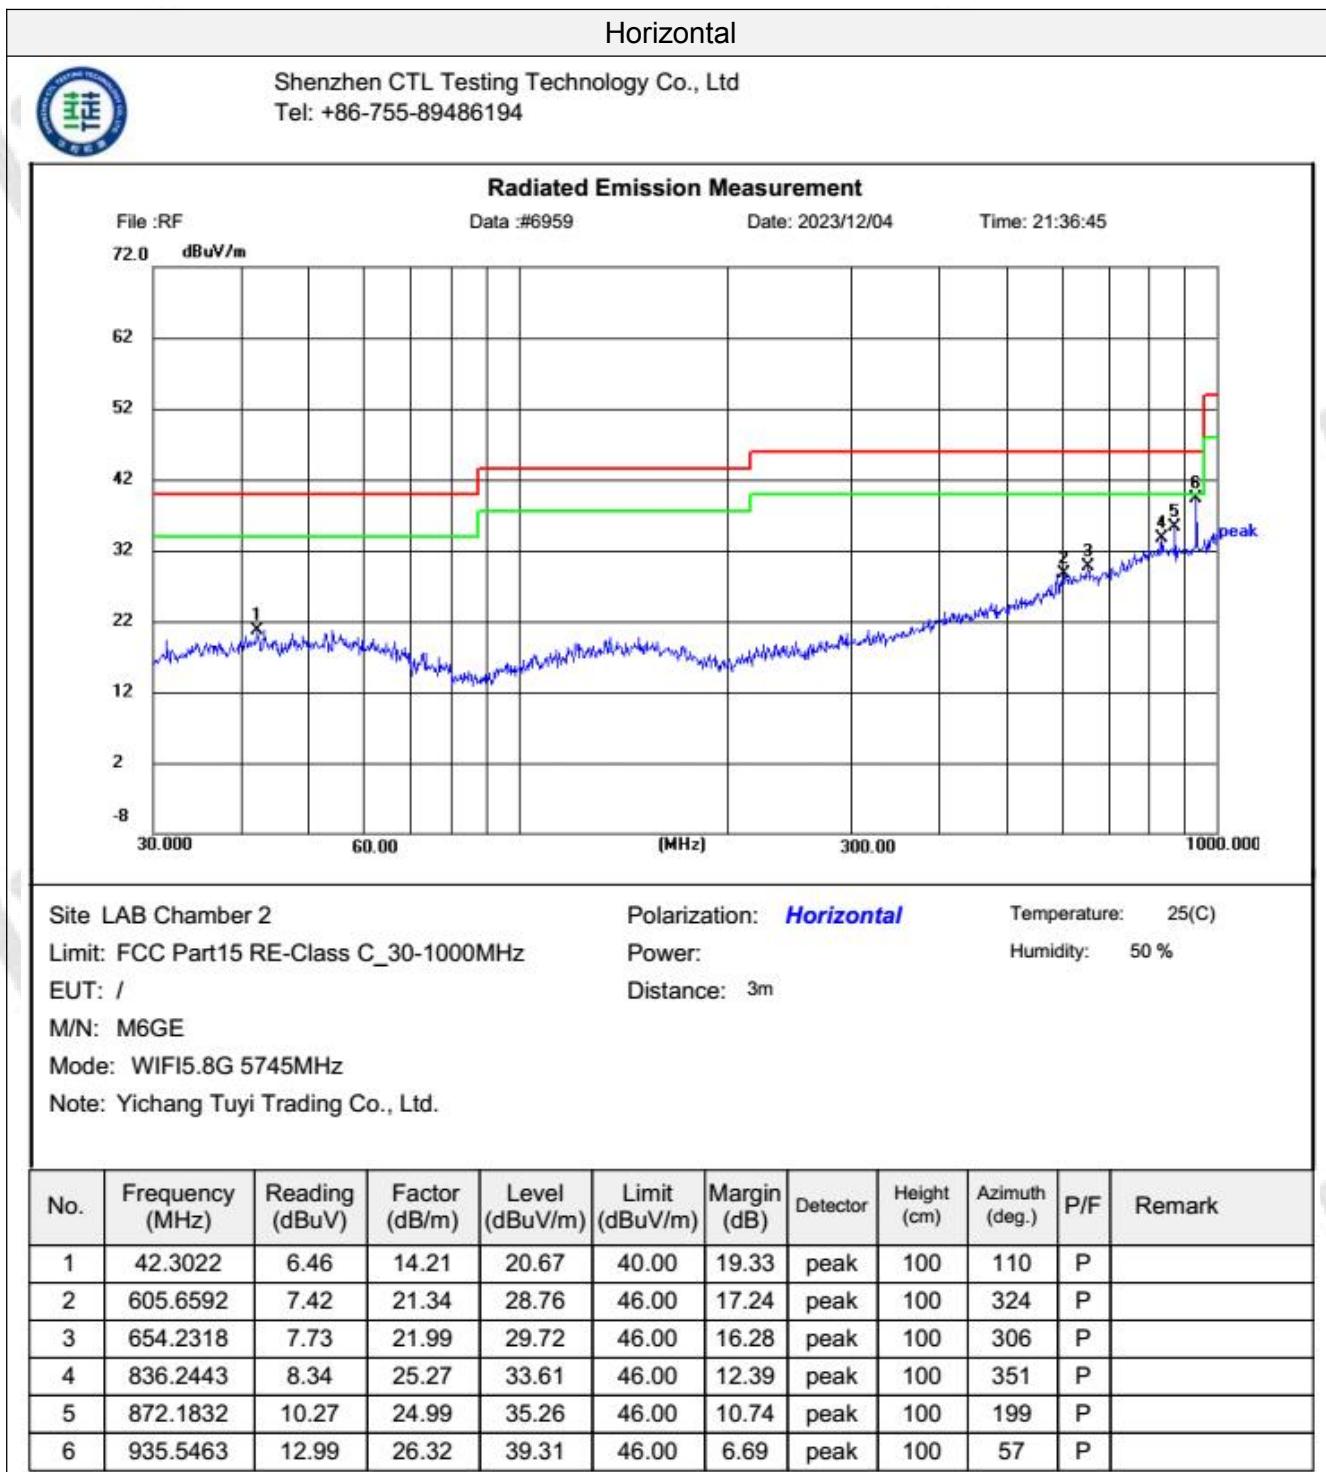

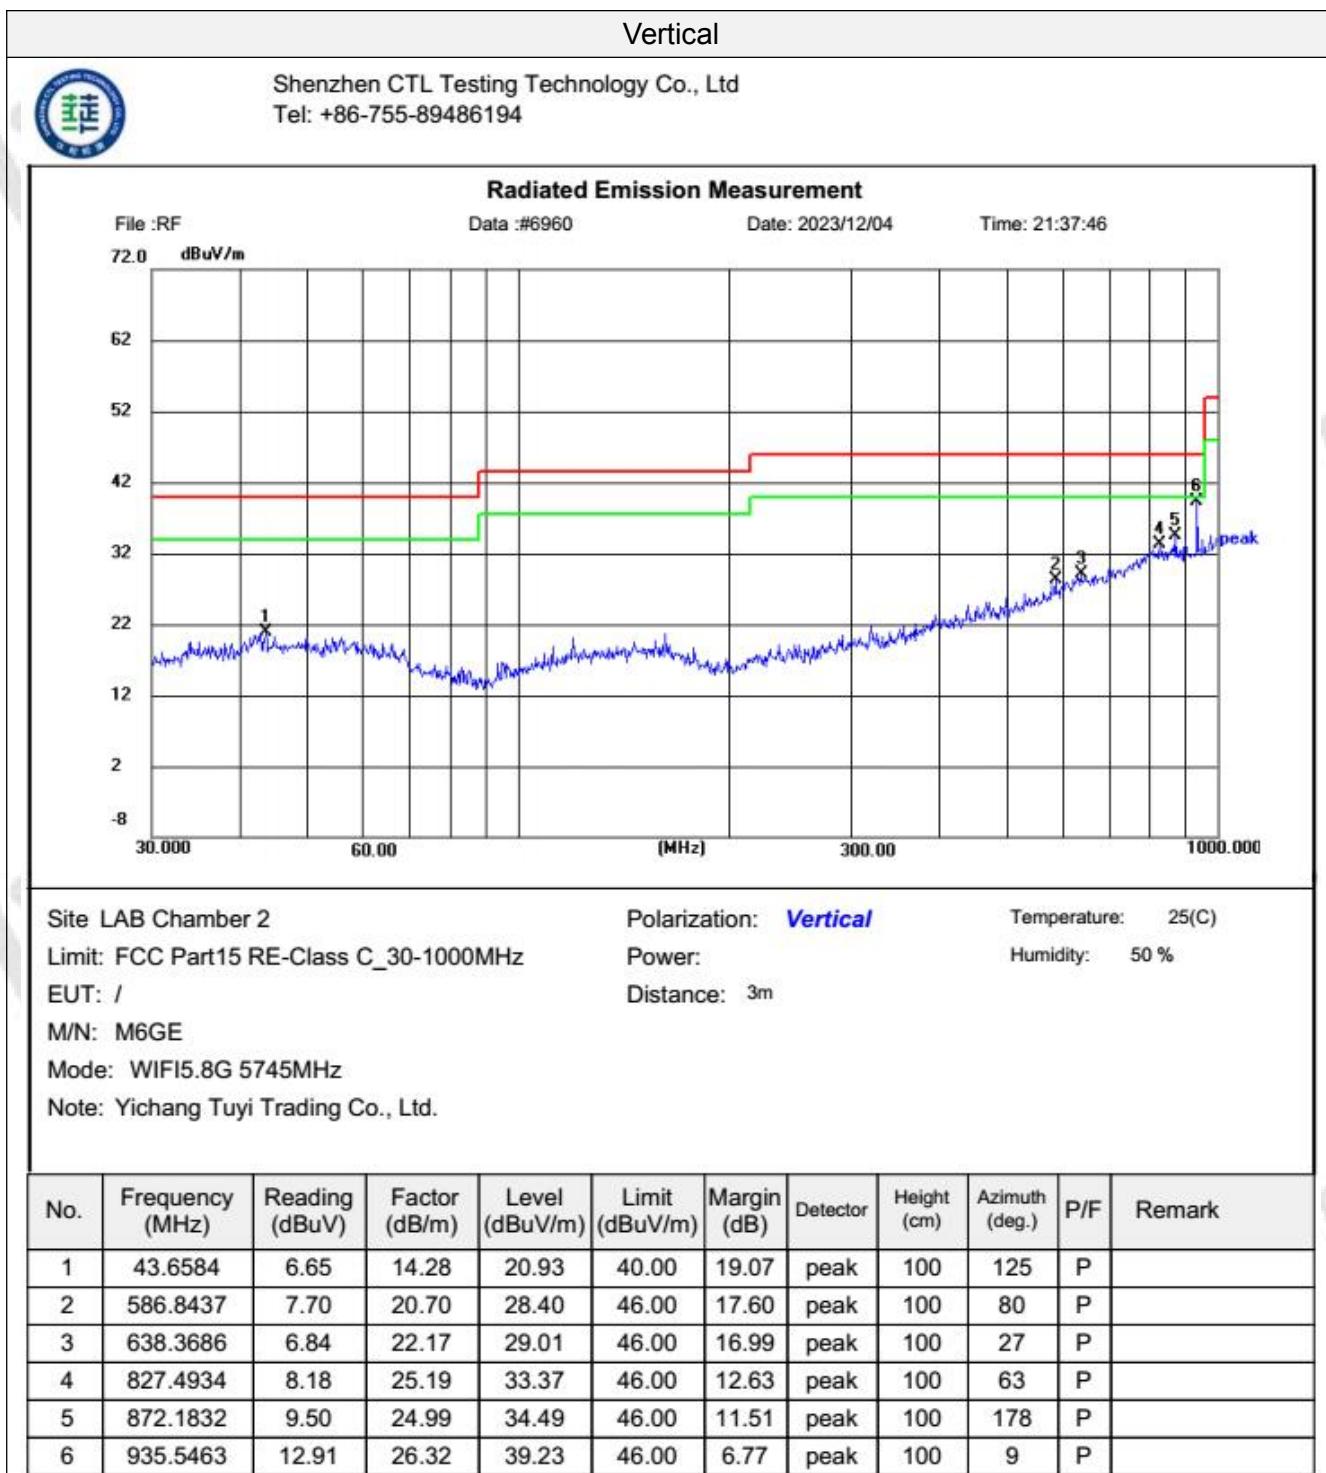


For 1GHz to 40GHz

Note: 1. All 802.11a / 802.11n (HT20) / 802.11ac (HT20) / 802.11n (HT40) / 802.11ac (HT40) / 802.11ac (HT80) modes have been tested for above 1GHz test, only the worst case 802.11n (HT20) was recorded.



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

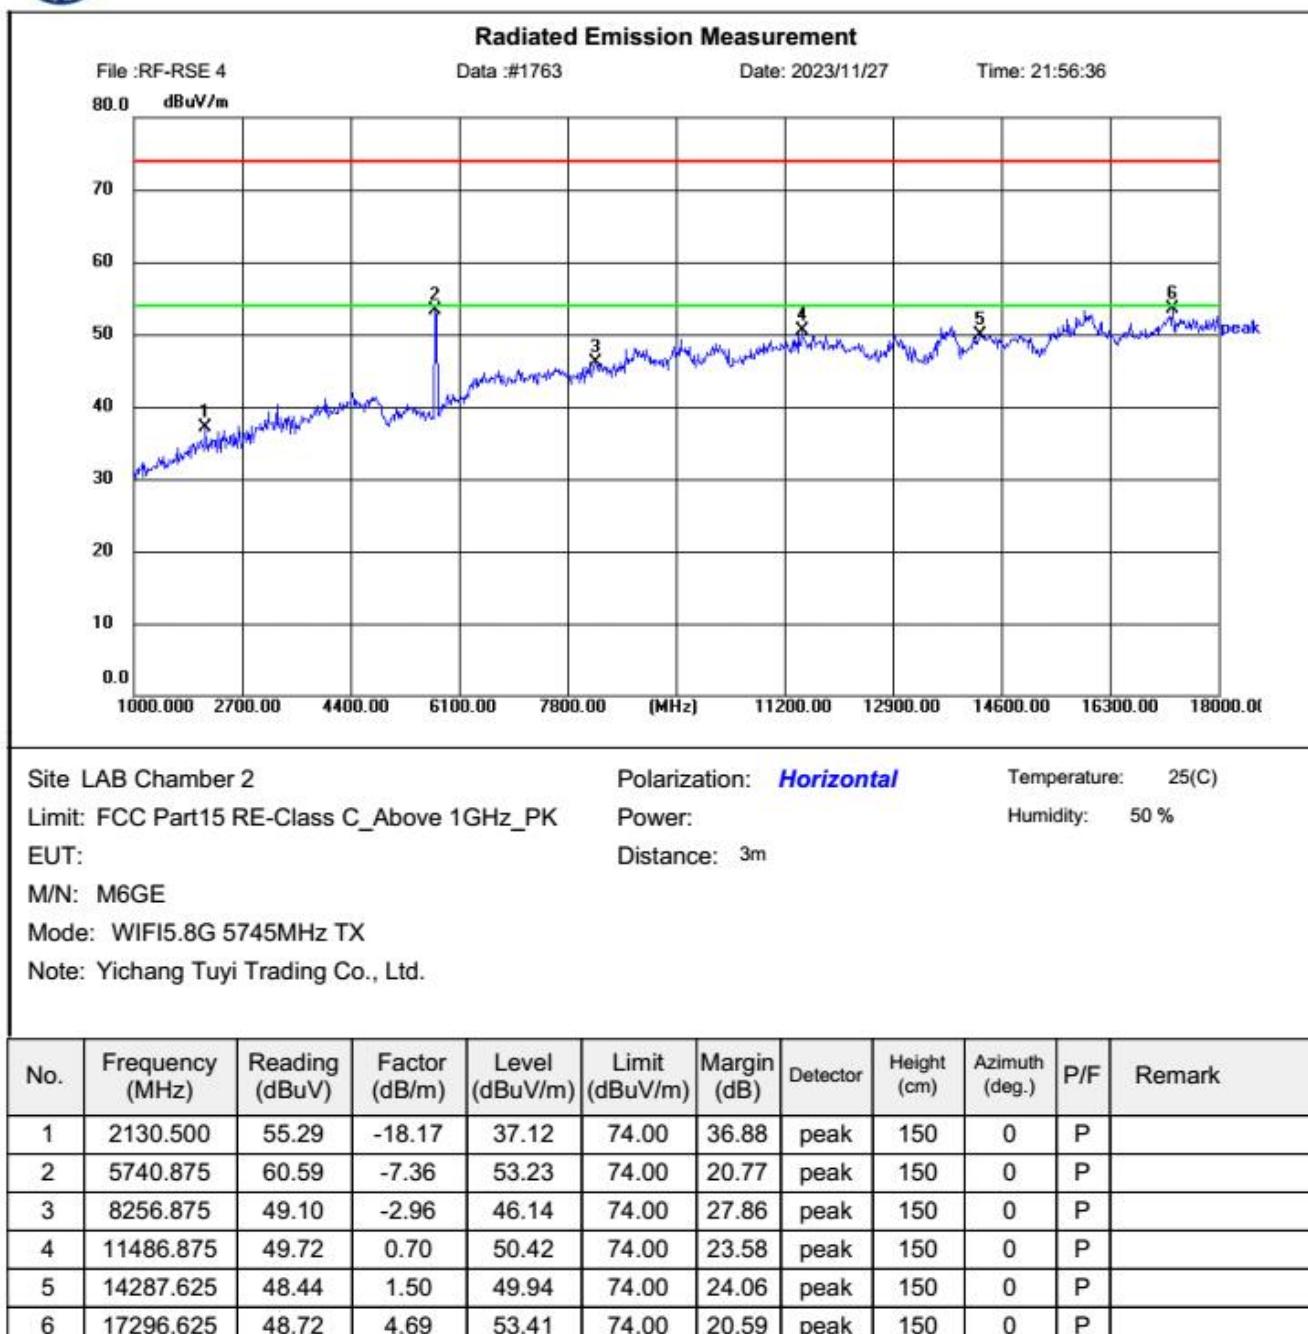



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

Radiated Emission Measurement


File :RF-RSE 4

Data :#1762

Date: 2023/11/27

Time: 21:54:59

80.0 dBuV/m

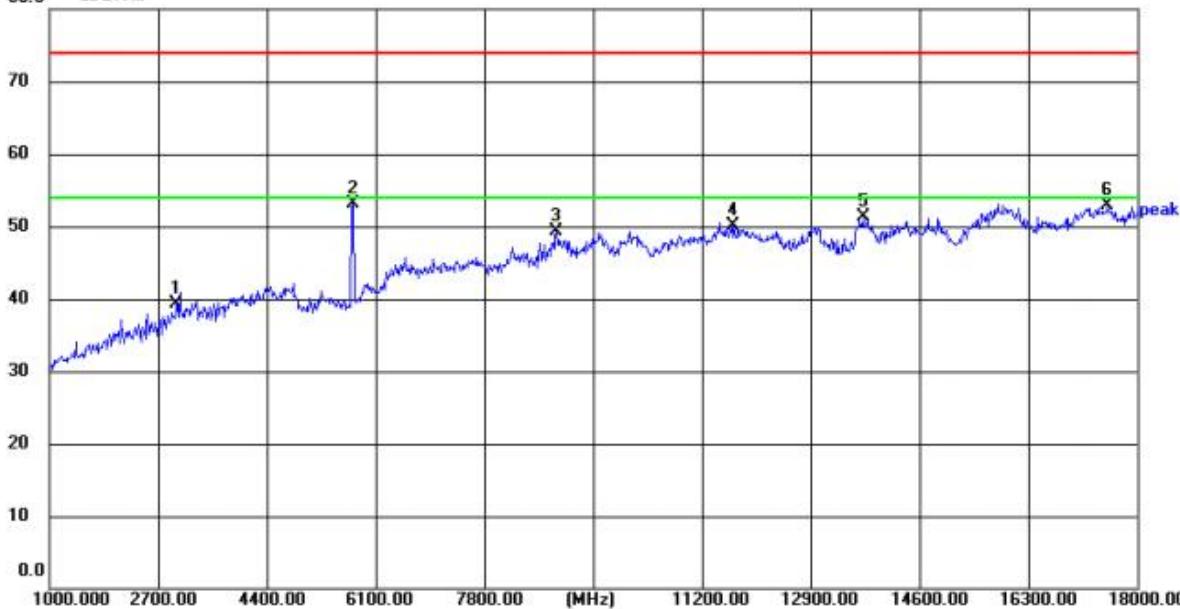

Site LAB Chamber 2

Polarization: **Vertical**

Temperature: 25(C)

Limit: FCC Part15 RE-Class C_Above 1GHz_PK

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N: M6GE

Mode: WIFI5.8G 5745MHz TX

Note: Yichang Tuyi Trading Co., Ltd.

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 | 2999.625 | 53.73 | -14.49 | 39.24 | 74.00 | 34.76 | peak | 150 | 360 | P | |
| 2 | 5749.375 | 60.46 | -7.33 | 53.13 | 74.00 | 20.87 | peak | 150 | 360 | P | |
| 3 | 8932.625 | 50.43 | -1.19 | 49.24 | 74.00 | 24.76 | peak | 150 | 360 | P | |
| 4 | 11701.500 | 49.32 | 0.69 | 50.01 | 74.00 | 23.99 | peak | 150 | 360 | P | |
| 5 | 13720.250 | 49.92 | 1.33 | 51.25 | 74.00 | 22.75 | peak | 150 | 360 | P | |
| 6 | 17549.500 | 47.78 | 5.18 | 52.96 | 74.00 | 21.04 | peak | 150 | 360 | P | |



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

Radiated Emission Measurement


File :RF-RSE 4

Data :#1764

Date: 2023/11/27

Time: 22:01:42

80.0 dBuV/m

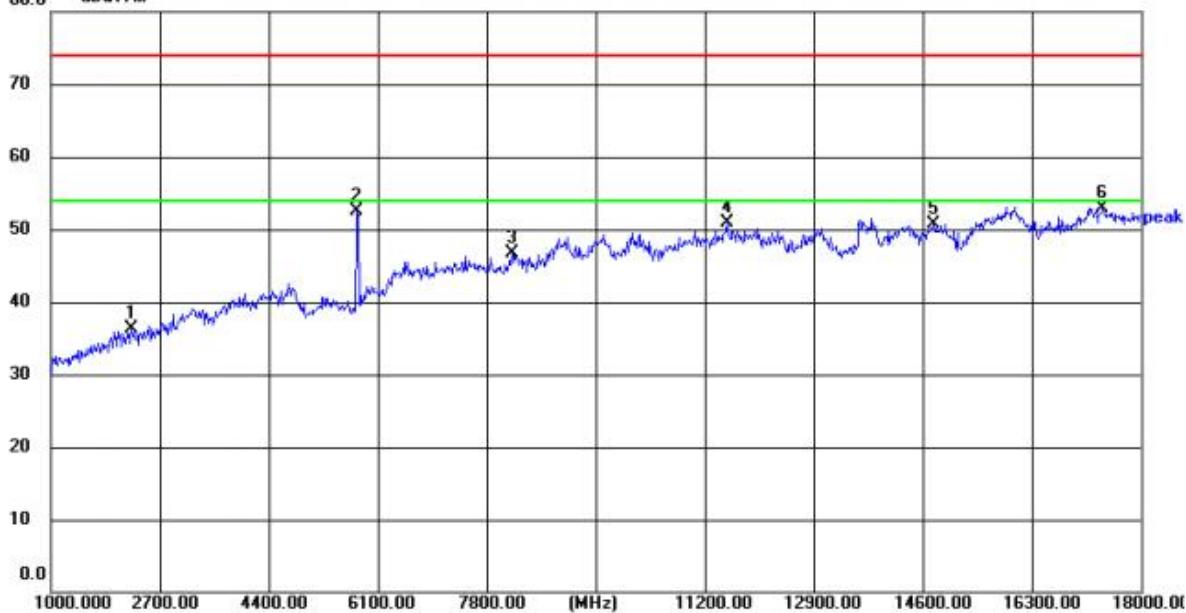

Site LAB Chamber 2

Polarization: **Horizontal**

Temperature: 25(C)

Limit: FCC Part15 RE-Class C_Above 1GHz_PK

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N: M6GE


Mode: WIFI5.8G 5785MHz TX

Note: Yichang Tuyi Trading Co., Ltd.

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 | 2266.500 | 53.86 | -17.57 | 36.29 | 74.00 | 37.71 | peak | 150 | 360 | P | |
| 2 | 5787.625 | 59.70 | -7.29 | 52.41 | 74.00 | 21.59 | peak | 150 | 360 | P | |
| 3 | 8197.375 | 49.73 | -3.12 | 46.61 | 74.00 | 27.39 | peak | 150 | 360 | P | |
| 4 | 11554.875 | 50.25 | 0.71 | 50.96 | 74.00 | 23.04 | peak | 150 | 360 | P | |
| 5 | 14778.500 | 49.76 | 0.93 | 50.69 | 74.00 | 23.31 | peak | 150 | 360 | P | |
| 6 | 17415.625 | 47.76 | 5.17 | 52.93 | 74.00 | 21.07 | peak | 150 | 360 | P | |



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

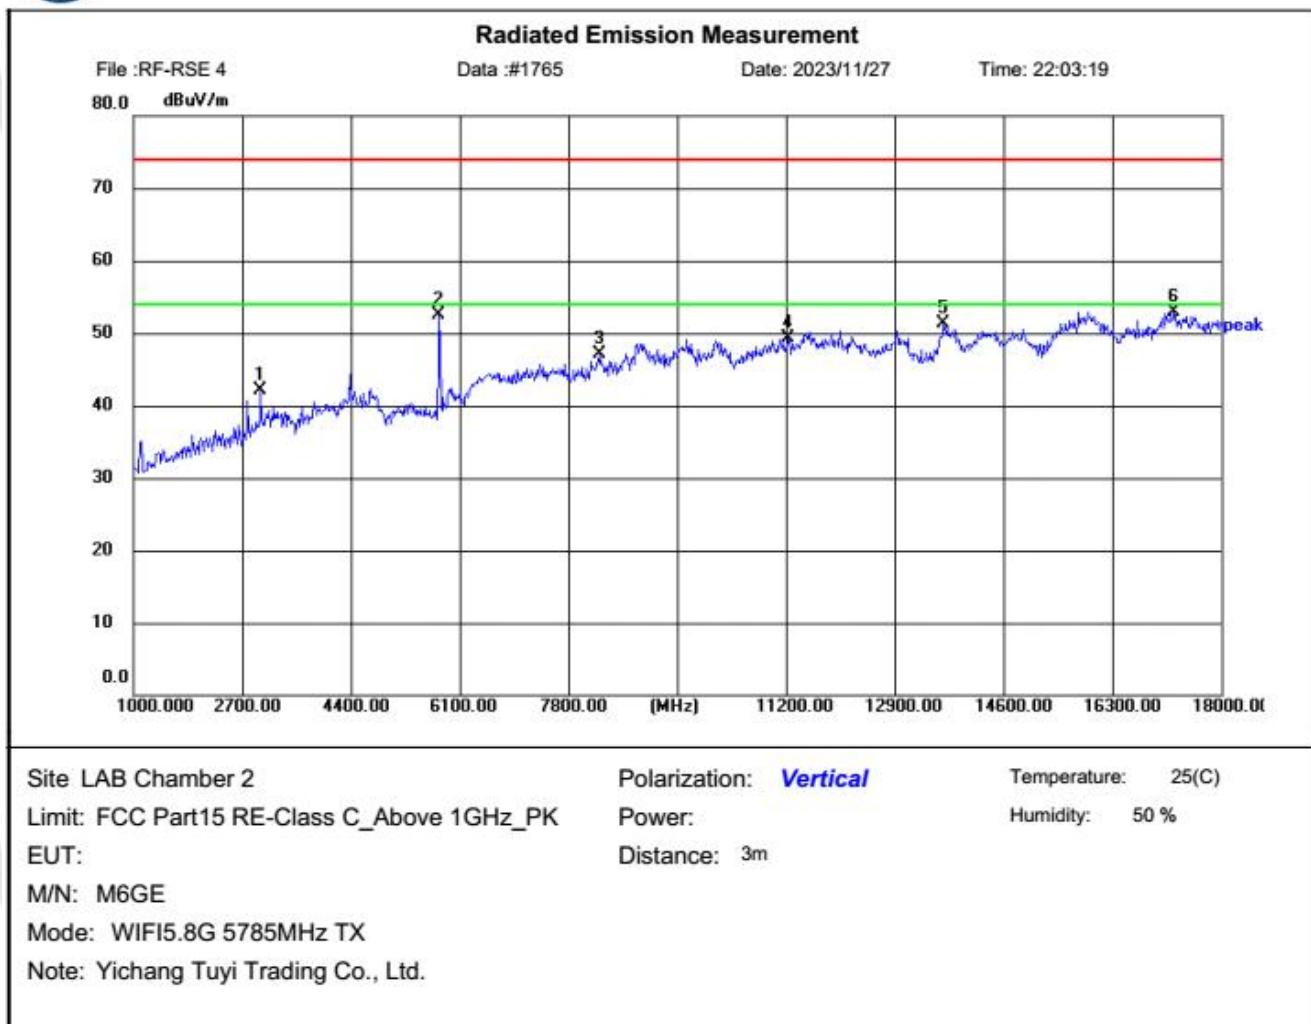

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 | 2995.375 | 56.67 | -14.51 | 42.16 | 74.00 | 31.84 | peak | 150 | 0 | P | |
| 2 | 5781.250 | 59.70 | -7.29 | 52.41 | 74.00 | 21.59 | peak | 150 | 0 | P | |
| 3 | 8293.000 | 50.10 | -2.91 | 47.19 | 74.00 | 26.81 | peak | 150 | 0 | P | |
| 4 | 11236.125 | 49.42 | -0.17 | 49.25 | 74.00 | 24.75 | peak | 150 | 0 | P | |
| 5 | 13671.375 | 50.06 | 1.30 | 51.36 | 74.00 | 22.64 | peak | 150 | 0 | P | |
| 6 | 17277.500 | 48.25 | 4.63 | 52.88 | 74.00 | 21.12 | peak | 150 | 0 | P | |



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

Radiated Emission Measurement

File :RF-RSE 4

Data :#1767

Date: 2023/11/27

Time: 22:07:06

80.0 dBuV/m

70

60

50

40

30

20

10

0.0

1000.000 2700.00 4400.00 6100.00 7800.00 11200.00 12900.00 14600.00 16300.00 18000.00

[MHz]

1000.000 2700.00 4400.00 6100.00 7800.00 11200.00 12900.00 14600.00 16300.00 18000.00

1000.000 2700.00 4400.00 6100.00 7800.00 11200.00 12900.00 14600.00 16300.00 18000.00

Site LAB Chamber 2

Polarization: **Horizontal**

Temperature: 25(C)

Limit: FCC Part15 RE-Class C_Above 1GHz_PK

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N: M6GE


Mode: WIFI5.8G 5825MHz TX

Note: Yichang Tuyi Trading Co., Ltd.

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 | 2589.500 | 53.32 | -16.61 | 36.71 | 74.00 | 37.29 | peak | 150 | 0 | P | |
| 2 | 5821.625 | 60.30 | -7.20 | 53.10 | 74.00 | 20.90 | peak | 150 | 0 | P | |
| 3 | 8314.250 | 48.71 | -2.89 | 45.82 | 74.00 | 28.18 | peak | 150 | 0 | P | |
| 4 | 11656.875 | 50.87 | 0.68 | 51.55 | 74.00 | 22.45 | peak | 150 | 0 | P | |
| 5 | 13826.500 | 49.07 | 1.38 | 50.45 | 74.00 | 23.55 | peak | 150 | 0 | P | |
| 6 | 17162.750 | 48.06 | 4.28 | 52.34 | 74.00 | 21.66 | peak | 150 | 0 | P | |



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

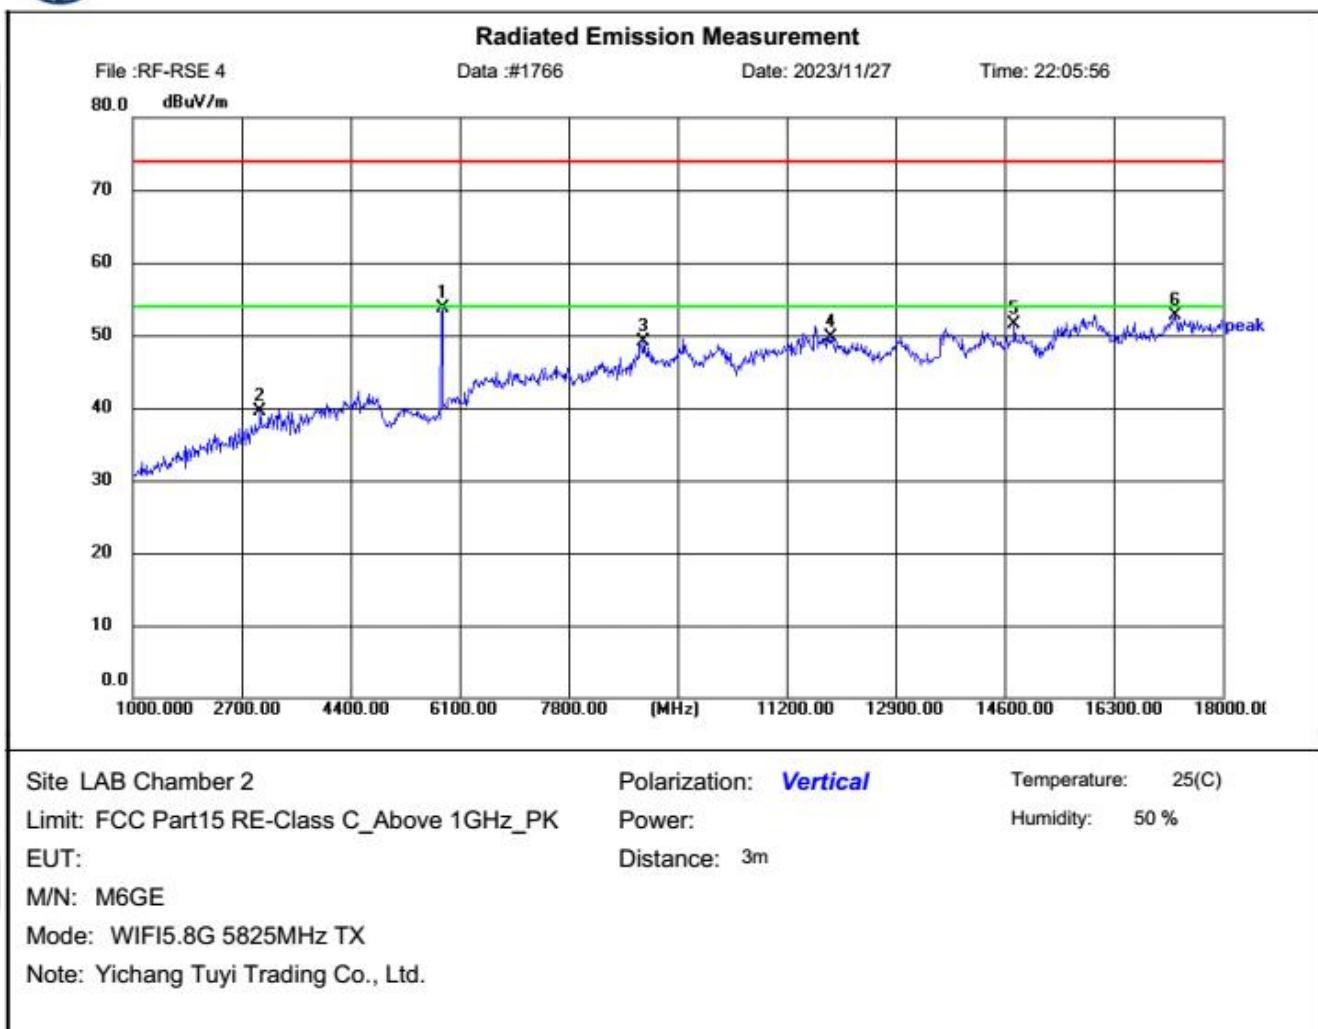

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 | 5832.250 | 60.94 | -7.16 | 53.78 | 74.00 | 20.22 | peak | 150 | 360 | P | |
| 2 | 2999.625 | 53.92 | -14.49 | 39.43 | 74.00 | 34.57 | peak | 150 | 360 | P | |
| 3 | 8987.875 | 50.19 | -1.03 | 49.16 | 74.00 | 24.84 | peak | 150 | 360 | P | |
| 4 | 11888.500 | 49.14 | 0.53 | 49.67 | 74.00 | 24.33 | peak | 150 | 360 | P | |
| 5 | 14757.250 | 50.48 | 0.97 | 51.45 | 74.00 | 22.55 | peak | 150 | 360 | P | |
| 6 | 17283.875 | 48.10 | 4.66 | 52.76 | 74.00 | 21.24 | peak | 150 | 360 | P | |

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. PK detector measurement value is lower than the average limit. Therefore, there is no need to test AV detector measurements.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
6. 18GHz-40GHz not recorded for no spurious point have a margin of less than 6 dB with respect to the limits.

Band Edge Test Plots

5745MHz 802.11n (HT20)



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

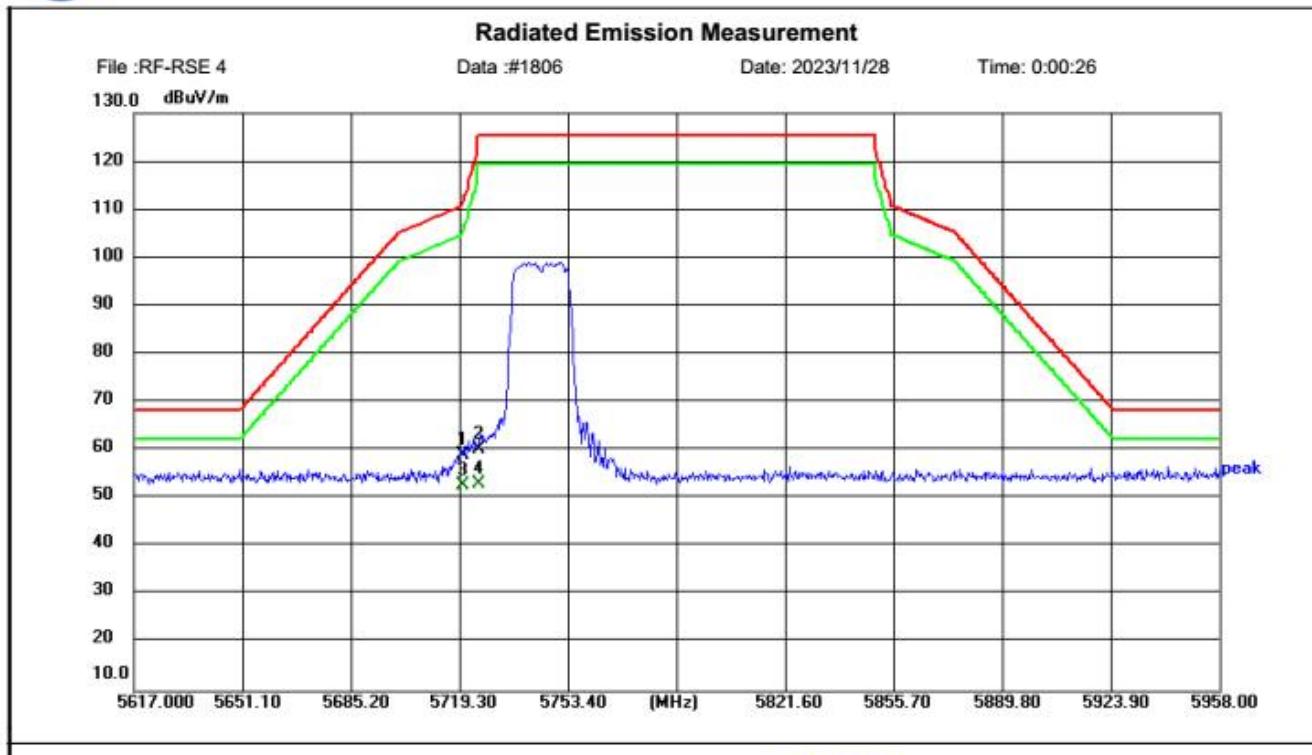

Site LAB Chamber 2

Limit: 5725-5850 BAND

EUT:

M/N: M6GE

Mode: WIFI5.8G 5745MHz TX

Note: Yichang Tuyi Trading Co., Ltd.

Polarization: **Horizontal**

Temperature: 25(C)

Power:


Humidity: 50 %

Distance: 3m

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 | 5720.323 | 41.05 | 18.11 | 59.16 | 111.54 | 52.38 | peak | 150 | 360 | P | |
| 2 | 5725.097 | 42.19 | 18.12 | 60.31 | 125.20 | 64.89 | peak | 150 | 360 | P | |
| 3 | 5720.323 | 34.50 | 18.11 | 52.61 | 111.54 | 58.93 | AVG | 150 | 0 | P | |
| 4 | 5725.097 | 35.00 | 18.12 | 53.12 | 125.20 | 72.08 | AVG | 150 | 0 | P | |



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

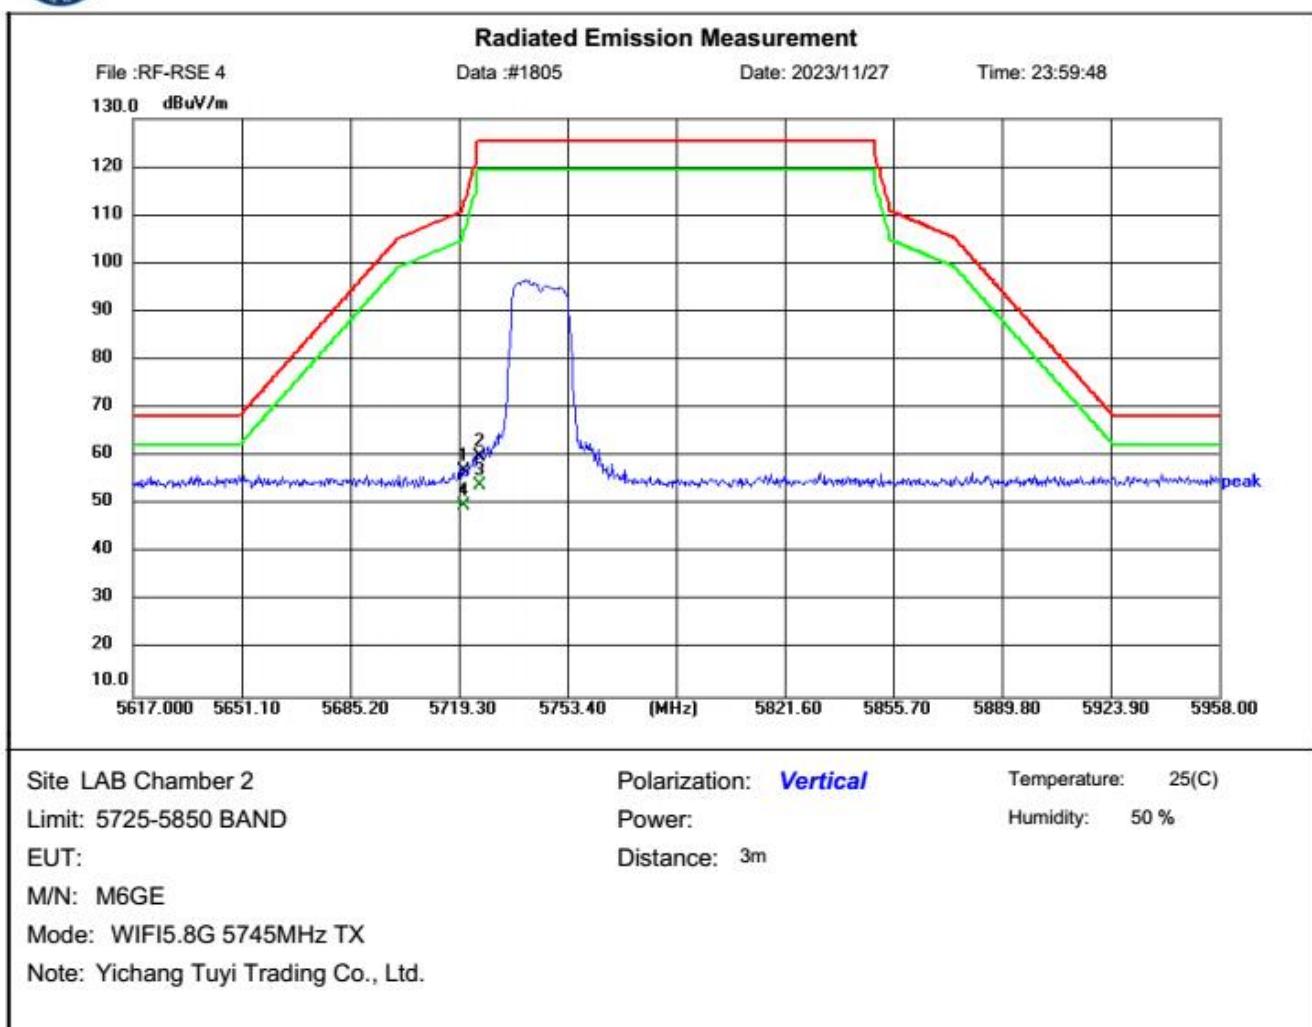

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 | 5720.664 | 38.81 | 18.11 | 56.92 | 112.31 | 55.39 | peak | 150 | 360 | P | |
| 2 | 5725.779 | 41.95 | 18.12 | 60.07 | 125.20 | 65.13 | peak | 150 | 360 | P | |
| 3 | 5725.779 | 35.72 | 18.12 | 53.84 | 125.20 | 71.36 | AVG | 150 | 0 | P | |
| 4 | 5720.664 | 31.50 | 18.11 | 49.61 | 112.31 | 62.70 | AVG | 150 | 0 | P | |

Band Edge Test Plots

5755MHz 802.11n (HT40)



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194


Radiated Emission Measurement

File :RF-RSE 4
130.0 dBuV/m

Data #1807

Date: 2023/11/28

Time: 0:03:32

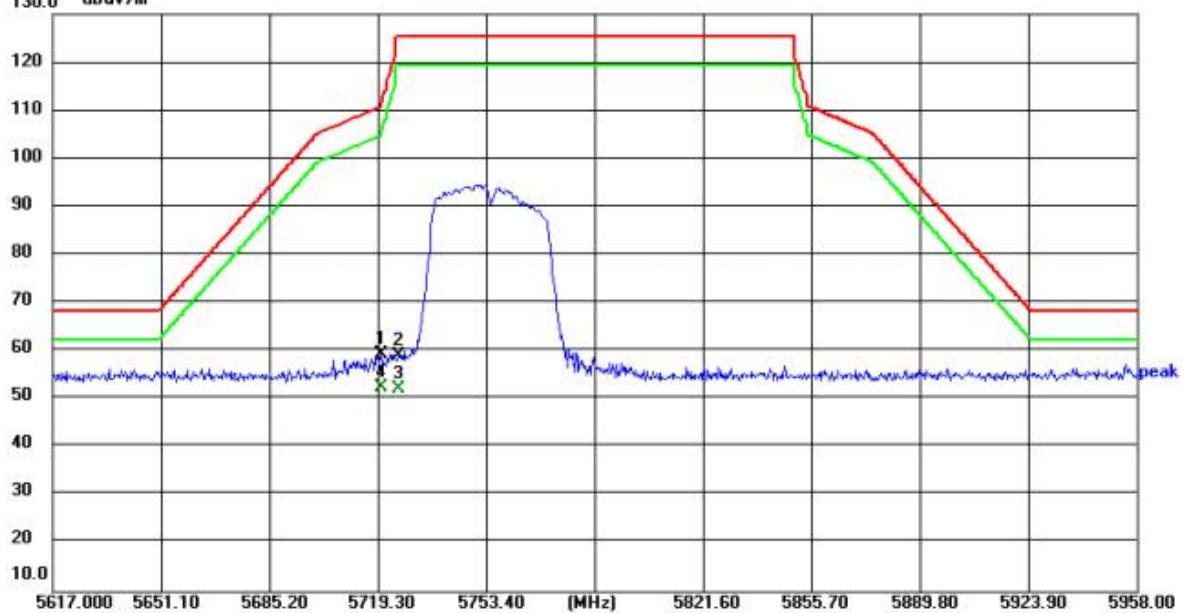

Site LAB Chamber 2

Polarization: **Horizontal**

Temperature: 25(C)

Limit: 5725-5850 BAND

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N: M6GE


Mode: WIFI5.8G 5755MHz TX

Note: Yichang Tuyi Trading Co., Ltd.

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 | 5720.323 | 41.13 | 18.11 | 59.24 | 111.54 | 52.30 | peak | 150 | 360 | P | |
| 2 | 5725.779 | 40.97 | 18.12 | 59.09 | 125.20 | 66.11 | peak | 150 | 360 | P | |
| 3 | 5725.779 | 34.00 | 18.12 | 52.12 | 125.20 | 73.08 | AVG | 150 | 0 | P | |
| 4 | 5720.323 | 34.36 | 18.11 | 52.47 | 111.54 | 59.07 | AVG | 150 | 0 | P | |



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

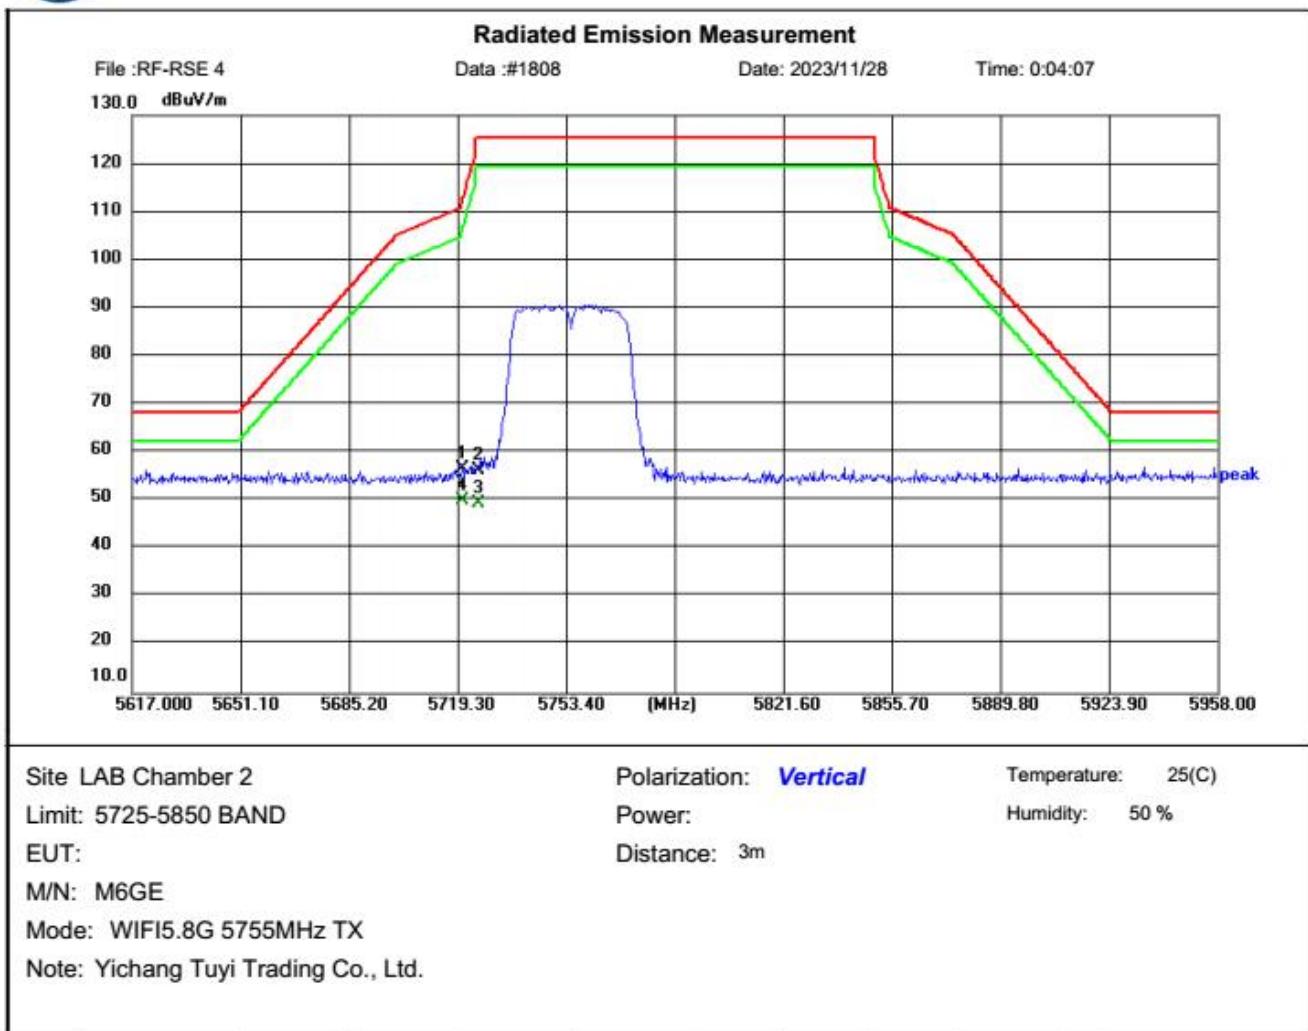

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 | 5720.664 | 38.57 | 18.11 | 56.68 | 112.31 | 55.63 | peak | 150 | 360 | P | |
| 2 | 5725.779 | 38.11 | 18.12 | 56.23 | 125.20 | 68.97 | peak | 150 | 360 | P | |
| 3 | 5725.779 | 31.35 | 18.12 | 49.47 | 125.20 | 75.73 | AVG | 150 | 0 | P | |
| 4 | 5720.664 | 31.86 | 18.11 | 49.97 | 112.31 | 62.34 | AVG | 150 | 0 | P | |

Band Edge Test Plots

5775MHz 802.11AC (HT80)



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194


Radiated Emission Measurement

File :RF-RSE 4

Data :#1811

Date: 2023/11/28

Time: 0:07:30

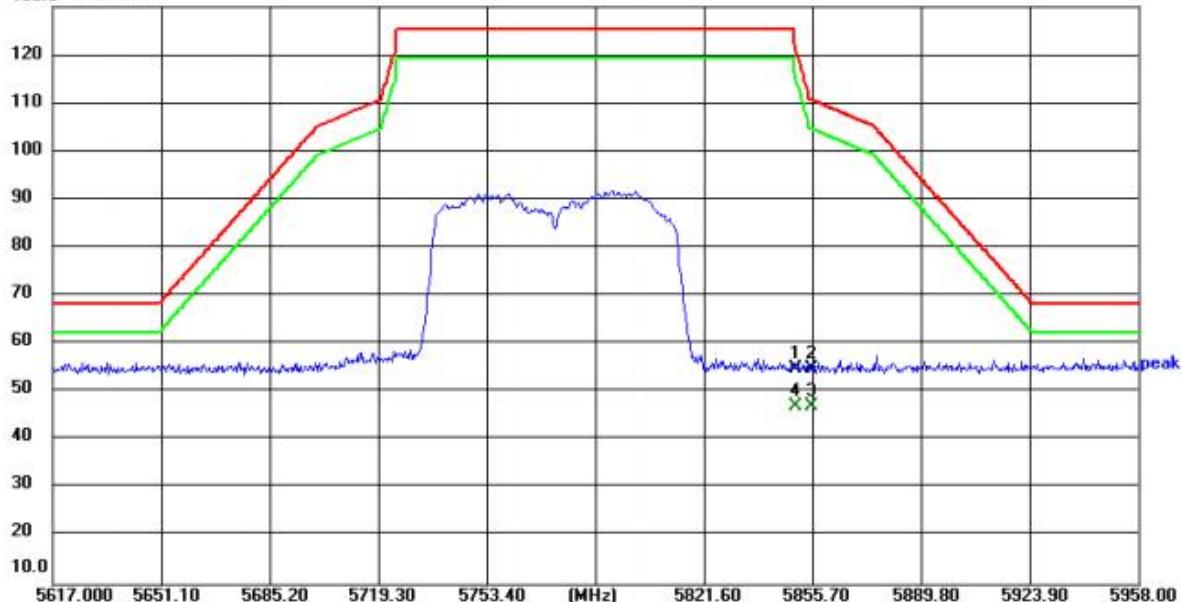130.0 dB_{uV/m}

Site LAB Chamber 2

Limit: 5725-5850 BAND

EUT:

M/N: M6GE

Mode: WIFI5.8G 5775MHz TX

Note: Yichang Tuya Trading Co., Ltd.

Polarization: **Horizontal**

Temperature: 25(C)

Power:


Humidity: 50 %

Distance: 3m

| No. | Frequency (MHz) | Reading (dB _{uV}) | Factor (dB/m) | Level (dB _{uV/m}) | Limit (dB _{uV/m}) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|-----------------------------|---------------|-----------------------------|-----------------------------|-------------|----------|-------------|----------------|-----|--------|
| 1 | 5850.244 | 36.44 | 18.30 | 54.74 | 121.64 | 66.90 | peak | 150 | 360 | P | |
| 2 | 5855.359 | 36.61 | 18.32 | 54.93 | 110.70 | 55.77 | peak | 150 | 360 | P | |
| 3 | 5855.359 | 28.87 | 18.32 | 47.19 | 110.70 | 63.51 | AVG | 150 | 0 | P | |
| 4 | 5850.244 | 28.71 | 18.30 | 47.01 | 121.64 | 74.63 | AVG | 150 | 0 | P | |



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

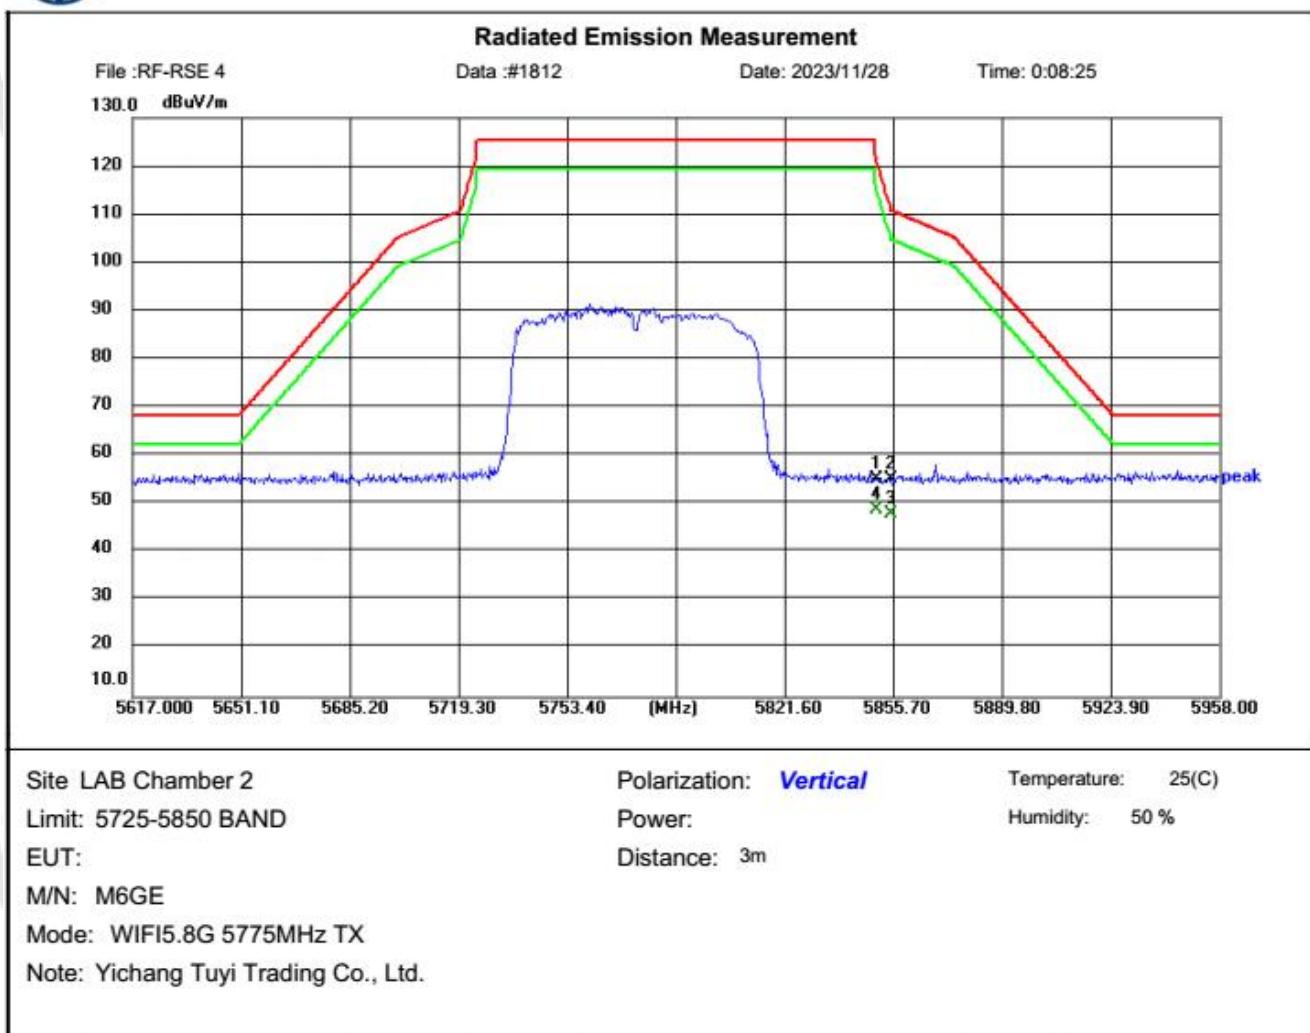


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 | 5850.585 | 36.85 | 18.30 | 55.15 | 120.87 | 65.72 | peak | 150 | 360 | P | |
| 2 | 5855.018 | 36.72 | 18.32 | 55.04 | 110.79 | 55.75 | peak | 150 | 360 | P | |
| 3 | 5855.018 | 29.69 | 18.32 | 48.01 | 110.79 | 62.78 | AVG | 150 | 0 | P | |
| 4 | 5850.585 | 30.41 | 18.30 | 48.71 | 120.87 | 72.16 | AVG | 150 | 0 | P | |

Band Edge Test Plots

5795MHz 802.11n (HT40)



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

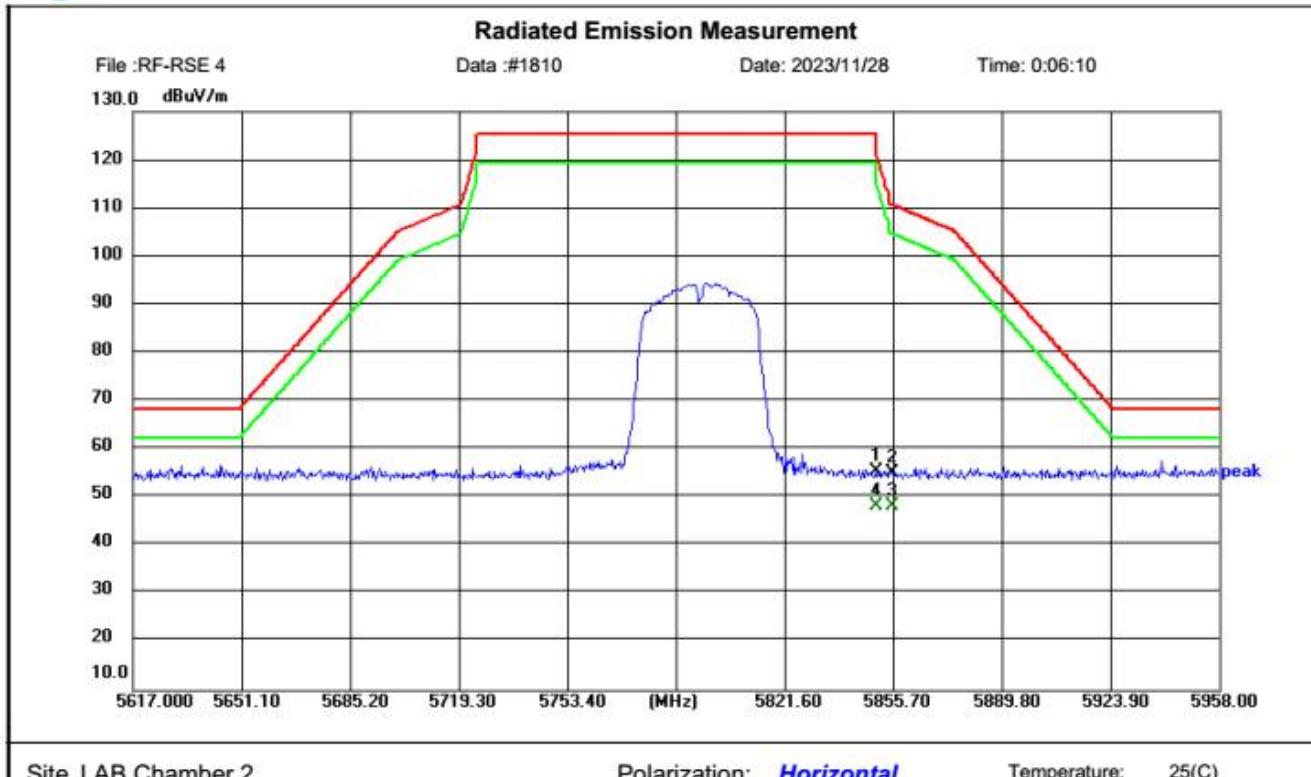

Site LAB Chamber 2

Limit: 5725-5850 BAND

EUT:

M/N: M6GE

Mode: WIFI5.8G 5795MHz TX

Note: Yichang Tuya Trading Co., Ltd.

Polarization: **Horizontal**

Temperature: 25(C)

Power:


Humidity: 50 %

Distance: 3m

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 | 5850.244 | 37.20 | 18.30 | 55.50 | 121.64 | 66.14 | peak | 150 | 360 | P | |
| 2 | 5855.359 | 36.88 | 18.32 | 55.20 | 110.70 | 55.50 | peak | 150 | 360 | P | |
| 3 | 5855.359 | 29.78 | 18.32 | 48.10 | 110.70 | 62.60 | AVG | 150 | 0 | P | |
| 4 | 5850.244 | 29.89 | 18.30 | 48.19 | 121.64 | 73.45 | AVG | 150 | 0 | P | |



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

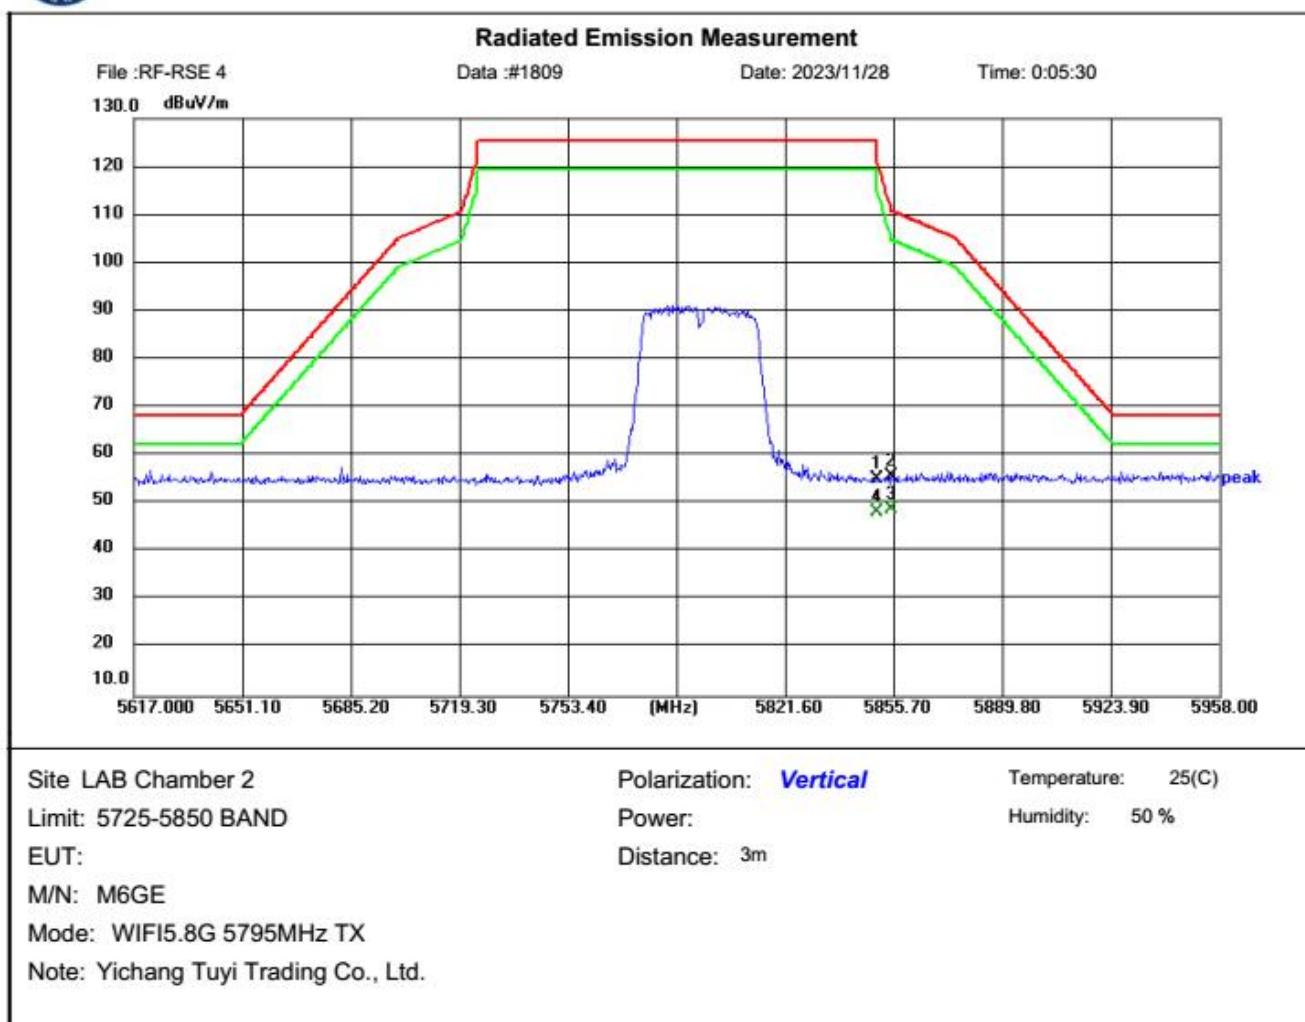

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 | 5850.244 | 36.71 | 18.30 | 55.01 | 121.64 | 66.63 | peak | 150 | 360 | P | |
| 2 | 5855.018 | 37.42 | 18.32 | 55.74 | 110.79 | 55.05 | peak | 150 | 360 | P | |
| 3 | 5855.018 | 30.65 | 18.32 | 48.97 | 110.79 | 61.82 | AVG | 150 | 0 | P | |
| 4 | 5850.244 | 29.80 | 18.30 | 48.10 | 121.64 | 73.54 | AVG | 150 | 0 | P | |

Band Edge Test Plots

5825MHz 802.11n (HT20)



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194


Radiated Emission Measurement

File :RF-RSE 4
130.0 dBuV/m

Data #:1803

Date: 2023/11/27

Time: 23:56:23

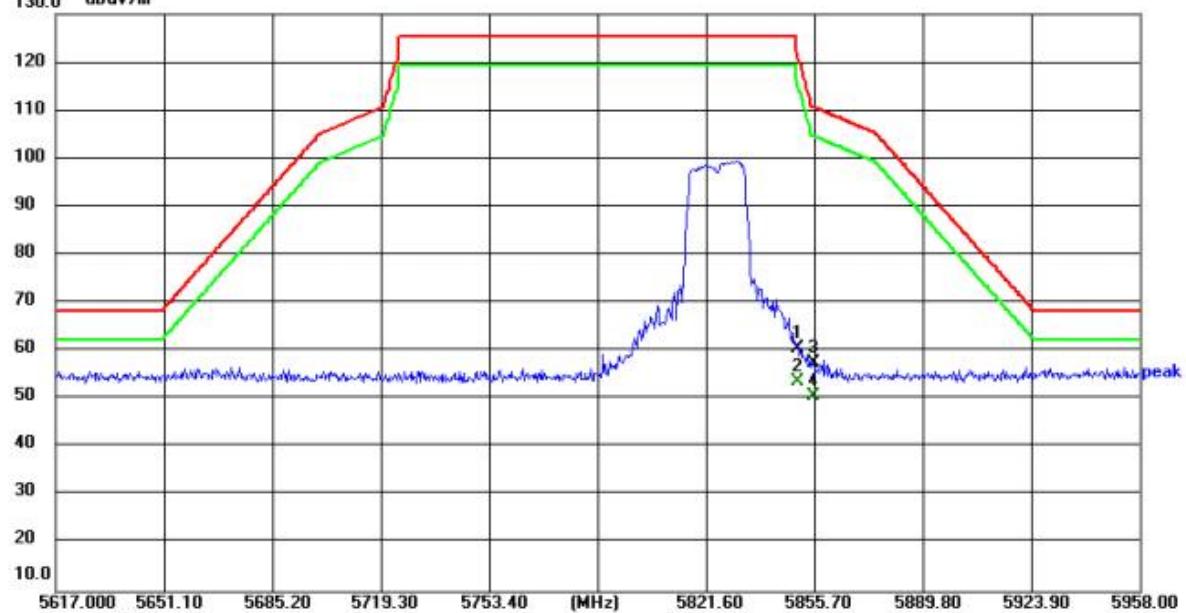

Site LAB Chamber 2

Limit: 5725-5850 BAND

EUT:

M/N: M6GE

Mode: WIFI5.8G 5825MHz TX

Note: Yichang Tuyi Trading Co., Ltd.

Polarization: **Horizontal**

Power:

Temperature: 25(C)


Humidity: 50 %

Distance: 3m

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1 | 5850.244 | 42.11 | 18.30 | 60.41 | 121.64 | 61.23 | peak | 150 | 360 | P | |
| 2 | 5850.244 | 35.21 | 18.30 | 53.51 | 121.64 | 68.13 | AVG | 150 | 0 | P | |
| 3 | 5855.359 | 39.12 | 18.32 | 57.44 | 110.70 | 53.26 | peak | 150 | 360 | P | |
| 4 | 5855.359 | 32.19 | 18.32 | 50.51 | 110.70 | 60.19 | AVG | 150 | 0 | P | |



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

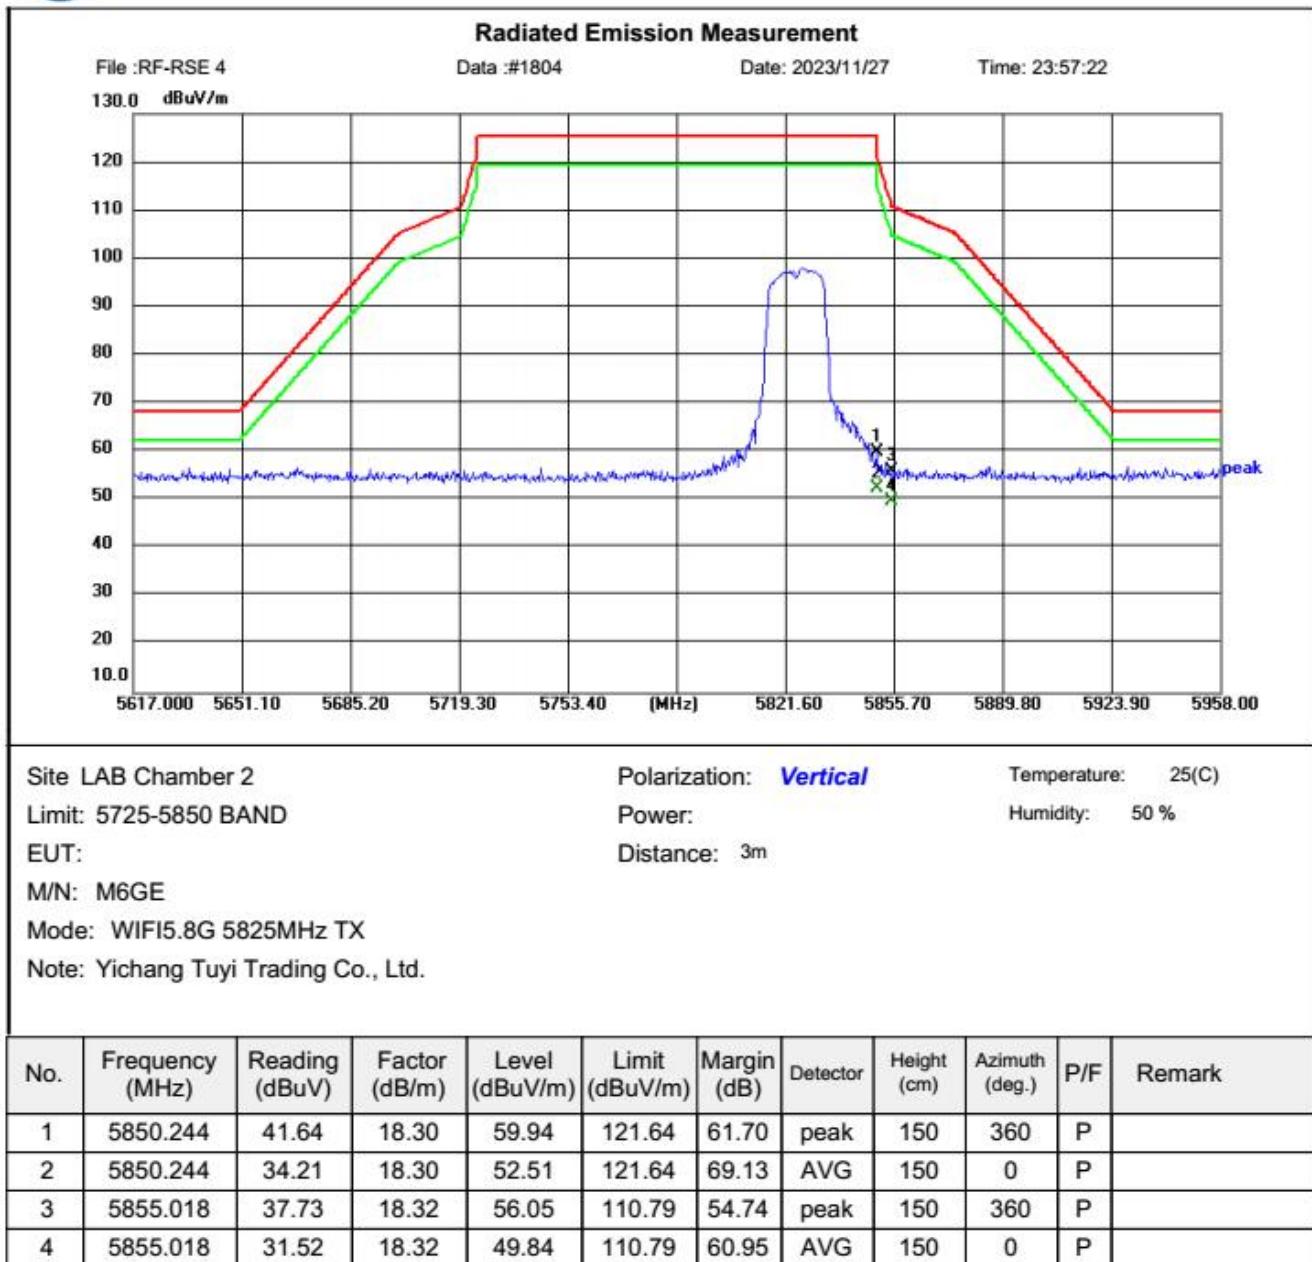

3.3. Maximum Conducted Average Output Power

Limit

FCC requirement:

For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6dBi.

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi.


For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10\log B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum.

Test Configuration



Test Results

Raw data reference to Section 2 of document No. CTL2311171011-WF04_5G_BAND_3_Appendix.

3.4. Power Spectral Density

Limit

FCC requirement:

For the band 5.15-5.25 GHz.

- (i) For an outdoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17dBm in any 1 MHz band.^{note1}
- (ii) For an indoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17dBm in any 1 MHz band.^{note1}
- (iii) For fixed point-to-point access points operating in the band 5.15 - 5.25 GHz, transmitters that employ a directional antenna gain greater than 23dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23dBi.
- (iv) For mobile and portable client devices in the 5.15 - 5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 MHz band. ^{note1}

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands

The maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

IC requirement:

For the band 5.15-5.25 GHz.

The e.i.r.p. spectral density shall not exceed 10dBm in any 1.0 MHz band.

Frequency band 5250-5350 MHz

The power spectral density shall not exceed 11dBm in any 1.0 MHz band

Frequency bands 5470-5600 MHz and 5650-5725 MHz

The power spectral density shall not exceed 11dBm in any 1.0 MHz band.

For the band 5.725 - 5.85 GHz

The maximum power spectral density shall not exceed 30dBm in any 500 kHz band. ^{note1, note2}

Note1: If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Note2: Fixed point - to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW = 1MHz for U-NII 1, U-NII 2A, U-NII C band and 510KHz for U-NII 3 band.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to encompass the entire EBW.
5. Detector = Average.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.

Test Configuration



Test Results

Raw data reference to Section 3 of document No. CTL2311171011-WF04_5G_BAND_3_Appendix.

3.5. Emission Bandwidth (26dBm Bandwidth)

Limit

N/A

Test Procedure

1. Set resolution bandwidth (RBW) = approximately 1 % of the EBW.
2. Set the video bandwidth (VBW) > RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW / EBW ratio is approximately 1 %.

Test Configuration



Test Results

This product is not suitable for this test item..

3.6. Minimum Emission Bandwidth (6dBm Bandwidth)

Limit

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 kHz for the band 5.725-5.85 GHz

Test Procedure

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth 3 x RBW.
3. Detector = Peak.
4. Trace mode = Max hold.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Configuration



Test Results


Raw data reference to Section 1 of document No. CTL2311171011-WF04_5G_BAND_3_Appendix.

3.7. Frequency Stability

LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

TEST CONFIGURATION

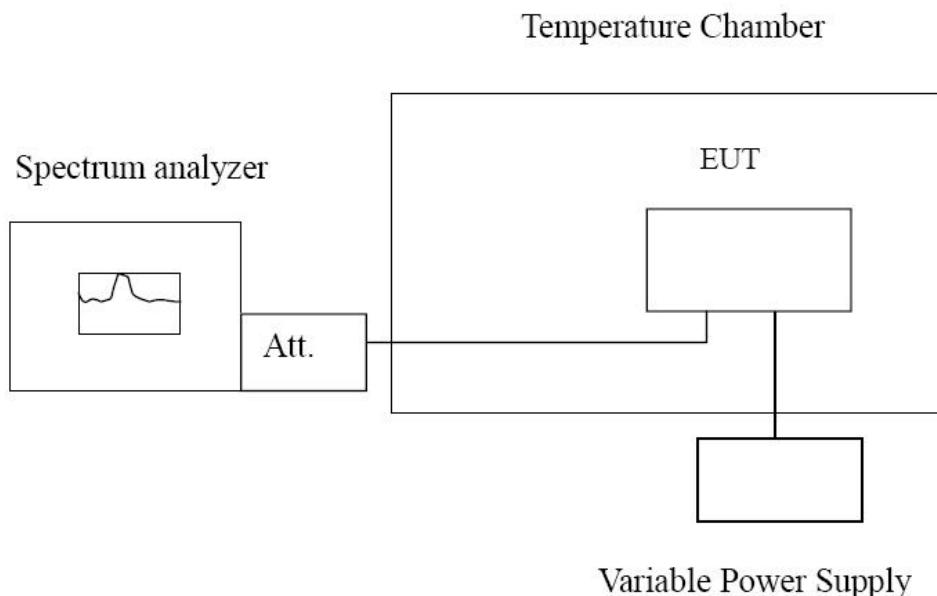

TEST PROCEDURE

Frequency Stability under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +85°C reached.

Frequency Stability under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

TEST RESULTS

Raw data reference to Section 4 of document No. CTL2311171011-WF04_5G_BAND_3_Appendix.

3.8. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited


And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance



The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The maximum gain of Antenna 1 was 2.78dBi and Antenna 2 was 3.22 dBi

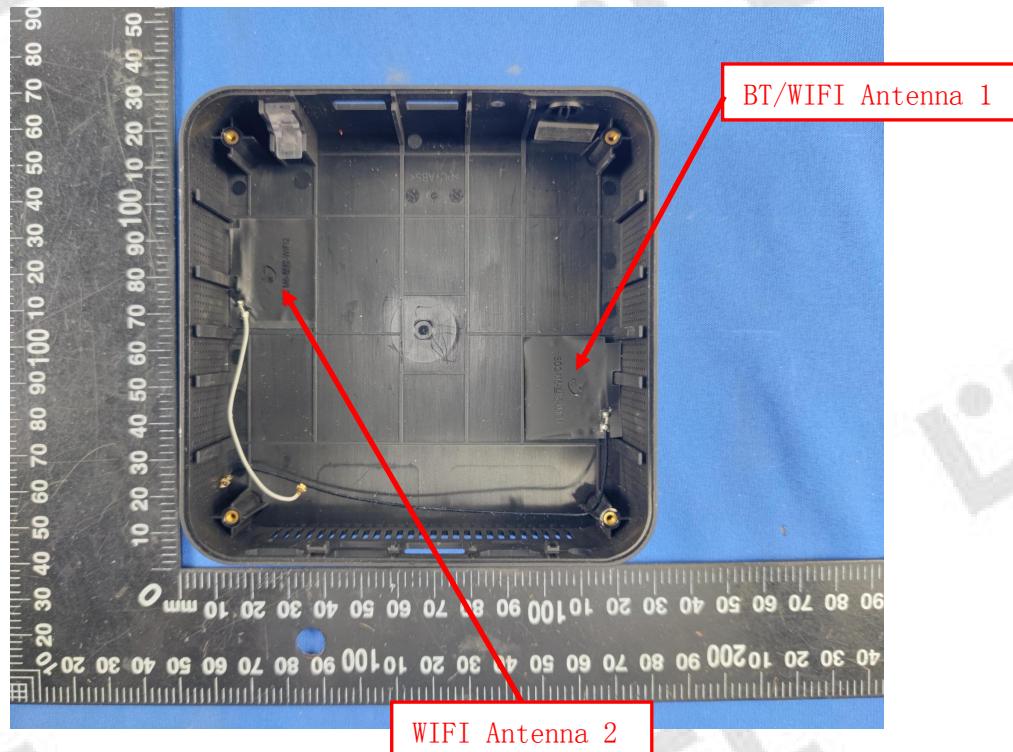

4. Test Setup Photos of the EUT

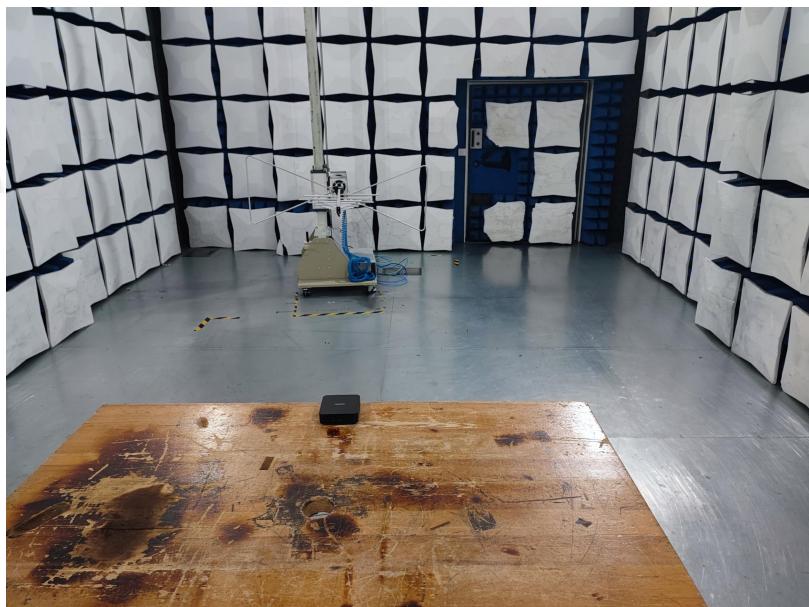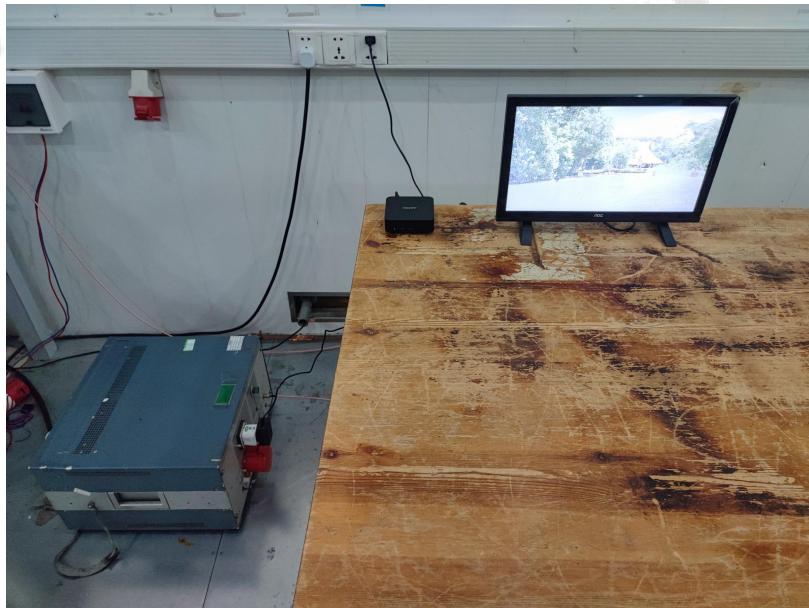

5. Photos of the EUT

Reference to the test report No. CTL2311171011-WF01

***** End of Report *****