

# Shenzhen Tianyiyuan Elec& Technology co., Ltd

Contact: Tang Gong 13244864327 (same as wechat number)

Address: 6th Floor, Building A, Xinlongxin Industrial Park, No.50 Fengtang Avenue, Fuhai Street,  
Baoan District, Shenzhen

## Recognition book

### SPECIFICATION FOR APPROVAL



## Project Information

<u>Customer</u>	Shenzhen Huaxin Zhiying Technology Co., Ltd
<u>Project</u>	CT319 (Dual-band antenna)
<u>Band</u>	2450/5250/5800MHz
TTY <u>Part number</u>	TTY-TX3905
<u>Version</u>	01
<u>RF</u>	Mike Tang
<u>ME</u>	Jake Jian
<u>Date</u>	2025.7.11
<u>project Version</u>	V1.0

# Shenzhen Tianyiyuan Elec& Technology co., Ltd

Contact: Tang Gong 13244864327 (same as wechat number)

Address: 6th Floor, Building A, Xinlongxin Industrial Park, No.50 Fengtang Avenue, Fuhai Street,  
Baoan District, Shenzhen

Customer part number

## 1、Specifications

The report provides a test of the electrical performance parameters of the TYY-TX3905 Technical\_\_parameters\_\_of\_\_antenna\_\_electrical appliances antenna, which is a science and technology model.TYY-TX3905 WIFI Built in antenna,WIFI Antenna is made by copper pipe+RF Line composition。 (As follows 1 Shown)

Electrical technical parameters			
电 性 能 指 标		Electrical Specifications	
频率范围	2400~2500MHZ 5180~5320MHZ 5700~5825MHZ	Frequency Range	2400~2500MHZ 5180~5320MHZ 5700~5825MHZ
电压驻波比	≤2.0	VSWR	≤2.0
增益	3.82dBi	GAIN	3.82dBi
输入阻抗	50 Ω	Input Impedance	50 Ω
机 械 指 标		Mechanical Specifications	
天线颜色	黑色	Antenna Color	BLACK
接口形式	IPEX-2	Input connector	IPEX-2
线长度	60mm	Cable length	60mm
工作温度	-40℃~+85℃	Working Temperature	-40℃~+85℃
工作湿度	20~80%	Working Humidity	20~80%

Chart 1 TYY-TX3905Product size

# Shenzhen Tianyiyuan Elec& Technology co., Ltd

Contact: Tang Gong 13244864327 (same as wechat number)

Address: 6th Floor, Building A, Xinlongxin Industrial Park, No.50 Fengtang Avenue, Fuhai Street,  
Baoan District, Shenzhen

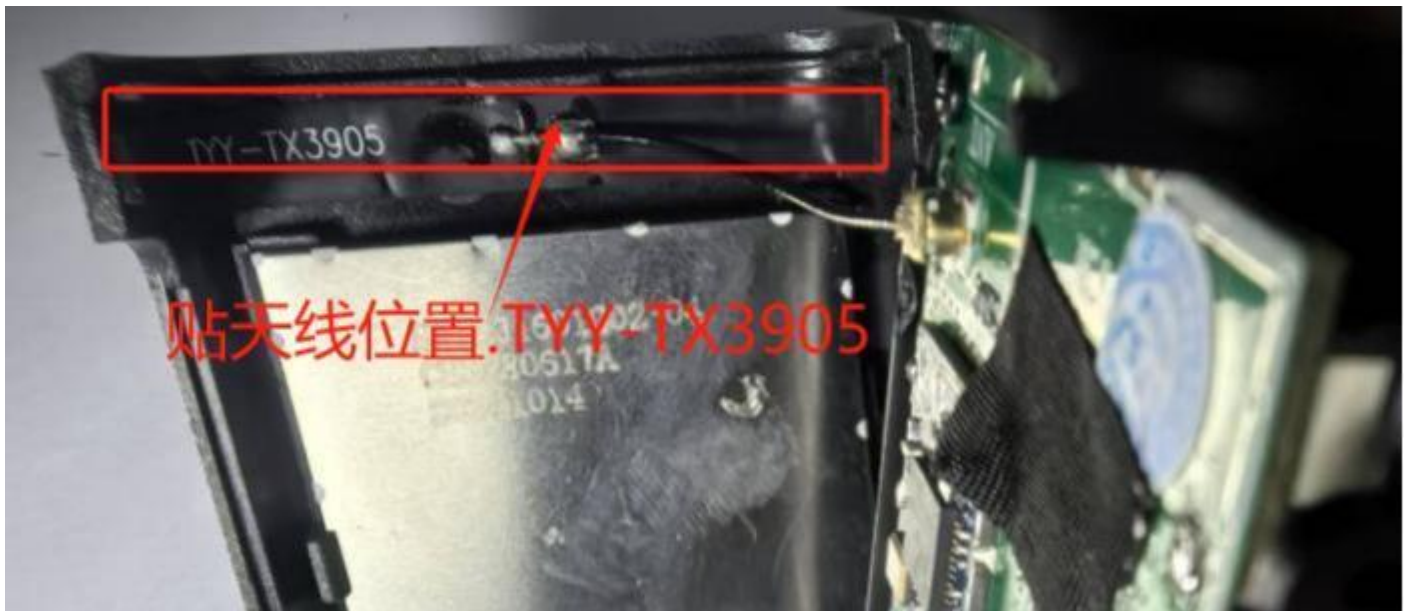


**Chart 2 TYY-TX3905 Antenna finished**



Line length 60+/-2mm.

**Chart 3 Location of antenna patch**



First, fasten the terminal socket, then peel off the adhesive tape on the back of the antenna. The antenna must be attached to the plastic shell and kept away from metal components and objects.

**Chart 4 Model appearance diagram**

# Shenzhen Tianyiyuan Elec& Technology co., Ltd

Contact: Tang Gong 13244864327 (same as wechat number)  
Address: 6th Floor, Building A, Xinlongxin Industrial Park, No.50 Fengtang Avenue, Fuhai Street,  
Baoan District, Shenzhen




Chart 5 Actual measurement test chart (download speed 12.1 M/S per



second)

## 2. Electrical properties

2.1WIFI Antenna matching circuit This item matching circuit is provided by the customer。

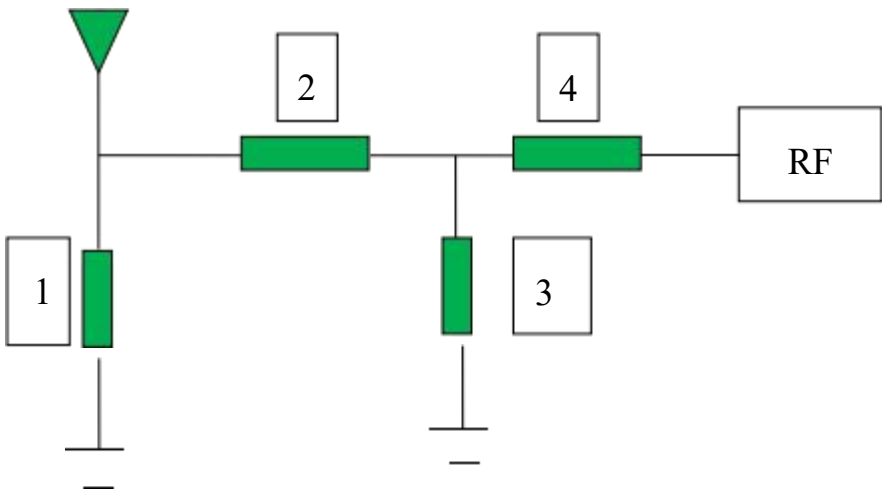


# Shenzhen Tianyiyuan Elec& Technology co., Ltd

Contact: Tang Gong 13244864327 (same as wechat number)

Address: 6th Floor, Building A, Xinlongxin Industrial Park, No.50 Fengtang Avenue, Fuhai Street, Baoan District, Shenzhen

Element number	1	2	3	4
WIFI optimum	NC	0 ohm	NC	
Original (spare)	50 ohm matching (inductance capacitance / sunlord Darfon)			

## Chart 6 Agilent E5071C network analyzer

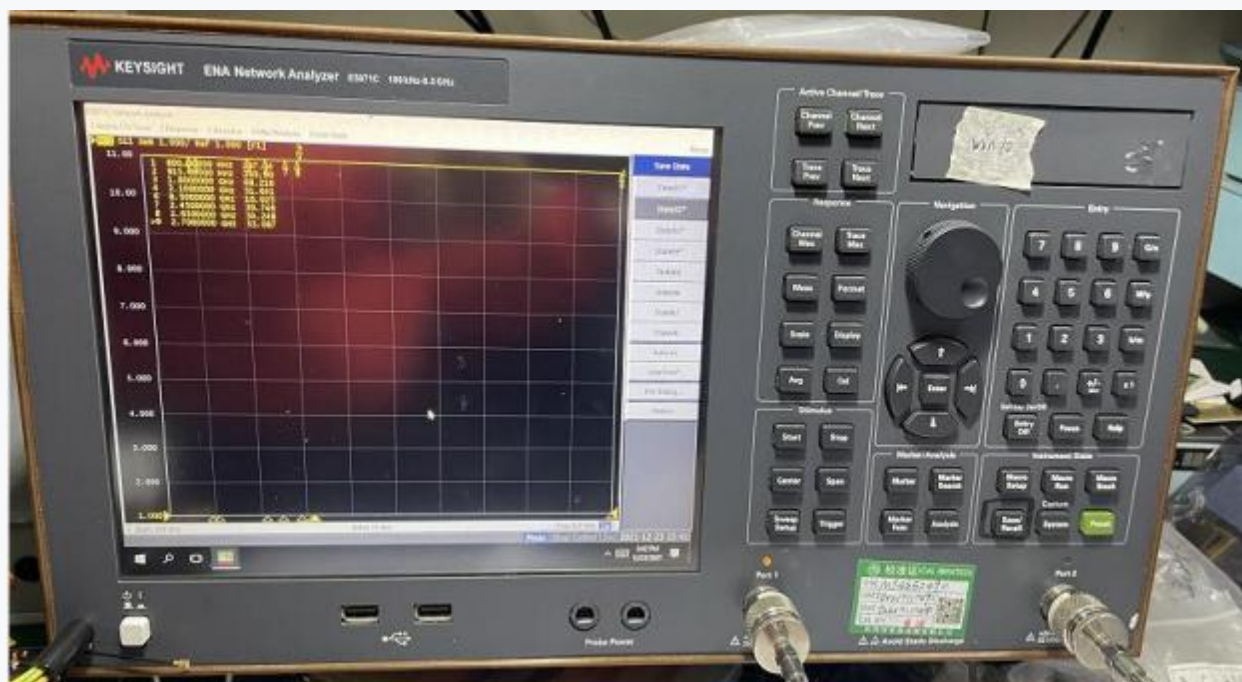

**OTA microwave anechoic chamber:** The test frequency range is 800MHz-8.5 GHz, the quiet zone range is 50cm circumference, and the reflectivity is less than -90 dB.

### 2.4. 2 Instruments tested

**Agilent E5071C network analyzer, log-periodic antenna, computer, transmitting turntable, receiving antenna, printer, jacket choke (in order to reduce the loss of signal connection lines).**


## Chart 7 OTA Microwave dark room



# Shenzhen Tianyiyuan Elec& Technology co., Ltd

Contact: Tang Gong 13244864327 (same as wechat number)

Address: 6th Floor, Building A, Xinlongxin Industrial Park, No.50 Fengtang Avenue, Fuhai Street,  
Baoan District, Shenzhen

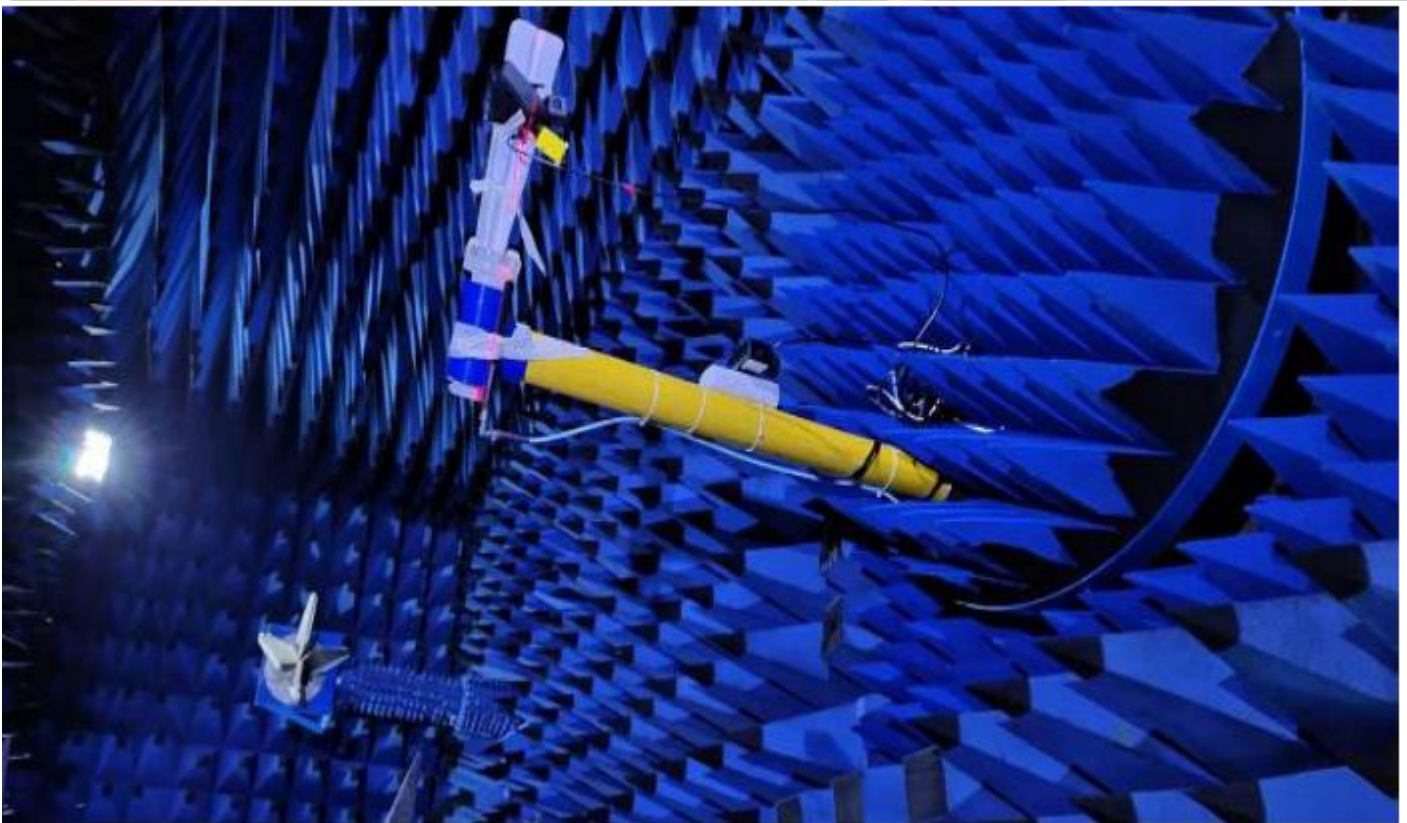

## **Chart 8 Test system**


Test environment: OTA743 darkroom, W500/8960/8753ES /5071C, the machine is placed with its back to the turntable 4 meters away from the

# Shenzhen Tianyiyuan Elec& Technology co., Ltd

Contact: Tang Gong 13244864327 (same as wechat number)

Address: 6th Floor, Building A, Xinlongxin Industrial Park, No.50 Fengtang Avenue, Fuhai Street,  
Baoan District, Shenzhen

standard horn

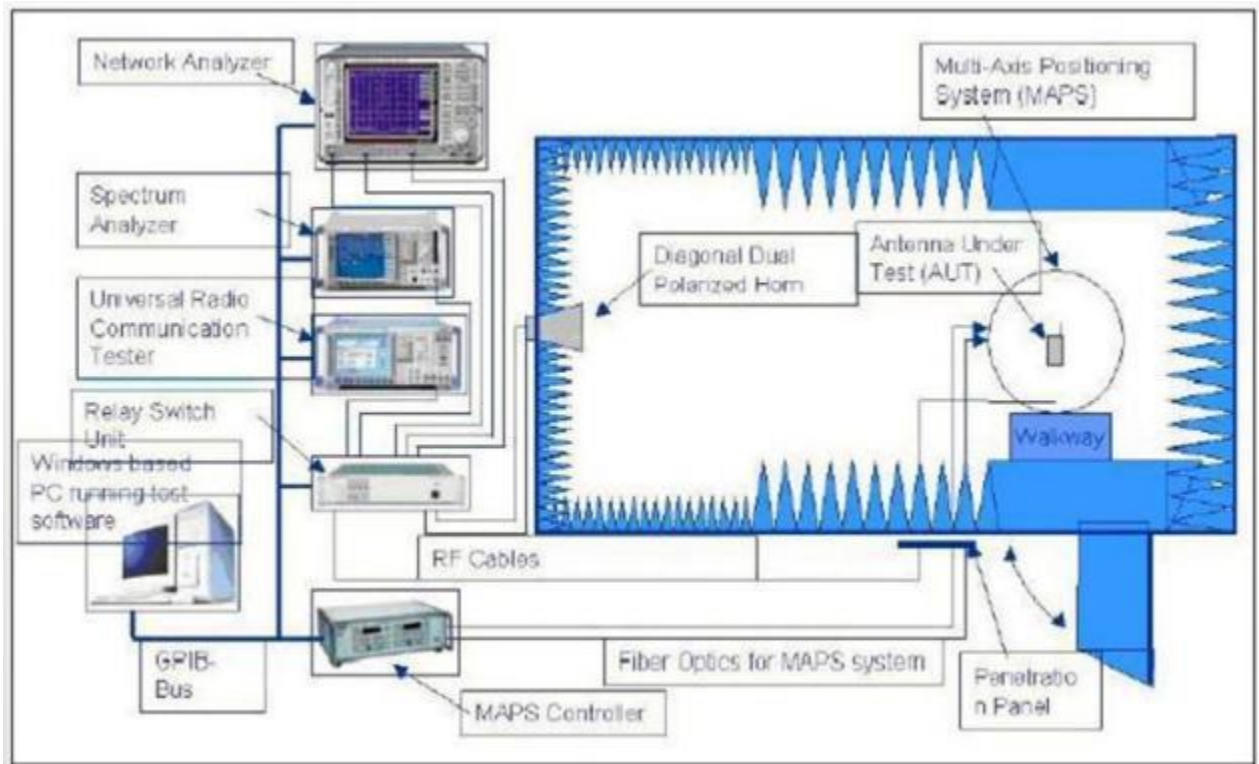

## 2.3.1. Test setup

Connect the VSWR test device are: Agilent E5071C network analyzer from 50 ohm coaxial Cable 120mm long Brass & test fixture Processing test fixture: 50 ohm antenna leads to SMA-J connector from the test point on the plate PCB with a rigid cable, and a Connect the choke tube, and then sequentially connected with other devices.

## Chart 9    Return loss


## Chart 10 WIFI VSWR



# Shenzhen Tianyiyuan Elec& Technology co., Ltd

Contact: Tang Gong 13244864327 (same as wechat number)

Address: 6th Floor, Building A, Xinlongxin Industrial Park, No.50 Fengtang Avenue, Fuhai Street, Baoan District, Shenzhen

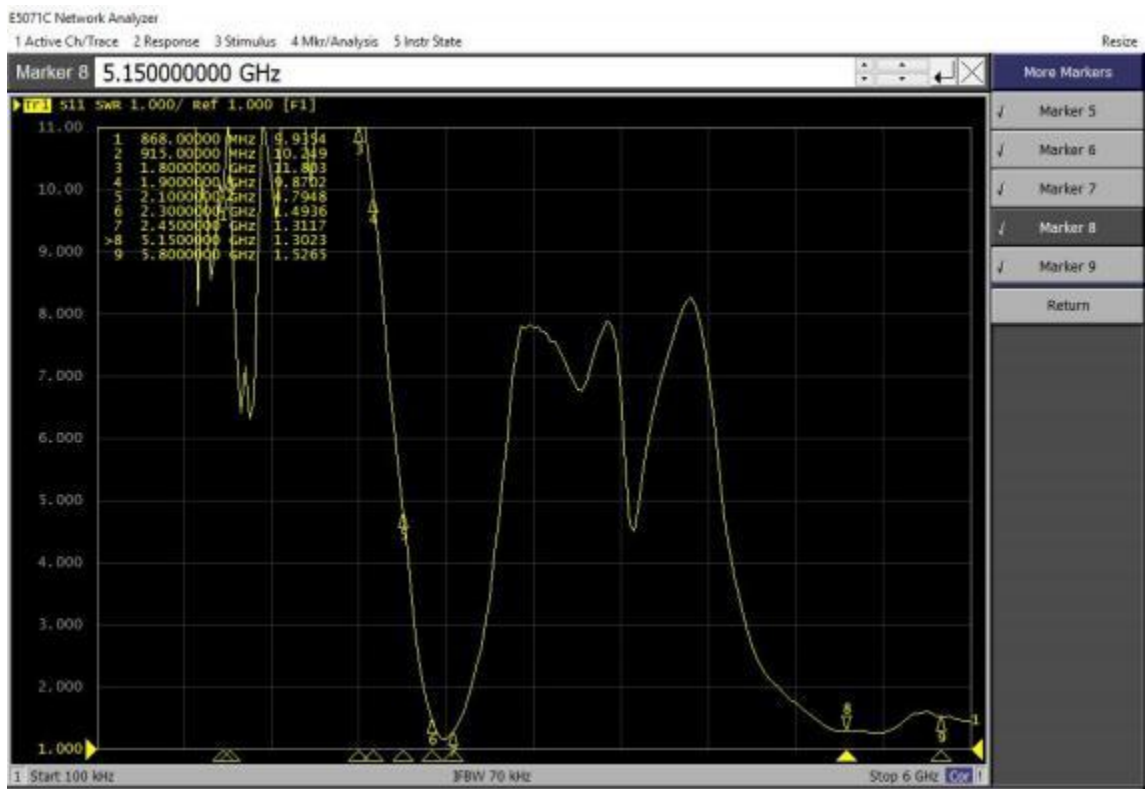

standard	Low frequency		High frequency		
frequency (MHz)	2412	2445	5700	5800	
VSWR	1.3	1.4	1.3	1.5	

## Elevation map coverage


Frequency ID	1	2	3	4	5	6	7	8	9	10	11	12	12	13	14	15	16	17
Frequency (MHz)	2400.0	2420.0	2440.0	2460.0	2480.0	2500.0	5180.0	5200.0	5240.0	5260.0	5280.0	5300.0	5320.0	5720.0	5745.0	5770.0	5800.0	5825.0
Efficiency (dBi)	-2.16	-2.00	-1.91	-1.63	-1.73	-1.69	-1.55	-1.27	-1.54	-1.72	-1.83	-1.51	-1.51	-1.38	-1.06	-1.62	-1.84	-1.06
Gain (dBi)	1.92	2.20	2.38	3.11	2.97	3.13	3.23	3.29	2.56	2.22	2.38	3.08	3.08	3.55	3.25	3.82	3.80	3.23
Efficiency (%)	60.79	63.03	64.48	68.74	67.12	67.72	70.06	74.67	70.12	67.23	65.55	70.59	70.59	72.70	68.38	68.93	65.41	68.37
Directivity (dB)	4.08	4.20	4.29	4.74	4.70	4.82	4.78	4.56	4.10	3.95	4.21	4.59	4.59	4.93	5.31	5.43	5.64	5.29
Peak Gain Position (Theta)	79.00	79.00	40.00	44.00	44.00	139.00	137.00	83.00	140.00	140.00	140.00	42.00	42.00	42.00	42.00	39.00	33.00	33.00
Peak Gain Position (Phi)	330.00	330.00	30.00	30.00	30.00	30.00	30.00	330.00	360.00	360.00	360.00	240.00	240.00	240.00	240.00	240.00	210.00	180.00
Efficiency ThetaPol (%)	46.42	47.51	48.72	51.70	50.50	51.25	52.44	55.54	52.09	49.87	48.68	39.98	39.98	40.88	43.24	42.73	44.99	50.03
Efficiency PhiPol (%)	14.37	15.52	15.76	17.04	16.62	16.48	17.62	19.13	18.03	17.36	16.87	30.60	30.60	31.82	35.14	26.21	20.41	28.35
Upper Hem. Efficiency (%)	31.95	32.81	33.10	34.94	34.05	34.58	36.33	39.45	37.43	35.90	34.75	38.74	38.74	39.89	42.65	38.19	36.56	42.89
Lower Hem. Efficiency (%)	28.83	30.22	31.38	33.80	33.07	33.14	33.73	35.22	32.69	31.33	30.80	31.84	31.84	32.82	29.73	34.74	33.84	30.48



# Shenzhen Tianyiyuan Elec& Technology co., Ltd

Contact: Tang Gong 13244864327 (same as wechat number)


Address: 6th Floor, Building A, Xinlongxin Industrial Park, No.50 Fengtang Avenue, Fuhai Street,  
Baoan District, Shenzhen

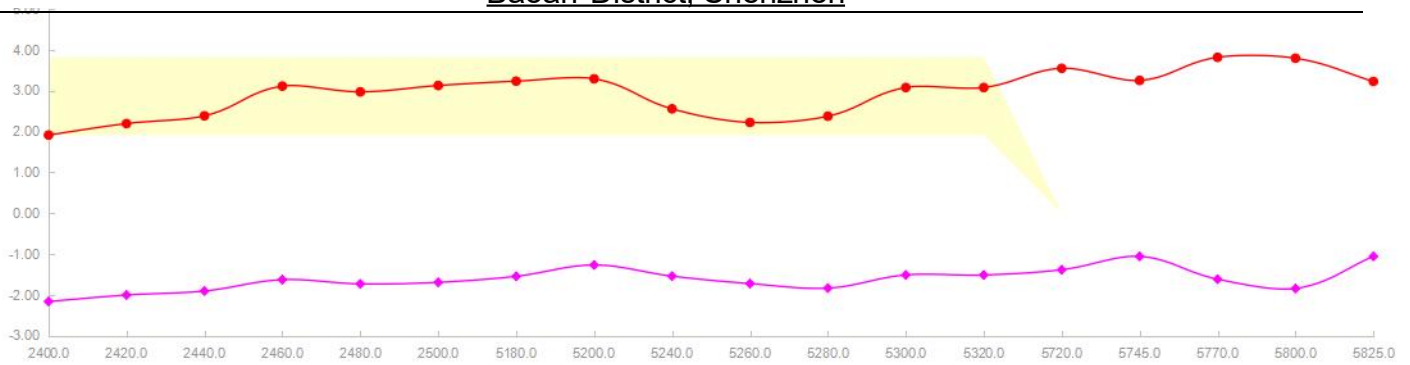

# Shenzhen Tianyiyuan Elec& Technology co., Ltd

Contact: Tang Gong 13244864327 (same as wechat number)

Address: 6th Floor, Building A, Xinlongxin Industrial Park, No.50 Fengtang Avenue, Fuhai Street,  
Baoan District, Shenzhen








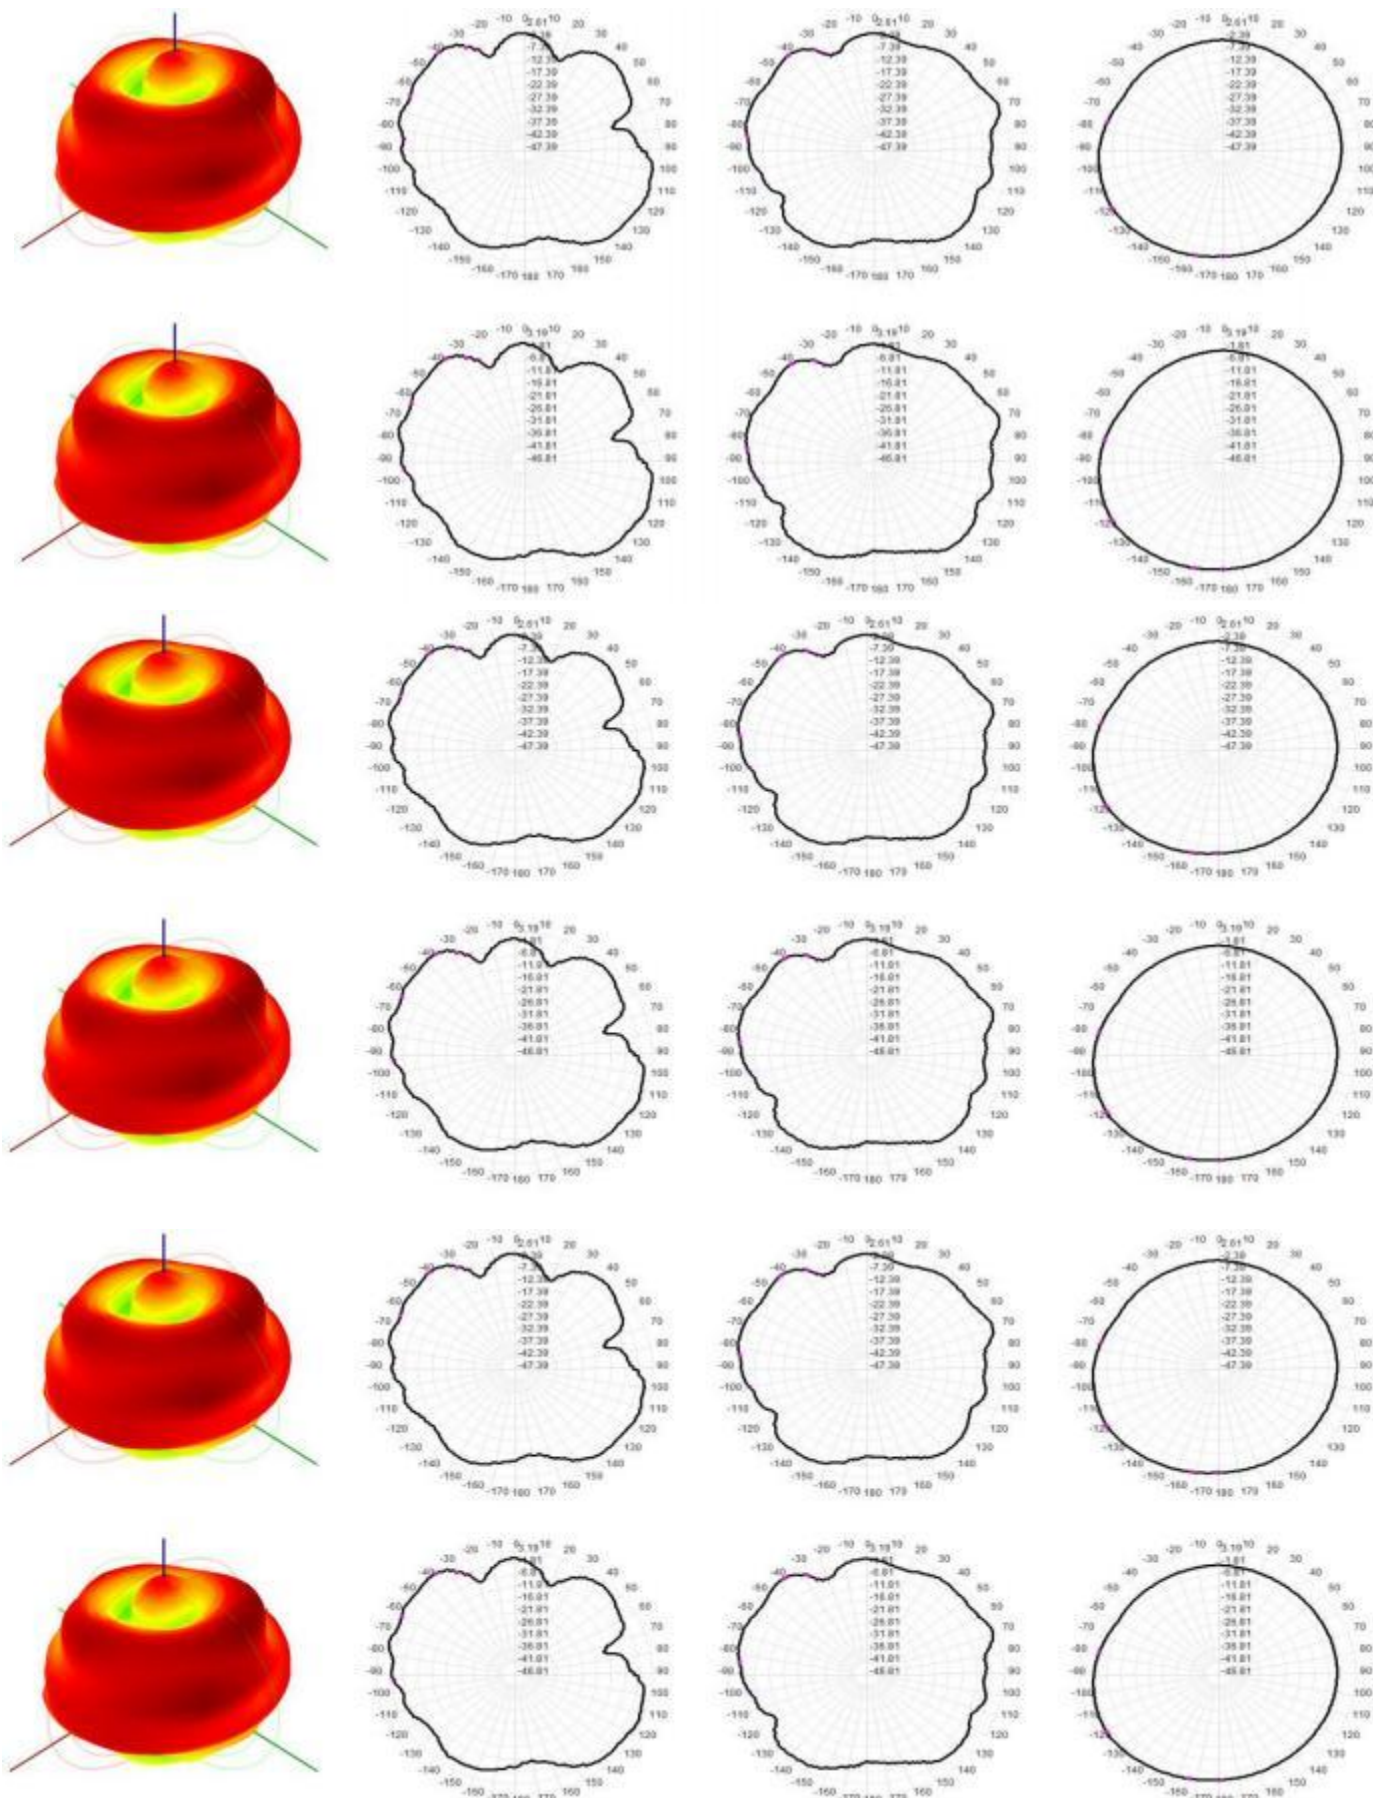




# Shenzhen Tianyiyuan Elec& Technology co., Ltd

Contact: Tang Gong 13244864327 (same as wechat number)

Address: 6th Floor, Building A, Xinlongxin Industrial Park, No.50 Fengtang Avenue, Fuhai Street,  
Baoan District, Shenzhen



## 3, recommendations and conclusions

**This report is based on the antenna electrical performance measured by the customer based on the final version of the model project of Shenzhen Huaxin Zhiying Technology Co., Ltd As can be seen from the above test data, the antenna provides good electrical performance.**

**Tianyiyuan is looking forward to your confirmation. Thank you for your cooperation!**

# Thank You !

