

On your side



# TEST REPORT

FCC/ISED RFID Test for JA900-R3F  
Certification

APPLICANT  
AI SYSTEM Co.,Ltd.

REPORT NO.  
HCT-RF-2312-FI007

DATE OF ISSUE  
December 18, 2023

Tested by  
Jin Gwan Lee

Technical Manager  
Jong Seok Lee

HCT CO., LTD.  
*BongJai Huh*  
BongJai Huh / CEO

HCT CO., LTD.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si,  
Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 Fax. +82 31 645 6401



**HCT Co., Ltd.**

74, Seocheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 Fax. +82 31 645 6401



# TEST REPORT

**REPORT NO.**  
HCT-RF-2312-FI007

**DATE OF ISSUE**  
December 18, 2023

**Additional model**

<b>Applicant</b>	AI SYSTEM Co.,Ltd. B-748, IX Tower, 27, Dongtancheomdansaneop 1-ro, Hwaseong-si, Gyeonggi-do, Republic of Korea
<b>Eut Type Model Name</b>	UHF RFID READER JA900-R3F
<b>FCC ID</b>	2BDZLJA900-R3F
<b>IC</b>	31767-JA900R3F
<b>RF Peak Output Power</b>	27.075 dBm (509.92 mW)
<b>Frequency of Operation</b>	902.75 MHz – 927.25 MHz
<b>FCC Classification</b>	FCC Part 15 Spread Spectrum Transmitter
<b>FCC Rule Part(s)</b>	Part 15 subpart C 15.247
<b>ISED Rule Part(s)</b>	RSS-247 Issue 3 (February 2023) RSS-Gen Issue 5_Amendment 2 (February 2021)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	December 18, 2023	Initial Release

### Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC/ISED Rules under normal use and maintenance. measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC/ISED Rules under normal use and maintenance.

### A2LA Statement:

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and A2LA(American Association for Laboratory Accreditation) requirements, which signed the ILAC-MRA. (A2LA Certificate No. 4114.01)

If this report is required to confirmation of authenticity, please contact to [www.hct.co.kr](http://www.hct.co.kr)

## CONTENTS

1. EUT DESCRIPTION	5
2. Requirements for Frequency Hopping Device(FHSS) transmitter(15.247)	6
3. TEST METHODOLOGY	7
EUT CONFIGURATION	7
EUT EXERCISE	7
GENERAL TEST PROCEDURES	7
DESCRIPTION OF TEST MODES	8
4. INSTRUMENT CALIBRATION	8
5. FACILITIES AND ACCREDITATIONS	8
FACILITIES	8
EQUIPMENT	8
6. ANTENNA REQUIREMENTS	9
7. MEASUREMENT UNCERTAINTY	10
8. DESCRIPTION OF TESTS	11
9. TEST SUMMARY	30
10. TEST RESULT	31
10.1 PEAK POWER	31
10.2 BAND EDGES	34
10.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99 % BW)	37
10.4 NUMBER OF HOPPING FREQUENCY	41
10.5 TIME OF OCCUPANCY (DWELL TIME)	43
10.6 SPURIOUS EMISSIONS	45
10.6.1 CONDUCTED SPURIOUS EMISSIONS	45
10.6.2 RADIATED SPURIOUS EMISSIONS	46
10.7 RECEIVER SPURIOUS EMISSIONS	55
10.8 POWERLINE CONDUCTED EMISSIONS	56
11. LIST OF TEST EQUIPMENT	58
12. ANNEX A _ TEST SETUP PHOTO	60

**1. EUT DESCRIPTION**

Model	JA900-R3F
Additional model	-
EUT Type	UHF RFID READER
Power Supply	DC 12 V
Frequency Range	902.75 MHz – 927.25 MHz
Max. RF Output Power	27.075 dBm (509.92 mW)
Modulation Type	ASK
Number of Channels	50 Channels
Antenna Specification	Antenna type: AIR PATCH Antenna Peak Gain : 2.16 dBi
Date(s) of Tests	November 06, 2023 ~ December 12, 2023
PMN (Product Marketing Number)	UHF RFID READER
HVIN (Hardware Version Identification Number)	JA900-R3F
FVIN (Firmware Version Identification Number)	V1.0
HMN (Host Marketing Name)	N/A
EUT serial numbers	Radiated : AISP23390001 Conducted : AISP23390002

## 2. Requirements for Frequency Hopping Device(FHSS) transmitter(15.247)

This RFID module has been tested by a RFID Qualification Lab, and we confirm the following:

- 1) This system is hopping pseudo-randomly.
- 2) Each frequency is used equally on the average by each transmitter.
- 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
- 4) The receiver shifts frequencies in synchronization with the transmitted signals.
  - 15.247(g): The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.
  - 15.247(h): The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.
  - RSS-247 5.1 (a): The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### 3. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) is used in the measurement of the test device.

#### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.225 under the FCC Rules Part 15 Subpart C. / RSS-Gen issue 5, RSS-247 issue 3.

#### GENERAL TEST PROCEDURES

##### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

##### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013).

## DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

## 4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. FACILITIES AND ACCREDITATIONS

### FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated March 31, 2022 (CAB identifier: KR0032).

For ISED, test facility was accepted dated April 06, 2022 (CAB identifier: KR0032).

### EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 6. ANTENNA REQUIREMENTS

### According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

This device has a standard antenna connector but, it is professionally installed in specific location, so § 15.203 Antenna requirements does not be applied to.

### According to RSS-Gen(Issue 5) Section 6.8:

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device’s antenna shall be stated, based on a measurement or on data from the antenna’s manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

## 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 ( Confidence level about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 ( Confidence level about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	5.82 ( Confidence level about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.74 ( Confidence level about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 ( Confidence level about 95 %, $k=2$ )
Radiated Disturbance (Above 40 GHz)	5.52 ( Confidence level about 95 %, $k=2$ )

## 8. DESCRIPTION OF TESTS


### 8.1. Conducted Maximum Peak Output Power

#### Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

1. For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels
2. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

#### Test Configuration



#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer. The Spectrum Analyzer is set to the peak detector mode. This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.5 in ANSI 63.10-2013 & Procedure 10(b)(6)(i) in KDB 558074 v05r02)


- 1) Span: approximately 5 times the 20 dB bandwidth, centered on a hopping channel
- 2) RBW > the 20 dB bandwidth of the emission being measured
- 3) VBW  $\geq$  RBW
- 4) Sweep = Auto
- 5) Detector = Peak
- 6) Trace = Max hold

## 8.2. Conducted Band Edge(Out of Band Emissions)

### Limit

According to § 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

### Test Configuration



### Test Procedure

This test is performed with hopping off and hopping on.

The Spectrum Analyzer is set to (6.10.4 in ANSI 63.10-2013 & Procedure 8.5 and 8.6 in KDB 558074 v05r02)


- 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation
- 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (OBW/RBW)]$  below the reference level.
- 3) Attenuation: Auto (at least 10 dB preferred).
- 4) Sweep time: Coupled.
- 5) RBW: 100 kHz
- 6) VBW: 300 kHz
- 7) Detector: Peak
- 8) Trace: Max hold

### 8.3. Frequency Separation & 20 dB Bandwidth

#### Limit

According to § 15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

#### Test Configuration

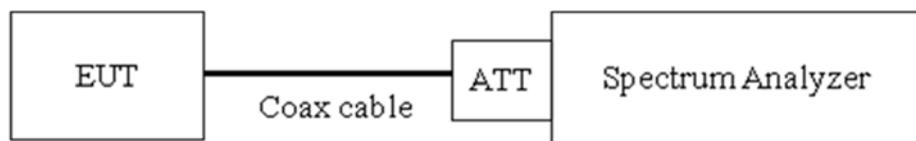

#### Test Procedure(Frequency Separation)

The Channel Separation test is performed with hopping on.

And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.2 in ANSI 63.10-2013 & Procedure 10(b)(6)(iii) in KDB 558074 v05r02)

- 1) Span: Wide enough to capture the peaks of two adjacent channels
- 2) RBW: Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3) VBW  $\geq$  RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.
- 8) Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

**Test Procedure (20 dB Bandwidth)**

And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (6.9.2 in ANSI 63.10-2013)


- 1) Span: Set between two times and five times the OBW
- 2) RBW: 1 % to 5 % of the OBW.
- 3) VBW  $\geq 3 \times$  RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.

#### 8.4. Number of Hopping Frequencies

##### Limit

According to § 15.247(a)(1)(i), For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies

##### Test Configuration

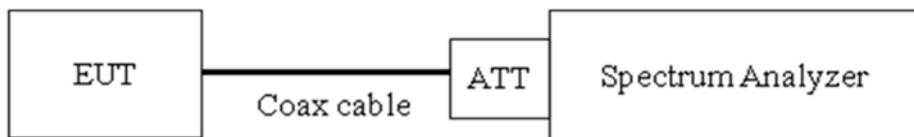

##### Test Procedure

The Bluetooth frequency hopping function of the EUT was enabled.

The Spectrum Analyzer is set to (7.8.3 in ANSI 63.10-2013 & Procedure 10(b)(4) in KDB 558074 v05r02)


- 1) Span: the frequency band of operation
- 2) RBW: To identify clearly the individual channels, set the RBW to less than 30 % of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 3) VBW  $\geq$  RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) Allow the trace to stabilize.

## 8.5. Time of Occupancy

### Limit

According to § 15.247(a)(1)(i), For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period

### Test Configuration

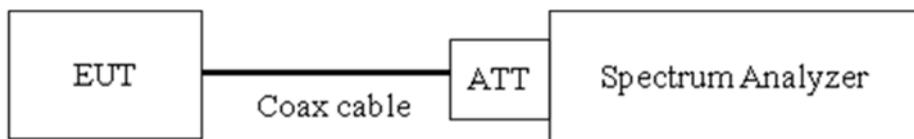

### Test Procedure

This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.4 in ANSI 63.10-2013 & Procedure 10(b)(6)(iv) in KDB 558074 v05r02)

- 1) Span: Zero span, centered on a hopping channel
- 2) RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1 / T$ , where T is the expected dwell time per channel.
- 3) Sweep = as necessary to capture the entire dwell time per hopping channel
- 4) Detector: Peak
- 5) Trace: Max hold


The marker-delta function was used to determine the dwell time.

## 8.6. Conducted Spurious Emissions

### Limit

Conducted > 20 dBc

### Test Configuration

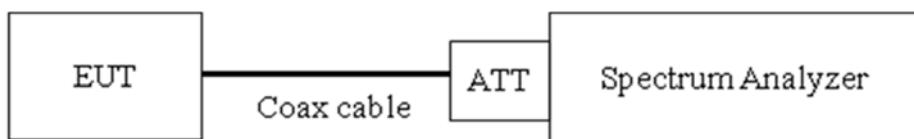

### Test Procedure

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer.

The Spectrum Analyzer is set to (7.8.8 in ANSI 63.10-2013 & Procedure 8.5 and 8.6 in KDB 558074 v05r02)

- 1) Span: 30 MHz to 10 times the operating frequency in GHz.
- 2) RBW: 100 kHz
- 3) VBW: 300 kHz
- 4) Sweep: Coupled
- 5) Detector: Peak

Measurements are made over the 30 MHz to 10 GHz range with the transmitter set to the lowest, middle, and highest channels.

This test is performed with hopping off.

**Factors for frequency**

Freq(MHz)	Factor(dB)
30	20.09
100	20.10
200	20.14
300	20.15
400	20.19
500	20.20
600	20.27
700	20.30
800	20.37
900	20.43
902	20.35
928	20.35
1 000	20.68
2 000	20.75
2 400	20.83
2 500	20.83
3 000	20.96
4 000	21.20
5 000	21.68
5 700	22.12
5 800	22.20
6 000	22.36
7 000	22.53
8 000	22.66
9 000	22.84
10 000	23.07
11 000	22.97
12 000	23.03
13 000	23.36
14 000	23.52
15 000	23.60
16 000	23.70
17 000	23.75
18 000	23.90
19 000	24.06
20 000	24.17
21 000	24.26
22 000	24.50
23 000	24.62
24 000	24.78
25 000	24.90

Note :

1. 902 ~ 928 MHz is fundamental frequency range.
2. Factor = Cable loss + Attenuator

**8.7. Radiated Test****Limit****FCC**

Frequency (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30

**ISED**


Frequency (MHz)	Field Strength ( $\mu$ A/m)	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30

**FCC&ISED**


Frequency (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

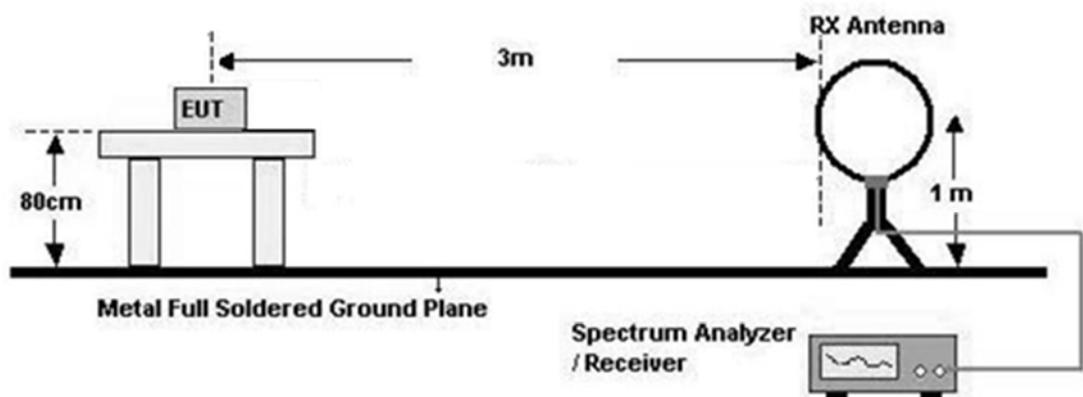

30 MHz - 1 GHz

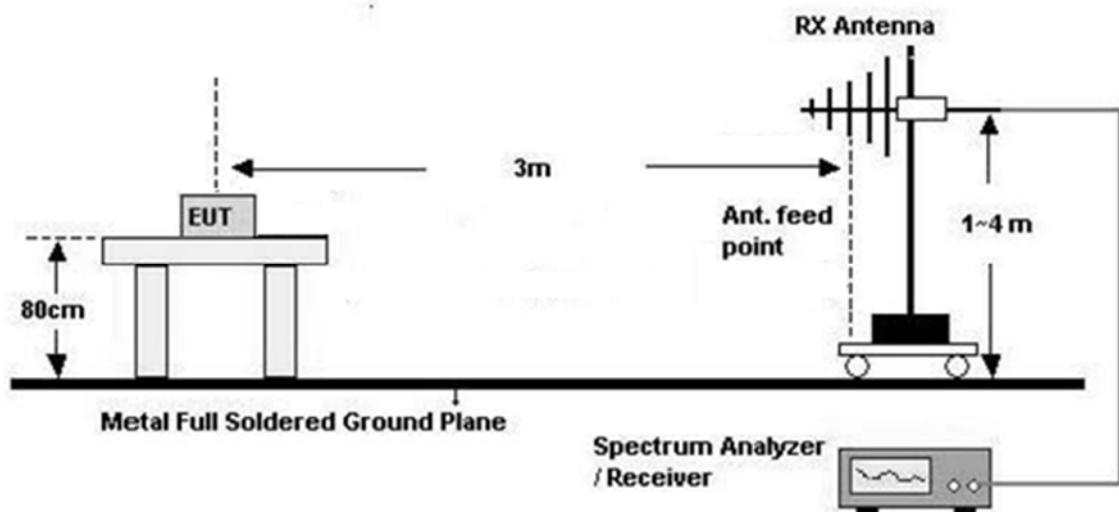

Above 1 GHz

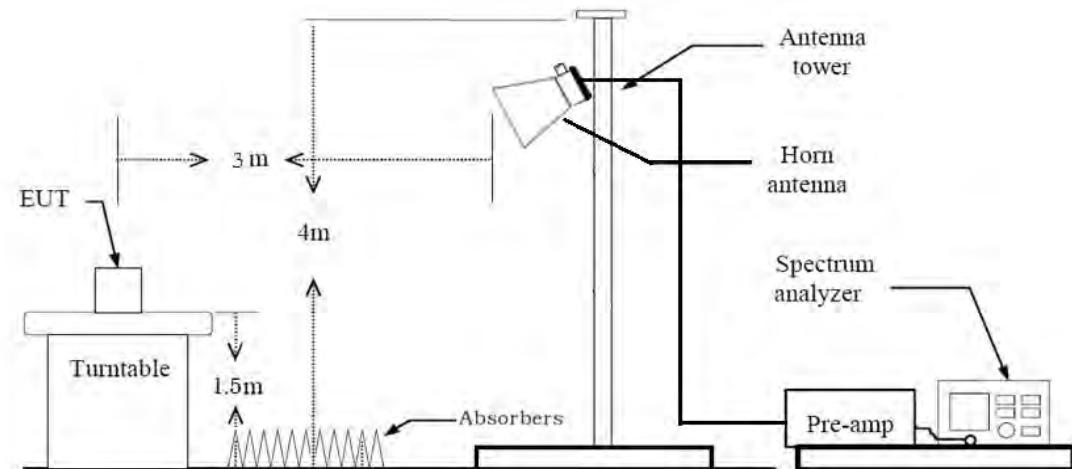

#### Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor( $0.009 \text{ MHz} - 0.490 \text{ MHz}$ ) =  $40\log(3 \text{ m}/300 \text{ m}) = -80 \text{ dB}$   
Measurement Distance : 3 m
7. Distance Correction Factor( $0.490 \text{ MHz} - 30 \text{ MHz}$ ) =  $40\log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$   
Measurement Distance : 3 m
8. Spectrum Setting
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Maxhold
  - RBW = 9 kHz
  - VBW  $\geq 3 \times \text{RBW}$
9. Total = Measured Level + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

**Test Procedure of Radiated spurious emissions(Below 1 GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
  - (1) Measurement Type(Quasi-peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Quasi-Peak
    - RBW = 120 kHz
7. Total = Measured Level
  - We apply to the offset in range 30 MHz - 1 GHz
  - The offset = Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. Radiated test is performed with hopping off.
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. Spectrum Setting
  - (1) Measurement Type(Peak & Average):
    - Measured Frequency Range 1 GHz – 10<sup>th</sup> Harmonics
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Average):
    - Average value of pulsed emissions
    - Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission and pulsed operation is employed, the average measurement shall determine from the peak field strength after correcting for the worst-case duty cycle as described in Number.12 (On Page. 23)
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
11. Total (Measurement Type : Peak)
  - = Peak Measured Value

Total (Measurement Type : Average)

= Peak Measured Value + D.C.C.F

- We apply to the offset in range 1 GHz - 18 GHz
- The offset = Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) - Amp Gain(A.G)

12. Duty Cycle Correction Factor

- a. The 100 ms period that contains the maximum “on time”
 

The maximum “on time” of the pulse train = 9.966 ms, where  $\tau$  = Worst pulse width
- b. Number of Pulse Train =  $H = 1$
- c. All of the pulses within the pulse train =  $\tau$  [ms] x  $H$  = 9.966 ms
- d. Duty Cycle Correction =  $20\log(\text{All of the pulses within the pulse train} / 100\text{ms})$  dB = -20.03 dB

## 8.8. AC Power line Conducted Emissions

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 <sup>(a)</sup>	56 to 46 <sup>(a)</sup>
0.50 to 5	56	46
5 to 30	60	50

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

### 8.9. Receiver Spurious Emissions

#### Limit


Frequency (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

#### Test Configuration


30 MHz - 1 GHz

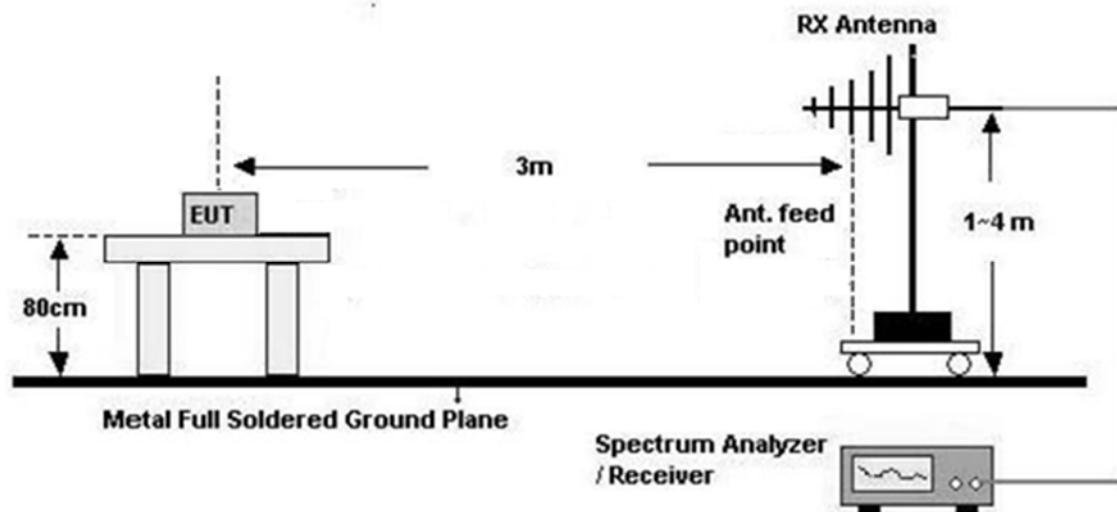

**Test Procedure of Receiver Spurious Emissions (Below 1GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 100 kHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Quasi-peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Quasi-Peak
    - RBW = 120 kHz
7. Total = Measured Level + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Above 1 GHz

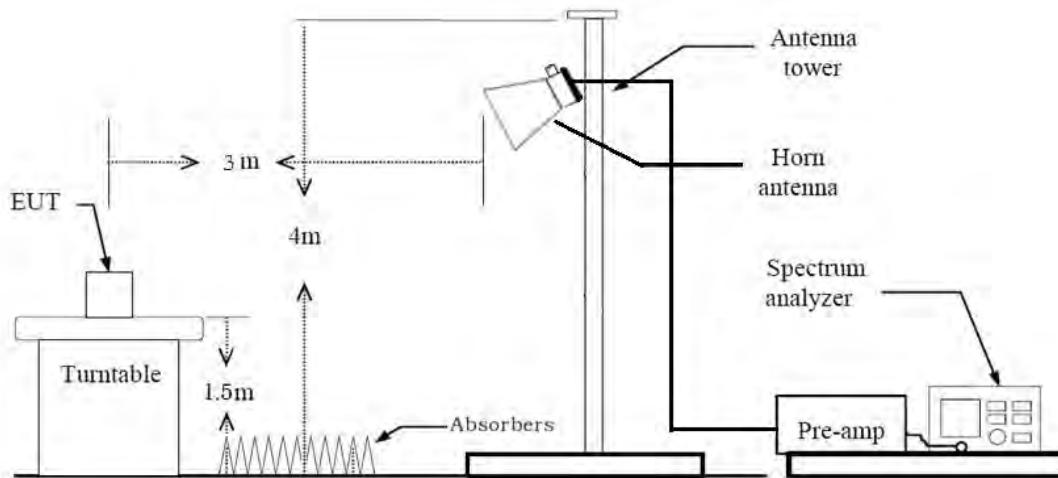

#### Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq$  3 x RBW

(2) Measurement Type(Average):

- Duty cycle < 98%, duty cycle variations are less than  $\pm 2\%$
- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz

- $VBW \geq 3 \times RBW$
- Sweep time = auto.

8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

9. Total = Measured Level + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

## 8.10. Worst case configuration and mode

### Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone + Core
  - Worstcase : Stand alone + Core
2. EUT Axis
  - Radiated Spurious Emissions : Z
3. All Antennas of operation were investigated and the test results are reported worst case Antenna.
  - Supported Antenna : Ant. 1, Ant. 2, Ant. 3, Ant. 4
  - Worst case : Ant. 3
4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
  - Position : Horizontal, Vertical, Parallel to the ground plane

### AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone + Core
  - Worstcase : Stand alone + Core

### Conducted test

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone + Core
  - Worstcase : Stand alone + Core
2. All Antennas of operation were investigated and the test results are reported worst case Antenna.  
(Except for Peak Power)
  - Supported Antenna : Ant. 1, Ant. 2, Ant. 3, Ant. 4
  - Worst case : Ant. 3

### Note:

1. Core is inbox with EUT.
- Core applied when the EUT uses the power adapter port. (cable 5 turns)
- Core details
  1. Manufacturer : TDK
  2. Model : ZCAT3035-1330

**9. TEST SUMMARY**

Test Description	FCC Part Section(s)	ISED Part Section(s)	Test Limit	Test Condition	Test Result
20 dB Bandwidth	§ 15.247(a)(1)(i)	RSS-247, 5.1 c)	< 250 kHz	Conducted	PASS
Occupied Bandwidth	N/A	RSS-GEN, 6.7	N/A		N/A
Conducted Maximum Peak Output Power	§ 15.247(b)(2)	RSS-247, 5.4 a)	< 1 W		PASS
Carrier Frequency Separation	§ 15.247(a)(1)	RSS-247, 5.1 b)	> 25 kHz or > 20 dB BW of hopping channel, whichever is greater.		PASS
Number of Hopping Frequencies	§ 15.247(a)(1)(i)	RSS-247, 5.1 c)	≥ 50		PASS
Time of Occupancy	§ 15.247(a)(1)(i)	RSS-247, 5.1 c)	< 400 ms (20s)		PASS
Conducted Spurious Emissions	§ 15.247(d)	RSS-247, 5.5	> 20 dB for all out-of band emissions		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	RSS-247, 5.5	> 20 dB for all out-of band emissions		PASS
AC Power line Conducted Emissions	§ 15.207(a)	RSS-GEN, 8.8	cf. Section 8.8		PASS
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	RSS-GEN, 8.9	cf. Section 8.7	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	RSS-GEN, 8.9 RSS-GEN, 8.10	cf. Section 8.7		PASS
Receiver Spurious Emissions	N/A	RSS-GEN, 7	cf. Section 8.9		PASS

**10. TEST RESULT****10.1 PEAK POWER****-Ant. 1-**

Channel	Frequency (MHz)	Output Power		Limit (W)	Result
		(dBm)	(mW)		
1	902.75	27.048	506.76	1	Pass
26	915.25	26.188	415.72		Pass
50	927.25	24.793	301.51		Pass

**-Ant. 2-**

Channel	Frequency (MHz)	Output Power		Limit (W)	Result
		(dBm)	(mW)		
1	902.75	27.013	502.69	1	Pass
26	915.25	26.167	413.71		Pass
50	927.25	24.709	295.73		Pass

**-Ant. 3-**

Channel	Frequency (MHz)	Output Power		Limit (W)	Result
		(dBm)	(mW)		
1	902.75	27.075	509.92	1	Pass
26	915.25	26.210	417.83		Pass
50	927.25	24.826	303.81		Pass

**-Ant. 4-**

Channel	Frequency (MHz)	Output Power		Limit (W)	Result
		(dBm)	(mW)		
1	902.75	26.967	497.39	1	Pass
26	915.25	26.089	406.35		Pass
50	927.25	24.599	288.34		Pass

**□ Test Plots****Note:**

In order to simplify the report, Attached Plots were only the worst case.

Worst case : Ant. 3

Peak Power (Ant. 3 Channel 0)



## Peak Power (Ant. 3 Channel 26)



## Peak Power (Ant. 3 Channel 50)



## 10.2 BAND EDGES

- Without hopping



Frequency (MHz)	Channel No.	Position	Measured Level (dB)	Limit	Margin	Result
				(dBc)	(dBc)	
902.75	1	Lower	68.614	20	48.614	Pass
927.25	50	Upper	64.507		44.507	Pass

- With hopping

Frequency (MHz)	Channel	Position	Measured Level (dB)	Limit	Margin	Result
				(dBc)	(dBc)	
902.75	1	Lower	60.998	20	40.998	Pass
927.25	50	Upper	65.552		45.552	Pass

## □ Test Plots

## Without Hopping

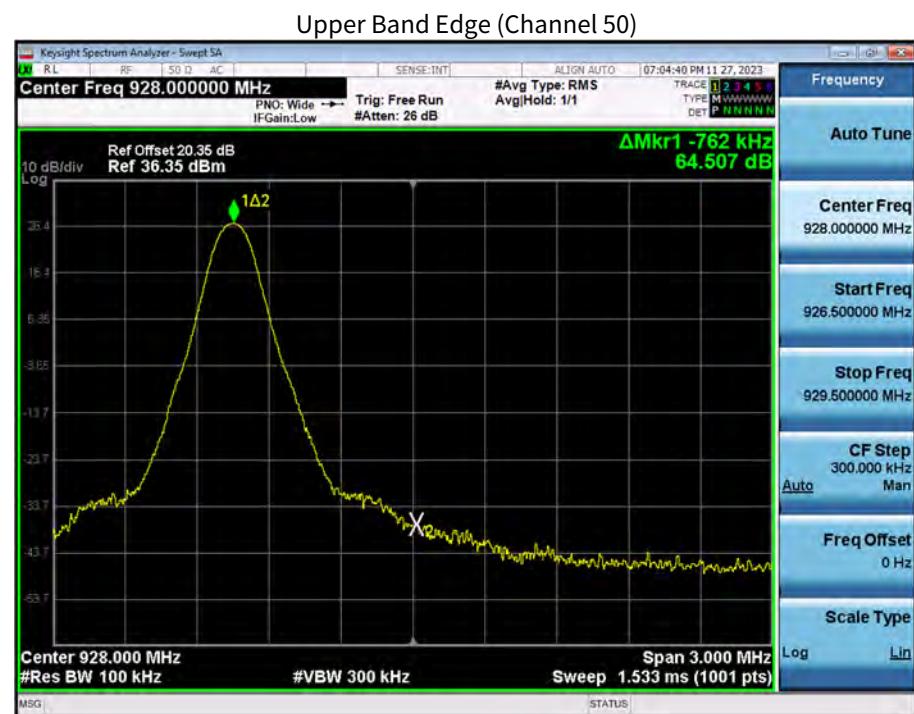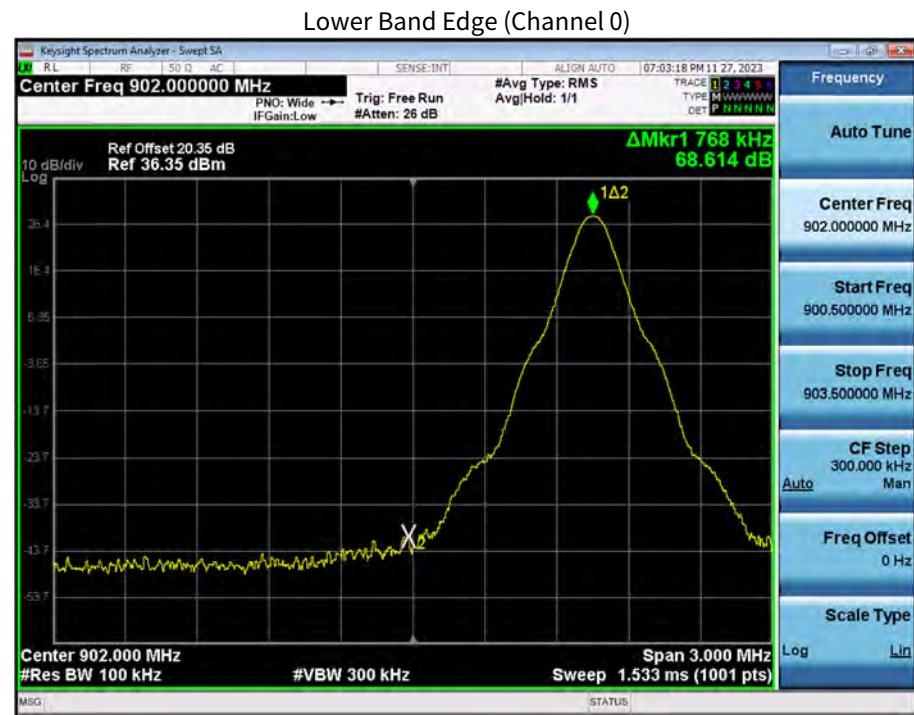

### With hopping

### Lower Band Edge (Channel 0)



### Upper Band Edge (Channel 50)




**10.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99 % BW)**

RFID				Limit (kHz)	Result
Channel Separation (kHz)	Ch. No	Frequency [MHz]	20 dB Bandwidth (kHz)		
499.5	1	902.75	146.3	>25 or > 20 dB BW of hopping channel, Whichever is greater	Pass
	26	915.25	160.4		
	50	927.25	157.6		

Occupied Bandwidth (99 % BW )


99 % BW (kHz)			
RFID	Channel 1	Channel 26	Channel 50
	165.76	176.22	166.80

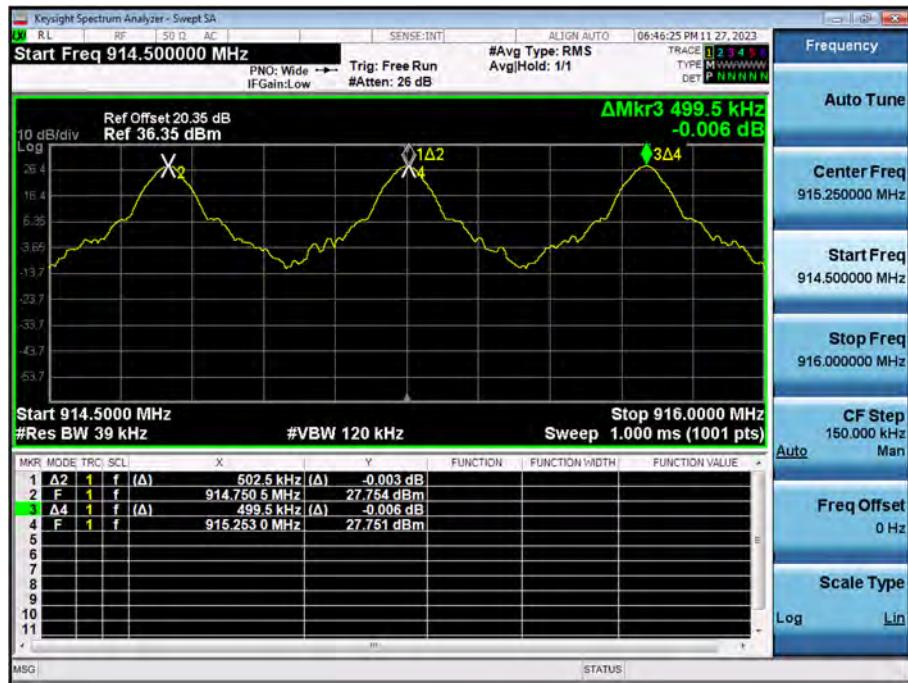**□ Test Plots****Channel Separation**

## 20 dB Bandwidth &amp; Occupied Bandwidth (Channel 0)



## 20 dB Bandwidth &amp; Occupied Bandwidth (Channel 26)

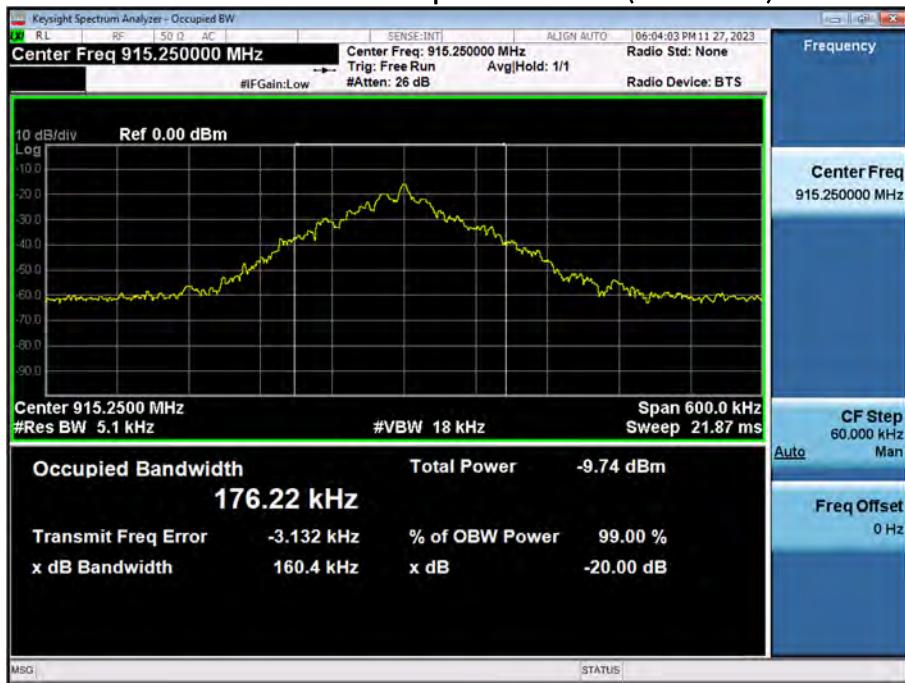


## 20 dB Bandwidth &amp; Occupied Bandwidth (Channel 50)



**10.4 NUMBER OF HOPPING FREQUENCY**

Result (No. of CH)	Limit
50	>=50

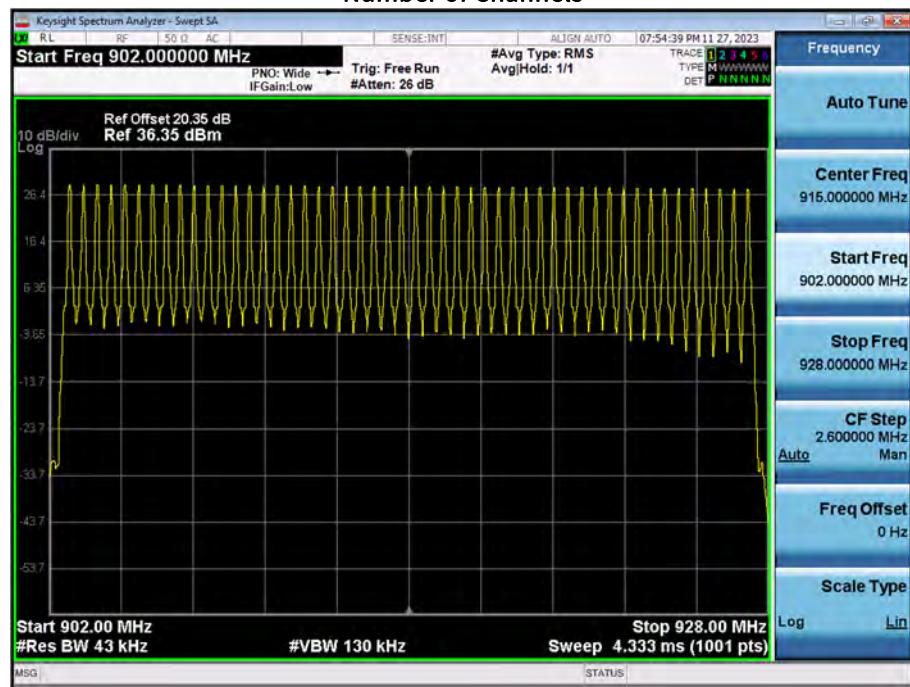**Test Plots****Number of Channels**

**10.5 TIME OF OCCUPANCY (DWELL TIME)**

Mode	Frequency (MHz)	Pulse Time (ms)		Dwell Time (ms)
RFID	902.3	Pulse1(1△2)	9.365	41.664
		Pulse2(3△4)	9.966	
		Pulse3(5△6)	9.966	
		Pulse4(7△8)	9.966	
		Pulse5(9△10)	2.401	


Mode	Frequency (MHz)	Dwell Time (ms)	Hops in 20s	Total Dwell Time (ms)
RFID	902.3	41.664	1	41.664

**Note :**


Dwell time is the sum of each pulse time.

## □ Test Plots

## Pulse Time

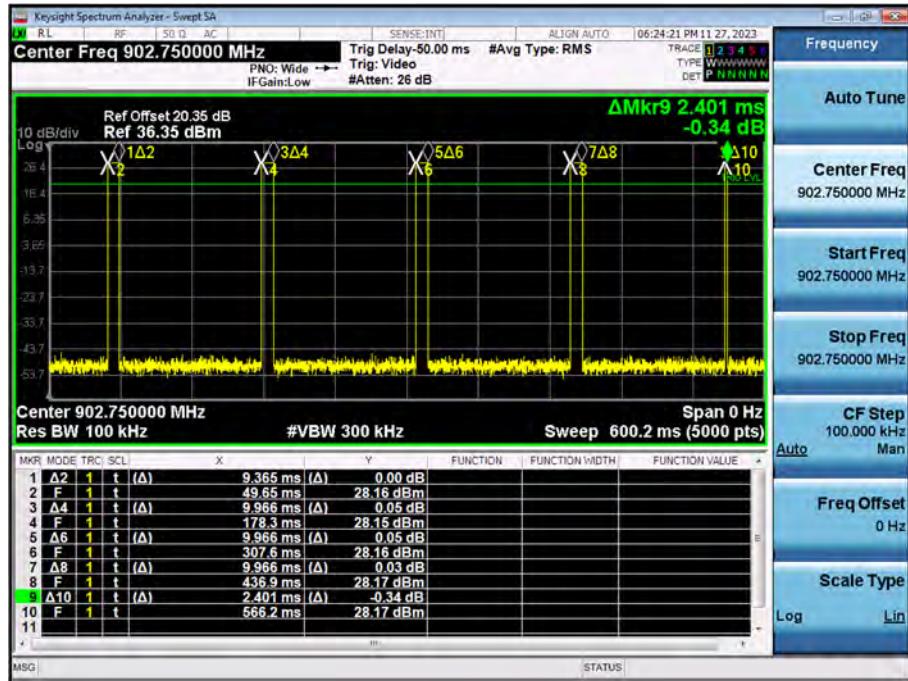

## Hops / channel @ 20s = 1 (The highest emission is only relevant)

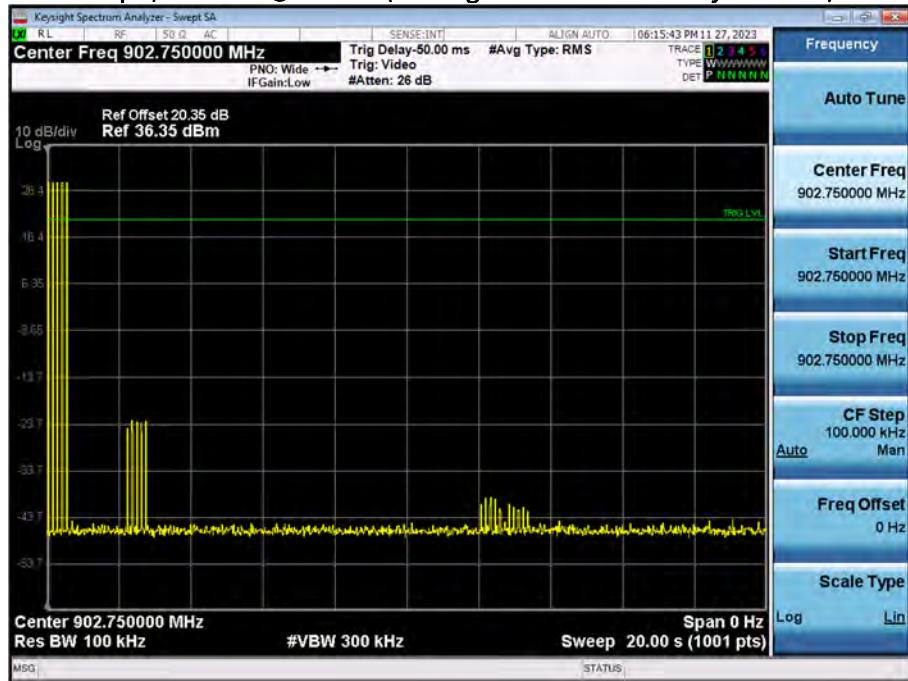

## 10.6 SPURIOUS EMISSIONS

### 10.6.1 CONDUCTED SPURIOUS EMISSIONS


Test Result : please refer to the plot below.

In order to simplify the report, attached plot was only the worst case mode.

#### Worst case Mode : Ant.3\_Channel 0 (902.75 MHz)

##### □ Test Plots

30 MHz ~ 26 GHz

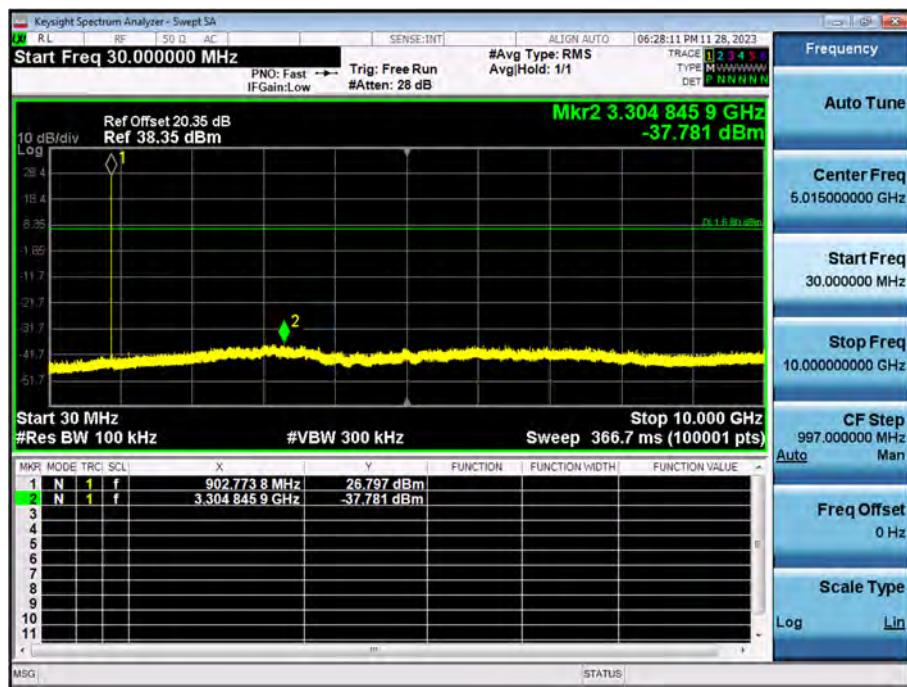

##### Note :

Limit : 6.797 dBm

**10.6.2 RADIATED SPURIOUS EMISSIONS****Frequency Range : 9 kHz – 30 MHz**

Frequency	Measured Value	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V/m	dB/m	dB	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No Critical peaks found							

**Note:**

1. The Measured of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor =  $40\log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dB $\mu$ V) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

**Frequency Range : Below 1 GHz**

Frequency	Measured Value	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V/m	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
38.58	30.00	H	30.00	40	10
37.57	38.07	V	38.07	40	1.93


**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
2. Radiated test is performed with hopping off.

**RESULT PLOTS**

Note :

In order to simplify the report, Only the worst case plot was reported.

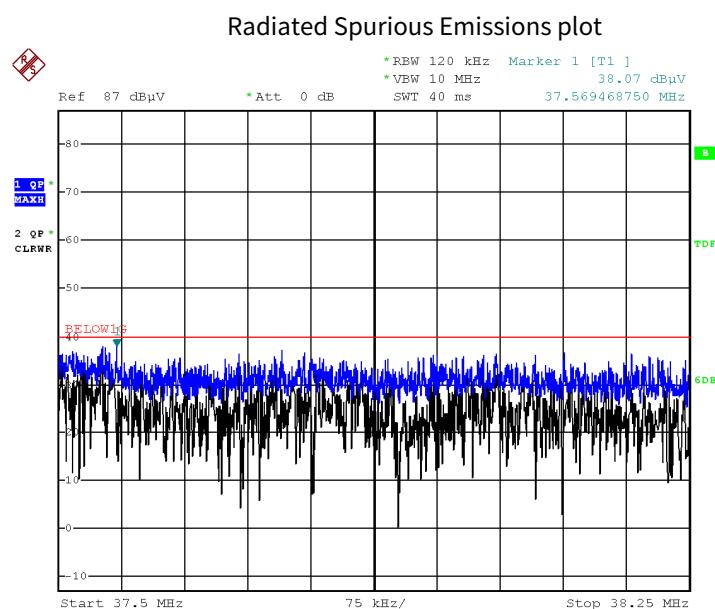

Date: 6.JAN.2003 23:56:46

## Frequency Range : Above 1 GHz

## Channel : 1 (902.75 MHz)

Frequency	Measured Level	D.C.C.F	ANT. POL	Total	Limit	Margin	Detect
[MHz]	[dB $\mu$ V]	[dB]	[H/V]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]	
2 708.25	68.54	0.00	H	68.54	73.98	5.44	PK
2 708.25	68.54	-20.03	H	48.51	53.98	5.47	AV
3 611.00	58.70	0.00	H	58.70	73.98	15.28	PK
3 611.00	58.70	-20.03	H	38.67	53.98	15.31	AV
4 513.75	52.46	0.00	H	52.46	73.98	21.52	PK
4 513.75	52.46	-20.03	H	32.43	53.98	21.55	AV
5 416.50	58.69	0.00	H	58.69	73.98	15.29	PK
5 416.50	58.69	-20.03	H	38.66	53.98	15.32	AV
8 124.75	62.80	0.00	H	62.80	73.98	11.18	PK
8 124.75	62.80	-20.03	H	42.77	53.98	11.21	AV
9 027.50	62.55	0.00	H	62.55	73.98	11.43	PK
9 027.50	62.55	-20.03	H	42.52	53.98	11.46	AV

Note :

1. Non Restricted Band refer to Conducted Spurious emission test result (20 dBc)

## Channel : 1 (902.75 MHz)

Frequency	Measured Level	D.C.C.F	ANT. POL	Total	Limit	Margin	Detect
[MHz]	[dB $\mu$ V]	[dB]	[H/V]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]	
2 708.25	67.61	0.00	V	67.61	73.98	6.37	PK
2 708.25	67.61	-20.03	V	47.58	53.98	6.40	AV
3 611.00	58.02	0.00	V	58.02	73.98	15.96	PK
3 611.00	58.02	-20.03	V	37.99	53.98	15.99	AV
4 513.75	51.28	0.00	V	51.28	73.98	22.70	PK
4 513.75	51.28	-20.03	V	31.25	53.98	22.73	AV
5 416.50	57.76	0.00	V	57.76	73.98	16.22	PK
5 416.50	57.76	-20.03	V	37.73	53.98	16.25	AV
8 124.75	60.96	0.00	V	60.96	73.98	13.02	PK
8 124.75	60.96	-20.03	V	40.93	53.98	13.05	AV
9 027.50	61.58	0.00	V	61.58	73.98	12.40	PK
9 027.50	61.58	-20.03	V	41.55	53.98	12.43	AV

Note :

1. Non Restricted Band refer to Conducted Spurious emission test result (20 dBc)

## Channel : 26 (915.25 MHz)

Frequency	Measured Level	D.C.C.F	ANT. POL	Total	Limit	Margin	Detect
[MHz]	[dB $\mu$ V]	[dB]	[H/V]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]	
2 745.75	70.85	0.00	H	70.85	73.98	3.13	PK
2 745.75	70.85	-20.03	H	50.82	53.98	3.16	AV
3 661.00	61.21	0.00	H	61.21	73.98	12.77	PK
3 661.00	61.21	-20.03	H	41.18	53.98	12.80	AV
4 576.25	52.03	0.00	H	52.03	73.98	21.95	PK
4 576.25	52.03	-20.03	H	32.00	53.98	21.98	AV
7 322.00	60.71	0.00	H	60.71	73.98	13.27	PK
7 322.00	60.71	-20.03	H	40.68	53.98	13.30	AV
8 237.25	63.05	0.00	H	63.05	73.98	10.93	PK
8 237.25	63.05	-20.03	H	43.02	53.98	10.96	AV
9 152.50	59.67	0.00	H	59.67	73.98	14.31	PK
9 152.50	59.67	-20.03	H	39.64	53.98	14.34	AV

Note :

1. Non Restricted Band refer to Conducted Spurious emission test result (20 dBc)

## Channel : 26 (915.25 MHz)

Frequency [MHz]	Measured Level [dB $\mu$ V]	D.C.C.F [dB]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Detect
2 745.75	67.93	0.00	V	67.93	73.98	6.05	PK
2 745.75	67.93	-20.03	V	47.90	53.98	6.08	AV
3 661.00	60.57	0.00	V	60.57	73.98	13.41	PK
3 661.00	60.57	-20.03	V	40.54	53.98	13.44	AV
4 576.25	51.97	0.00	V	51.97	73.98	22.01	PK
4 576.25	51.97	-20.03	V	31.94	53.98	22.04	AV
7 322.00	58.97	0.00	V	58.97	73.98	15.01	PK
7 322.00	58.97	-20.03	V	38.94	53.98	15.04	AV
8 237.25	60.42	0.00	V	60.42	73.98	13.56	PK
8 237.25	60.42	-20.03	V	40.39	53.98	13.59	AV
9 152.50	60.35	0.00	V	60.35	73.98	13.63	PK
9 152.50	60.35	-20.03	V	40.32	53.98	13.66	AV

Note :

1. Non Restricted Band refer to Conducted Spurious emission test result (20 dBc)

## Channel : 50 (927.25 MHz)

Frequency [MHz]	Measured Level [dB $\mu$ V]	D.C.C.F [dB]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Detect
2 781.75	68.21	0.00	H	68.21	73.98	5.77	PK
2 781.75	68.21	-20.03	H	48.18	53.98	5.80	AV
3 709.00	59.78	0.00	H	59.78	73.98	14.20	PK
3 709.00	59.78	-20.03	H	39.75	53.98	14.23	AV
4 636.25	50.27	0.00	H	50.27	73.98	23.71	PK
4 636.25	50.27	-20.03	H	30.24	53.98	23.74	AV
7 418.00	63.43	0.00	H	63.43	73.98	10.55	PK
7 418.00	63.43	-20.03	H	43.40	53.98	10.58	AV
8 345.25	63.47	0.00	H	63.47	73.98	10.51	PK
8 345.25	63.47	-20.03	H	43.44	53.98	10.54	AV

Note :

1. Non Restricted Band refer to Conducted Spurious emission test result (20 dBc)

## Channel : 50 (927.25 MHz)

Frequency [MHz]	Measured Level [dB $\mu$ V]	D.C.C.F [dB]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Detect
2 781.75	67.54	0.00	V	67.54	73.98	6.44	PK
2 781.75	67.54	-20.03	V	47.51	53.98	6.47	AV
3 709.00	59.78	0.00	V	59.78	73.98	14.20	PK
3 709.00	59.78	-20.03	V	39.75	53.98	14.23	AV
4 636.25	48.78	0.00	V	48.78	73.98	25.20	PK
4 636.25	48.78	-20.03	V	28.75	53.98	25.23	AV
7 418.00	61.25	0.00	V	61.25	73.98	12.73	PK
7 418.00	61.25	-20.03	V	41.22	53.98	12.76	AV
8 345.25	61.54	0.00	V	61.54	73.98	12.44	PK
8 345.25	61.54	-20.03	V	41.51	53.98	12.47	AV

Note :


1. Non Restricted Band refer to Conducted Spurious emission test result (20 dBc)

## RESULT PLOTS

Note :

In order to simplify the report, Only the worst case plot was reported.

Radiated Spurious Emissions plot – Average & Peak Result

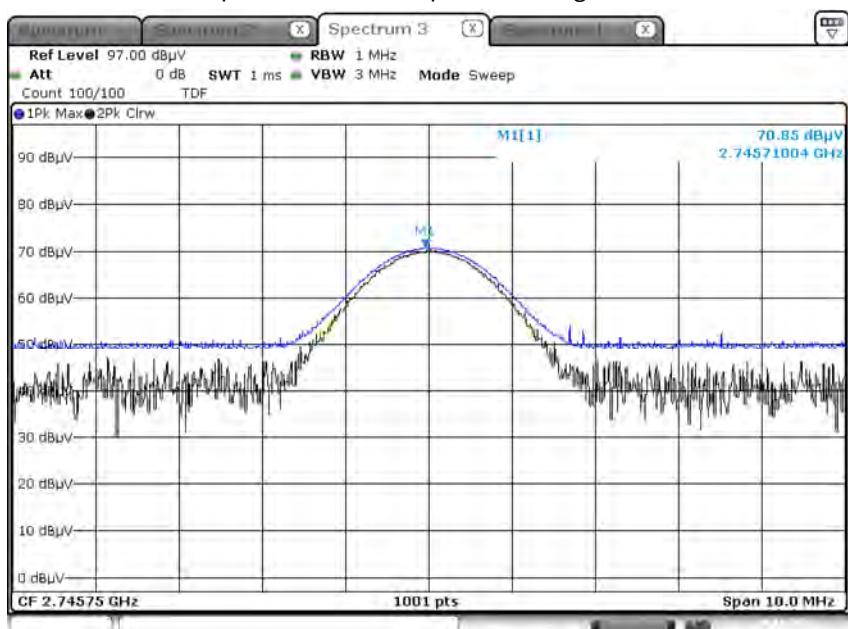

## 10.7 RECEIVER SPURIOUS EMISSIONS

### Frequency Range : Below 1 GHz

Frequency	Measured Value	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V/m	dB/m	dB	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB

No Critical peaks found

#### Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

### Frequency Range : Above 1 GHz

Frequency	Measured Value	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V/m	dB/m	dB	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB

No Critical peaks found

**10.8 POWERLINE CONDUCTED EMISSIONS****Conducted Emissions**


Test

1 / 2

**Test Report****Common Information**

EUT : JA900-R3F  
 Operating Conditions : RFID  
 Comment :

Full Spectrum

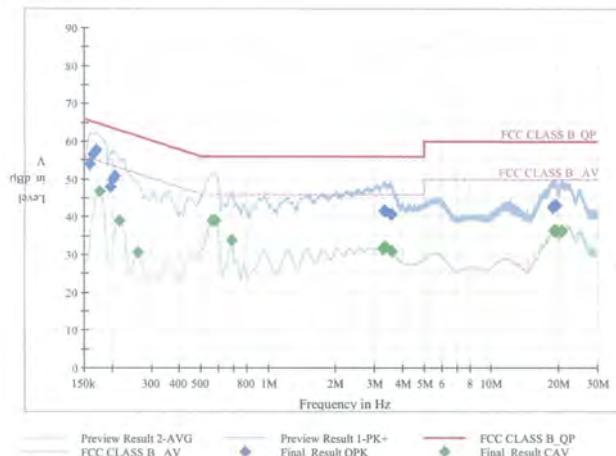**Final\_Result\_QPK**

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.1590	53.89	65.52	11.62	9.000	L1	9.7
0.1635	56.41	65.28	8.88	9.000	N	9.7
0.1703	57.68	64.95	7.27	9.000	L1	9.7
0.1973	48.00	63.73	15.72	9.000	L1	9.7
0.2018	49.90	63.54	13.64	9.000	L1	9.7
0.2063	50.84	63.36	12.51	9.000	L1	9.7
3.3080	41.64	56.00	14.36	9.000	L1	10.0
3.3170	41.46	56.00	14.54	9.000	L1	10.0
3.3463	41.54	56.00	14.46	9.000	L1	10.0
3.3530	41.57	56.00	14.43	9.000	L1	10.0
3.5353	40.75	56.00	15.25	9.000	L1	10.0
3.5803	40.71	56.00	15.29	9.000	L1	10.0
18.9748	42.49	60.00	17.51	9.000	N	10.5
18.9860	42.76	60.00	17.24	9.000	N	10.5
19.0265	42.74	60.00	17.26	9.000	N	10.5
19.1435	42.72	60.00	17.28	9.000	N	10.5
19.2425	42.99	60.00	17.01	9.000	N	10.5
19.4720	42.94	60.00	17.06	9.000	N	10.5

2023-12-01

오전 9:15:20

Test

2 / 2

**Final Result CAV**

Frequency (MHz)	CAverage (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.1748	46.82	54.73	7.91	9.000	N	9.7
0.2153	38.95	53.00	14.05	9.000	N	9.7
0.2603	30.49	51.42	20.93	9.000	N	9.7
0.5563	39.03	46.00	6.97	9.000	L1	9.8
0.5810	39.01	46.00	6.99	9.000	N	9.8
0.6823	33.88	46.00	12.12	9.000	N	9.8
3.2585	31.47	46.00	14.53	9.000	L1	10.0
3.2768	31.68	46.00	14.32	9.000	L1	10.0
3.3215	31.61	46.00	14.39	9.000	L1	10.0
3.3328	31.91	46.00	14.09	9.000	L1	10.0
3.3485	32.05	46.00	13.95	9.000	L1	10.0
3.5803	30.97	46.00	15.03	9.000	L1	10.0
19.1930	36.31	50.00	13.69	9.000	N	10.5
19.2988	36.12	50.00	13.88	9.000	N	10.5
19.3843	36.42	50.00	13.58	9.000	N	10.5
19.4720	36.29	50.00	13.71	9.000	N	10.5
20.5993	35.97	50.00	14.03	9.000	N	10.5
20.7680	36.45	50.00	13.55	9.000	N	10.5

2023-12-01

오전 9:15:20

**11. LIST OF TEST EQUIPMENT**Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/02/2024	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	05/26/2024	Annual
Temperature Chamber	SU-642	ESPEC	93008124	02/22/2024	Annual
Signal Analyzer	N9030A	Keysight	MY55410508	09/04/2024	Annual
Power Meter	N1911A	Agilent	MY45100523	03/06/2024	Annual
Power Sensor	N1921A	Agilent	MY57820067	03/06/2024	Annual
Directional Coupler	87300B	Agilent	3116A03621	10/30/2024	Annual
Power Splitter	11667B	Hewlett Packard	10545	02/06/2024	Annual
DC Power Supply	E3632A	Agilent	KR75305528	01/03/2024	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C-010	Agilent	08285	06/02/2024	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	03/08/2024	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A
Bluetooth Tester	CBT	Rohde & Schwarz	100808	02/16/2024	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	S3AM	08/03/2025	Biennial
Controller	EM2090	Emco	060520	N/A	N/A
Turn Table	N/A	Ets	N/A	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/17/2024	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	08/16/2024	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1191	11/07/2025	Biennial
Horn Antenna (15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Amp & Filter Bank Switch Controller	FBSM-01A	TNM system	0	N/A	N/A
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	01/05/2024	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	06/12/2024	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	06/12/2024	Annual
Band Reject Filter	WRCJV5100/5850-40/50-8EKK	Wainwright Instruments	1	02/09/2024	Annual
RF Switching System	FBSR-03A (3G HPF+LNA)	T&M SYSTEM	S3L1	11/17/2024	Annual
RF Switching System	FBSR-03A (10dB ATT+LNA)	T&M SYSTEM	S3L2	11/17/2024	Annual
RF Switching System	FBSR-03A (7G HPF+LNA)	T&M SYSTEM	S3L3	11/17/2024	Annual
RF Switching System	FBSR-03A (3dB ATT+LNA)	T&M SYSTEM	S3L4	11/17/2024	Annual
High Pass Filter	F5	Wainwright Instruments	F5	05/16/2024	Annual
Power Amplifier	CBL18265035	CERNEX	22966	11/17/2024	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/02/2024	Annual
Bluetooth Tester	TC-3000C	TESCOM	3000C000175	03/28/2024	Annual
Spectrum Analyzer	FSVA40 (10 Hz ~ 40 GHz)	Rohde & Schwarz	101502	03/17/2024	Annual
Spectrum Analyzer	FSP (9 kHz ~ 40 GHz)	Rohde & Schwarz	100643	10/30/2024	Annual

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

**12. ANNEX A\_ TEST SETUP PHOTO**

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2312-FI007-P