

RADIO PERFORMANCE TEST REPORT

Test Report No. : OT-243-RWD-037
Reception No. : 2312004422
Applicant : Firstsilicon
Address : 25, Gasan digital 1-ro, Geumcheon-gu, Seoul, South Korea
Manufacturer : Firstsilicon
Address : 25, Gasan digital 1-ro, Geumcheon-gu, Seoul, South Korea
Type of Equipment : Power optimizer
FCC ID. : 2BE2I-FS600B
Model Name : FS600B
Multiple Model Name : N/A
Serial number : N/A
Total page of Report : 26 pages (including this page)
Date of Incoming : January 31, 2024
Date of issue : March 18, 2024

SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART C Section 15.247**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

This report is not correlated with the "KS Q ISO/IEC 17025 and KOLAS accreditation" of Korean Laboratory Accreditation Scheme.





Tested by
 Su-Min, Yoo / Assistant Manager
 ONETECH Corp.

Reviewed by
 Tae-Ho, Kim / General Manager
 ONETECH Corp.

Approved by
 Jae-Ho, Lee / Chief Engineer
 ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY.....	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY.....	6
2.6 TEST FACILITY.....	6
3. GENERAL INFORMATION.....	7
3.1 PRODUCT DESCRIPTION.....	7
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	7
4. EUT MODIFICATIONS.....	7
5. SYSTEM TEST CONFIGURATION	8
5.1 JUSTIFICATION.....	8
5.2 PERIPHERAL EQUIPMENT	8
5.3 MODE OF OPERATION DURING THE TEST	9
5.4 CONFIGURATION OF TEST SYSTEM.....	11
5.5 ANTENNA REQUIREMENT	11
6. PRELIMINARY TEST	11
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	11
6.2 GENERAL RADIATED EMISSIONS TESTS	11
7. MIMIMUM 6 DB BANDWIDTH	12
7.1 OPERATING ENVIRONMENT	12
7.2 TEST SET-UP	12
7.3 TEST DATE	12
7.4 TEST DATA.....	12
8. MAXIMUM CONDUCTED(PEAK) OUTPUT POWER.....	13
8.1 OPERATING ENVIRONMENT	13
8.2 TEST SET-UP	13
8.3 TEST DATE	13
8.4 TEST DATA.....	13
9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	14

9.1 OPERATING ENVIRONMENT	14
9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	14
9.3 TEST SET-UP FOR RADIATED MEASUREMENT.....	14
9.4 TEST DATE	14
9.5 TEST DATA FOR CONDUCTED EMISSION	14
9.6 TEST DATA FOR RADIATED EMISSION	15
9.6.1 Radiated Emission which fall in the Restricted Band.....	15
9.6.2 Spurious & Harmonic Radiated Emission.....	16
10. POWER SPECTRAL DENSITY	18
10.1 OPERATING ENVIRONMENT	18
10.2 TEST SET-UP	18
10.3 TEST DATE	18
10.4 TEST DATA.....	18
11. RADIATED EMISSION TEST	19
11.1 OPERATING ENVIRONMENT	19
11.2 TEST SET-UP	19
11.3 TEST DATE	20
11.4 TEST DATA FOR 30 MHz ~ 1 000 MHz	21
11.5 TEST DATA FOR BELOW 30 MHz	22
11.6 TEST DATA FOR ABOVE 1 GHz	22
12. CONDUCTED EMISSION TEST	23
12.1 OPERATING ENVIRONMENT	23
12.2 TEST SET-UP	23
12.3 TEST DATE	23
12.4 TEST DATA.....	24
13. LIST OF TEST EQUIPMENT	26

※ Please refer to the Annex section for All test plots

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-243-RWD-037	March 18, 2024	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : Firstsilicon
Address : 25, Gasan digital 1-ro, Geumcheon-gu, Seoul, South Korea
Contact Person : Jung ho, Hyun / Certification test personnel
Telephone No. : +82-2-3402-7479
FCC ID : 2BE2I-FS600B
Model Name : FS600B
Brand Name : SolpoMax
Serial Number : N/A
Date : March 18, 2024

EQUIPMENT CLASS	DTS – DIGITAL TRNSMISSION SYSTEM
E.U.T. DESCRIPTION	Power optimizer
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The Firstsilicon, Model FS600B (referred to as the EUT in this report) is a Power optimizer. The product specification described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Power optimizer
OPERATING FREQUENCY	2 405 MHz ~ 2 480 MHz
MODULATION TYPE	DSSS
RF OUTPUT POWER	-13.95 dBm
ANTENNA TYPE	PCB Pattern Antenna
ANTENNA GAIN	-3.37 dBi
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	12 MHz
RATED SUPPLY VOLTAGE	DC 8.0 V ~ 60.0 V (Normal DC 46.0 V)

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	Firstsilicon	SolpoMax-Rev05-B-V3	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
FS600B	Firstsilicon	Power optimizer (EUT)	-
Ideapad L340	Lenovo	Notebook PC	EUT

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed. For final testing, the EUT was set at 2 405 MHz, 2 440 MHz, 2 480 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis, but the worst data was recorded in this report.


-. Duty Cycle

Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
802.15.4	-	-	100.00	0.00

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100

Correction Factor : 10 * Log(1 / (Duty Cycle / 100))

-. Test Plot

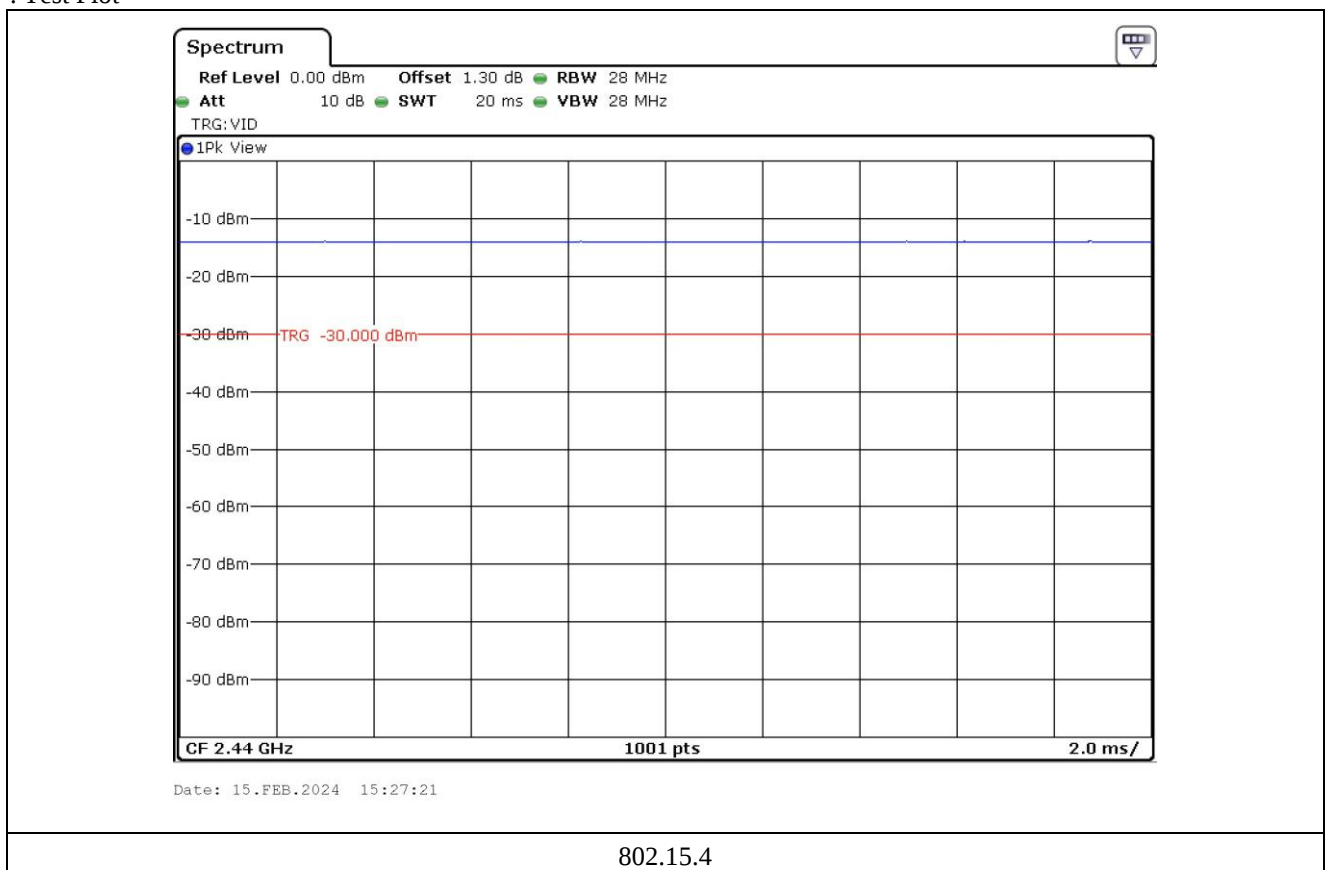

-. Channel List

Channel	Frequency[MHz]
1	2 405.00
2	2 410.00
3	2 415.00
4	2 420.00
5	2 425.00
6	2 430.00
7	2 435.00
8	2 440.00
9	2 445.00
10	2 450.00
11	2 455.00
12	2 460.00
13	2 465.00
14	2 470.00
15	2 475.00
16	2 480.00

5.4 Configuration of Test System

Line Conducted Test: The EUT was tested in the Transmitting mode. All supporting equipment were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a PCB Pattern Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MINIMUM 6 dB BANDWIDTH

7.1 Operating environment

Temperature : 23 °C
Relative humidity : 46 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

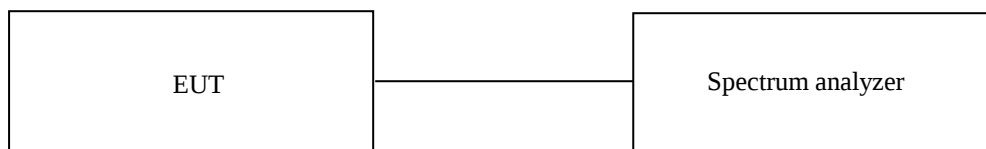

7.3 Test date

February 01, 2024 ~ February 16, 2024

7.4 Test data

-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (kHz)	LIMIT (kHz)	Margin (kHz)
1	2 405.00	1 568.00	500.00	1 068.00
8	2 440.00	1 548.00	500.00	1 048.00
16	2 480.00	1 568.00	500.00	1 068.00

Remark. Margin = Measured Value – Limit

8. MAXIMUM CONDUCTED(PEAK) OUTPUT POWER

8.1 Operating environment


Temperature : 23 °C

Relative humidity : 46 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $\geq$ DTS Bandwidth, the video bandwidth is set to 3 times the resolution bandwidth.

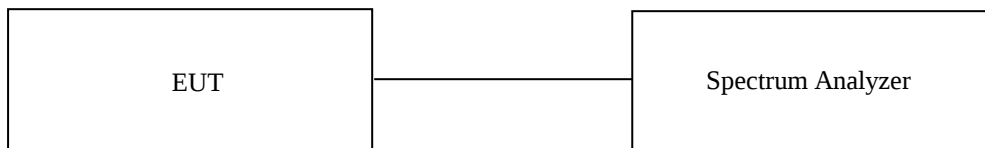

8.3 Test date

February 01, 2024 ~ February 16, 2024

8.4 Test data

-. Test Result : Pass

-. Duty Cycle : 100 %

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
1	2 405.00	-14.07	30.00	44.07
8	2 440.00	-13.95	30.00	43.95
16	2 480.00	-24.34	30.00	54.34

Remark. Margin = Limit – Measured Value

9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND


9.1 Operating environment

Temperature : 23 °C

Relative humidity : 46 % R.H.

9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz and video bandwidth is set to 300 kHz, and peak detection was used.

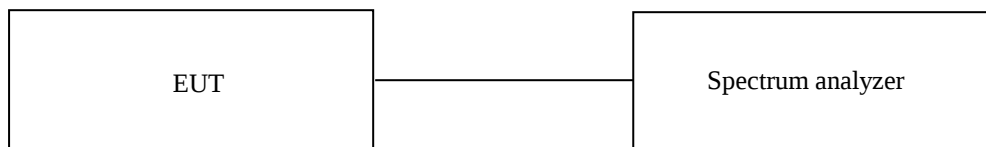

9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

9.4 Test date

February 01, 2024 ~ February 16, 2024

9.5 Test data for conducted emission

Please refer to the Annex

9.6 Test data for radiated emission

9.6.1 Radiated Emission which fall in the Restricted Band

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 100 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Gain	ATT (dB)	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel											
2 351.90	52.82	Peak	H	27.59	4.63	42.56	6.11	-	48.59	74.00	25.41
2 356.84	42.14	Average	H	27.59	4.63	42.56	6.11	-	37.91	54.00	16.09
2 343.93	52.72	Peak	V	27.59	4.63	42.56	6.11	-	48.49	74.00	25.51
2 389.58	41.52	Average	V	27.59	4.63	42.56	6.11	-	37.29	54.00	16.71
Test Data for High Channel											
2 483.53	61.39	Peak	H	27.53	4.83	42.51	6.13	-	57.37	74.00	16.63
2 483.51	53.90	Average	H	27.53	4.83	42.51	6.13	-	49.88	54.00	4.12
2 483.61	57.00	Peak	V	27.53	4.83	42.51	6.13	-	52.98	74.00	21.02
2 483.51	48.50	Average	V	27.53	4.83	42.51	6.13	-	44.48	54.00	9.52

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss + ATT + Duty Factor - AMP Gain

9.6.2 Spurious & Harmonic Radiated Emission

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode for the emissions fall in restricted band,
1 MHz and RMS Detector for Average Mode for the emissions fall in restricted band
100 kHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 100 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
4 809.02	55.21	Peak	H	31.22	6.60	41.84	-	51.19	74.00	22.81
4 810.86	45.79	Average	H	31.22	6.60	41.84	-	41.77	54.00	12.23
7 213.73	51.94	Peak	H	36.43	8.06	41.80	-	54.63	74.00	19.37
7 216.31	41.88	Average	H	36.43	8.06	41.80	-	44.57	54.00	9.43
4 810.92	57.73	Peak	V	31.22	6.60	41.84	-	53.71	74.00	20.29
4 810.91	51.40	Average	V	31.22	6.60	41.84	-	47.38	54.00	6.62
7 213.39	56.01	Peak	V	36.43	8.06	41.80	-	58.70	74.00	15.30
7 213.52	48.44	Average	V	36.43	8.06	41.80	-	51.13	54.00	2.87
Test Data for Middle Channel										
4 880.47	53.81	Peak	H	31.30	6.70	41.82	-	49.99	74.00	24.01
4 879.06	44.98	Average	H	31.30	6.70	41.82	-	41.16	54.00	12.84
7 321.15	51.84	Peak	H	36.30	8.62	41.80	-	54.96	74.00	19.04
7 318.50	40.94	Average	H	36.30	8.62	41.80	-	44.06	54.00	9.94
4 879.05	56.99	Peak	V	31.30	6.70	41.82	-	53.17	74.00	20.83
4 878.99	49.91	Average	V	31.30	6.70	41.82	-	46.09	54.00	7.91
7 321.30	56.22	Peak	V	36.30	8.62	41.80	-	59.34	74.00	14.66
7 318.46	48.42	Average	V	36.30	8.62	41.80	-	51.54	54.00	2.46

Test Data for High Channel										
4 960.86	49.39	Peak	H	31.22	6.71	41.81	-	45.51	74.00	28.49
4 960.72	37.69	Average	H	31.22	6.71	41.81	-	33.81	54.00	20.19
7 441.35	48.77	Peak	H	36.57	8.22	41.80	-	51.76	74.00	22.24
7 441.37	38.37	Average	H	36.57	8.22	41.80	-	41.36	54.00	12.64
4 960.96	49.53	Peak	V	31.22	6.71	41.81	-	45.65	74.00	28.35
4 960.88	38.26	Average	V	31.22	6.71	41.81	-	34.38	54.00	19.62
7 438.68	52.36	Peak	V	36.55	8.22	41.80	-	55.33	74.00	18.67
7 441.25	43.41	Average	V	36.57	8.22	41.80	-	46.40	54.00	7.60

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss + Duty Factor – AMP Factor

10. POWER SPECTRAL DENSITY

10.1 Operating environment


Temperature : 23 °C

Relative humidity : 46 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$, the video bandwidth is set to 3 times the resolution bandwidth.

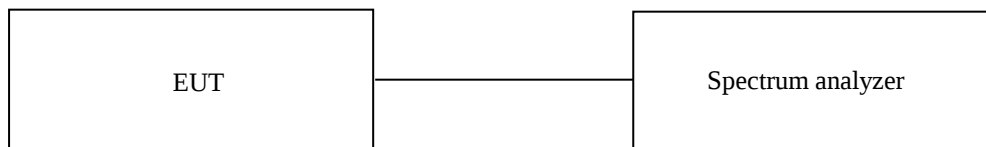

10.3 Test date

February 01, 2024 ~ February 16, 2024

10.4 Test data

-. Test Result : Pass

-. Duty Cycle : 100 %

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm / 3 kHz)	MARGIN (dB)
1	2 405.00	-29.92	8.00	37.92
8	2 440.00	-30.03	8.00	38.03
16	2 480.00	-40.29	8.00	48.29

Remark. Margin = Limit – Measured Value

11. RADIATED EMISSION TEST

11.1 Operating environment

Temperature : 23 °C

Relative humidity : 46 % R.H.


11.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

- Test Configuration


1. Below 30 MHz

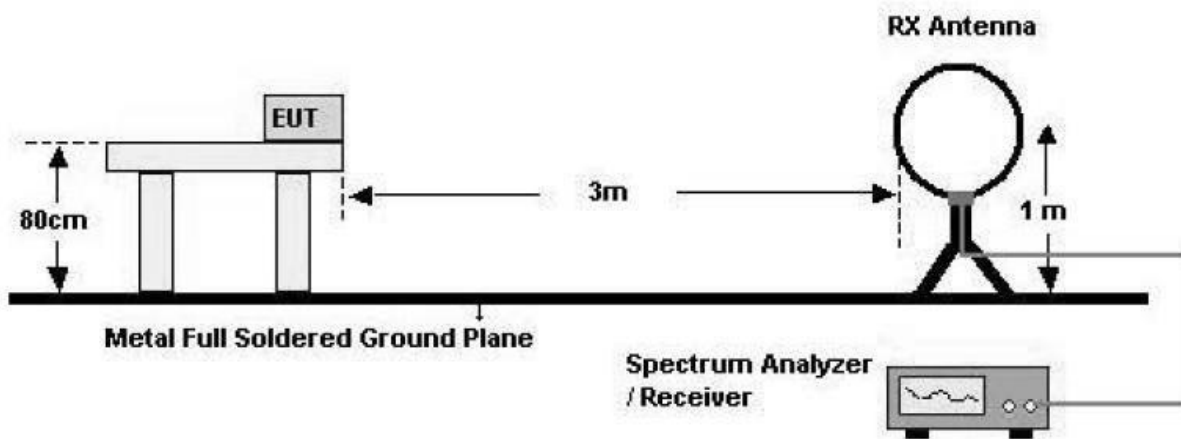

2. 30 MHz - 1 GHz

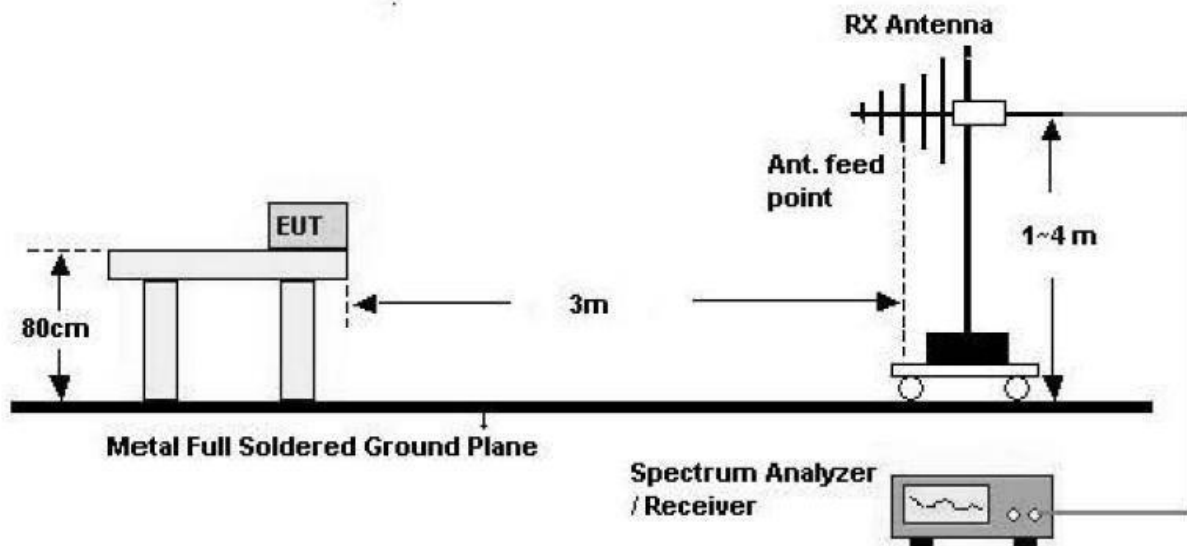

3. Above 1 GHz

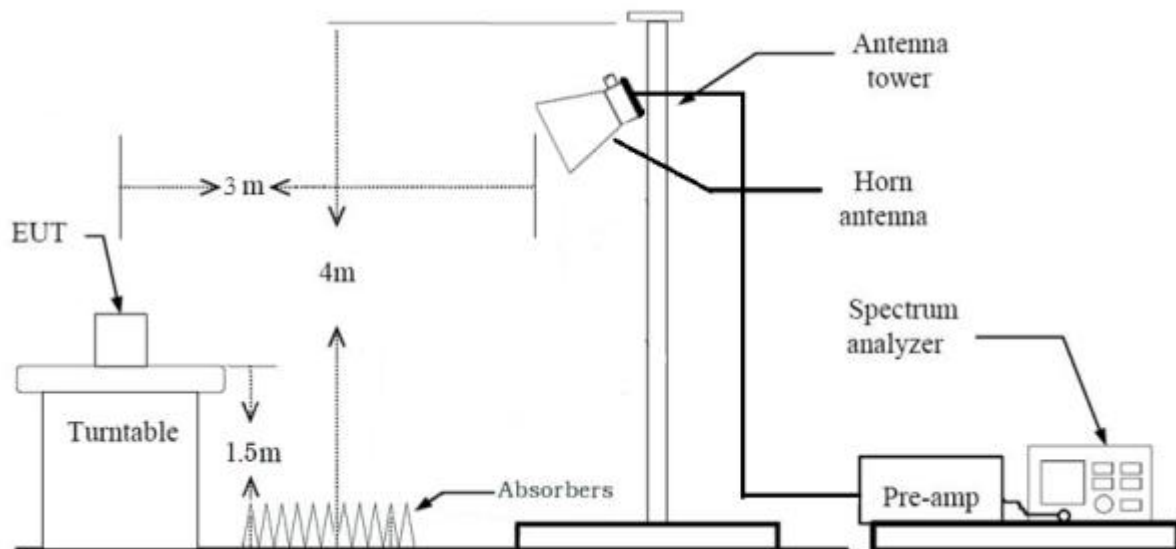

11.3 Test Date

February 01, 2024 ~ February 16, 2024

11.4 Test data for 30 MHz ~ 1 000 MHz


Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : Power optimizer

Test mode : Worst case (Middle CH / Max voltage)

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

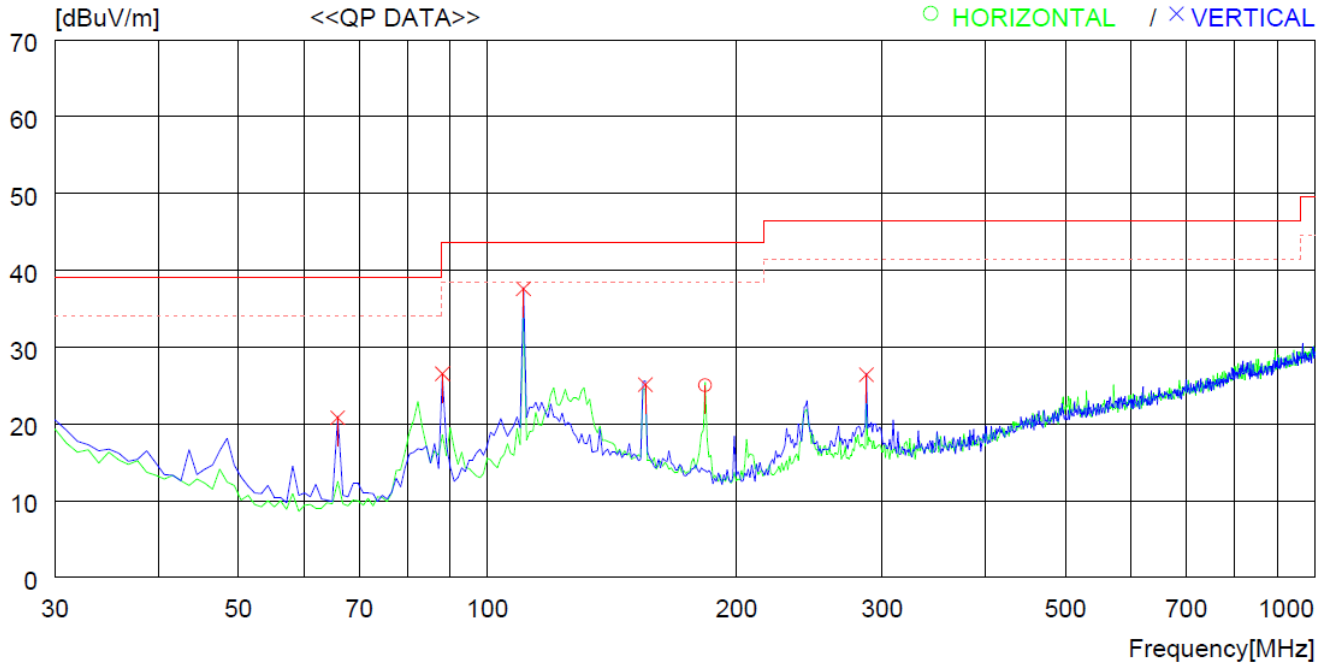

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	QP	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	183.260	39.2	16.3	2.6	33.1	25.0	43.5	18.5	200	359
----- Vertical -----										
2	65.890	39.6	12.7	1.6	33.1	20.8	39.1	18.3	200	239
3	88.200	44.1	13.6	1.9	33.1	26.5	43.5	17.0	100	213
4	110.510	51.1	17.5	2.1	33.1	37.6	43.5	5.9	100	64
5	155.130	37.5	18.3	2.4	33.1	25.1	43.5	18.4	100	359
6	287.050	37.5	18.7	3.4	33.2	26.4	46.4	20.0	200	0

11.5 Test data for Below 30 MHz

- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

11.6 Test data for above 1 GHz

- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

12. CONDUCTED EMISSION TEST

12.1 Operating environment

Temperature : 23 °C

Relative humidity : 46 % R.H.

12.2 Test set-up


The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a $50\ \Omega$ / $50\ \mu\text{H}$ + $5\ \Omega$ Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.

12.3 Test Date

February 01, 2024 ~ February 16, 2024

12.4 Test data


- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Test mode : Worst case (Middle CH / Max voltage)
- Tested Line : HOT LINE

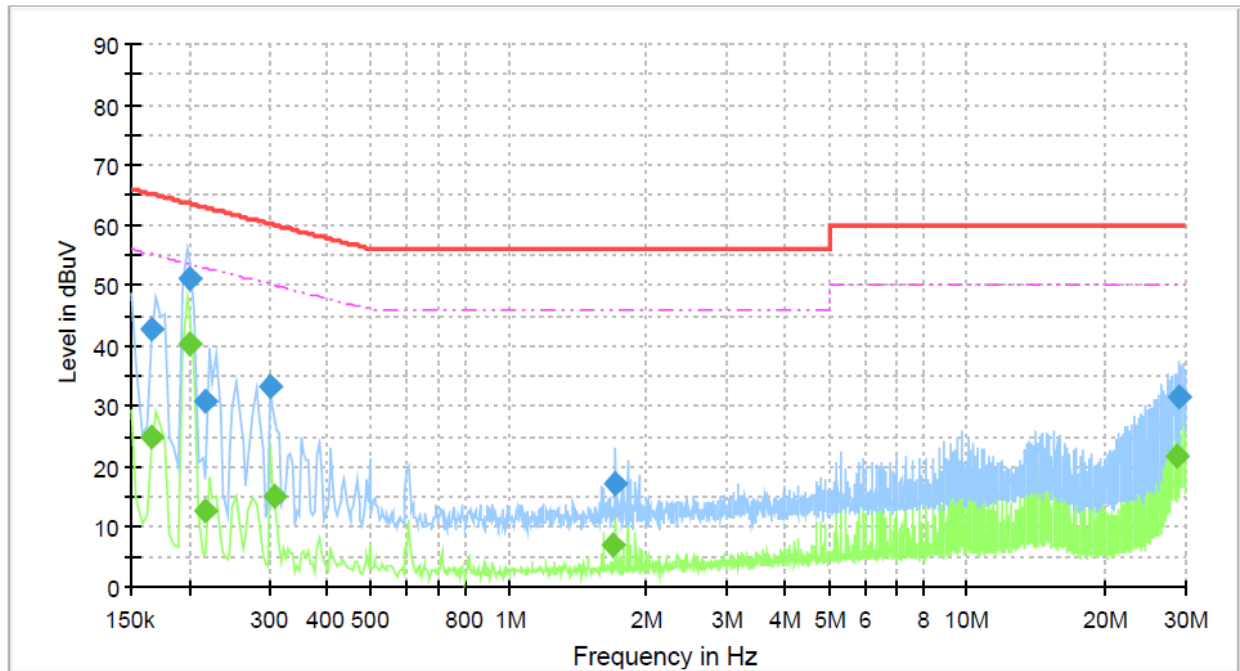

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.166	---	25.00	55.18	30.18	3000.0	9.0	L1	10.23
0.166	42.71	---	65.18	22.48	3000.0	9.0	L1	10.23
0.202	---	40.24	53.55	13.30	3000.0	9.0	L1	10.22
0.202	51.14	---	63.55	12.41	3000.0	9.0	L1	10.22
0.218	---	12.65	52.91	40.27	3000.0	9.0	L1	10.22
0.218	30.65	---	62.91	32.26	3000.0	9.0	L1	10.22
0.302	33.35	---	60.20	26.85	3000.0	9.0	L1	10.21
0.307	---	15.19	50.07	34.87	3000.0	9.0	L1	10.21
1.693	---	7.17	46.00	38.83	3000.0	9.0	L1	10.29
1.713	17.16	---	56.00	38.84	3000.0	9.0	L1	10.29
28.728	---	21.61	50.00	28.39	3000.0	9.0	L1	11.33
28.932	31.35	---	60.00	28.65	3000.0	9.0	L1	11.34

-. Tested Line : NEUTRAL LINE

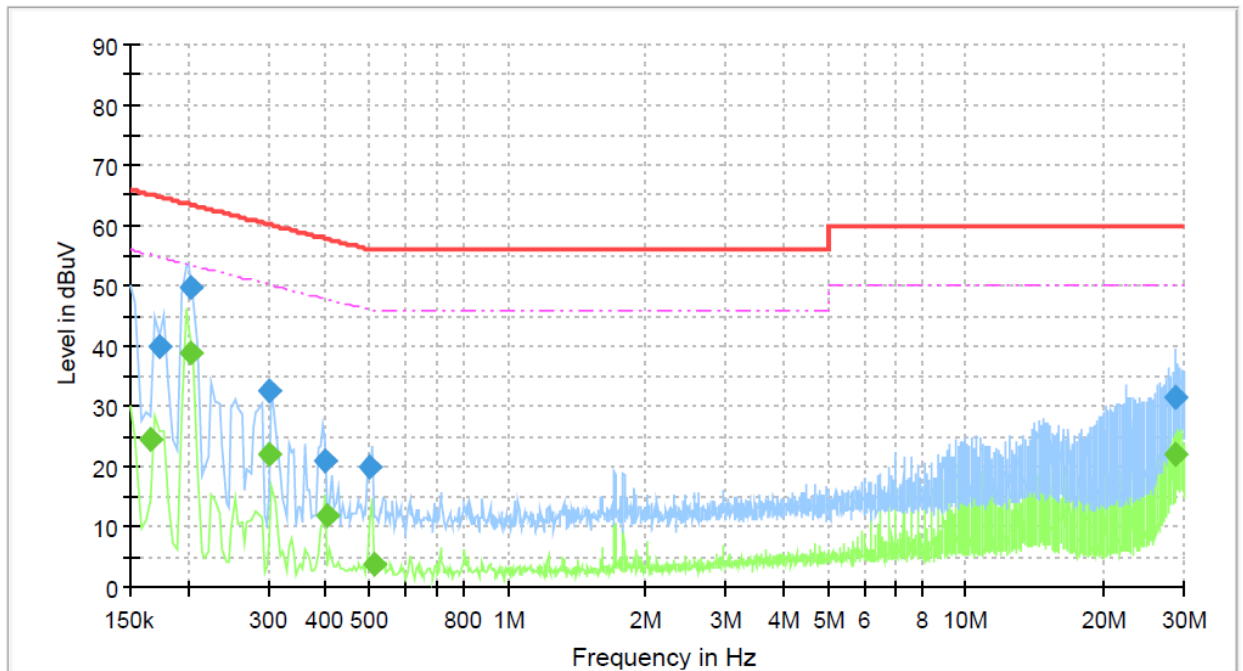

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.166	---	24.41	55.18	30.77	3000.0	9.0	N	10.25
0.174	40.02	---	64.79	24.77	3000.0	9.0	N	10.25
0.203	---	38.81	53.51	14.70	3000.0	9.0	N	10.24
0.203	49.71	---	63.51	13.79	3000.0	9.0	N	10.24
0.302	---	22.03	50.20	28.17	3000.0	9.0	N	10.21
0.302	32.64	---	60.20	27.56	3000.0	9.0	N	10.21
0.399	20.88	---	57.89	37.01	3000.0	9.0	N	10.22
0.403	---	11.76	47.80	36.04	3000.0	9.0	N	10.22
0.501	20.05	---	56.00	35.95	3000.0	9.0	N	10.22
0.511	---	3.78	46.00	42.22	3000.0	9.0	N	10.22
28.811	---	22.02	50.00	27.98	3000.0	9.0	N	11.26
28.812	31.55	---	60.00	28.45	3000.0	9.0	N	11.26

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

13. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
FSV40-N	Rohde & Schwarz	Signal Analyzer	102196	Jan. 15, 2024 (1Y)
FSV40-N	Rohde & Schwarz	Signal Analyzer	101651	Jan. 15, 2024 (1Y)
GEN60-25	TDK-Lambda	DC Power Supply	941Z19-0007	Jan. 16, 2024 (1Y)
ESR	Rohde & Schwarz	EMI Test Receiver	101470	Jun. 16, 2023 (1Y)
310N	Sonoma Instrument	Pre-Amplifier	312544	Mar. 14, 2023 (1Y)
SCU18	Rohde & Schwarz	Pre-Amplifier	102266	Jul. 11, 2023 (1Y)
SCU40A	Rohde & Schwarz	Pre-Amplifier	100436	Jan. 23, 2024 (1Y)
HPF 3GHz	Rohde & Schwarz	High Pass Filter	N/A	Jan. 15, 2024 (1Y)
FMZB 1513	Schwarzbeck	Loop Antenna	1513-235	Mar. 24, 2022 (2Y)
HLP-2008	TDK	Hybrid Antenna	131316	Mar. 07, 2022 (2Y)
BBHA9120D	Schwarzbeck	Horn Antenna	9120D-1349	Jul. 04, 2023 (1Y)
BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jan. 04, 2024 (1Y)
DT3000	Innco System	Turn Table	DT3000/093	N/A
MA4000-EP	Innco System	Antenna Master	MA4000/332/27030611/L	N/A
CO3000	Innco System	Controller	CO3000/904/37211215/L	N/A
ESR 3	Rohde & Schwarz	EMI TEST RECEIVER	102602	Mar. 15, 2023 (1Y)
NSLK8126	Schwarzbeck	LISN	8126404	Mar. 15, 2023 (1Y)
3825/2	EMCO	AMN	9109-1869	Mar. 15, 2023 (1Y)
VTSD 9561-F	Schwarzbeck	PULSE LIMITER	01337	Nov. 23, 2023 (1Y)