

东莞市庭丰电子有限公司

Dongguan Tristar Electronic Co., Ltd.


地址：广东省东莞市塘厦镇塘厦东兴路 196 号 1 栋、2 栋

Add: Building 1 & Building 2, NO.196, Tangxia Dongxing Road, Tangxia Town, Dongguan City, Guangdong Province, China Zip code: 523710


2.4G-2.48G 频段板载 PIFA 天线测试报告

SPECIFICATIONS	
Frequency (MHz)	2400-2480
Peak Gain (dBi)	0.927
Average Gain (dBi)	>-4
VSWR	<3.2
Impedance (Ω)	50Ω
Antenna Type	Plannar Inverted F Antenna on board
Polarization	Linear

测试环境：中科国技暗室测试系统

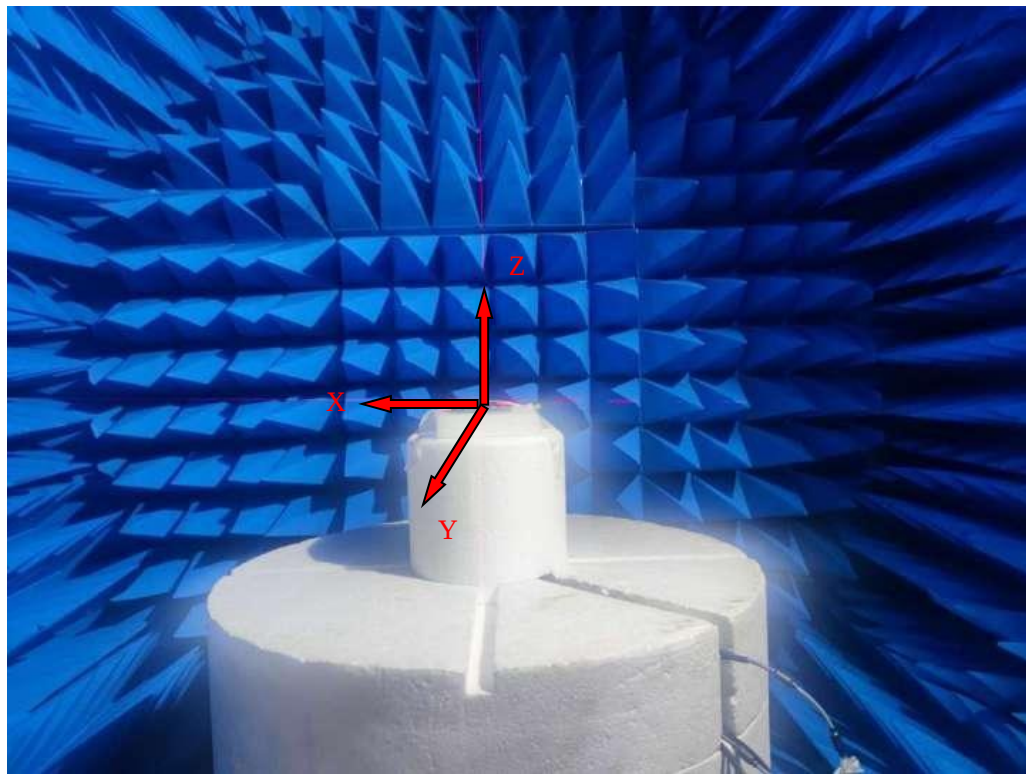

天线实物及物理尺寸

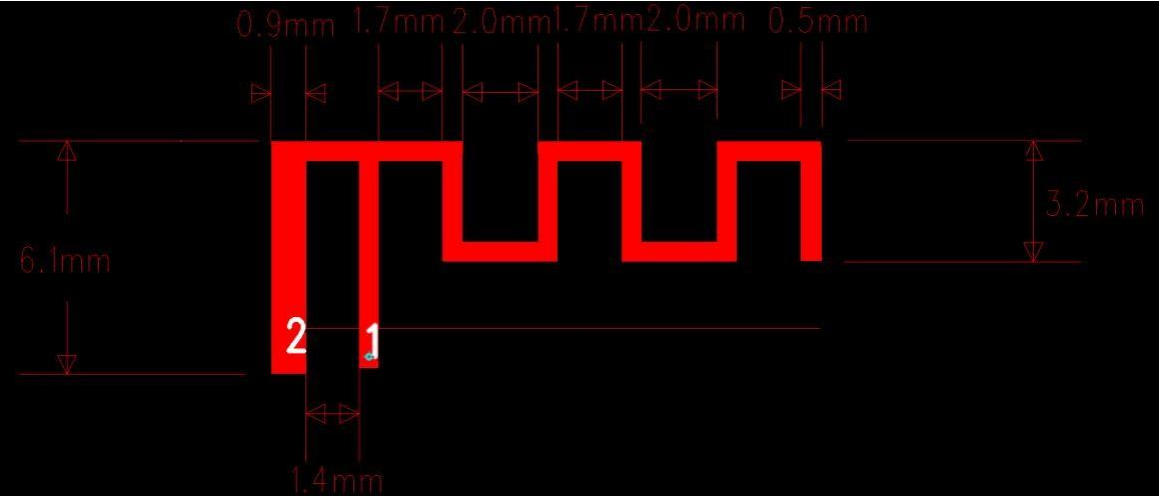

天线无源S 参数:


驻波比（VSWR）、回波损耗（Return Loss）及史密斯圆图




天线效率及增益

Frequency (MHz)	Gain (dBi)	Efficiency (%)	AverageGain (dBi)	Efficiency (dB)
2400	0.433	59.329%	-2.717	-2.267
2410	0.927	51.861%	-3.416	-2.852
2420	0.829	52.112%	-3.166	-2.831
2430	0.881	49.299%	-3.258	-3.072
2440	0.192	50.672%	-3.144	-2.952
2450	0.688	53.067%	-2.735	-2.752
2460	0.194	59.423%	-2.276	-2.260
2470	0.118	56.680%	-2.438	-2.466
2480	0.499	61.727%	-2.112	-2.095
Average	0.529	54.908%	-2.806	-2.616
Peak	0.927	61.727%	-2.112	-2.095

天线 2440MHz 3D-Horizontal Pattern

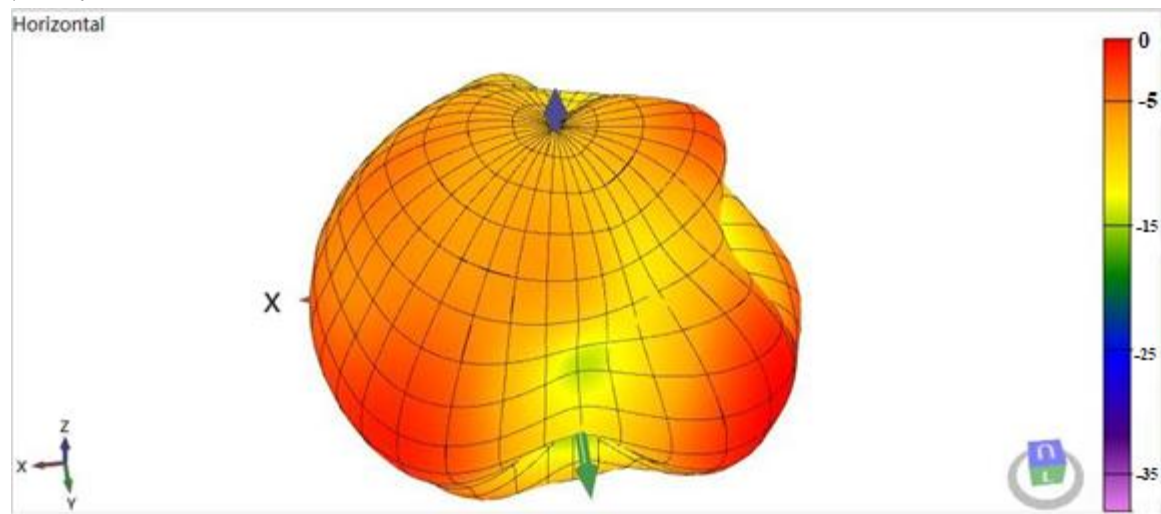

天线 2440MHz 3D-Vertical Pattern

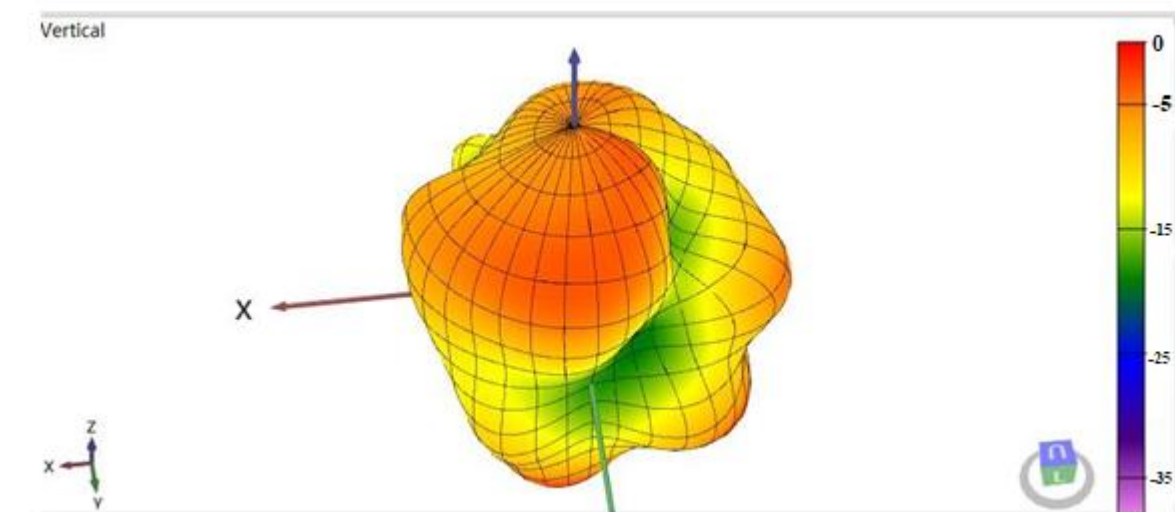

2440MHz 3D-Total Pattern

