


EMC Test Report

regarding

USA: CFR Title 47, Part 15.247/15.109 (Emissions)
Canada: IC RSS-247v3/GEnE (Emissions)

for



G-FM-VBT-BAT

Category: Wireless Vibration Sensor

Judgments:

Aligns with FCC 15.247, ISSED RSS-247v3

Testing Completed: March 12, 2025



Prepared for:

Grace Technologies, Inc.

1515 East Kimberly Rd., Davenport IA 52807

Phone: (563) 386 9596, Fax: (563) 386 9639

Contact: Bryce Brewer, BryceB@gracetechnologies.com

Data Rec./Rev. by:

John Nantz
John Nantz

Rpt. Auth. by:

Joseph Brunett
Dr. Joseph Brunett, EMC-002790-NE

Rpt. Prep./Rev. by:

John Nantz
John Nantz

Date of Issue:

March 13, 2025

Revision History

Rev. No.	Date	Details	Revised By
r0	March 13, 2025	Initial Release.	J. Nantz
r1	March 27, 2025	Added missing equipment.	J. Nantz
r1	April 29, 2025	Added missing equipment.	J. Nantz

Contents

Revision History	2
Table of Contents	2
1 Test Report Scope and Limitations	4
1.1 Laboratory Authorization	4
1.2 Report Retention	4
1.3 Subcontracted Testing	4
1.4 Test Data	4
1.5 Limitation of Results	4
1.6 Copyright	4
1.7 Endorsements	4
1.8 Test Location	5
1.9 Traceability and Equipment Used	5
2 Test Specifications and Procedures	6
2.1 Test Specification and General Procedures	6
3 Configuration and Identification of the Equipment Under Test	7
3.1 Description and Declarations	7
3.1.1 EUT Configuration	8
3.1.2 Modes of Operation	8
3.1.3 Variants	8
3.1.4 Test Samples	8
3.1.5 Functional Exerciser	9
3.1.6 Modifications Made	9
3.1.7 Production Intent	9
3.1.8 Declared Exemptions and Additional Product Notes	9
4 Emissions	10
4.1 General Test Procedures	10
4.1.1 Radiated Test Setup and Procedures	10
4.1.2 Power Supply Variation	12
4.2 Intentional Emissions	13
4.2.1 Duty and Transmission Cycle, Pulsed Operation	13
4.2.2 Fundamental Emission Bandwidth	14
4.2.3 Effective Isotropic Radiated Power	16
4.2.4 Power Spectral Density	17
4.3 Unintentional Emissions	19
4.3.1 Restricted Band Transmit Chain Spurious Emissions	19
4.3.2 OOB Transmit Chain Spurious Emissions	20
4.3.3 Radiated Digital and Cabinet Spurious	21

5 Measurement Uncertainty and Accreditation Documents22

List of Tables

1.8.0 Test Site List.	5
1.9.0 Equipment List.	5
3.1.0 EUT Declarations.	7
4.2.1 Pulsed Emission Characteristics (Duty Cycle).	13
4.2.2 Intentional Emission Bandwidth.	14
4.2.3 Tx. Power Results.	16
4.2.4 Power Spectral Density Results.	17
4.3.1 Transmit Chain Spurious Emissions.	19
5.0.0 Measurement Uncertainty.	22

List of Figures

3.1.0 Photos of EUT.	7
3.1.1 EUT Test Configuration Diagram.	8
4.1.1 Radiated Emissions Diagram of the EUT.	10
4.1.1 Radiated Emissions Test Setup Photograph(s).	11
4.2.1 Example Pulsed Emission Characteristics (Duty Cycle).	13
4.2.2 Example Intentional Emission Bandwidth Plots.	15
4.2.3 Conducted Power Measurement Plots.	16
4.2.4 Power Spectral Density Plots.	18
4.3.2 Worst Case Transmitter OOB Emissions Measured.	20
5.0.0 Accreditation Documents	22

1 Test Report Scope and Limitations

1.1 Laboratory Authorization

Test Facility description and attenuation characteristics are on file with the FCC Laboratory, Columbia, Maryland (FCC Reg. No: US5348 and US5356) and with ISED Canada, Ottawa, ON (File Ref. No: 3161A and 24249). Amber Helm Development L.C. holds accreditation under NVLAP Lab Code 200129-0.

1.2 Report Retention

For equipment verified to comply with the regulations herein, the manufacturer is obliged to retain this report with the product records for the life of the product, and no less than ten years. A copy of this Report will remain on file with this laboratory until March 2025.

1.3 Subcontracted Testing

This report does not contain data produced under subcontract.

1.4 Test Data

This test report contains data included within the laboratory's scope of accreditation. Any data in this report that is not covered under the laboratory's scope is clearly identified.

1.5 Limitation of Results

The test results contained in this report relate only to the item(s) tested. Any electrical or mechanical modification made to the test item subsequent to the test date shall invalidate the data presented in this report. Any electrical or mechanical modification made to the test item subsequent to this test date shall require reevaluation.

1.6 Copyright

This report shall not be reproduced, except in full, without the written approval of Amber Helm Development L.C.

1.7 Endorsements

This report shall not be used to claim product endorsement by any accrediting, regulatory, or governmental agency.

1.8 Test Location

The EUT was fully tested by **Amber Helm Development L.C.**, headquartered at 92723 Michigan Hwy-152, Sister Lakes, Michigan 49047 USA. Table 1.8.0 lists all sites employed herein. Specific test sites utilized are also listed in the test results sections of this report where needed.

Table 1.8.0 Test Site List.

Description	Location	Quality Num.
OATS (3 meter)	3615 E Grand River Rd., Williamston, Michigan 48895	OATSC

1.9 Traceability and Equipment Used

Pertinent test equipment used for measurements at this facility is listed in Table 1.9.0 . The quality system employed at Amber Helm Development L.C. has been established to ensure all equipment has a clearly identifiable classification, calibration expiry date, and that all calibrations are traceable to the SI through NIST, other recognized national laboratories, accepted fundamental or natural physical constants, ratio type of calibration, or by comparison to consensus standards. All equipment is evaluated on a cycle no greater than 12 months following laboratory validation procedures and is calibrated following manufacturer recommended intervals.

Table 1.9.0 Equipment List.

Description	Manufacturer/Model	SN	Quality Num.	Cal/Ver By / Date Due
EMI Receiver	R & S / ESW26	101313	RSESW2601	RS / Dec-2025
Spectrum Analyzer	R & S / FSV30	101660	RSFSV3001	RS / Apr-2025
Biconical	EMCO / 93110B	9802-3039	BICEMCO01	Keysight / Aug-2025
Log Periodic Antenna	EMCO / 3146	9305-3614	LOGEMCO01	Keysight / Aug-2025
BNC-BNC Coax	WRTL / RG58/U	001	CAB001-BLACK	AHD / Sept-2025
3.5-3.5MM Coax	Coax / Coax	001	CAB018-WHT	AHD / Sept-2025
Quad Ridge Horn	Singer / A6100	C35200	HQR1TO18S01	Keysight / Aug-2025
K-Band Horn	JEF / NRL Std.	001	HRNK01	AHD / On Use
6dB Attenuator	Pasternack / PE7087-6	1	ATTEN01	AHD / On-Use

2 Test Specifications and Procedures

2.1 Test Specification and General Procedures

The goal of Grace Technologies, Inc. is to demonstrate that the Equipment Under Test (EUT) complies with the Rules and/or Directives below. Detailed in this report are the results of testing the Grace Technologies, Inc. G-FM-VBT-BAT for compliance to:

Country/Region/Manu.	Rules or Directive	Referenced Section(s)
United States	Code of Federal Regulations	CFR Title 47, Part 15.247/15.109
Canada	ISED Canada	IC RSS-247v3/GENe

It has been determined that the equipment under test is subject to the rules and directives above at the date of this testing. In conjunction with these rules and directives, the following specifications and procedures are followed herein to demonstrate compliance (in whole or in part) with these regulations.

ANSI C63.4:2014	"Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"
ANSI C63.10:2020	"American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices"
KDB 558074 D01 v05r02	"GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES "
KDB 662911 D01v02r01	"Emissions Testing of Transmitters with Multiple Outputs in the Same Band"
KDB 662911 D02 v01	"MIMO with Cross-Polarized Antenna"
WR-ITP0102RA	"AHD Internal Document - Radiated Emissions Test Method"
WR-ITP0101LC	"AHD Internal Document - Conducted Emissions Test Method"
ICES-003; Issue 7 (2020)	"Information Technology Equipment (ITE) - Limits and methods of measurement"

3 Configuration and Identification of the Equipment Under Test

3.1 Description and Declarations

The equipment under test is an Equipment Vibration Monitoring Sensor module containing a Zigbee transceiver. The EUT is approximately 7.5 x 4.5 x 4.5 cm in dimension, and is depicted in Figure 3.1.0 . It is powered by 3.6 VDC DC Battery. The EUT is used in manufacturing and hazardous environments to monitor the state of health of equipment. Table 3.1.0 outlines provider declared EUT specifications.

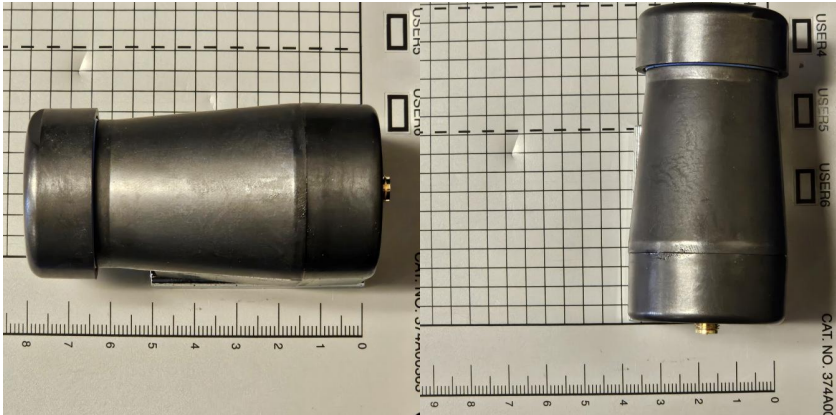


Figure 3.1.0 Photos of EUT.

Table 3.1.0 EUT Declarations.

General Declarations	
Equipment Type:	Wireless Vibration Sensor
Country of Origin:	Not Declared
Nominal Supply:	3.6 VDC
Oper. Temp Range:	-10°C to +80°C
Frequency Range:	2400 – 2483.5 MHz
Antenna Dimension:	Max: 10.5 cm x 1.5 cm x 1 cm
Antenna Type:	RP-SMA Stub, RP-SMA Monopole, RP-SMA Patch or Ceramic chip
Antenna Gain:	Ceramic Chip: 3.5 dBi max., RP-SMA Stub: 2 dBi max., RP-SMA Monopole: 5.0 dBi max., RP-SMA Patch: 3.0 dBi max.
Number of Channels:	16
Channel Spacing:	5 MHz
Alignment Range:	Not Declared
Type of Modulation:	OQPSK
United States	
FCC ID Number:	2BE57VBTBAT
Classification:	DTS
Canada	
IC Number:	32885-VBTBAT
Classification:	Other

3.1.1 EUT Configuration

The EUT is configured for testing as depicted in Figure 3.1.1 .

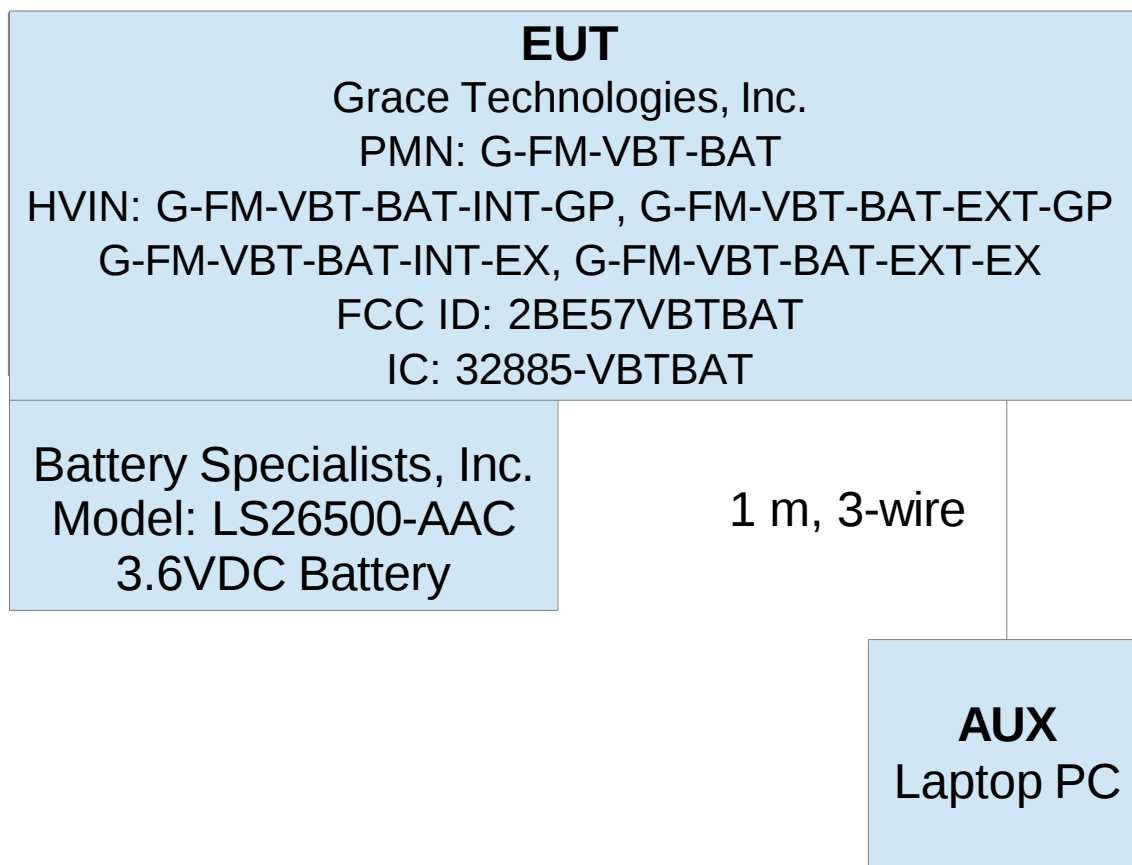


Figure 3.1.1 EUT Test Configuration Diagram.

3.1.2 Modes of Operation

The EUT employs a 2.4 GHz, IEEE 802.15.4 Zigbee DTS transceiver. The Zigbee radio can employ 1 of 4 antennas: Internal ceramic chip, external RP-SMA stub, RP-SMA monopole or an RP-SMA patch antenna. It is noted that the EUT is only able to employ 1 antenna at any time.

3.1.3 Variants

There are 2 types of variants: One for General Purpose applications and the other for Hazardous Location Exposure where the only difference is the housing material and the label on the product. Within each type of variant there are two antenna types: Internal and External. Therefore there are four variants and they are as follows: HVIN: G-FM-VBT-BAT-EXT-GP, HVIN: G-FM-VBT-BAT-INT-GP, HVIN: G-FM-VBT-BAT-EXT-EX and HVIN: G-FM-VBT-BAT-INT-EX.

3.1.4 Test Samples

Three samples of the EUT were provided in total: one normal, unpotted PCBA (SN: PCBA) for photos, one normal sample with RP-SMA connector for external antennas (SN: B), and one normal sample with PCB mount ceramic chip antenna (SN: C). Samples B and C were capable of receiving radio instructions via USB interface to a laptop

computer. The manufacturer provided software tools and firmware needed to place the EUT radio into test and normal operating modes. All samples were flash with firmware version: GraceSense OS-X.

3.1.5 Functional Exerciser

Normal functionality was confirmed by measurement of transmitted signals.

3.1.6 Modifications Made

In order to meet the upper band edge requirements channel 26 TX power was set to a value of 90. Channels 11-25 were set at the maximum TX power setting of 200.

3.1.7 Production Intent

The EUT appears to be a production ready sample.

3.1.8 Declared Exemptions and Additional Product Notes

Not applicable.

4 Emissions

4.1 General Test Procedures

4.1.1 Radiated Test Setup and Procedures

Radiated electromagnetic emissions from the EUT are first pre-scanned in our screen room. Spectrum and modulation characteristics of all emissions are recorded. Instrumentation, including spectrum analyzers and other test equipment as detailed in Section 1.8 are employed. After pre-scan, emission measurements are made on the test site of record. If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in relevant test standards are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed if the resulting emissions appear to be worst-case in such a configuration. See Figure 4.1.1 . All intentionally radiating elements that are not fixed-mounted in use are placed on the test table lying flat, on their side, and on their end (3-axes) and the resulting worst case emissions are recorded. If the EUT is fixed-mounted in use, measurements are made with the device oriented in the manner consistent with installation and then emissions are recorded. If the EUT exhibits spurious emissions due to internal receiver circuitry, such emissions are measured with an appropriate carrier signal applied.

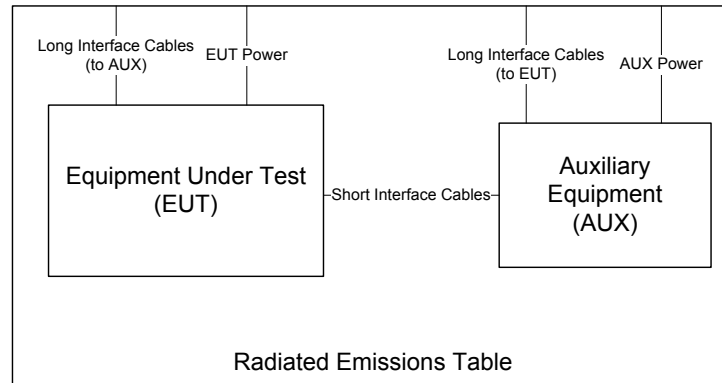


Figure 4.1.1 Radiated Emissions Diagram of the EUT.

For devices with intentional emissions below 30 MHz, a shielded loop antenna and/or E-field and H-Field broadband probes are used depending on the regulation. Shielded loops are placed at a 1 meter receive height at the desired measurement distance. For exposure in this band, 10cm diameter single-axis broadband probes meeting the requirements of ISSED RSS-102.NS.MEAS are employed. Measurements are repeated and summed over three axes, and the entire frequency range is measured with and without the EUT transmitting.

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. For both horizontal and vertical polarizations, the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected. The EUT is then rotated through 360° in azimuth until the highest emission is detected. The test antenna is then raised and lowered one last time from 1 to 4 m and the worst case value is recorded. Emissions above 1 GHz are characterized using standard gain or broadband ridge-horn antennas on our OATS with a 4 × 5 m rectangle of ECCOSORB absorber covering the OATS ground screen and a 1.5m table height. Care is taken to ensure that test receiver resolution and video bandwidths meet the regulatory requirements, and that the emission bandwidth of the EUT is not reduced. Photographs of the test setup employed are depicted in Figure 4.1.1 .

Where regulations allow for direct measurement of field strength, power values (dBm) measured on the test receiver / analyzer are converted to dBμV/m at the regulatory distance, using

$$E_{dist} = 107 + P_R + K_A - K_G + K_E - C_F$$

where P_R is the power recorded on spectrum analyzer, in dBm, K_A is the test antenna factor in dB/m, K_G is the combined pre-amplifier gain and cable loss in dB, K_E is duty correction factor (when applicable) in dB, and C_F is a distance conversion (employed only if limits are specified at alternate distance) in dB. This field strength value is then compared with the regulatory limit. If effective isotropic radiated power (EIRP) is computed, it is computed as

$$EIRP(dBm) = E_{3m}(dB\mu V/m) - 95.2.$$

When presenting data at each frequency, the highest measured emission under all possible EUT orientations (3-axes) is reported.

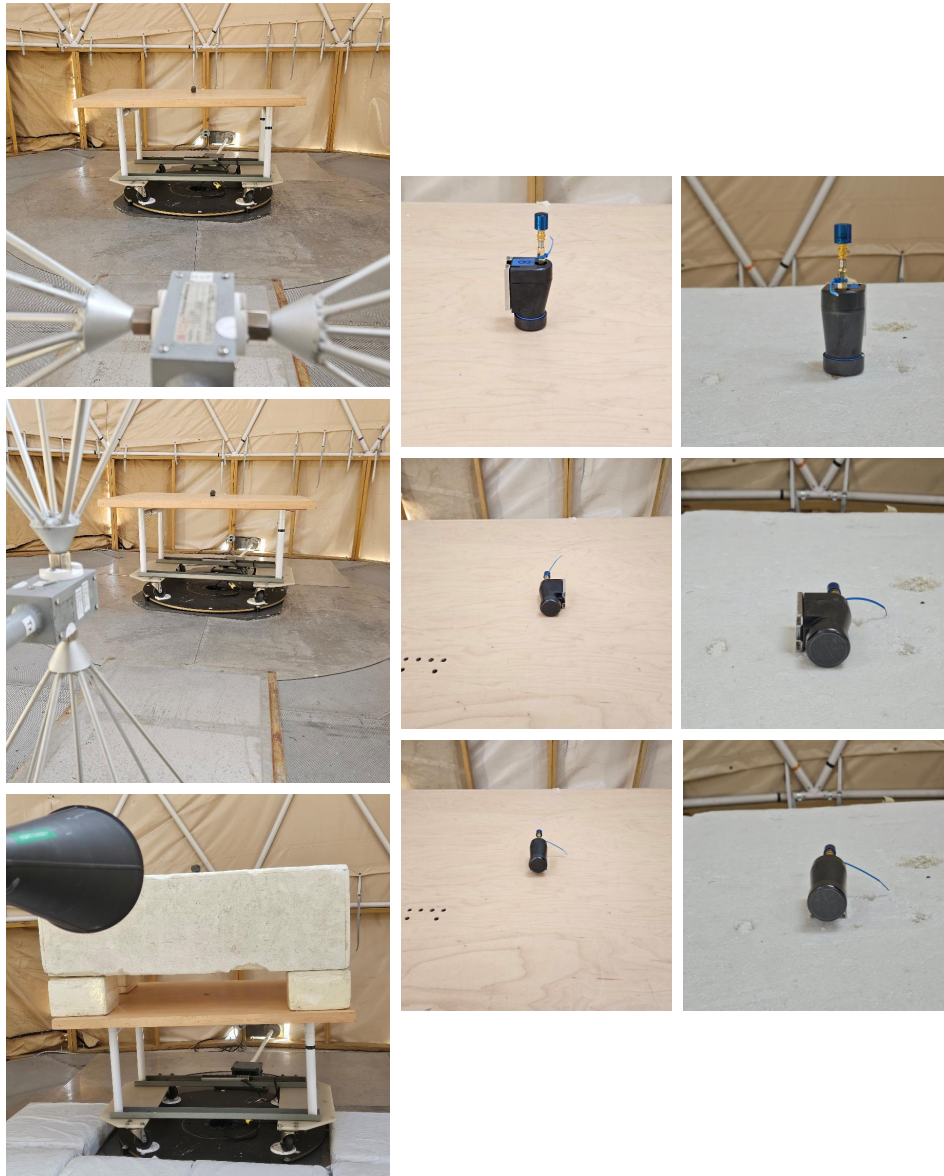


Figure 4.1.1 Radiated Emissions Test Setup Photograph(s).

4.1.2 Power Supply Variation

Tests at extreme supply voltages are made if required by the procedures specified in the test standard, and results of this testing are detailed in this report.

In the case the EUT is designed for operation from a battery power source, the extreme test voltages are evaluated over the range specified in the test standard; no less than $\pm 10\%$ of the nominal battery voltage declared by the manufacturer. For all battery operated equipment, worst case intentional and spurious emissions are re-checked employing a new (fully charged) battery.

4.2 Intentional Emissions

4.2.1 Duty and Transmission Cycle, Pulsed Operation

The details and results of testing the EUT for pulsed operation are summarized in Table 4.2.1 . Plots showing the measurements made to obtain these values are provided in Figure 4.2.1 .

Table 4.2.1 Pulsed Emission Characteristics (Duty Cycle).

Test Date:7-Mar-25

Test Engineer:John Nantz

EUT Grace G-FM-VBTX-BAT

Meas. Distance:Conducted

Test Mode Pulsed Operation / Average Measurement Duty Cycle								
R0	Mode	Data Rate Mbps	Voltage V	Oper. Freq MHz	Pulse Length ms	Pulse Period ms	Duty Cycle %	Power Duty Correction dB
R1	Zigbee	0.25	3.6	2445	100.000	100.000	100	0.0
R2								
#	C1	C2	C3	C4	C5	C6	C7	C8

* Duty Cycle is measured in line with DTS guidance 558074 D01 v5 r02 section 6(b) for averaging only over full-power transmission pulses.

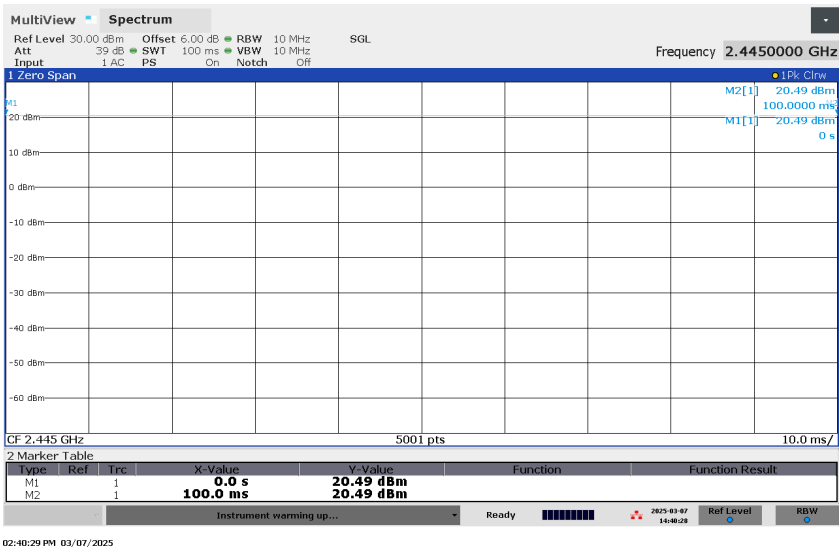


Figure 4.2.1 Example Pulsed Emission Characteristics (Duty Cycle).


4.2.2 Fundamental Emission Bandwidth

Emission bandwidth (EBW) of the EUT is measured with the device placed in the test mode(s) with the shortest available packet length and minimum packet spacing. Radiated emissions are recorded following the test procedures listed in Section 2.1. The 6 dB bandwidth is measured for the lowest, middle, and highest channels available. The 99% emission bandwidth per IC test procedures is also reported. The results of this testing are summarized in Table 4.2.2 . Plots showing measurements employed obtain the emission bandwidths reported are provided in Figure 4.2.2 .


Table 4.2.2 Intentional Emission Bandwidth.

Test Date: 7-Mar-25
Test Engineer: John Nantz
EUT Grace G-FM-VBTX-BAT
Meas. Distance: Conducted


R0	Occupied Bandwidth								
	Transmit Mode	Data Rate (Mbps)	Path A / B	Voltage (V)	Oper. Freq (MHz)	6 dB BW (MHz)	6 dB BW Limit (MHz)	99% OBW (MHz)	Pass/Fail
R1	Zigbee	0.25	N/A	3.6	2405.0	1.71	0.50	2.25	Pass
R2					2445.0	1.70	0.50	2.25	Pass
R3					2475.0	1.70	0.50	2.26	Pass
R4					2480.0	1.71	0.50	2.26	Pass
#	C1	C2	C3	C4	C5	C6	C7	C8	C9

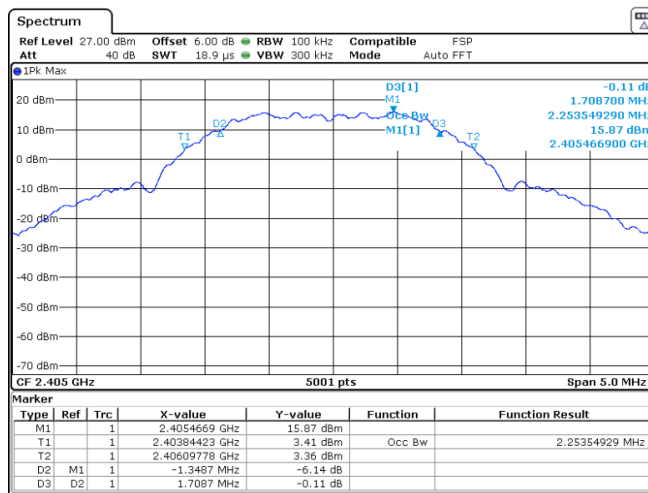


Date: 7.MAR.2025 17:46:45

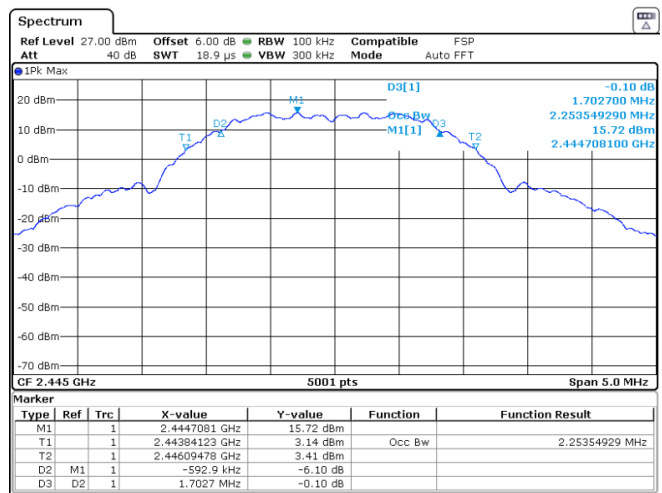

Date: 7.MAR.2025 17:44:59

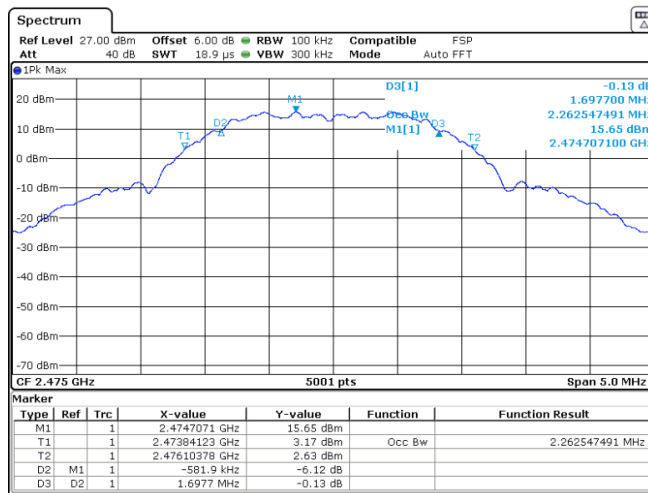

Date: 7.MAR.2025 17:42:55

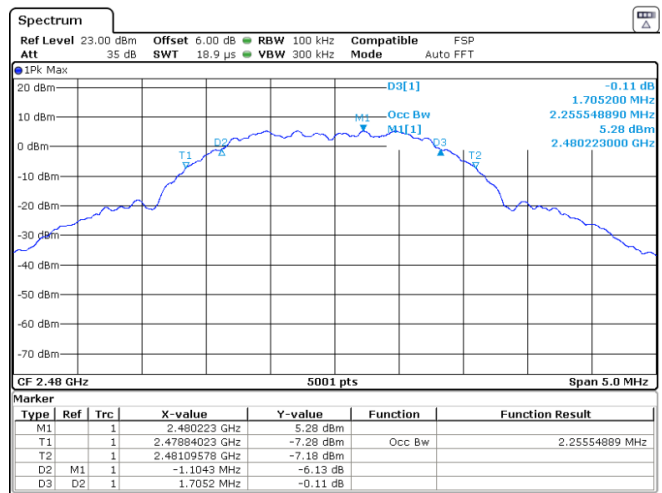

Date: 7.MAR.2025 17:41:01

Figure 4.2.2 Example Intentional Emission Bandwidth Plots.

4.2.3 Effective Isotropic Radiated Power

The EUT's radiated power is computed from antenna port conducted power measurements and the gain of the EUT antenna(s). Where the EUT is not sold with an antenna connector, a modified product has been provided including such. The results of this testing are summarized in Table 4.2.3 .


Table 4.2.3 Tx. Power Results.

Test Date: 7-Mar-25
 Test Engineer: John Nantz
 EUT: Grace G-FM-VBTX-BAT
 Meas. Distance: Conducted

	Fundamental Power												
R0	Mode	Channel	Freq. MHz	Path A / B	Pout (Pk) dBm	Pout (Avg) dBm	Duty dB	Pout(Avg) + Duty dBm	Ant Gain dBi	EIRP (Avg) dBm	EIRP (Avg) Limit dBm	Pass dB	Comments
R1	Zigbee	11	2405.0	N/A	20.3		0.0	20.3	5.0	25.3	36.0	10.7	
R2		19	2445.0		20.1		0.0	20.1	5.0	25.1	36.0	10.9	
R3		25	2475.0		20.0		0.0	20.0	5.0	25.0	36.0	11.0	
R4		26	2480.0		9.4		0.0	9.4	5.0	14.4	36.0	21.6	
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13

ROW COLUMN

R0 C6 Measured conducted from radio conducted sample. Avg Power measured per DTS Guidance 558074 D01 v5 r02 Section 8.3.2.2 / ANSI C63.10 11.9.2.2.2
 R0 C5 Measured conducted from radio conducted sample. Pk Power measured per DTS Guidance 558074 D01 v5 r02 Section 8.3.1.3 / ANSI C63.10 11.9.1.3
 R0 C9 Maximum Antenna Gain across Band. For MIMO, Gain = Gain_dBi + 10*log10(N), N = 2 antennas.
 R0 C9 Declared antenna gain is 5dBi.

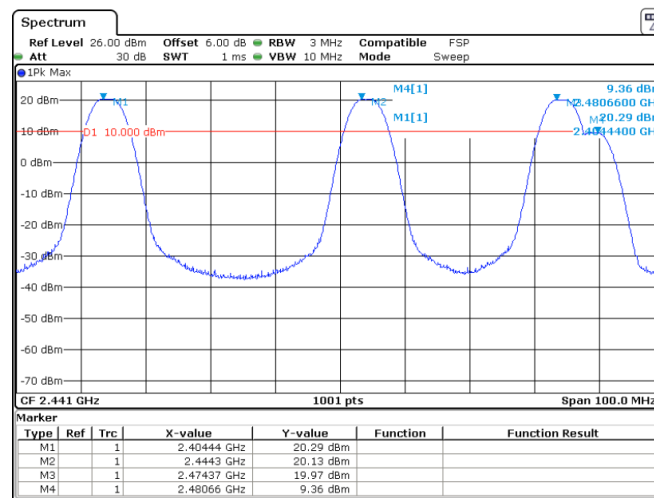

Date: 7.MAR.2025 17:34:56

Figure 4.2.3 Conducted Power Measurement Plots.

4.2.4 Power Spectral Density

For this test, the EUT was attached directly to the test receiver. Following FCC DTS measurement procedures, the emission spectrum is first scanned for maximum spectral peaks, the span and receiver bandwidth are then reduced until the power spectral density is measured in the prescribed receiver bandwidth. The results of this testing are summarized in Table 4.2.4 . Plots showing how these measurements were made are depicted in Figure 4.2.4 .

Table 4.2.4 Power Spectral Density Results.

Frequency Range
2400-2483.5

Detector
Pk

IF Bandwidth
3 kHz

Video Bandwidth
10 kHz

Test Date: 7-Mar-25

Test Engineer: John Nantz

EUT: Grace G-FM-VBXT-BAT


Meas. Distance: Conducted

Power Spectral Density										
R0	Mode	Path A / B	Channel	Frequency (MHz)	Ant. Used	PK PSDcond (meas) (dBm/3kHz)	Duty dB	PSDcond (calc) (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass By (dB)
R1	Zigbee	N/A	11	2405	Cond.	4.5	0.0	4.5	8.00	3.5
R2			19	2445	Cond.	4.3	0.0	4.3	8.00	3.8
R3			25	2475	Cond.	4.1	0.0	4.1	8.00	3.9
R4			26	2480	Cond.	-6.4	0.0	-6.4	8.00	14.4
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10


ROW COLUMN

R0 C6 PSD measured conducted following DTS guidance 558074 D01 v5 r02 8.4 / ANSI C63.10 11.10 PKPSD procedure.


R0 C7 Not applicable for PKPSD measurements

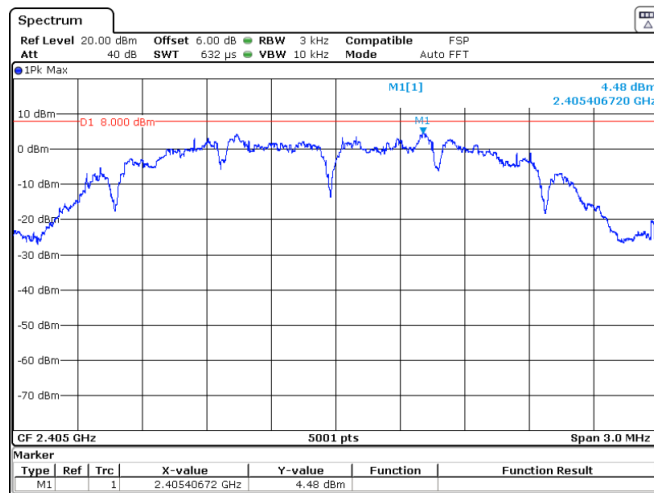


Date: 7.MAR.2025 17:52:59

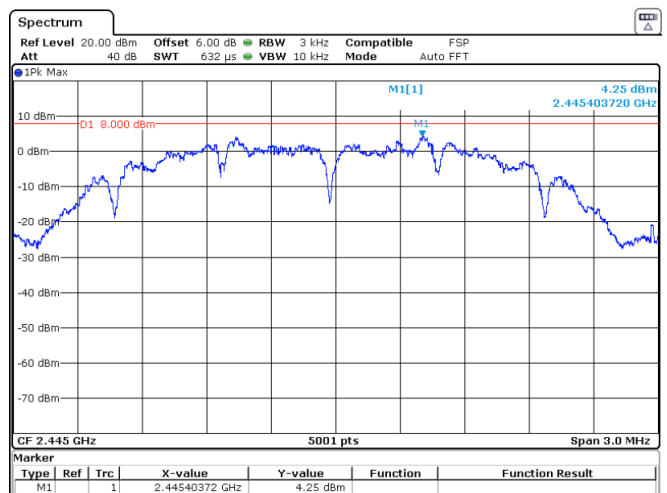

Date: 7.MAR.2025 17:53:43

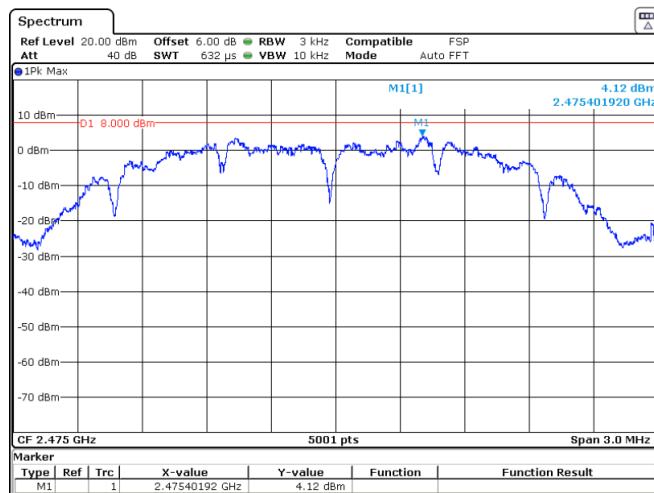

Date: 7.MAR.2025 17:54:24

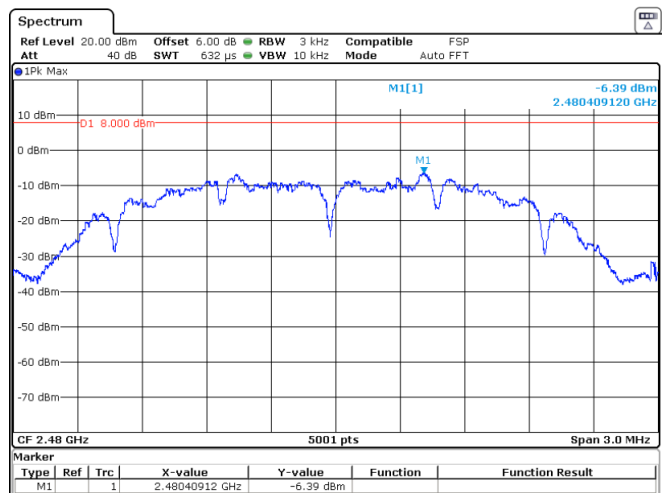

Date: 7.MAR.2025 17:55:24

Figure 4.2.4 Power Spectral Density Plots.

4.3 Unintentional Emissions

4.3.1 Restricted Band Transmit Chain Spurious Emissions

The results for the measurement of transmit chain spurious emissions at the nominal voltage and temperature are provided in Table 4.3.1 . Measurements are performed to 10 times the highest fundamental operating frequency.

Table 4.3.1 Transmit Chain Spurious Emissions.

Frequency Range
30 >= f > 1000 MHz
f < 1000 MHz

Det
Pk/QPk
Pk/Avg

IF Bandwidth
100 kHz
1 MHz

Video Bandwidth
300 kHz
3 MHz

Test Date:
Test Engineer:
EUT:
Meas. Distance:

7-Mar-25
John Nantz
Grace G-FM-VBXT-BAT
Conducted

R0	Transmitter Spurious in Restricted Bands														FCC/IC	
	Mode	Path A / B	Frequency		Output Power		Ant Gain dBi	GR Factor dB	Avg Duty Factor dB	Electric Field @ 3m				Pass dB	Comments	
			Start MHz	Stop MHz	Pb dBm	Avg dBm				Calc. Pk dBuV/m	Limit Pk dBuV/m	Calc. Avg dBuV/m	Limit Qpk/Avg dBuV/m			
R1	Fundamental Restricted Band Edge (Low Side)															
R2	ZIGBEE	N/A	2390.0	2390.0	-40.4	-49.1	5.0	0.0	0.0	54.8	74.0	46.1	54.0	7.9	max all - L,M,H channels	
R3	Fundamental Restricted Band Edge (High Side)															
R4	ZIGBEE	N/A	2483.5	2483.5	-35.2	-41.8	5.0	0.0	0.0	65.0	74.0	53.4	54.0	0.6	max all - L,M,H channels	
R5																
R6	ZIGBEE	N/A	30	88	-56.5		5.0	4.7	0.0	38.8			40	1.3	max all - L,M,H channels	
R7	ZIGBEE	N/A	88	216	-56.1		5.0	4.7	0.0	39.1			43	3.9	max all - L,M,H channels	
R8	ZIGBEE	N/A	216	1000	-54.4		5.0	4.7	0.0	40.8			46	5.2	max all - L,M,H channels	
R9	ZIGBEE	N/A	1000.0	4000.0	-39.7	-48.9	5.0	0.0	0.0	55.5	74.0	46.3	54.0	7.7	max all - L,M,H channels	
R10	ZIGBEE	N/A	4810.0	4810.0	-46.3	-58.9	5.0	0.0	0.0	48.9	74.0	36.3	54.0	17.7		
R11	ZIGBEE	N/A	4890.0	4890.0	-47.1	-58.2	5.0	0.0	0.0	48.1	74.0	37.0	54.0	17.0		
R12	ZIGBEE	N/A	4960.0	4960.0	-47.4	-59.3	5.0	0.0	0.0	47.8	74.0	35.9	54.0	18.1		
R13	ZIGBEE	N/A	4000.0	6000.0	-46.3	-58.2	5.0	0.0	0.0	48.9	74.0	37.0	54.0	17.0	max all - L,M,H channels	
R14	ZIGBEE	N/A	6000.0	8400.0	-46.0	-55.7	5.0	0.0	0.0	49.2	74.0	39.5	54.0	14.5	max all - L,M,H channels	
R15	ZIGBEE	N/A	8400.0	12500.0	-44.8	-58.7	5.0	0.0	0.0	50.4	74.0	36.5	54.0	17.5	max all - L,M,H channels	
R16	ZIGBEE	N/A	12500.0	26000.0	-40.7	-54.4	5.0	0.0	0.0	54.5	74.0	40.9	54.0	13.2	max all - L,M,H channels	
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	

ROW COLUMN

R0 C5/C6 Conducted measurements were made in line with DTS guidance 558074 D01 v5 r02 sections 8.5, 8.6, 8.7 / ANSI C63.10 11.10, 11.11, 11.12

R0 C8 Ground Reflection Factor as described in ANSI C63.10-2013 section 11.12.2.2 (c)

R0 C10/C12 Computed according to ANSI C63.10-2013 section 11.12.2.2 (e)

4.3.2 OOB Transmit Chain Spurious Emissions

The results for the measurement of transmit chain spurious emissions relative to the fundamental in a 100 kHz receiver bandwidth (at the nominal voltage and temperature) in the worst cases are provided in Figure 4.3.2 below.

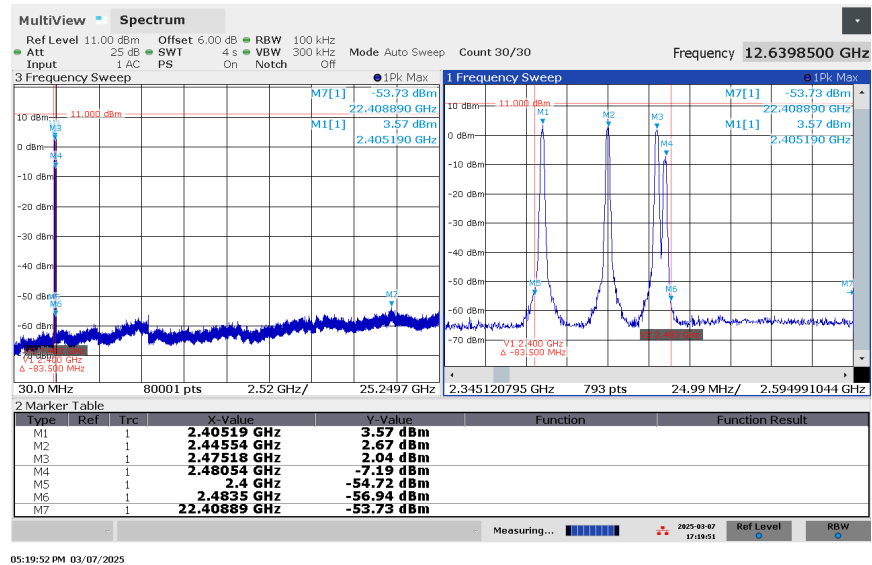


Figure 4.3.2 Worst Case Transmitter OOB Emissions Measured.

4.3.3 Radiated Digital and Cabinet Spurious

The results for the measurement of digital and cabinet spurious emissions are not reported herein as all emissions were greater than 20 dB below the regulatory limit. Emissions from digital components are measured to 1 GHz, or to five times the maximum crystal or oscillator operating frequency, whichever is greater. Cabinet emissions are measured up to the highest frequency tested during conducted measurements.

5 Measurement Uncertainty and Accreditation Documents

The maximum values of measurement uncertainty for the laboratory test equipment and facilities associated with each test are given in the table below. This uncertainty is computed for a 95.45% confidence level based on a coverage factor of $k = 2$.

Table 5.0.0 Measurement Uncertainty.

Measured Parameter	Measurement Uncertainty [†]
Radio Frequency	$\pm(f_{Mkr}/10^7 + RBW/10 + (SPN/(PTS - 1))/2 + 1 \text{ Hz})$
Conducted Emm. Amplitude	$\pm 1.9 \text{ dB}$
Radiated Emm. Amplitude ($f < 30 \text{ MHz}$)	$\pm 3.1 \text{ dB}$
Radiated Emm. Amplitude (30 – 200 MHz)	$\pm 4.0 \text{ dB}$
Radiated Emm. Amplitude (200 – 1000 MHz)	$\pm 5.2 \text{ dB}$
Radiated Emm. Amplitude ($f > 1000 \text{ MHz}$)	$\pm 3.7 \text{ dB}$

[†]Ref: CISPR 16-4-2:2011+A1:2014



Figure 5.0.0 Accreditation Documents