


Label and location





51.2V 100Ah
5120Wh

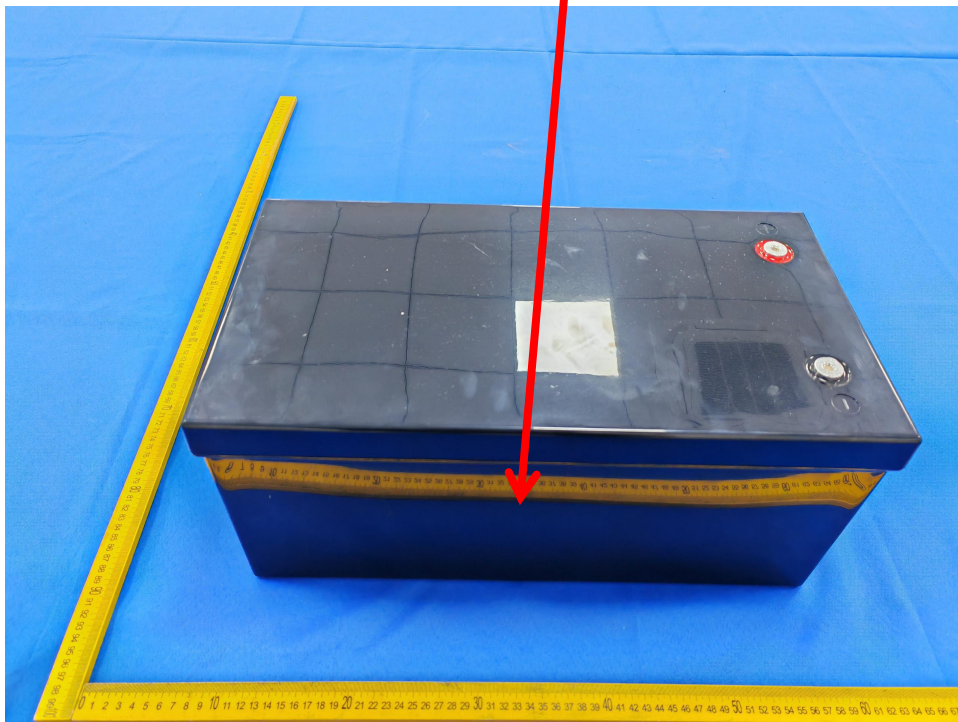

LTCP Low Temperature Charging Protection

Li Time

DO NOT

- Open, disassemble, or modify the battery.
- Puncture, drop, crush, burn, penetrate, shake, or strike the battery.
- Heat the battery above 158°F / 70°C.
- Expose metal terminals or connectors.
- Touch the exposed electrolyte or powder if the battery casing is damaged.

www.litime.com



service@litime.com

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference.
(2) This device must accept any interference received, including interference that may cause undesired operation.

CAUTION

Risk of fire and burns. Improper use of the battery can lead to battery failure or other potential damage.



Made in China

