


Inverted F Antenna Specification

Summary

ITEM	ANT SPEC					
Model Name	2.4G ANT					
Center Frequency	Horizontal			Vertical		
	2400MHz	2450MHz	2500MHz	2400MHz	2450MHz	2500MHz
	-1.26	-0.76	-0.58	-6.71	-4.15	-2.44
MAX. Gain	-0.58dBi					
Polarization	Horizontal and Vertical					
Azimuth Beam Pattern	Omni-directional					
Impedance	50 Ohm					
Manufacture	Shenzhenshihuayunzhichuangkeji Co., Ltd.					


202, Lingzhi Light Industry Building, No.78 Qianjin 1st Road, Lingzhi Garden Community, Xin'an Street, Bao'an District, Shenzhen City, Guangdong Province, China

Antenna Photo & Length (mm)

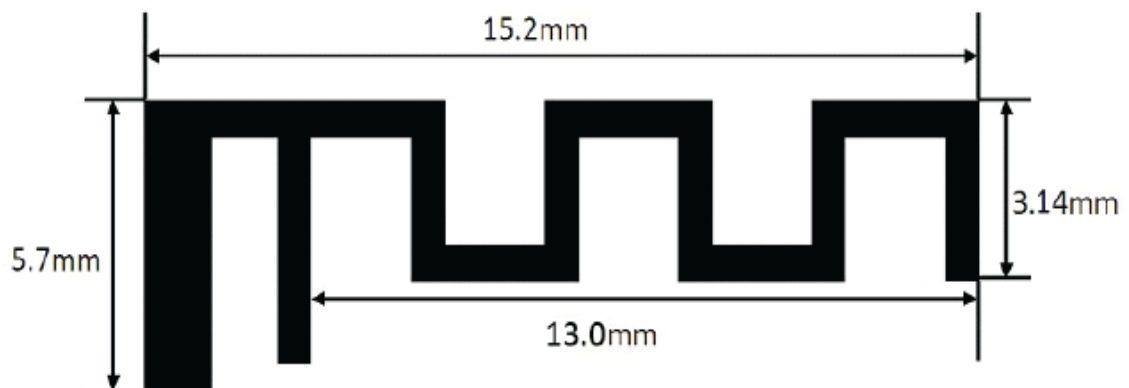

Horizontal: 2400 MHz 2450 MHz 2500 MHz


Max: 0dBi Min: -40dBi Scale: 5/div

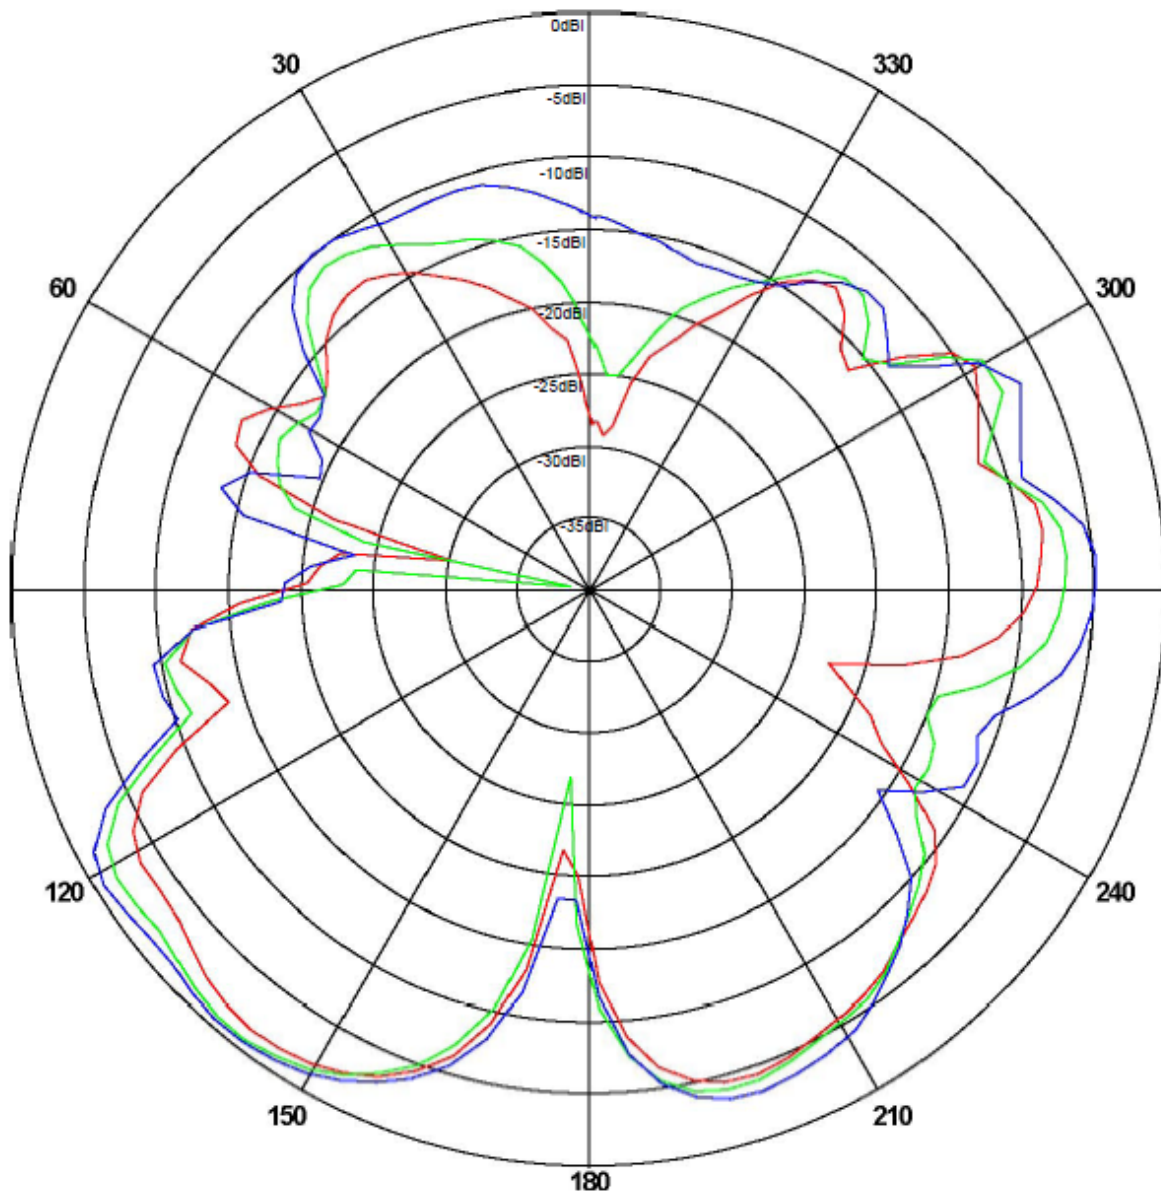

Frequency (MHz)	Gain(dBi)		
	Max	Min	Avg
2400	-1.26	-30.08	-7.18
2450	-0.76	-36.56	-7.48
2500	-0.58	-22.03	-6.59

Vertical: 2400 MHz 2450 MHz 2500 MHz

Max: 0dBi Min: -30dBi Scale: 5/div

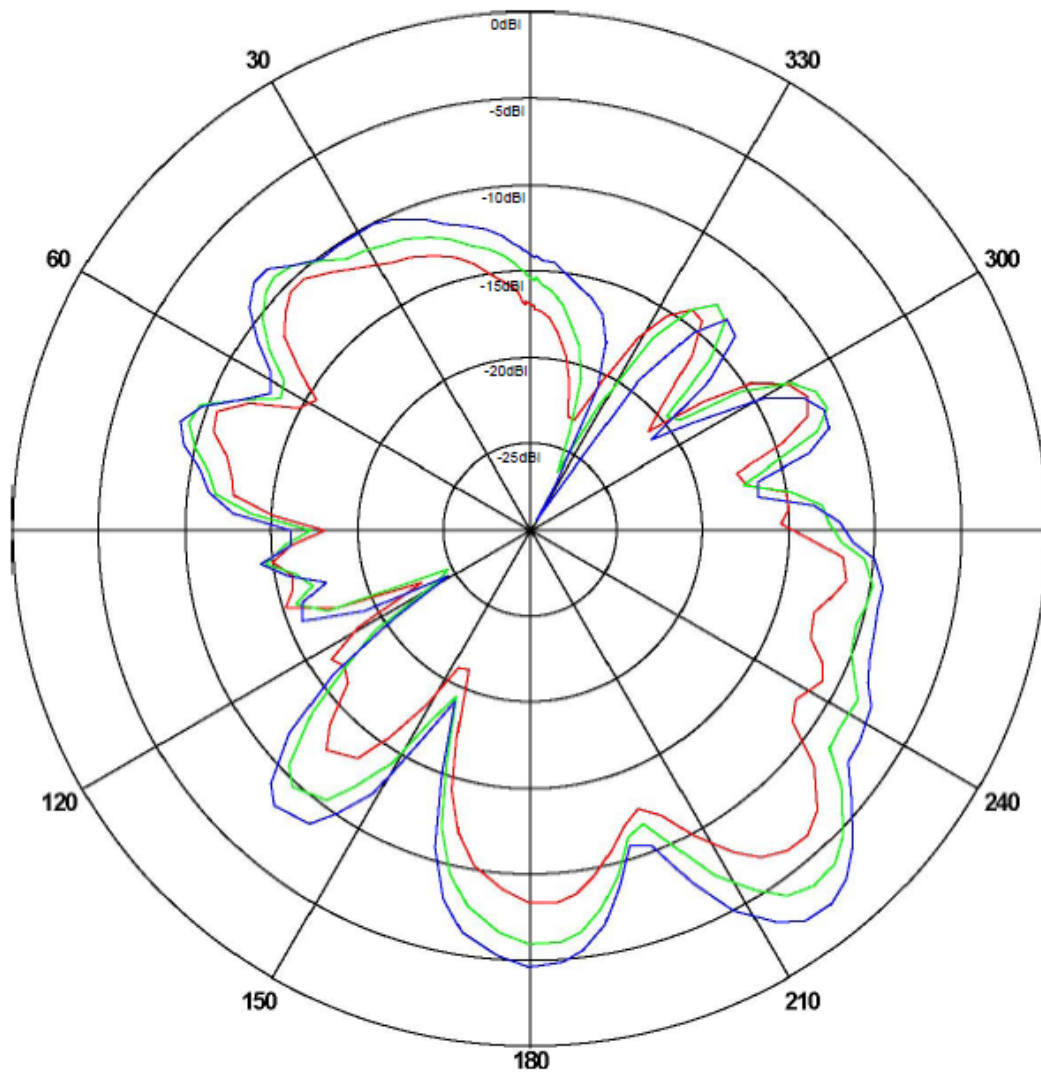

Frequency (MHz)	Gain (dBi)		
	Max	Min	Avg
2400	-6.71	-22.14	-12.42
2450	-4.15	-24.58	-10.47
2500	-2.44	-29.52	-9.204

ANT Test Labs: Attestation of Global Compliance Co., Ltd.