

### 3.10 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10: 2013 Section 11.12		
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m)	Remark
	30MHz-88MHz	40.0	Quasi-peak
	88MHz-216MHz	43.5	Quasi-peak
	216MHz-960MHz	46.0	Quasi-peak
	960MHz-1GHz	54.0	Quasi-peak
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

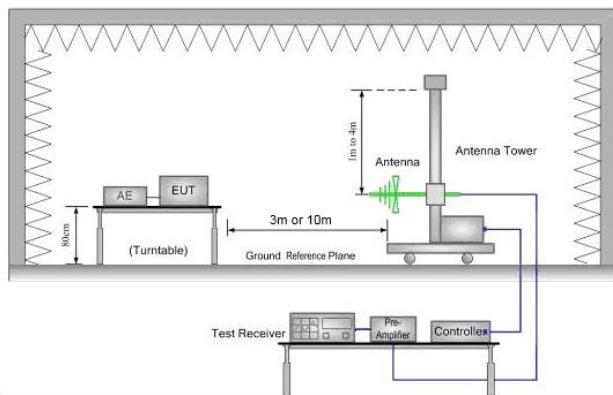


Figure 1. 30MHz to 1GHz

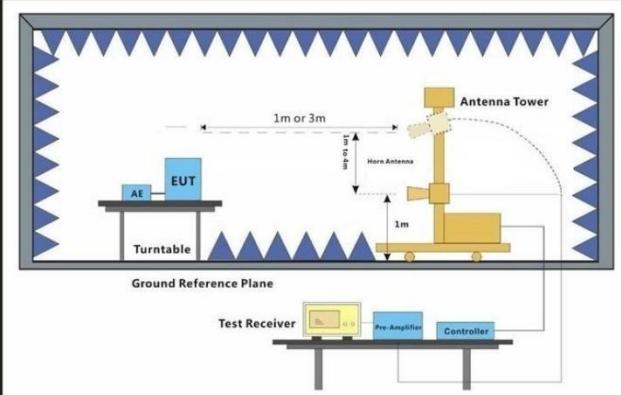


Figure 2. Above 1 GHz

Test Procedure:	<ol style="list-style-type: none"> <li>For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> <li>Test the EUT in the lowest channel , the Highest channel</li> <li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.</li> <li>Repeat above procedures until all frequencies measured was complete.</li> </ol>
Test Configuration:	Measurements Below 1000MHz

Dongguan DN Testing Co., Ltd.

Add: No. 1, West Fourth Street, Xingfa South Road, Wusha Community, Chang'an Town, Dongguan City, Guangdong P.R.China

Web: [www.dn-testing.com](http://www.dn-testing.com)

Tel:+86-769-88087383


E-mail: [service@dn-testing.com](mailto:service@dn-testing.com)



	<ul style="list-style-type: none"><li>• RBW = 120 kHz</li><li>• VBW = 300 kHz</li><li>• Detector = Peak</li><li>• Trace mode = max hold</li></ul> <p>Peak Measurements Above 1000 MHz</p> <ul style="list-style-type: none"><li>• RBW = 1 MHz</li><li>• VBW <math>\geq 3</math> MHz</li><li>• Detector = Peak</li><li>• Sweep time = auto</li><li>• Trace mode = max hold</li></ul> <p>Average Measurements Above 1000MHz</p> <ul style="list-style-type: none"><li>• RBW = 1 MHz</li><li>• VBW = 10 Hz, when duty cycle is no less than 98 percent.</li><li>• VBW <math>\geq 1/T</math>, when duty cycle is less than 98 percent where T is the minimum</li></ul> <p>transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Transmitting mode.
Final Test Mode:	Pretest the EUT Transmitting mode. Through Pre-scan, find the DH5 of data type is the worst case of all modulation type. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 2.9 for details
Test Results:	Pass


**Test Date****DH5 2402MHz**

Vertical:

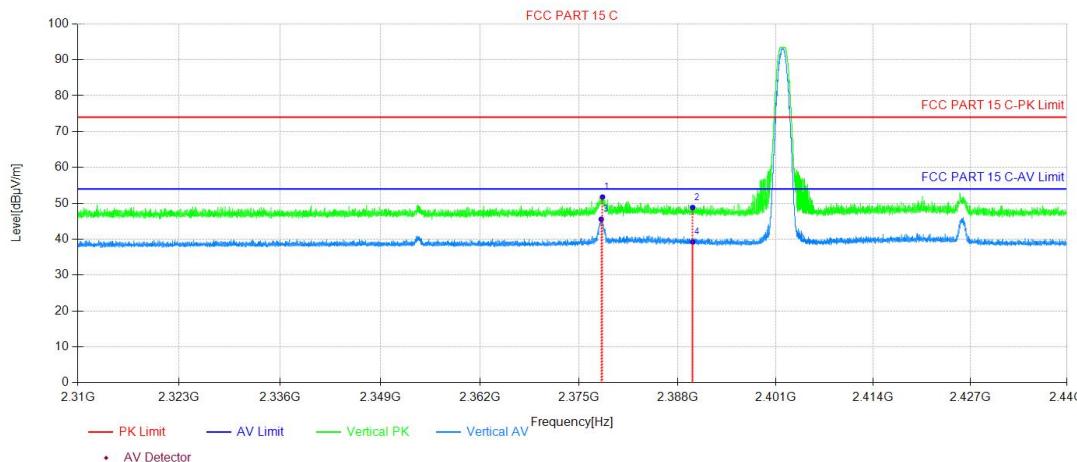

NO.	Freq. [MHz]	Reading Level [dBµV]	Correct Factor [dB/m]	Result Level [dBµV/m]	AV Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2378.10	50.40	1.35	51.75	74.00	22.25	150	85	Peak
2	2390.01	47.47	1.37	48.84	74.00	25.16	150	11	Peak
3	2377.93	44.23	1.35	45.58	54.00	8.42	150	85	AV
4	2390.01	37.83	1.37	39.20	54.00	14.80	150	147	AV


Horizontal:

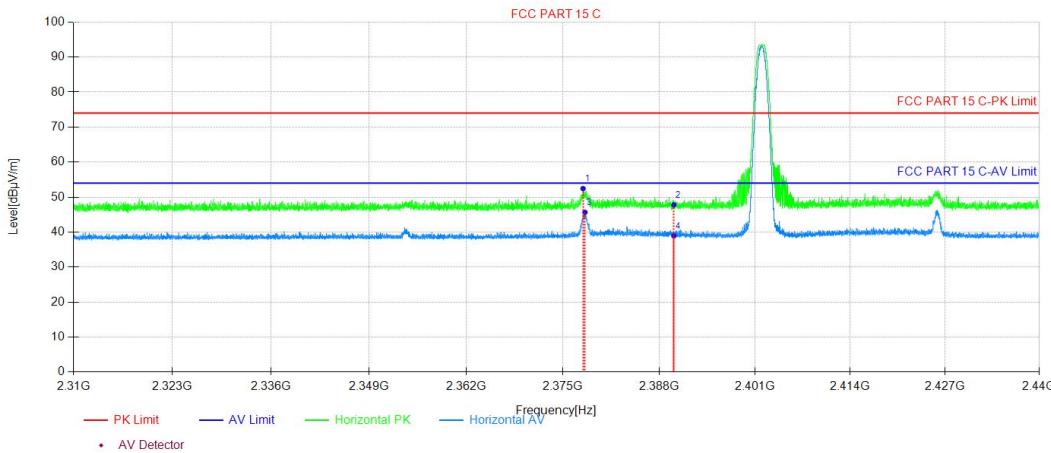

NO.	Freq. [MHz]	Reading Level [dBµV]	Correct Factor [dB/m]	Result Level [dBµV/m]	AV Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2377.72	51.09	1.35	52.44	74.00	21.56	150	89	Peak
2	2390.01	46.42	1.37	47.79	74.00	26.21	150	135	Peak
3	2377.98	44.31	1.35	45.66	54.00	8.34	150	81	AV
4	2390.01	37.53	1.37	38.90	54.00	15.10	150	69	AV


**DH5 2480MHz**

Vertical:

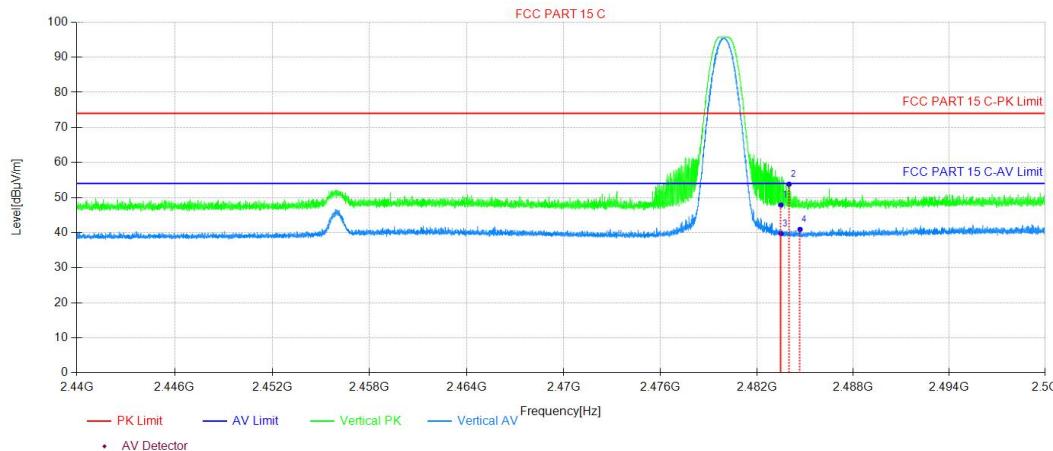

NO.	Freq. [MHz]	Reading Level [dB $\mu$ V]	Correct Factor [dB/m]	Result Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2483.50	46.01	1.86	47.87	74.00	26.13	150	81	Peak
2	2484.00	51.93	1.86	53.79	74.00	20.21	150	65	Peak
3	2483.50	37.87	1.86	39.73	54.00	14.27	150	129	AV
4	2484.69	39.05	1.86	40.91	54.00	13.09	150	81	AV

Horizontal:

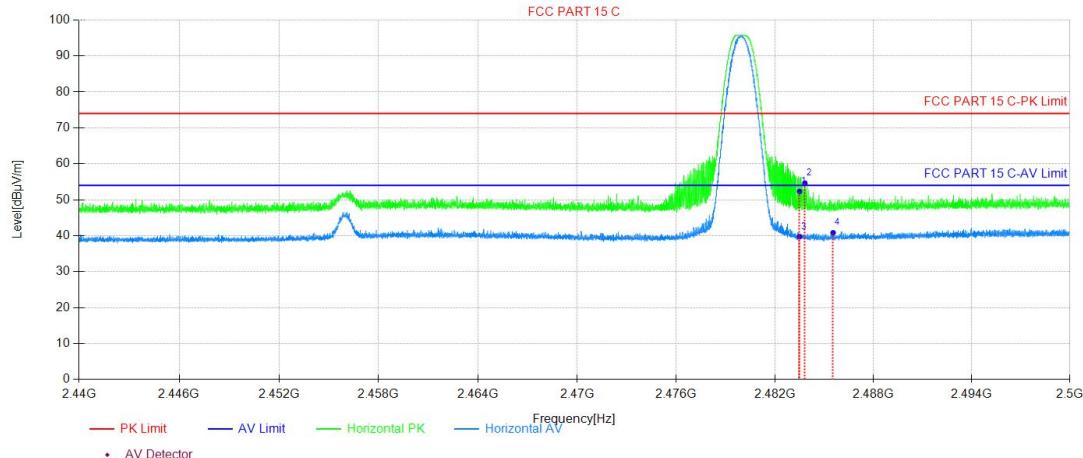


NO.	Freq. [MHz]	Reading Level [dB $\mu$ V]	Correct Factor [dB/m]	Result Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2483.50	50.46	1.86	52.32	74.00	21.68	150	146	Peak
2	2483.82	52.78	1.86	54.64	74.00	19.36	150	70	Peak
3	2483.50	37.90	1.86	39.76	54.00	14.24	150	146	AV
4	2485.55	38.99	1.86	40.85	54.00	13.15	150	23	AV

Note:

1. The Measurement (Result Level) is calculated by Reading Level adding the Correct Factor(maybe including Ant.Factor and the Cable Factor etc.), The basic equation is as follows:

Result Level= Reading Level + Correct Factor(including Ant.Factor ,Cable Factor etc.

### 3.11 AC Power Line Conducted Emissions

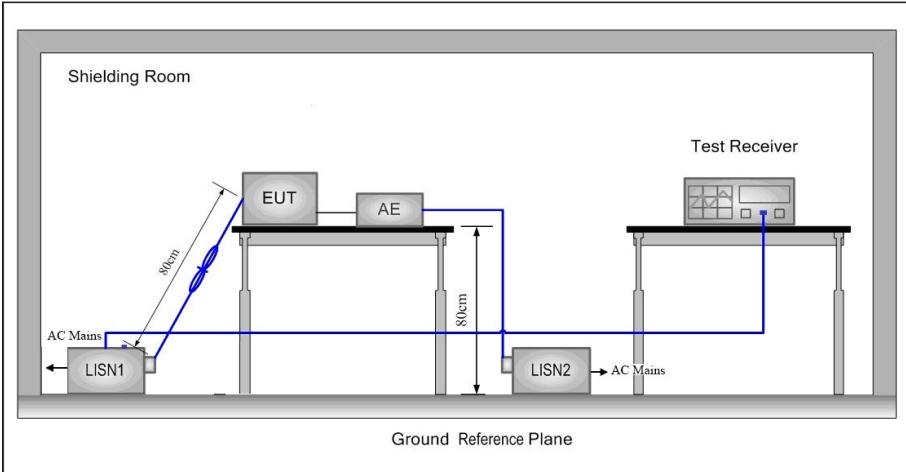Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	<p>1) The mains terminal disturbance voltage test was conducted in a shielded room.</p> <p>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a <math>50\Omega/50\mu\text{H} + 5\Omega</math> linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</p> <p>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</p> <p>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 2013 on conducted measurement.</p>		
Test Setup:			
Exploratory Test Mode:	<p>Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.</p> <p>Charge + Transmitting mode.</p>		




Final Test Mode:	Through Pre-scan, find the the worst case.
Instruments Used:	Refer to section 2.9 for details
Test Results:	PASS

### Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live Line:

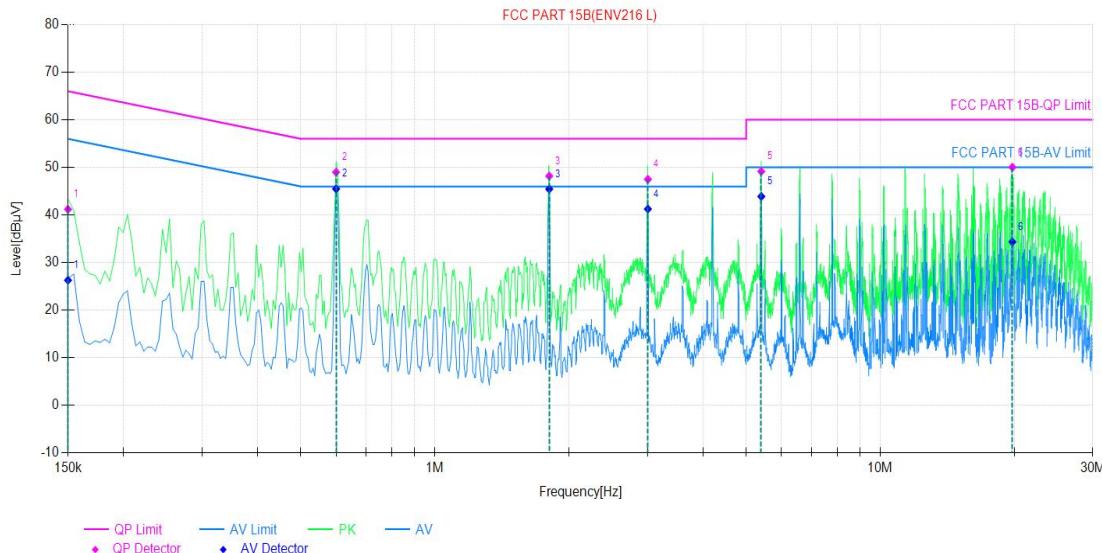

NO.	Freq. [MHz]	Correct Factor [dB]	QP Reading Level [dB $\mu$ V]	QP Result Level [dB $\mu$ V]	QP Limit [dB $\mu$ V]	QP Margin [dB]	AV Reading Level [dB $\mu$ V]	AV Result Level [dB $\mu$ V]	AV Limit [dB $\mu$ V]	AV Margin [dB]
1	0.15	9.89	31.3	41.19	66.00	24.81	16.41	26.30	56.00	29.70
2	0.6	9.82	39.18	49.00	56.00	7.00	35.68	45.50	46.00	0.50
3	1.80	9.73	38.45	48.18	56.00	7.82	35.71	45.44	46.00	0.56
4	3.00	9.74	37.76	47.50	56.00	8.50	31.51	41.25	46.00	4.75
5	5.40	9.81	39.34	49.15	60.00	10.85	34.09	43.90	50.00	6.10
6	19.80	10.11	39.92	50.03	60.00	9.97	24.24	34.35	50.00	15.65

Neutral Line:

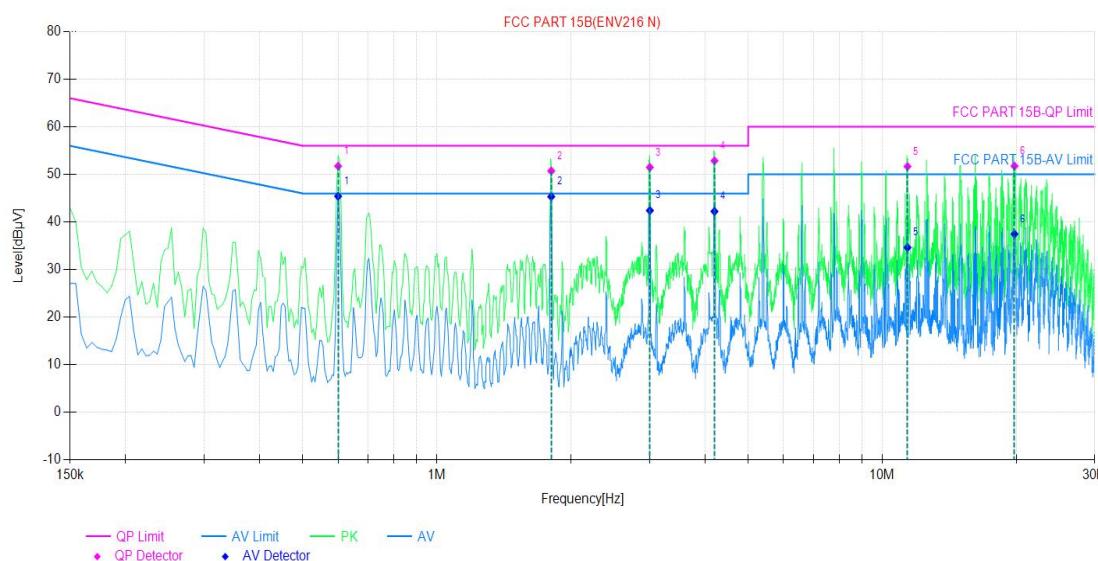

NO.	Freq. [MHz]	Correct Factor [dB]	QP Reading Level [dBμV]	QP Result Level [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading Level [dBμV]	AV Result Level [dBμV]	AV Limit [dBμV]	AV Margin [dB]
1	0.6	9.78	41.95	51.73	56.00	4.27	35.63	45.41	46.00	0.59
2	1.80	9.76	40.97	50.73	56.00	5.27	35.56	45.32	46.00	0.68
3	3.01	9.87	41.61	51.48	56.00	4.52	32.54	42.41	46.00	3.59
4	4.20	9.96	42.9	52.86	56.00	3.14	32.27	42.23	46.00	3.77
5	11.39	9.84	41.82	51.66	60.00	8.34	24.81	34.65	50.00	15.35
6	19.81	10.06	41.69	51.75	60.00	8.25	27.42	37.48	50.00	12.52

## Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. The Measurement (Result Level) is calculated by Reading Level adding the Correct Factor(maybe including LISN Factor and the Cable Factor etc.), The basic equation is as follows:

Result Level= Reading Level + Correct Factor(including LISN Factor, Cable Factor )



## 4 Appendix

### Appendix A: 20dB Emission Bandwidth

#### Test Result

Test Mode	Antenna	Freq(MHz)	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	1.050	2401.478	2402.528	---	---
		2441	1.047	2440.481	2441.528	---	---
		2480	1.062	2479.463	2480.525	---	---
2DH5	Ant1	2402	1.296	2401.346	2402.642	---	---
		2441	1.353	2440.328	2441.681	---	---
		2480	1.389	2479.307	2480.696	---	---
3DH5	Ant1	2402	1.305	2401.349	2402.654	---	---
		2441	1.299	2440.346	2441.645	---	---
		2480	1.287	2479.358	2480.645	---	---



## Test Graphs

## DH5\_Ant1\_2402



## DH5\_Ant1\_2441



## DH5\_Ant1\_2480





## 2DH5\_Ant1\_2402



## 2DH5\_Ant1\_2441



## 2DH5\_Ant1\_2480





## 3DH5\_Ant1\_2402



## 3DH5\_Ant1\_2441



## 3DH5\_Ant1\_2480





## Appendix B: Maximum conducted output power

### Test Result

Test Mode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	-0.59	≤20.97	PASS
		2441	-1.38	≤20.97	PASS
		2480	-1.98	≤20.97	PASS
2DH5	Ant1	2402	0.22	≤20.97	PASS
		2441	-0.32	≤20.97	PASS
		2480	-1.06	≤20.97	PASS
3DH5	Ant1	2402	0.69	≤20.97	PASS
		2441	-0.23	≤20.97	PASS
		2480	-0.75	≤20.97	PASS

**Test Graphs****DH5\_Ant1\_2402****DH5\_Ant1\_2441****DH5\_Ant1\_2480**



## 2DH5\_Ant1\_2402



## 2DH5\_Ant1\_2441



## 2DH5\_Ant1\_2480





## 3DH5\_Ant1\_2402



## 3DH5\_Ant1\_2441



## 3DH5\_Ant1\_2480





## Appendix C: Carrier frequency separation


### Test Result

Test Mode	Antenna	Freq(MHz)	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.132	≥1.062	PASS
2DH5	Ant1	Hop	0.992	≥0.926	PASS
3DH5	Ant1	Hop	0.992	≥0.870	PASS



## Test Graphs

## DH5\_Ant1\_Hop

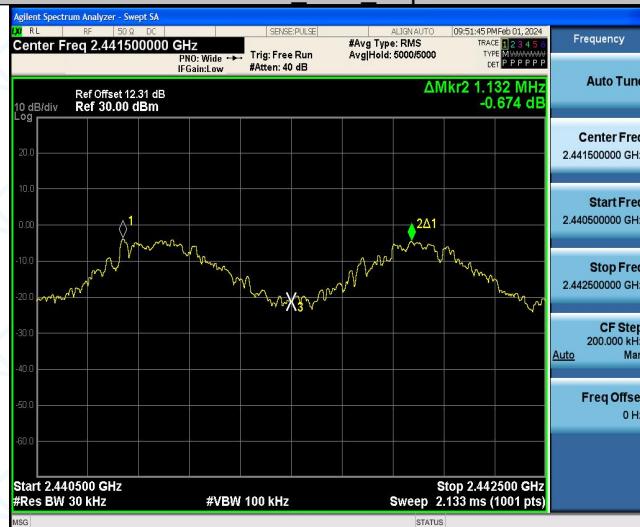

## 2DH5\_Ant1\_Hop



## 3DH5\_Ant1\_Hop

