


MBAP v1.0 LABEL SPECIFICATIONS

- LABEL TO BE MANUFACTURED WITH UL RECOGNIZED MATERIALS TO MEET PERMANENCE OF MARKING TEST, 15 SECONDS RUBBING WITH 'HEXANE', 15 SECONDS WITH WATER.
- LABEL MUST BE LEGIBLE AND NOT EASILY REMOVEABLE.
- MIN FLAMMABILITY RATING IS 'HB'
- MATERIAL:
STOCK: 2 MIL GLOSS WHITE POLYESTER
ADHESIVE: PERMANENT
LAMINATE: 1 MIL CLEAR
- SERIAL NUMBERING TO FOLLOW THE FOLLOWING SCHEME:
MBAPv-YYWW-XXXX
-YYWW TO REFERENCE MANUFACTURING YEAR AND WEEK.
(EX. WEEK BEGINNING 2024-04-01 = -2414)
DATE TO BE SPECIFIED BY PURCHASER AT PO PLACEMENT.
-XXXX TO START AT -0001 AND INCREASE SEQUENTIALLY.
QR CODE TO MATCH FULL FORMAT SERIAL NUMBER.



LABEL LOCATIONS

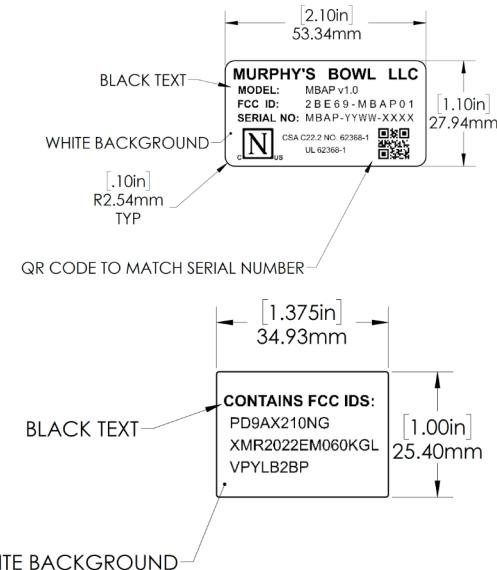