

TEST REPORT

Reference No...... : WTD24D02035253W
FCC ID..... : 2BE7O-QUWP1
Applicant : FAR EASTERN MANUFACTURING LTD.
Address : MAJOR HOUSE, UNIT B, 964 NORTH CIRCULAR ROAD, LONDON,
NW2 7JR, UK
Manufacturer : FAR EASTERN MANUFACTURING LTD.
Address : MAJOR HOUSE, UNIT B, 964 NORTH CIRCULAR ROAD, LONDON,
NW2 7JR, UK
Product : Wireless Kinetic Switch
Model(s) : QUWP1, QUWP2, QUWS1W, QUWS2W, QUWS3W, QUWS1B,
QUWS1S, QUWS2B, QUWS2S, QUWS3B, QUWS3S
Brand Name..... :  , 
Standards : FCC 47CFR Part 15 Subpart C Section 15.231
Date of Receipt sample : 2018-11-02
Date of Test : 2018-11-02 to 2018-11-06
Date of Issue : 2024-03-14
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998

Fax: +86-769-2267 6828

Compiled by:

James Cheng

James Cheng / Project Engineer

Approved by:

Deval Qin


Deval Qin / Designated Reviewer

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS	2
3 REVISION HISTORY.....	3
4 GENERAL INFORMATION.....	4
4.1 GENERAL DESCRIPTION OF E.U.T.....	4
4.2 DETAILS OF E.U.T.	4
4.3 TEST MODE	4
5 EQUIPMENT USED DURING TEST.....	5
5.1 EQUIPMENTS LIST	5
5.2 MEASUREMENT UNCERTAINTY	6
5.3 TEST EQUIPMENT CALIBRATION	6
5.4 TEST FACILITY	6
6 TEST SUMMARY	8
7 RADIATED SPURIOUS EMISSIONS	9
7.1 EUT OPERATION	9
7.2 TEST SETUP	10
7.3 SPECTRUM ANALYZER SETUP.....	11
7.4 TEST PROCEDURE	12
7.5 SUMMARY OF TEST RESULTS	12
8 PERIODIC OPERATION.....	14
9 EMISSION BANDWIDTH.....	17
9.1 TEST PROCEDURE	17
9.2 TEST RESULT	17
10 ANTENNA REQUIREMENT	18
11 PHOTOGRAPHS –TEST SETUP AND EUT	18

3 Revision History

Test Report No.	Date of Receipt Sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD24D02035253W	2018-11-02	2018-11-02 to 2018-11-06	2024-03-14	Original	-	Valid
Note: This report is based on WTS18S11127947W (FCC ID: 2AL7Q-GD-10T) to change applicant, manufacturer, product name, models and add brand names.						

4 General Information

4.1 General Description of E.U.T.

Product Name:	Wireless Kinetic Switch
Model No.:	QUWP1, QUWP2, QUWS1W, QUWS2W, QUWS3W, QUWS1B, QUWS1S, QUWS2B, QUWS2S, QUWS3B, QUWS3S
Model Description:	Only the colors, number of the buttons are different, the others are all the same. The model QUWP1 is the tested sample.
Note:	The new model QUWP1 corresponds to the original reported model GD-10T.

4.2 Details of E.U.T.

Frequency Range:	433.32MHz
Type of Modulation:	FSK
Antenna installation:	Integrated Antenna
Rating(s):	N/A

4.3 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Channel
Transmitting	433.32MHz

5 Equipment Used during Test

5.1 Equipments List

3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	2018.04.20	2019.04.19
2	Amplifier	Agilent	8447D	2944A10178	2018.01.10	2019.01.09
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2018.05.18	2019.05.17
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2018.10.15	2019.10.14
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2018.05.18	2019.05.17
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2018.10.24	2019.10.23
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2018.04.07	2019.04.06
8	Coaxial Cable (above 1GHz)	Top	1GHz-18GHz	EW02014-7	2018.04.07	2019.04.06
9	Signal Generator	R&S	SMP22	100102	2018.09.15	2019.09.14
3m Semi-anechoic Chamber for Radiation Emissions(TDK)						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2018.04.20	2019.04.19
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2018.04.19	2019.04.18
3	Amplifier	ANRITSU	MH648A	M43381	2018.04.20	2019.04.19
4	Cable	HUBER+SUHNER	CBL2	525178	2018.04.20	2019.04.19
5	Active Loop Antenna	Com-Power Corp.	AL-130R	10160007	2018.04.17	2019.04.16
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMI Test Receiver	R&S	ESCI	100947	2018.09.15	2019.09.14
2	LISN	R&S	ENV216	100115	2018.09.15	2019.09.14
3	Cable	Top	TYPE16(3.5M)	-	2018.09.15	2019.09.14

5.2 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Conducted Emissions	150kHz~30MHz	$\pm 3.64\text{dB}$	(1)
Radiated Spurious Emissions	30MHz~1000MHz	$\pm 5.03\text{dB}$	(1)
	1000M~5000MHz	$\pm 5.47\text{ dB}$	(1)
(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.			

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by GUANG ZHOU GRG METROLOGY & TEST CO., LTD. address is No.163, Pingyun Rd. West of Huangpu Ave, Tianhe District, Guangzhou, Guangdong, China.

5.4 Test Facility

A. Accreditations for Conformity Assessment (International)

Abbreviations for Conformity Assessment (International)

Country/Region	Scope Covered By	Scope	Note
USA	ISO/IEC 17025	FCC ID \ DOC \ VOC	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India		WPC	-
Thailand		NTC	-
Singapore		IDA	-
Note: 1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476. 2. ISED Canada Registration No.: 7760A			

B.TCBs and Notify Bodies Recognized Testing Laboratory.

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd.	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

6 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	N/A
Radiated Spurious Emissions	15.205(a) 15.209 15.231(a)	Pass
Periodic Operation	15.231(a)	Pass
Emission Bandwidth	15.231(c)	Pass
Antenna Requirement	15.203	Pass
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	Pass
Note: Pass=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable		

7 Radiated Spurious Emissions

Test Requirement: FCC Part15 §15.231(a), (b)

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Fundamental Frequency (MHz)	Field Strength of Fundamental (uV/m)	Field Strength of Fundamental (dBuV/m)	Field Strength of Spurious Emission (uV/m)	Field Strength of Spurious Emission (dBuV/m)
44.66-40.70	2250	67	225	47
70-130	1250	62	125	42
130-174	1250 to 3750*	62 to 71.48*	125 to 375*	42 to 51.48*
174-260	3750	71.48	375	51.48
260-470	3750 to 12500*	71.48 to 81.94*	375 to 1250*	51.48 to 61.94*
Above 470	12500	81.94	1250	61.94
* linear interpolations				

7.1 EUT Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 51.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation:

The test was performed in transmitting mode, the test data were shown in the report.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

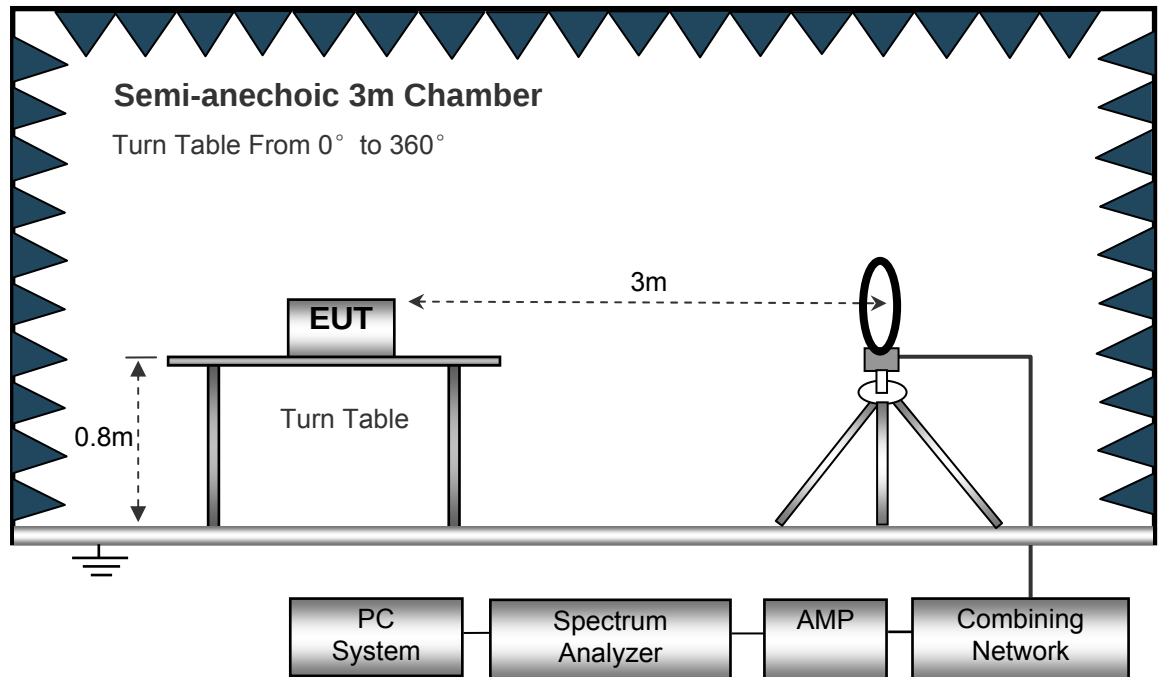

The test setup for emission measurement from 30 MHz to 1 GHz.

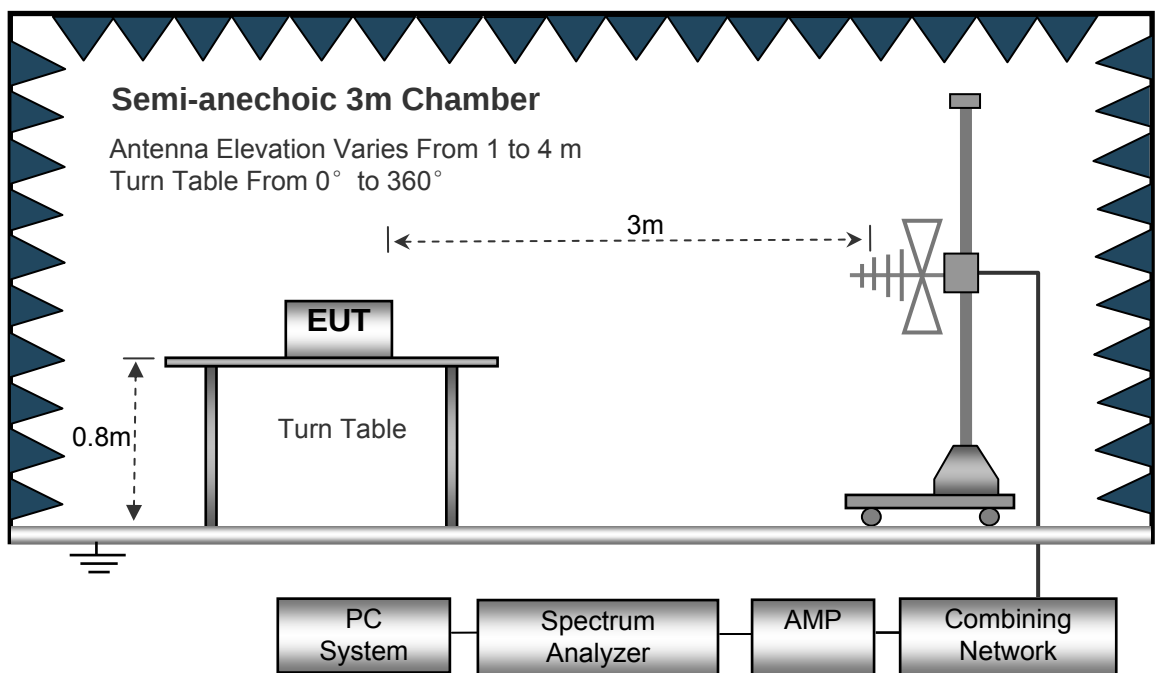

The test setup for emission measurement above 1 GHz.

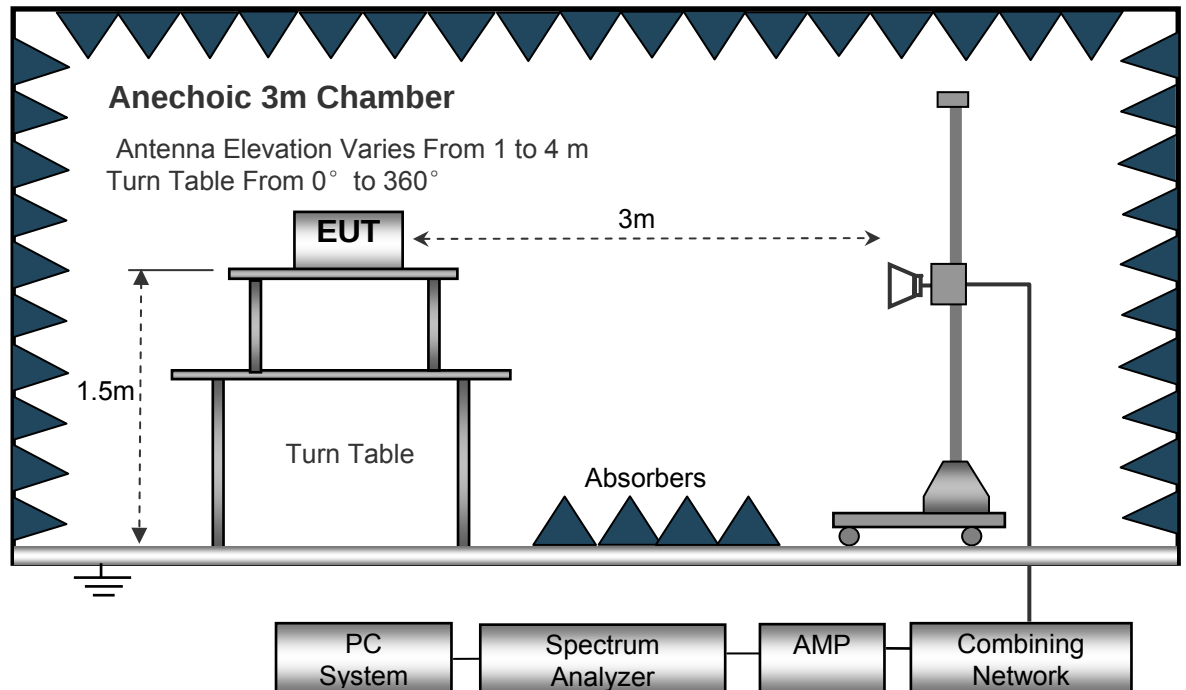

7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep SpeedAuto
 IF Bandwidth.....10kHz
 Video Bandwidth.....10kHz
 Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

Sweep SpeedAuto
 DetectorPK
 Resolution Bandwidth.....100kHz
 Video Bandwidth.....300kHz

Above 1GHz

Sweep SpeedAuto
 DetectorPK
 Resolution Bandwidth.....1MHz
 Video Bandwidth.....3MHz

7.4 Test Procedure

1. The EUT is placed on a turntable. For below 1GHz, the EUT is 0.8m above ground plane; For above 1GHz, the EUT is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X, Y, Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

7.5 Summary of Test Results

Test Frequency: 9 kHz~30 MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 6GHz

Frequency	Receiver Reading (PK)	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude (PK)	FCC Part 15.231/15.209/205	
			Height	Polar			Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)
433.32	89.36	156	1.5	H	-7.26	82.10	100.81	-18.71
433.32	75.85	208	1.8	V	-7.26	68.59	100.81	-32.22
866.64	42.81	255	1.4	H	0.04	42.85	80.81	-37.96
866.64	41.29	44	1.4	V	0.04	41.33	80.81	-39.48
1299.96	49.42	95	1.2	H	-16.75	32.67	80.81	-48.14
1299.96	52.36	235	1.7	V	-16.75	35.61	80.81	-45.20
1733.28	45.77	150	2.0	H	-15.03	30.75	80.81	-50.06
1733.28	47.02	274	1.9	V	-15.03	31.99	80.81	-48.82

AV = Peak +20Log₁₀(duty cycle) =PK+(-21.45) [refer to section 9 for more detail]

Frequency	PK	RX Antenna Polar	Duty cycle Factor	Calculated AV	FCC Part 15.231/209/205	
					Limit	Margin
(MHz)	(dBμV/m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
433.32	82.10	H	-21.45	60.65	80.81	-20.16
433.32	68.59	V	-21.45	47.14	80.81	-33.67
866.64	42.85	H	-21.45	21.40	60.81	-39.41
866.64	41.33	V	-21.45	19.88	60.81	-40.93
1299.96	32.67	H	-21.45	11.22	60.81	-49.59
1299.96	35.61	V	-21.45	14.16	60.81	-46.65
1733.28	30.75	H	-21.45	9.30	60.81	-51.51
1733.28	31.99	V	-21.45	10.54	60.81	-50.27

8 Periodic Operation

The duty cycle was determined by the following equation:

To calculate the actual field intensity, the duty cycle correction factor in decibel is needed for later use and can be obtained from following conversion

Duty Cycle(%)=Total On interval in a complete pulse train/ Length of a complete pulse train * %

Duty Cycle Correction Factor(dB)=20 * Log₁₀(Duty Cycle (%)/100)

Total transmission time(ms)	1.41*6=8.46
Length of a complete transmission period(ms)	100
Duty Cycle (%)	8.46
Duty Cycle Correction Factor(dB)	-21.45

Refer to the duty cycle plot (as below), this device meets the FCC requirement.



Length of a complete pulse train:

Remark:

According to FCC part15.35(c) required that a complete pulse train is more than 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

Refer to the duty cycle plot (as below)

Test Plot

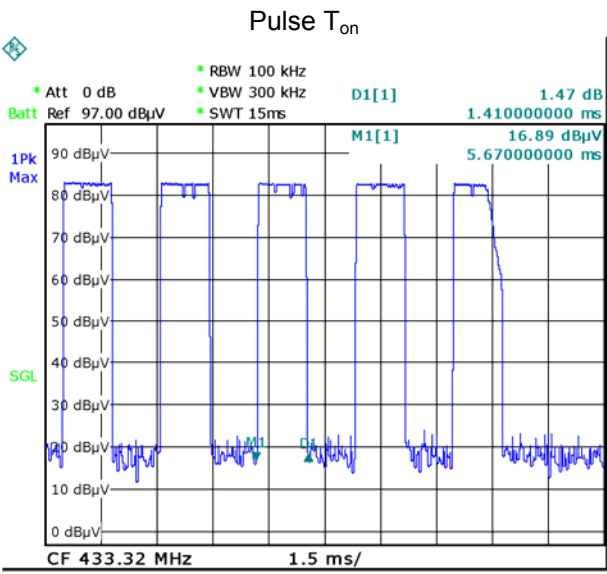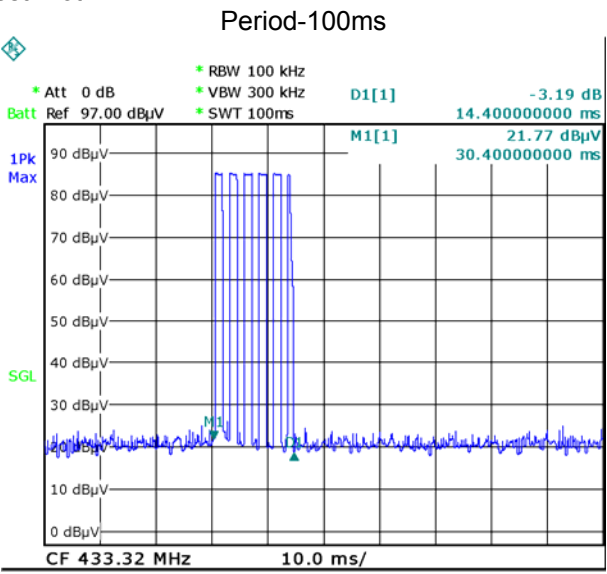


According to FCC Part15.231(a)

- (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- (2)A transmitter activated automatically shall cease transmission within 5 seconds after activation.

Test result

Duration Time (ms)	Limit (s)	Result
320	<5.0	Compliance

Test Plot

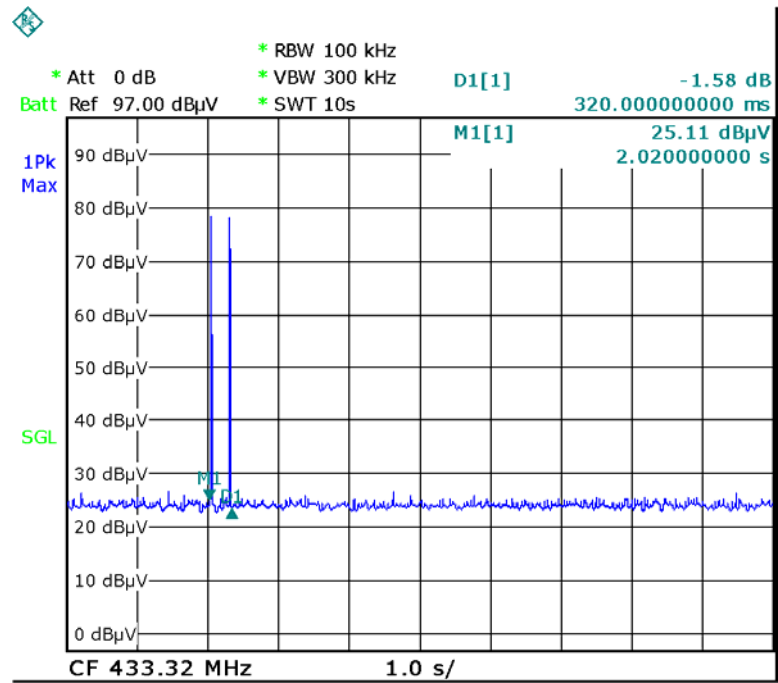

9 Emission Bandwidth

Test Requirement: FCC Part15.231(c)

Test Method: FCC Part15.231(c)

Limit The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency.


9.1 Test Procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer. EUT and its simulators are placed on a table, let EUT working in test mode, then test it.
2. The bandwidth of the fundamental frequency was measure by spectrum analyser with:
RBW=1% to 5% of OBW, VBW=3 times of RBW.
The 20 dB bandwidth and 99% bandwidth were recorded.

9.2 Test Result

Frequency (MHz)	20dB Bandwidth Emission(kHz)	99% Bandwidth Emission(kHz)	Limit (kHz)	Result
433.32	221.60	183.63	1083.30	Compliance

Test Plot

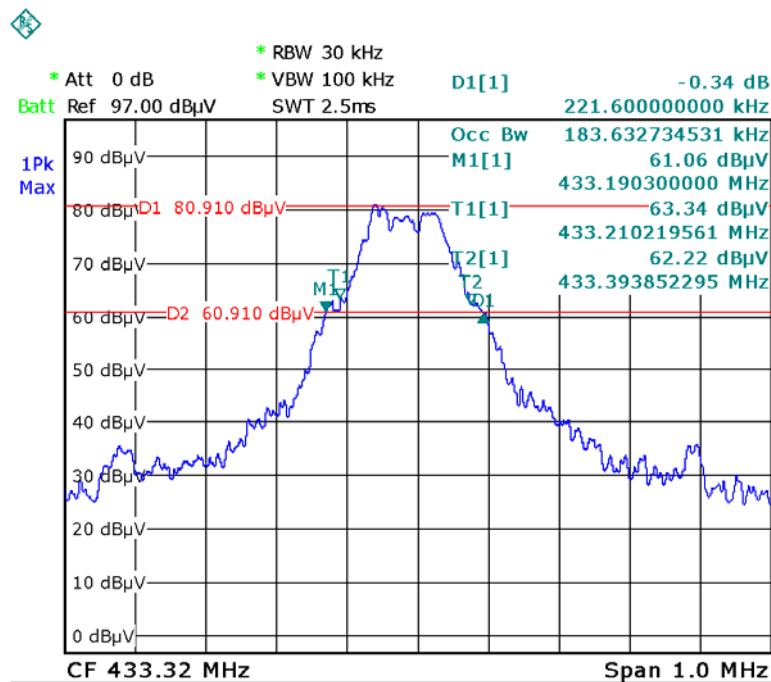

10 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfil the requirement of this section.

Note: Please refer to EUT photos for more details.

11 Photographs –Test Setup and EUT

Note: Please refer to appendix: Appendix-QUWP1-Photos.

=====End of Report=====