

HONANT

Acknowledgement

SPECIFICATION FOR APPROVAL

Customer Name

CUSTOMER NAME:

Shenzhen Gangshan Guanglian Electronic Technology Co., Ltd.
The third floor of Building 11, Heshakeng Industrial Zone, Sanlian Village, Buji Town,
Longgang District, Shenzhen

Customer Part Number

CUSTOMER P/N:

1120-008-0084 2.4Gbuilt-inFPCSticker Antenna,L=45MM, domesticIPEX
Interface/Hongji Wireless Long44*Width5.6MM

Product Number

PRODUCT P/N:

H1C45F3D380A

Product Name

PRODUCT NAME:

2.4Gbuilt-inFPCantenna

Specifications:

H1C45F3D380A/2.4Gbuilt-inFPCantenna0.81Black Line

Description:

L=45mm+DomesticIPEX(Second generation)

Version

REV:

Aversion

Factory stamp

SIGN	Approval APPROVED BY	Audit CHECKED BY	Production DRAM

Customer signature

SIGN	quality QE	Development R&D	project PE

Table of contents

Contents

one,Version History (Revision History)

two,Specifications (Specification Table)

three,Finished product picture (Product Drawing)

Four,Packaging Specifications (Packaging Specifications)

five,Test Report (Test Report)

six,Schematic diagram of the whole machine (Schematic diagram of the entire machine)

1. Version HistoryRevision History):

Version Number Reversion n	Revision Page noodle Revisio	Change Date Change date	Revised by Revised by	Reasons and contents of revision Reason and content for revision	Remark Remarks
A	-	2024.12.21	Victor	First edition released	

illustrate:

In principle, this specification is valid for 1 year;


If either party needs to make changes, both parties must reach an agreement and the changes can be implemented; after the validity period of this specification expires, if neither party makes any request for modification, the validity period of this specification will be extended by 1 year.

2. SpecificationsSpecification Table):




Main technical parameters of the product

Main technical indicators		Main technical specifications	
Frequency range (MHZ)	2400-2500	Frequency Range (MHZ)	2400-2500
Characteristic impedance(Ω)	50	Impedance(Ω)	50
Gain(dBi)	1.66	Gain(dBi)	1.66
Output voltage VSWR	≤2.0	VSWR	≤2.0
Polarization	Linear polarization	Polarization	Linear
Directionality	Omnidirectional	Radiation	Omni-directional
Connection	Cable+IPEX	Connector Type	Cable+IPEX
Physical properties		Physical Properties	
Antenna Materials	FPC	Antenna cover	FPC
Operating temperature	- 20°C~+70°C	Operating Temp	- 20°C~+70°C
Storage temperature	- 20°C~+60°C	Storage Temp	- 20°C~+60°C

3. Finished product picture (Product drawing):

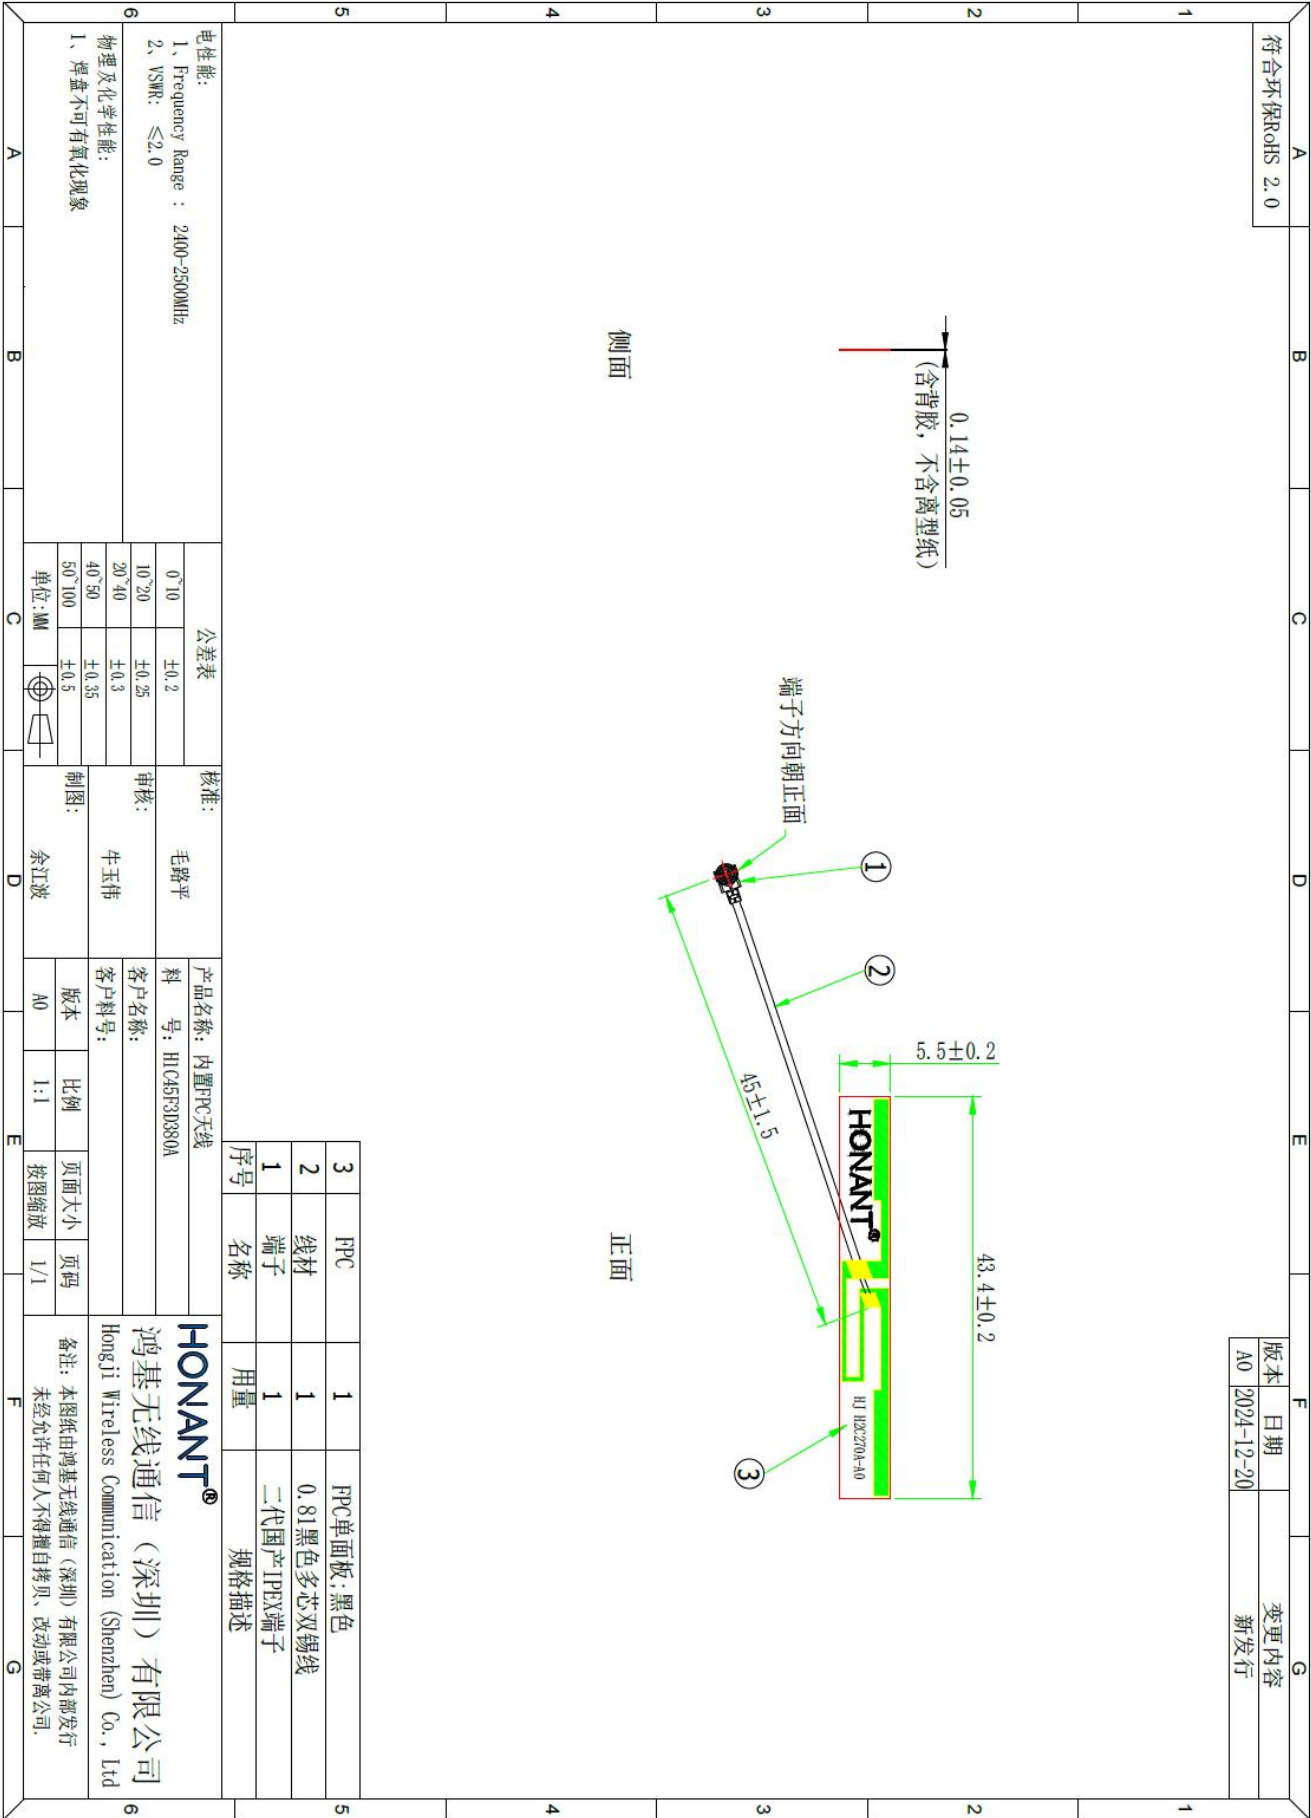


4. Packaging Specifications (Packaging specifications):

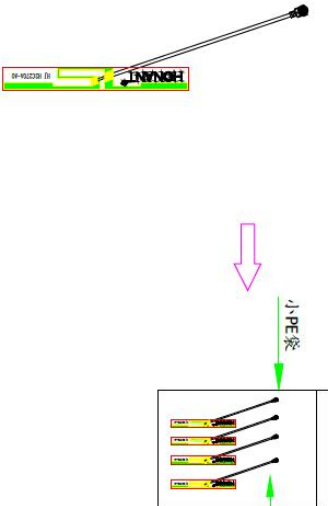A				B				C				D				E				F				G																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
符合环保RoHS 2.0																				版本				日期				变更内容																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
																				A0				2024-12-20				新发行																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
1								单个产品								小内袋包装说明： 1. 每袋装入200pcs产品。								大内袋包装说明： 1. 每大袋装入10小袋/共2000PCS产品。 2. 每大袋需贴相应内袋标签																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
2																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
3																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
4								外箱包装说明： 1. 纸箱底/顶层需放各1PCS平卡， 2. 外箱需贴1PCS外箱标签于图示位置。 3. 每箱装10大袋/共20000PCS产品。 (此数量可在可沉重及可转运范围内调整)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
5								注：此包装方式为预估 出货时以实际为准																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
6																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
A		B		C		D		E		F		G		H		I		J		K		L		M		N		O		P		Q		R		S		T		U		V		W		X		Y		Z																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
				单位:MM																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							

5. Test report:

5.1: Network Analyzer Test Report

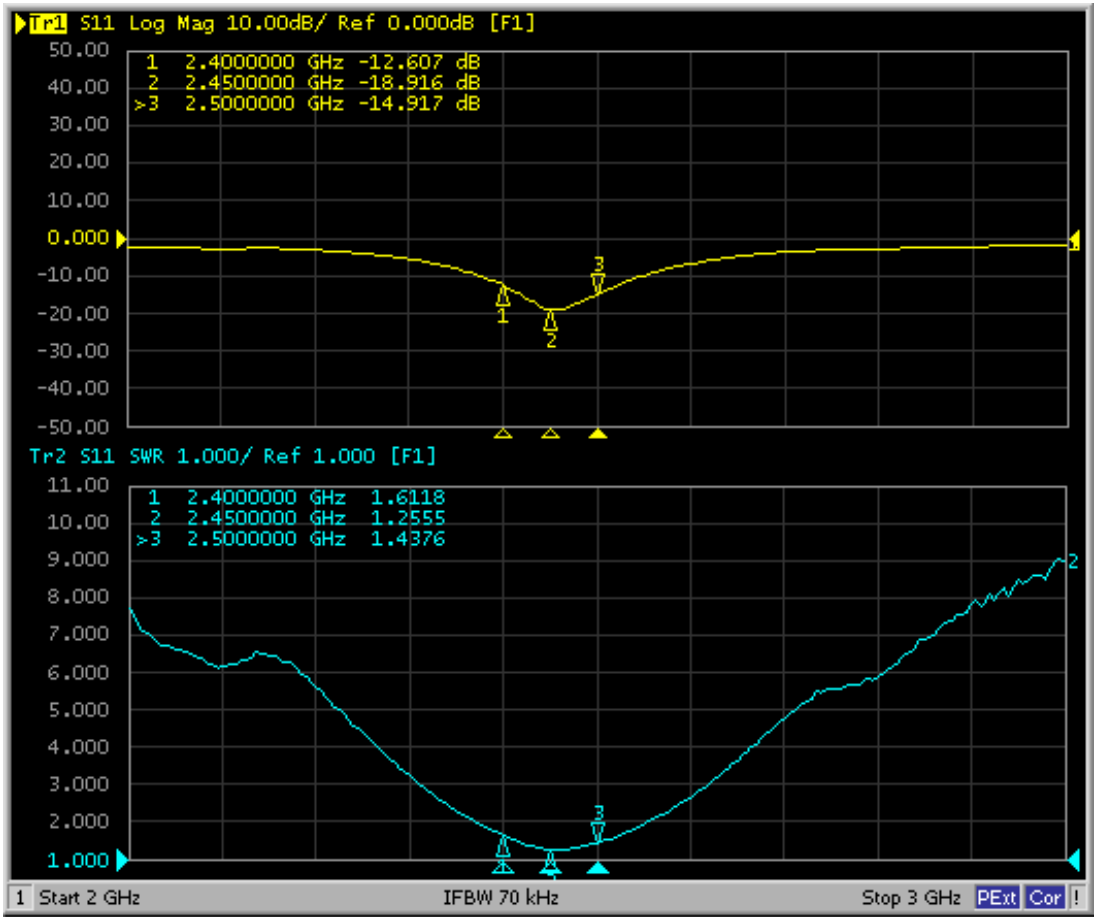

5.2 Antenna gain and efficiency


Passive Test For 2400										
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHIS (%)	Max (dB)	Min (dB)	Attenut Hor	Attenut Ver
2400	50.62	-2.17	0.69	-1.46	30.896	29.723	0.69	-16.74	46.87	46.67
2410	52.59	-2.03	0.77	-1.38	31.843	30.747	0.77	-16.35	46.85	46.74
2420	55.98	-1.81	1.14	-1.01	33.907	32.075	1.14	-16.18	46.98	46.85
2430	51.86	-2.09	0.81	-1.34	31.729	30.134	0.81	-16.64	47.05	46.99
2440	53.97	-1.94	1	-1.15	33.014	30.952	1	-16.3	47.31	47.29
2450	56.85	-1.75	1.02	-1.13	34.403	32.446	1.02	-15.22	47.72	47.63
2460	56.96	-1.43	1.29	-0.86	36.974	34.985	1.29	-14.02	47.76	47.66
2470	58.73	-1.21	1.34	-0.81	38.62	37.105	1.34	-12.96	47.73	47.52
2480	56.88	-1.14	1.37	-0.78	38.737	38.14	1.37	-12.37	47.76	47.52
2490	57.78	-0.93	1.66	-0.49	40.801	39.976	1.66	-12.02	47.89	47.63
2500	55.63	-1.1	1.51	-0.64	39.282	38.348	1.51	-12.04	47.75	47.52
							Application Information			
							O4Version	4.95.303		
							TotalTime	3m 12s 530ms		
							AdditionalInfor	NULL		

5.3: Active test report


Active Measurement Report											
Manufacturer				Model							
Item	Tester	Measurement	Azimuths	Elevations	Standard	Band	Channel	Frequency	MaxValue	TIS	TRP
1	Cmw500	Tis_with_Eirp	Every30	Every30	WIFI_B	B_11M	1	2412	-82.44	-77.56	15.33
2	Cmw500	Tis_with_Eirp	Every30	Every30	WIFI_B	B_11M	6	2437	-83.82	-79.06	16.11
3	Cmw500	Tis_with_Eirp	Every30	Every30	WIFI_B	B_11M	13	2472	-79.08	-73.95	16.48

5.4: darkroom2D,3D Raditation Pattern


2400.000MHz

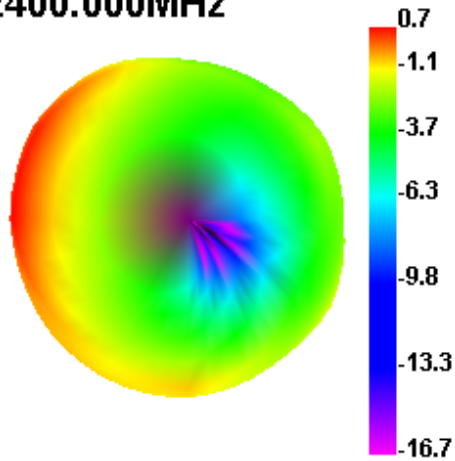


2400.000MHz H

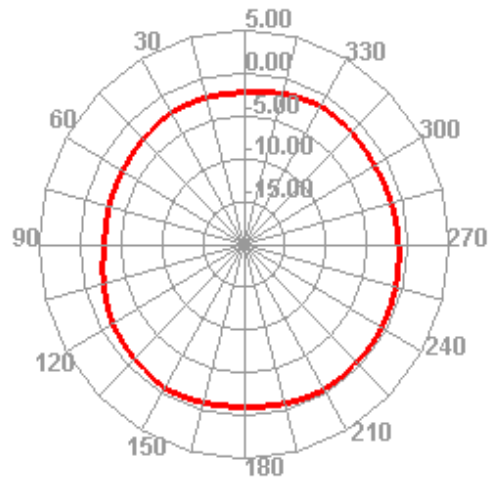


2400.000MHz E1

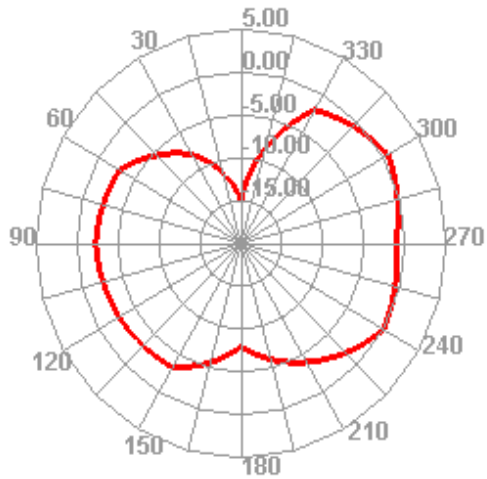


2400.000MHz E2

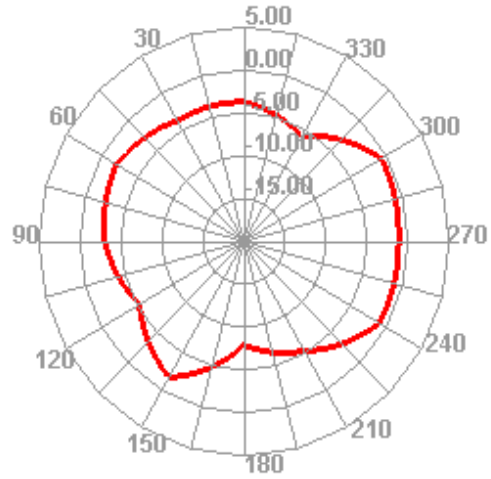


2410.000MHz

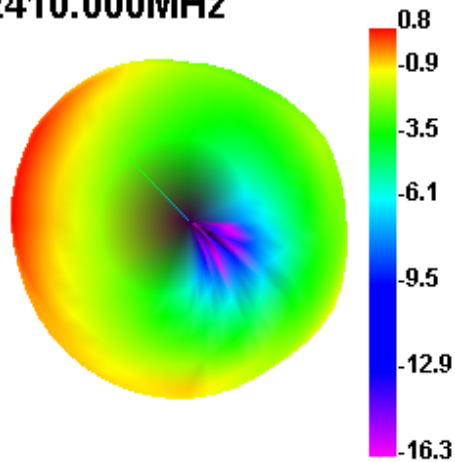


2410.000MHz H

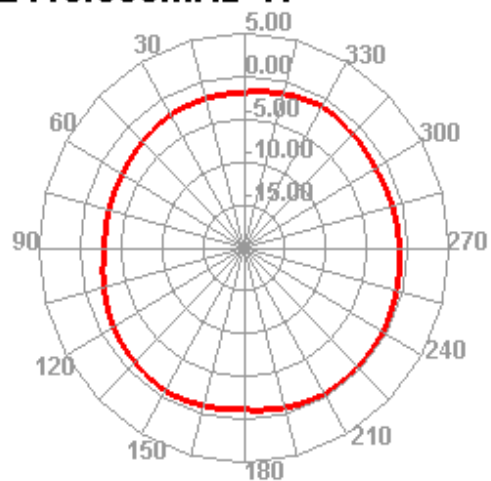


2410.000MHz E1

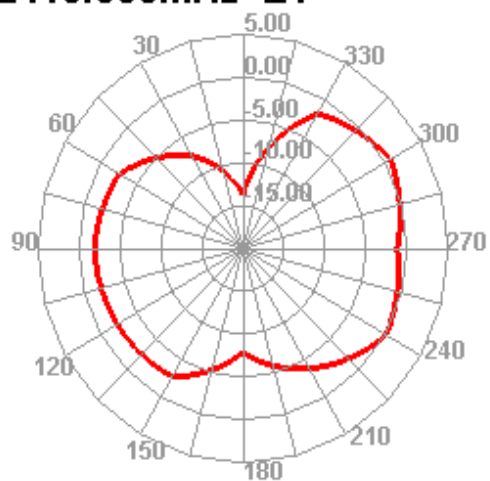


2410.000MHz E2

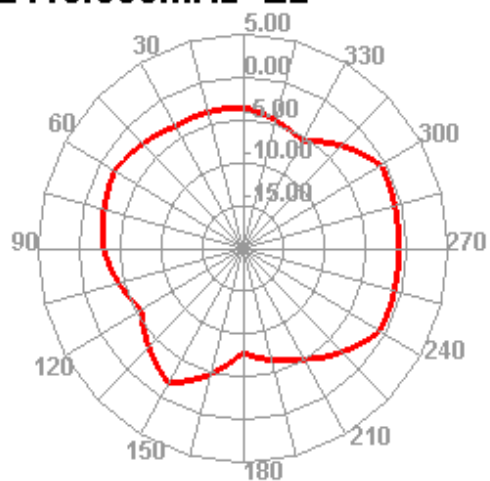


2420.000MHz

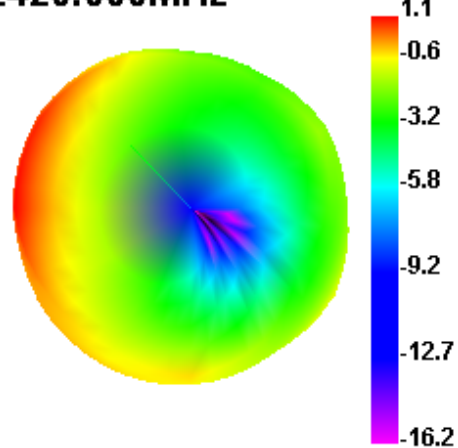


2420.000MHz H

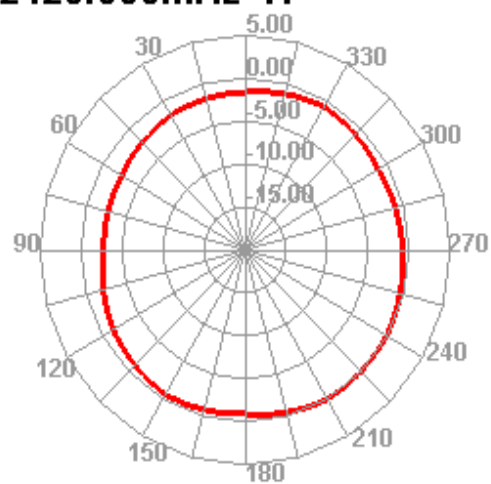


2420.000MHz E1

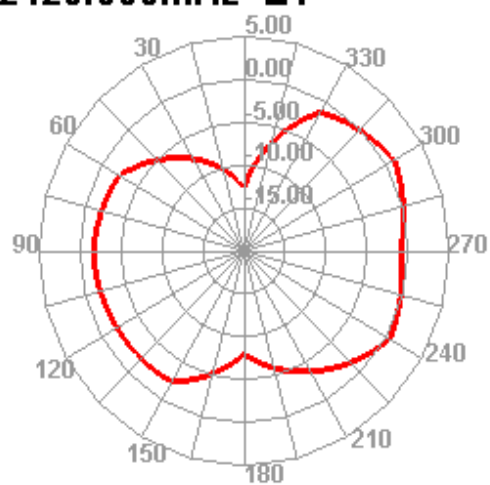


2420.000MHz E2

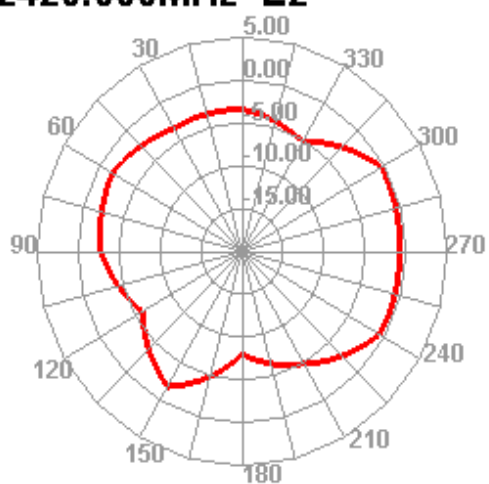


2430.000MHz

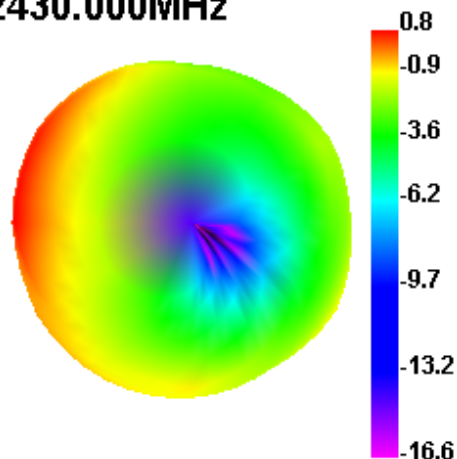


2430.000MHz H

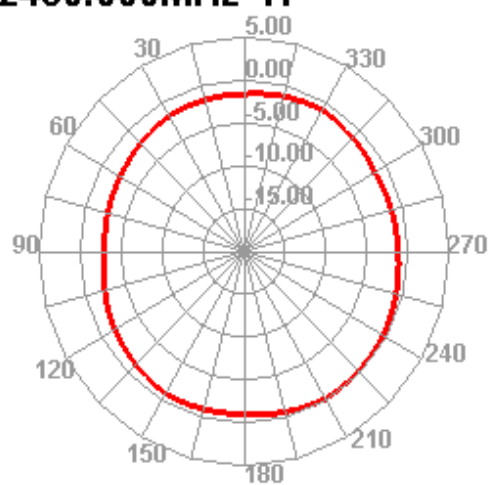


2430.000MHz E1

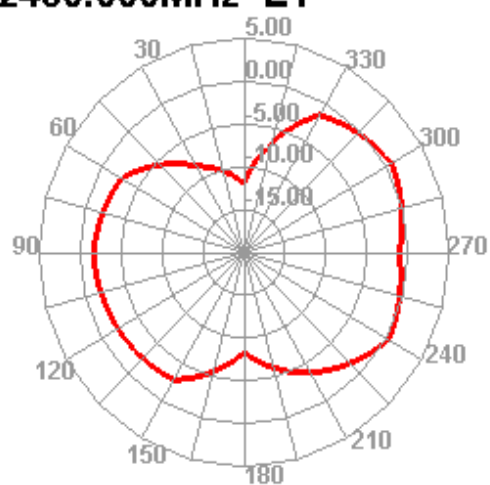


2430.000MHz E2

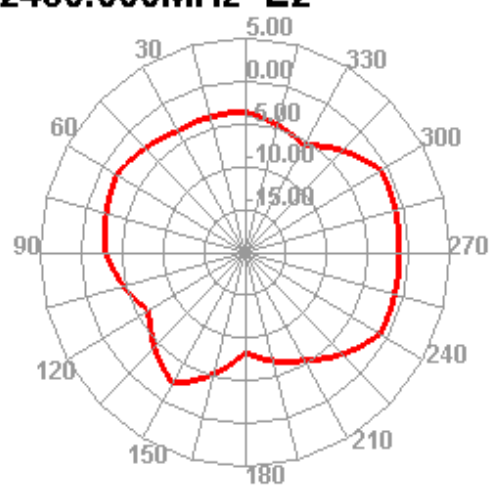


2440.000MHz

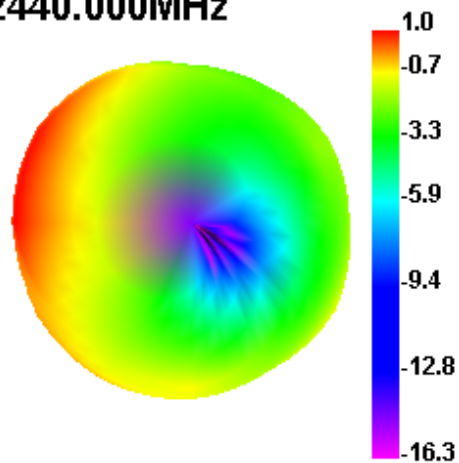


2440.000MHz H

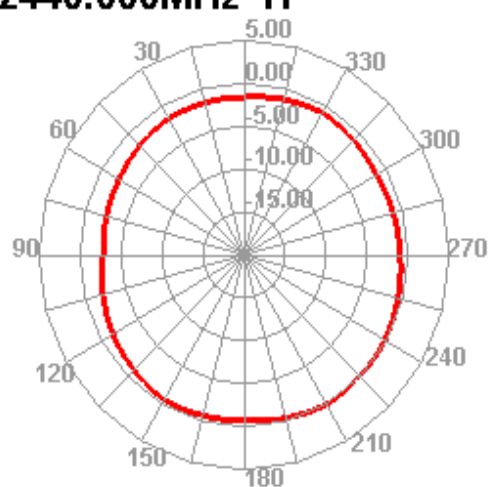


2440.000MHz E1

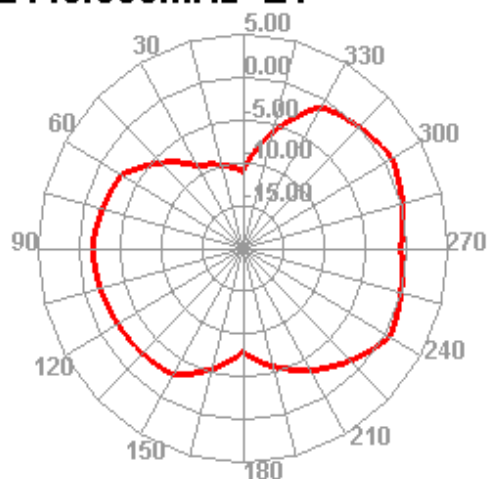


2440.000MHz E2

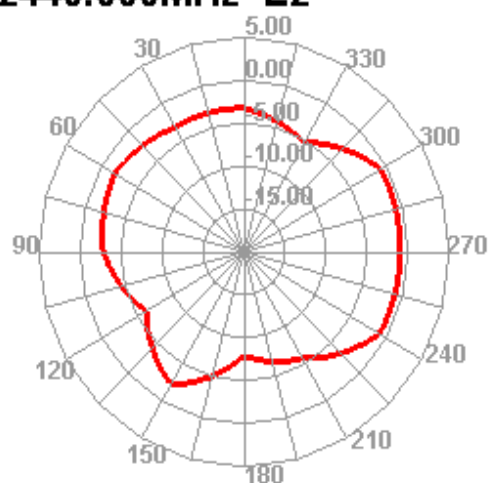


2450.000MHz

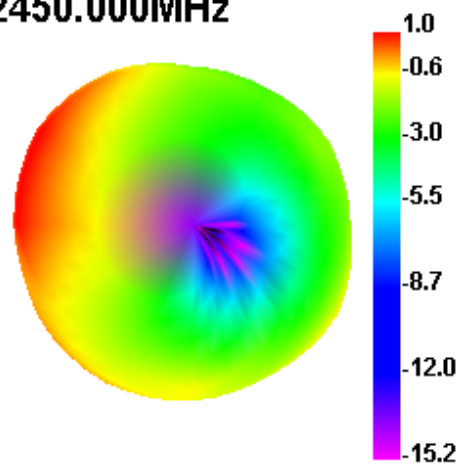


2450.000MHz H

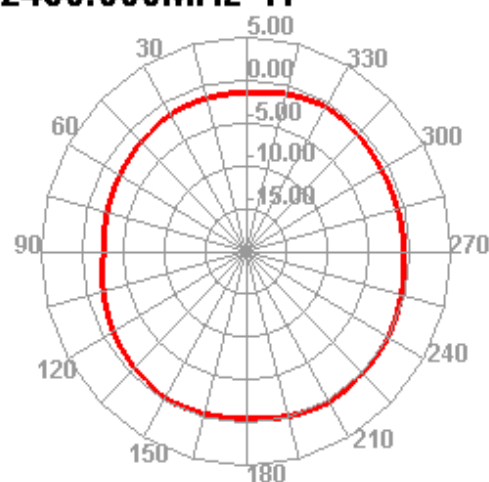



2450.000MHz E1

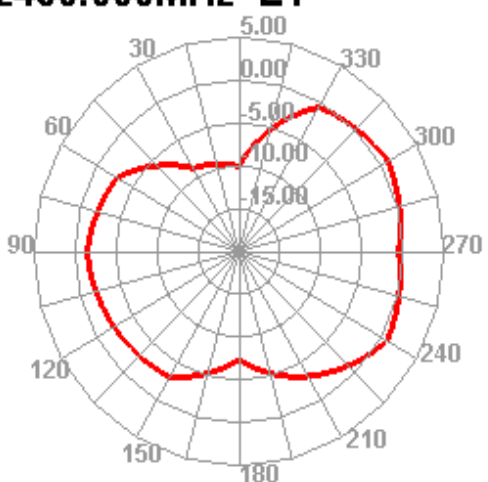


2450.000MHz E2

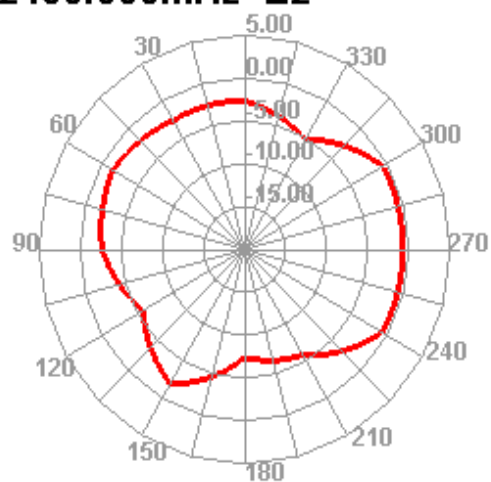


2460.000MHz

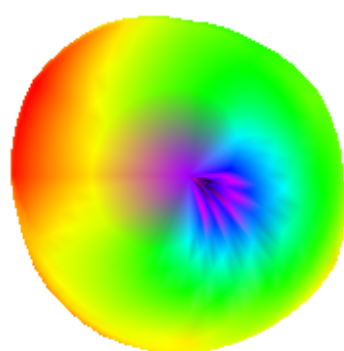


2460.000MHz H

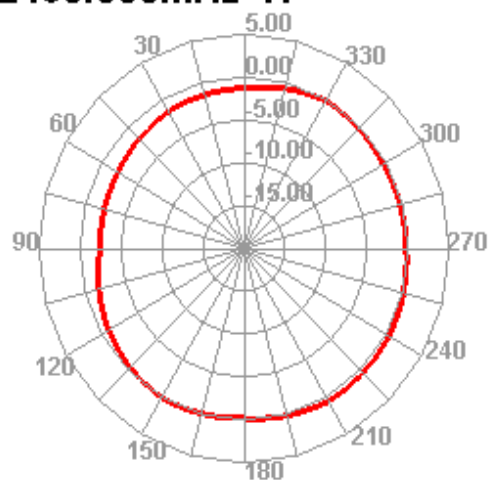


2460.000MHz E1

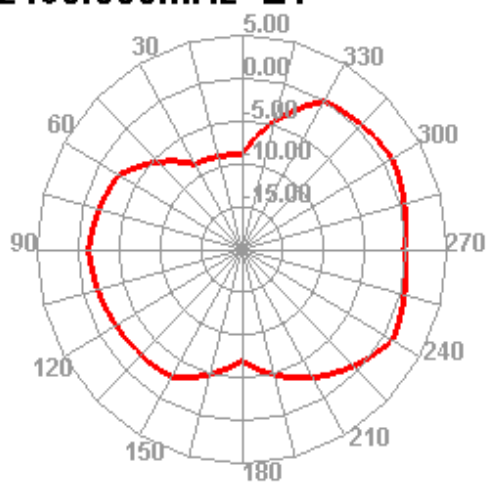


2460.000MHz E2

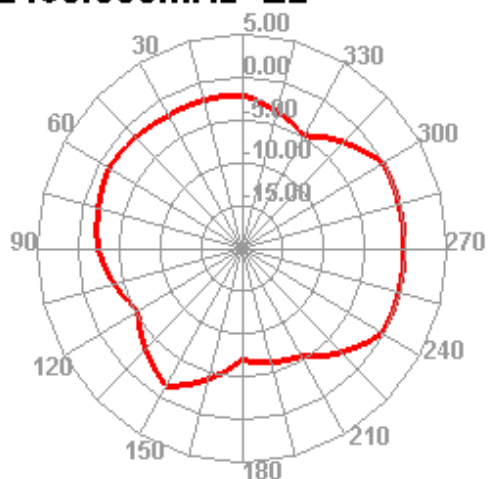


2470.000MHz




2470.000MHz H

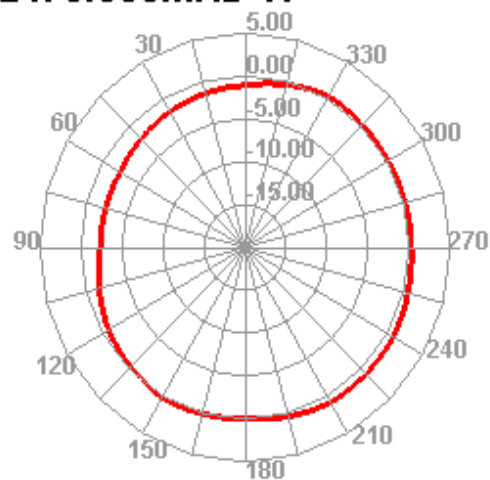


2470.000MHz E1

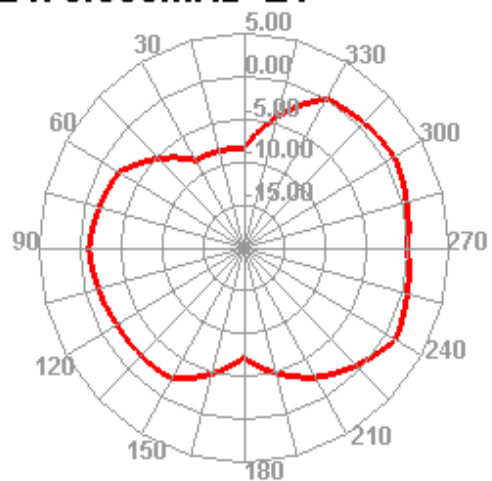


2470.000MHz E2

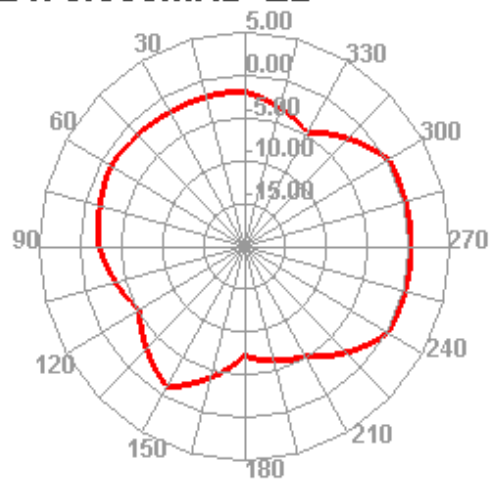


2480.000MHz

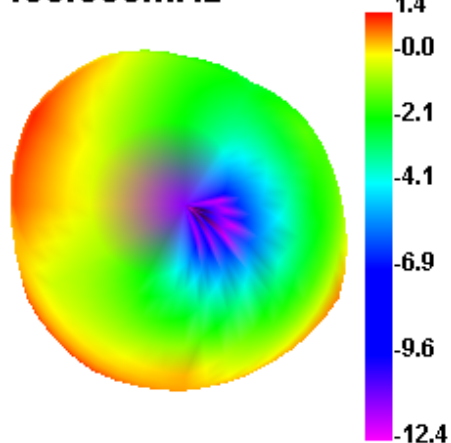


2480.000MHz H

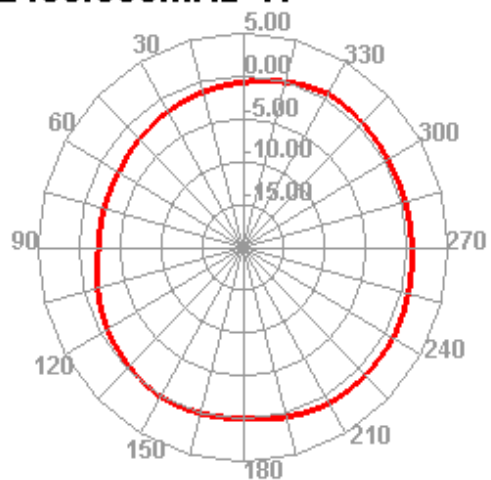


2480.000MHz E1

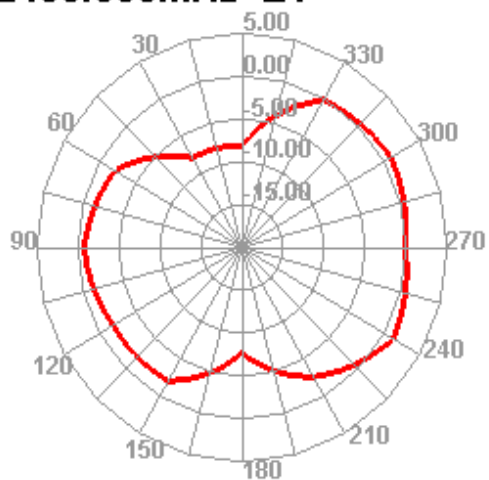


2480.000MHz E2

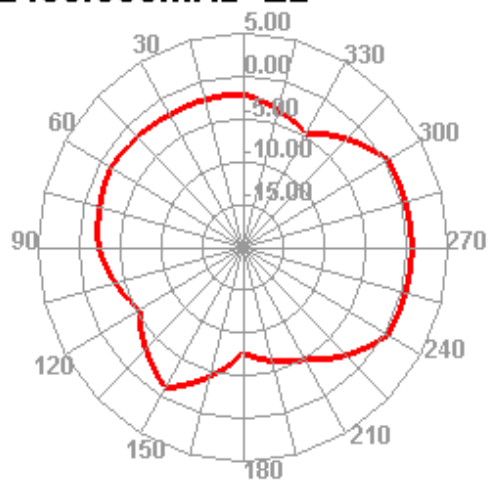


2490.000MHz

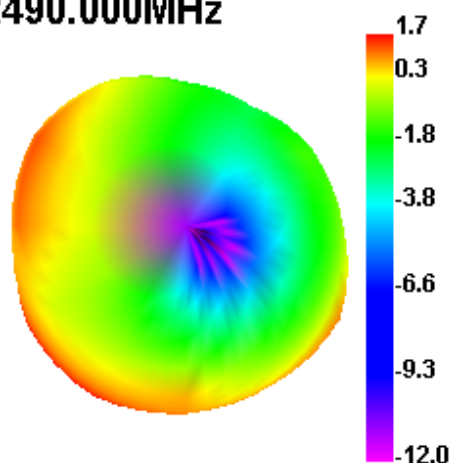


2490.000MHz H

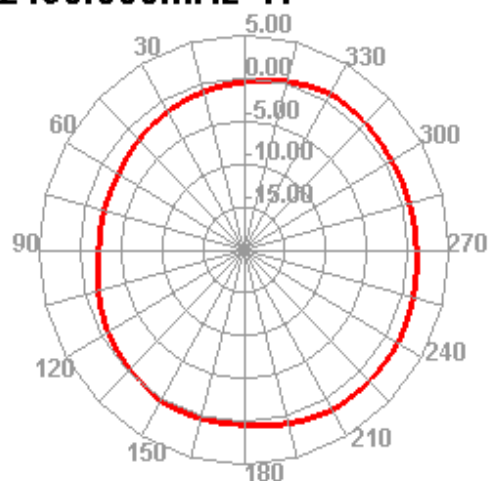


2490.000MHz E1

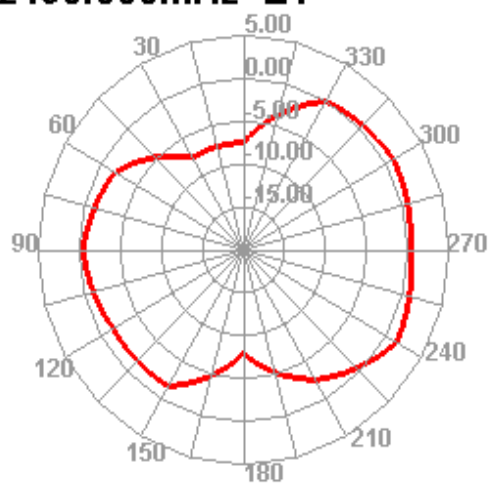


2490.000MHz E2

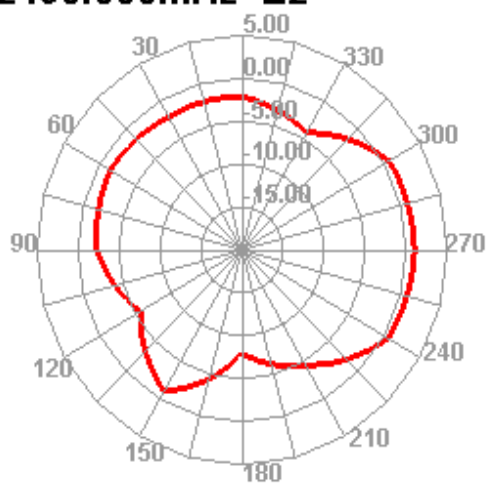


2500.000MHz

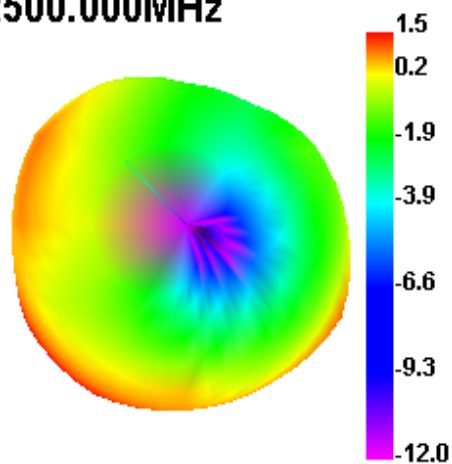

2500.000MHz H

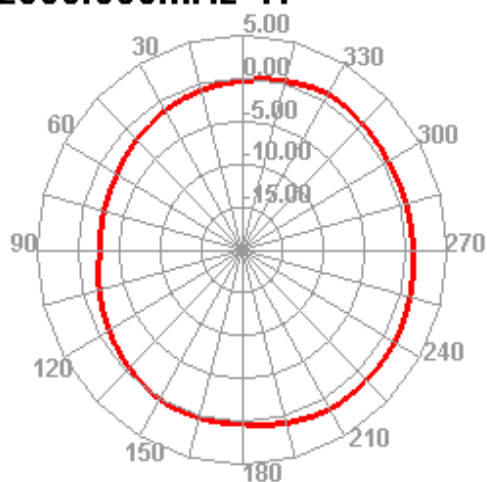

2500.000MHz E1

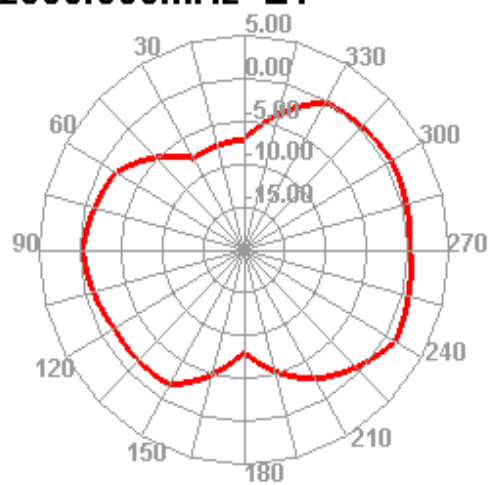

2500.000MHz E2

