



TEST REPORT

FCC ID: 2BE8H-W723F

Applicant: Shenzhen Yuanshang Innovation Industry Limited

Address: 603-4, No. 111-1 Huangjinshan, Bantian Community, Bantian Street, Longgang District, Shenzhen

Manufacturer: Dongguan Hechuang Green Energy Electronic Technology Co., Ltd

Address: 3 Room 301, Building 2, No. 5 Lindong Third Road, Lin Village, Tangxia Town, Dongguan City, Guangdong Province

EUT: Magnetic 5 in 1 wireless charger

Trade Mark: AC ISLAND

Model Number: W7-23F
W7-23G, W7-23H, W7-23I, W7-23J, W7-23K, W7-23L, W7-23M

Date of Receipt: Nov. 15, 2024

Test Date: Nov. 15, 2024 - Jan. 21, 2025

Date of Report: Jan. 21, 2025

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Applicable Standards: FCC PART 15 Subpart C
ANSI C63.10:2013

Test Result: Pass

Report Number: DL-241115033ER

Prepared (Engineer): Dimon Tan

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	3
2. TEST SUMMARY.....	3
3. GENERAL INFORMATION.....	4
4. TEST INSTRUMENT USED.....	6
5. CONDUCTED EMISSION TEST.....	7
6. RADIATION EMISSION TEST.....	11
7. BANDWIDTH TEST.....	17
8. SETUP PHOTOGRAPHS.....	19
9. EUT PHOTOGRAPHS.....	19

**1. VERSION**

Version No.	Date	Description
00	Nov. 29, 2024	Original

2. TEST SUMMARY

EMC Emission			
Test Item	Section in CFR 47	Result	Remark
AC Power Line Conducted Emission	15.207	PASS	
Spurious Emission	15.209(a)(f)	PASS	
20dB Bandwidth	15.215	PASS	
Antenna requirement	15.203	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) Test Facility: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

(3) This report shall not be reproduced, except in full, without the written approval of the Issuing DL Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the DL Testing, responsible for this Test Report.



3. GENERAL INFORMATION

3.1 Description of Device (EUT)


Product Name: Magnetic 5 in 1 wireless charger
Trade Mark: AC ISLAND
Model No.: W7-23F
Model Difference: All models except model name and appearance color. The internal structure is the same as the circuit.
Serial No.: W7-23G, W7-23H, W7-23I, W7-23J, W7-23K, W7-23L, W7-23M
MODEL:TC-095C35G
Adapter: INPUT: 110-240V~50/60Hz Max 0.9A
OUTPUT: 5V---3A, 9V---3A, 10V---2A, 12V---2.91A, 5V---3A, 15V---2.33A
20V---1.75A, PPS: 3.3-11V---3A(35W)
Hardware version: H1.0
Software version: S1.0
Operation Frequency: 115kHz ~ 205KHz
Modulation type: MSK
Antenna Type: Inductive loop coil Antenna
Antenna gain: 0dBi
Input: DC5V---2.91A(35W)
Power supply: Output: Magnetic Wireless Charger: 5W/7.5W /10W/15W
Apple Watch Charger: 3W/5W, AirPods Charger: 5W
USB-A: 5V-2.4A, USB-C: 5V-2.4A (Total: 12W; Smart Distribution)

3.2 Tested System Details

None.



3.3 Block Diagram of Test Set-up



3.4 Test Mode Description

Mode1.: On Mode(Magnetic Wireless Charger: 15W) Mode2.: On Mode(Magnetic Wireless Charger: 10W)

Mode3.: On Mode(Magnetic Wireless Charger: 7.5W) Mode4.: On Mode(Magnetic Wireless Charger: 5W)

Mode5.: On Mode(Apple Watch Charger: 3W) Mode6.: On Mode(Apple Watch Charger: 5W)

Mode7.: On Mode(AirPods Charger: 5W)

Mode8.: On Mode(Magnetic Wireless Charger: 15W+Apple Watch Charger: 3W+ AirPods Charger: 5W)

Mode9.: On Mode(Magnetic Wireless Charger: 15W+Apple Watch Charger: 5W+ AirPods Charger: 5W)

Mode10.: On Mode(Magnetic Wireless Charger: 10W+Apple Watch Charger: 3W+ AirPods Charger: 5W)

Mode11.: On Mode(Magnetic Wireless Charger: 10W+Apple Watch Charger: 5W+ AirPods Charger: 5W)

Mode12.: On Mode(Magnetic Wireless Charger: 7.5W+Apple Watch Charger: 3W+ AirPods Charger: 5W)

Mode13.: On Mode(Magnetic Wireless Charger: 7.5W+Apple Watch Charger: 5W+ AirPods Charger: 5W)

Mode14.: On Mode(Magnetic Wireless Charger: 5W+Apple Watch Charger: 3W+ AirPods Charger: 5W)

Mode15.: On Mode(Magnetic Wireless Charger: 5W+Apple Watch Charger: 5W+ AirPods Charger: 5W)

Note: 1. We have evaluated 1%, 50% and 99% battery charging mode, and the worst mode (99%) is showed in this report.

All of the test modes were tested and passed, with only mode 9 showing the worst mode, documented in this report.

3.5 Test Auxiliary Equipment

Mobile phone (Provide by test lab):

Manufacturer: SAMSUNG

Model: Galaxy S21 5G

Watch (Provide by test lab):

Manufacturer: Apple

Model: Series 6

Adapter (Provide by test lab):

Manufacturer: XIAOMI

Model: AD65G

I/P: AC 100-240V 50/60Hz

O/P: DC 5V/3A, DC 9V/3A, DC 10V/5A, DC 12V/3A,
DC 15V/3A, DC 20V/3.25A

Headset (Provide by test lab):

Manufacturer: Apple

Model: AirPods Pro

3.6 Test Uncertainty

Conducted Emission Uncertainty(150KHz-30MHz) : $\pm 2.56\text{dB}$

20dB Bandwidth : $\pm 0.5\text{kHz}$

Radiated Emission Uncertainty(9KHz-1GHz) : $\pm 3.24\text{dB}$

**4. TEST INSTRUMENT USED****For Conducted Emission Test (843 Shielded Room)**

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
843 Shielded Room	ChengYu	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
EMI Receiver	R&S	ESR	101421	Nov. 01, 2024	Oct. 31, 2025
LISN	R&S	ENV216	102417	Nov. 01, 2024	Oct. 31, 2025
Clamp	COM-POWER	CLA-050	431071	Nov. 01, 2024	Oct. 31, 2025
3-Loop Antenna	DAZE	ZN30401	13021	Nov. 01, 2024	Oct. 31, 2025
ISN T8	Schwarzbeck	NTFM 8158	101135	Nov. 01, 2024	Oct. 31, 2025
ISN T5	Schwarzbeck	NTFM 8158	101136	Nov. 01, 2024	Oct. 31, 2025
843 Cable 1#	ChengYu	CE Cable	001	Nov. 01, 2024	Oct. 31, 2025
843 Cable 1#	ChengYu	CE Cable	002	Nov. 01, 2024	Oct. 31, 2025

For Radiated Emission Test (966 chamber)


Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
966 Chamber	ChengYu	966 Room	966	Nov. 06, 2023	Nov. 05, 2026
Spectrum Analyzer	Agilent	E4408B	MY50140780	Nov. 01, 2024	Oct. 31, 2025
EMI Receiver	R&S	ESRP7	101393	Nov. 01, 2024	Oct. 31, 2025
Amplifier	Schwarzbeck	BBV9743B	00153	Nov. 01, 2024	Oct. 31, 2025
Amplifier	EMEC	EM01G8GA	00270	Nov. 01, 2024	Oct. 31, 2025
Broadband Trilog Antenna	Schwarzbeck	VULB9162	00306	Nov. 01, 2024	Oct. 31, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	02139	Nov. 01, 2024	Oct. 31, 2025
Loop Antenna	ZHINAN	ZN30900A	/	Nov. 01, 2024	Oct. 31, 2025
966 Cable 1#	ChengYu	966	004	Nov. 01, 2024	Oct. 31, 2025
966 Cable 2#	ChengYu	966	003	Nov. 01, 2024	Oct. 31, 2025



5. CONDUCTED EMISSION TEST

5.1 Block Diagram of Test Setup

For Mains Terminals Test

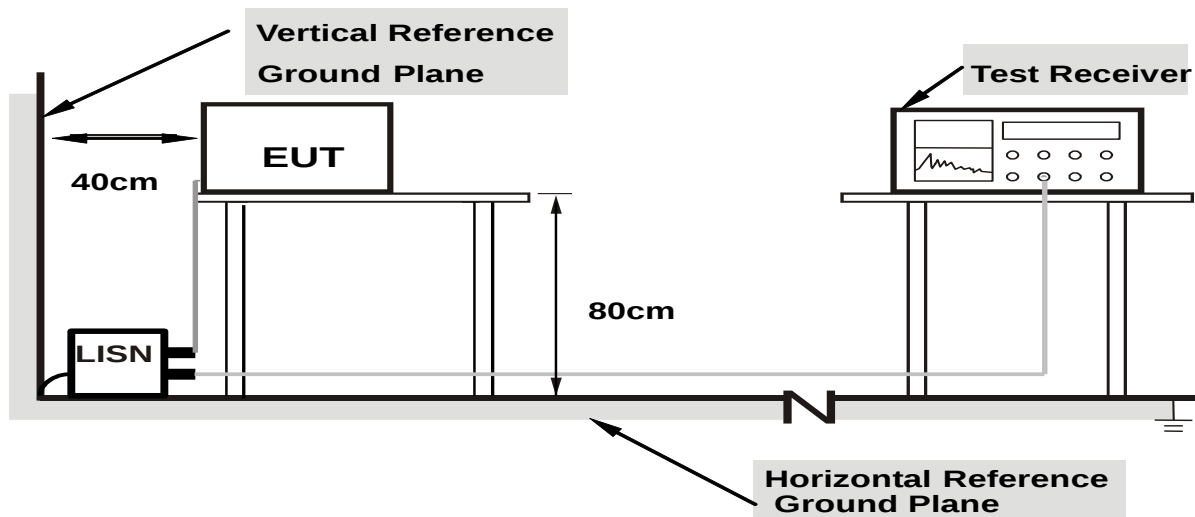

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

5.2 Test Standard and Limit

FCC Part 15 Subpart C

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15~0.50	66 ~ 56*	55 ~ 46*
0.50~5.00	56	46
5.00~30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

5.3 EUT Configuration on Test

The following equipment's are installed on conducted emission test to meet FCC Part 15 Subpart C requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

5.4 Operating Condition of EUT

5.4.1 Setup the EUT and simulators as shown in Section 5.1.

5.4.2 Turn on the power of all equipments.

5.4.3 Let the EUT work in test modes and test it.



5.5 Test Procedure

The EUT is put on the table and connected to the AC mains through a Artificial Mains Network (AMN) or ISN. This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are checked to find out the maximum conducted emission levels according to the **ANSI C63.10** regulations during conducted emission test.

The bandwidth of the test receiver (R&S Test Receiver ESR) is set at 10KHz.

The frequency range from 150 KHz to 30 MHz is investigated.

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Mesurement Level = Reading level + Correct Factor


5.6 Test Result

PASS

Please refer to the following page.




Conducted Emission Test Data			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Phase:	Line
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 9

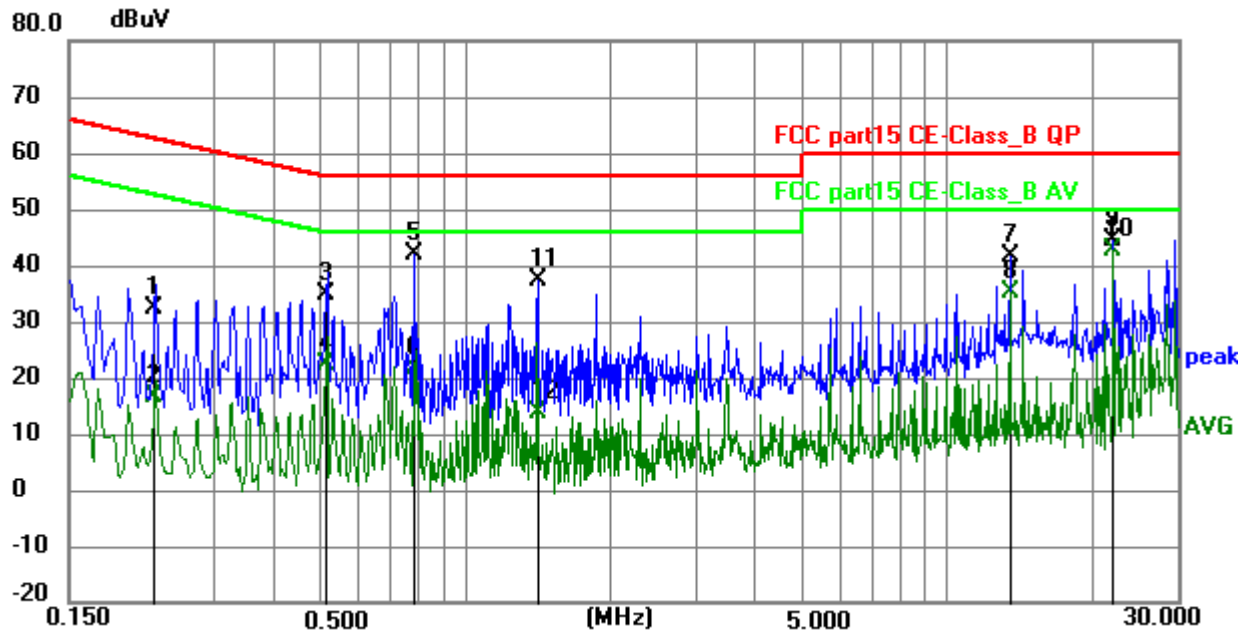

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2265	22.29	10.12	32.41	62.58	-30.17	QP	P	
2	0.2265	6.52	10.12	16.64	52.58	-35.94	AVG	P	
3	0.5144	24.64	10.16	34.80	56.00	-21.20	QP	P	
4	0.5144	12.27	10.16	22.43	46.00	-23.57	AVG	P	
5	0.7799	31.98	10.07	42.03	56.00	-13.97	QP	P	
6	0.7799	11.49	10.07	21.56	46.00	-24.44	AVG	P	
7	13.5240	29.88	11.55	41.43	60.00	-18.57	QP	P	
8	13.5240	23.50	11.55	35.05	50.00	-14.95	AVG	P	
9	22.0783	32.11	12.33	44.44	60.00	-15.56	QP	P	
10 *	22.0783	30.40	12.33	42.73	50.00	-7.27	AVG	P	
11	1.4144	27.30	10.05	37.35	56.00	-18.65	QP	P	
12	1.4144	3.75	10.05	13.80	46.00	-32.20	AVG	P	



Conducted Emission Test Data			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Phase:	Neutral
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 9

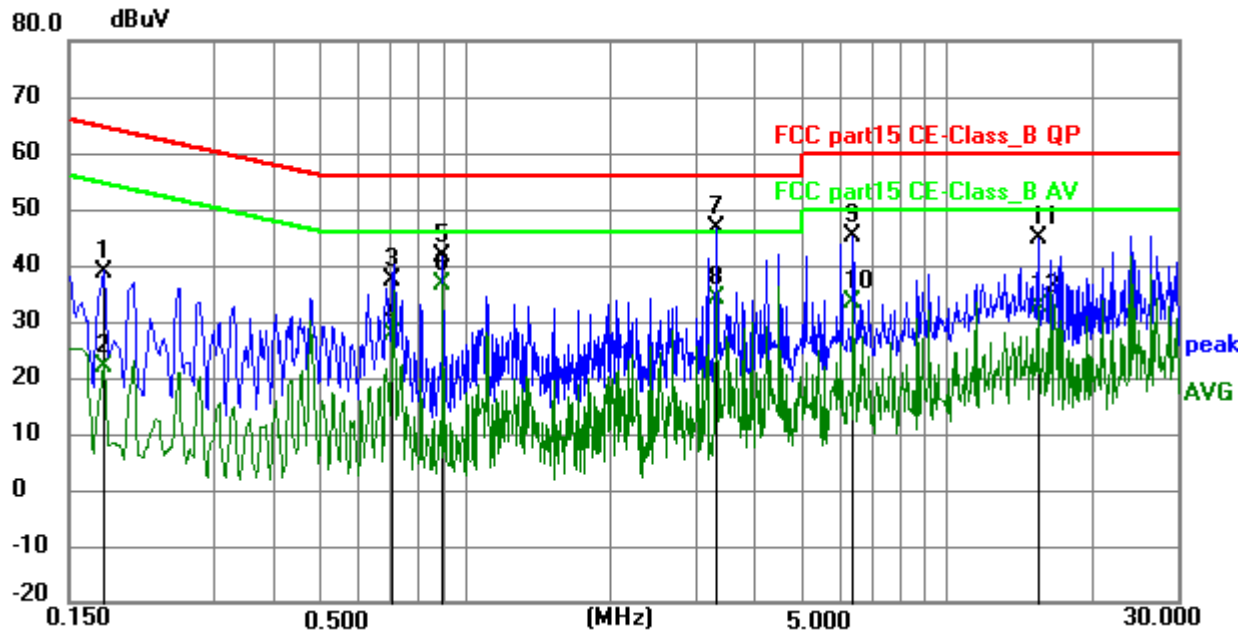


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1770	28.65	10.15	38.80	64.63	-25.83	QP	P	
2	0.1770	11.81	10.15	21.96	54.63	-32.67	AVG	P	
3	0.7080	27.34	10.11	37.45	56.00	-18.55	QP	P	
4	0.7080	17.70	10.11	27.81	46.00	-18.19	AVG	P	
5	0.8970	31.48	10.08	41.56	56.00	-14.44	QP	P	
6	0.8970	26.59	10.08	36.67	46.00	-9.33	AVG	P	
7 *	3.3180	36.59	10.10	46.69	56.00	-9.31	QP	P	
8	3.3180	24.14	10.10	34.24	46.00	-11.76	AVG	P	
9	6.3825	34.65	10.59	45.24	60.00	-14.76	QP	P	
10	6.3825	22.82	10.59	33.41	50.00	-16.59	AVG	P	
11	15.4365	33.25	11.61	44.86	60.00	-15.14	QP	P	
12	15.4365	21.18	11.61	32.79	50.00	-17.21	AVG	P	


6. RADIATION EMISSION TEST

6.1 Block Diagram of Test Setup

Radiated Emission Test-Up Frequency Below 30MHz

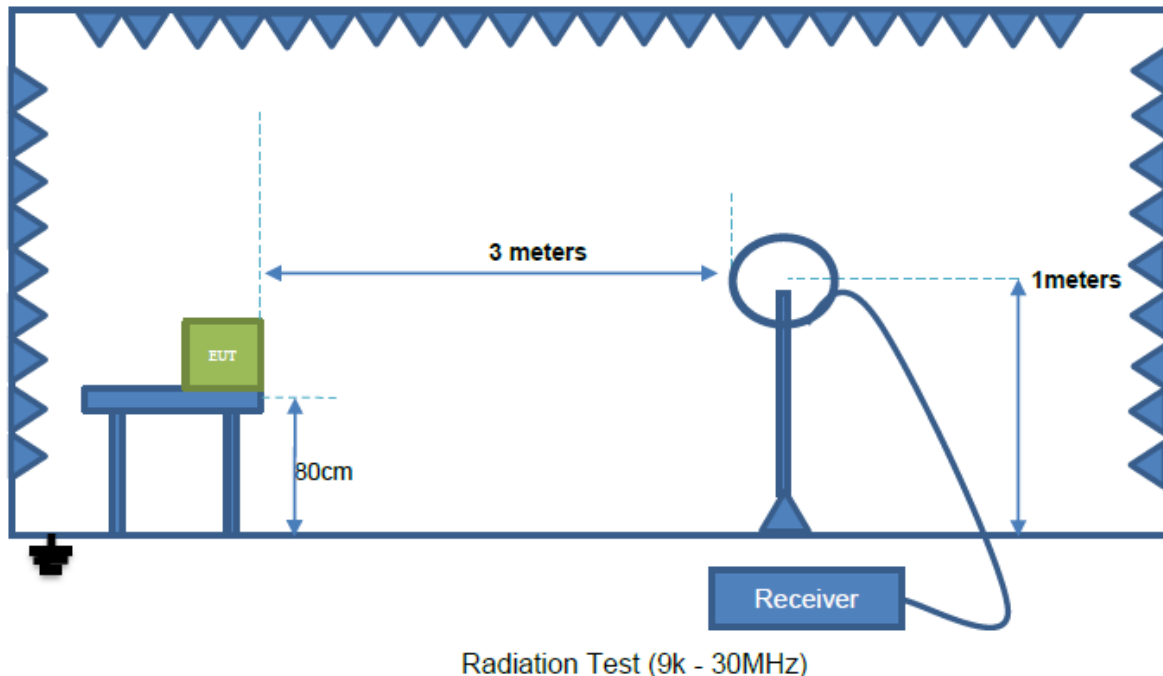

Below 1GHz

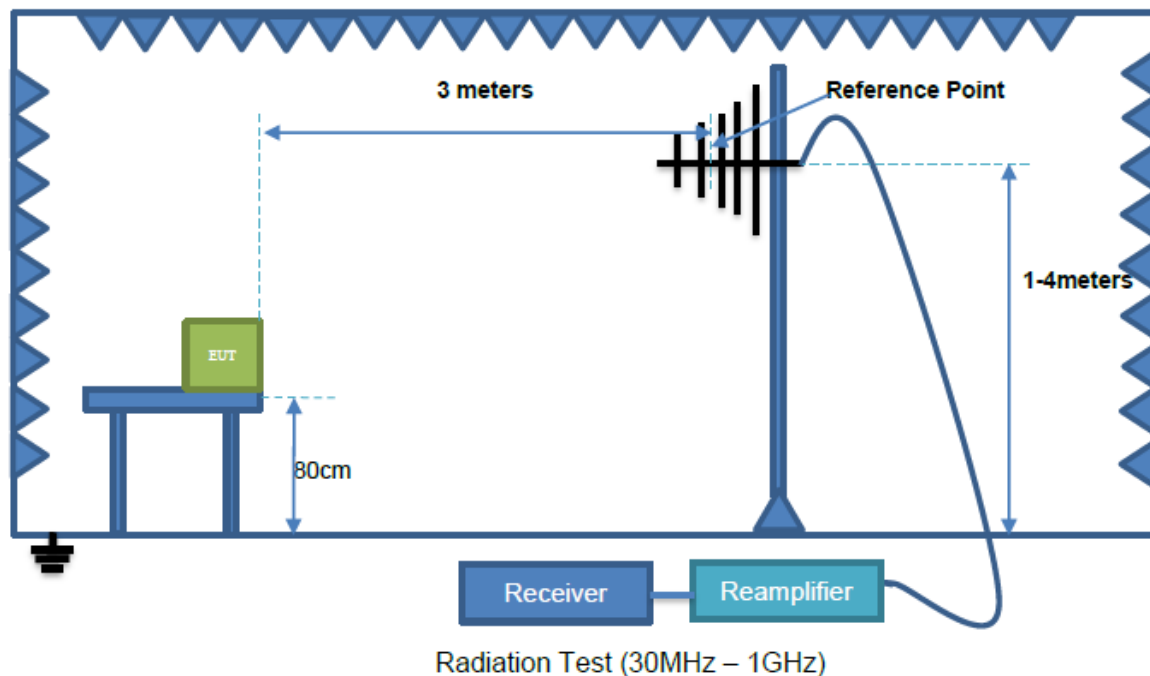

6.2 Test Standard and Limit

FCC Part 15 Subpart C



Limits for frequency below 30MHz

Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.090	2400/F(kHz)	300	AVERAGE
0.090-0.110	2400/F(kHz)	300	Quasi-peak Value
0.110-0.490	2400/F(kHz)	300	AVERAGE
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

Above 30MHz

Frequency (MHz)	Distance (Meters)	Field Strengths Limits (dBμV/m)	Remark
30 ~ 88	3	40.0	Quasi-peak Value
88 ~ 216	3	43.5	Quasi-peak Value
216 ~ 960	3	46.0	Quasi-peak Value
960 ~ 1000	3	54.0	Quasi-peak Value
Above 1000	3	74.0	PEAK
		54.0	AVERAGE

Remark:

(1) The smaller limit shall apply at the cross point between two frequency bands.

(2) Distance refers to the distance in meters between the measuring instrument, antenna and the closed point of any part of the device or system.

6.3 EUT Configuration on Test

The FCC Part 15 Subpart C regulations test method must be used to find the maximum emission during radiated emission test.

The configuration of EUT is the same as used in conducted emission test.

Please refer to Section 5.3.

6.4 Operating Condition of EUT

Same as conducted emission test, which is listed in Section 5.4 except the test set up replaced as Section 6.2.

6.5 Test Procedure


- 1) The radiated emissions test was conducted in a semi-anechoic chamber.
- 2) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
- 3) Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT.
- 4) The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.
- 5) The bandwidth setting on the field strength meter (R&S Test Receiver ESCI) is set at 120KHz.
- 6) The frequency range from 30MHz to 1000MHz is checked.



6.6 Test Result

PASS

Radiation Emission Test Data 9 kHz~150 KHz			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	/
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 9

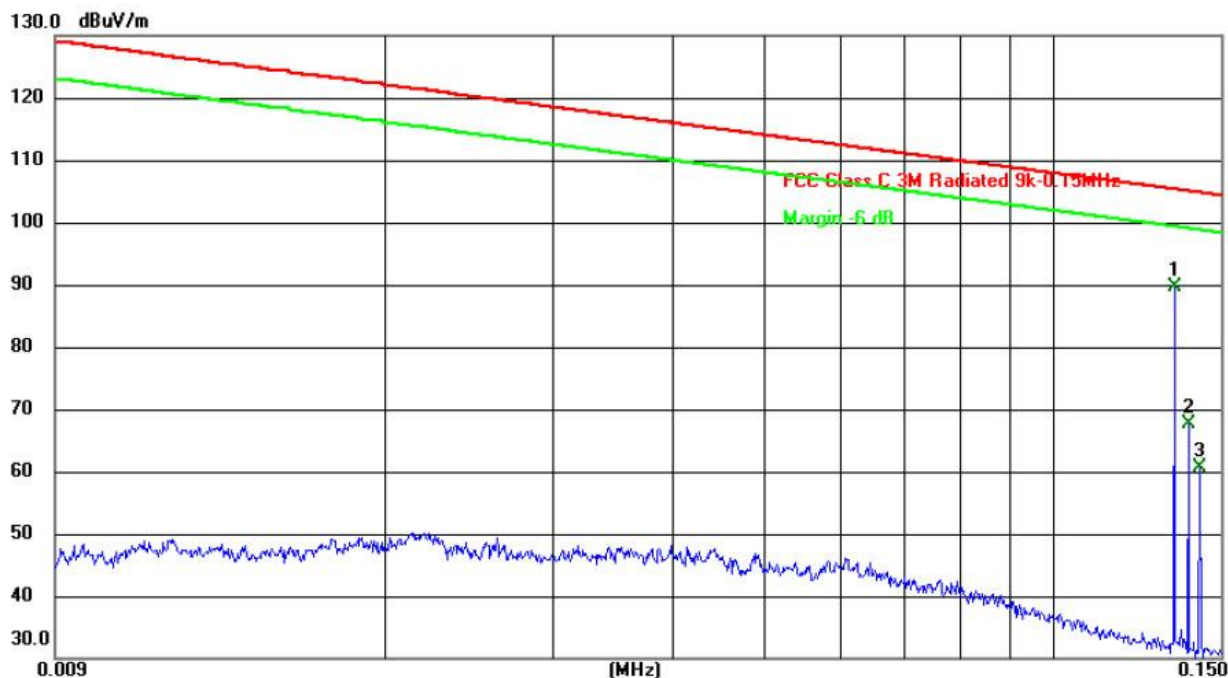

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	dB	Detector
1	*	0.1340	89.20	0.36	89.56	105.34	-15.78	AVG
2		0.1386	67.21	0.39	67.60	105.04	-37.44	AVG
3		0.1423	60.16	0.39	60.55	104.81	-44.26	AVG

Note:


Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level(Meter Reading+ Factor) - Limit.



Radiation Emission Test Data 150 kHz~30 MHz			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	/
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 9

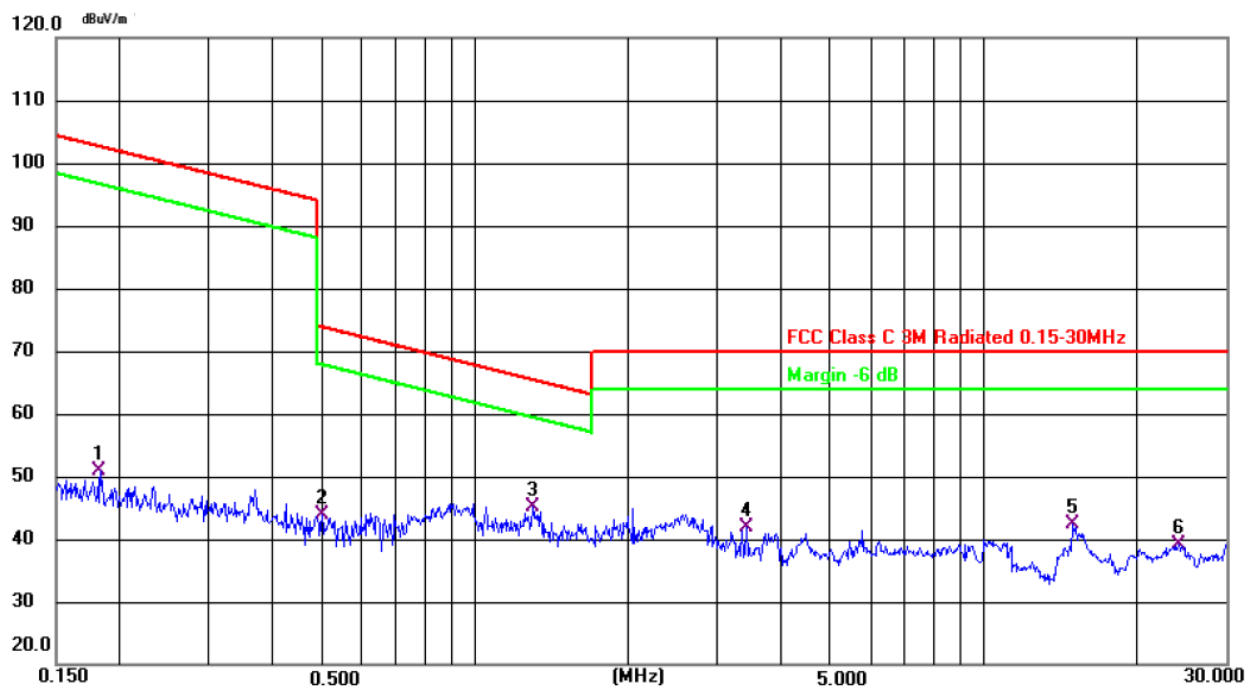

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dbuv/m	dB	dB	Detector
1		0.1833	50.32	0.48	50.80	102.60	-51.80	QP
2		0.4993	42.72	1.27	43.99	73.83	-29.84	QP
3	*	1.2960	41.94	3.15	45.09	65.42	-20.33	QP
4		3.4174	34.40	7.50	41.90	70.00	-28.10	QP
5		14.9068	38.61	3.67	42.28	70.00	-27.72	QP
6		24.1422	66.21	-27.13	39.08	70.00	-30.92	QP

Note:

Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level(Meter Reading+ Factor) - Limit.



Radiation Emission Test Data			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 9



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector
		MHz	Level	Factor	ment			
			dBuV	dB	dbuv/m	dB	dB	
1		34.8385	30.86	-15.63	15.23	40.00	-24.77	QP
2	*	157.5588	50.90	-17.62	33.28	43.50	-10.22	QP
3		264.7457	41.38	-12.84	28.54	46.00	-17.46	QP
4		319.9370	43.29	-11.55	31.74	46.00	-14.26	QP
5		744.8661	32.78	-3.25	29.53	46.00	-16.47	QP
6		948.7610	31.65	-0.27	31.38	46.00	-14.62	QP



Radiation Emission Test Data			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 9



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dbuv/m	dB	dB	Detector
1	*	34.3964	50.50	-15.60	34.90	40.00	-5.10	QP
2		70.0903	41.06	-17.01	24.05	40.00	-15.95	QP
3		150.0108	52.67	-18.14	34.53	43.50	-8.97	QP
4		314.3765	48.68	-11.44	37.24	46.00	-8.76	QP
5		420.5803	41.26	-9.10	32.16	46.00	-13.84	QP
6		744.8661	32.58	-3.25	29.33	46.00	-16.67	QP

Remarks:

- 1.Final Level =Receiver Read level + Correct factor (Antenna Factor + Cable Loss – Preamplifier Factor)
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.



7. BANDWIDTH TEST

7.1 TEST SETUP

1. Set RBW = 3KHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

7.2 TEST SETUP



7.3 TEST Result

Frequency (KHz)	20dB bandwidth (KHz)	Result
138(Phone)	7.746	Pass
138(Watch)	8.615	Pass
138(Earphone)	8.242	Pass



Phone



Watch



Earphone



8. SETUP PHOTOGRAPHS

Reference to the setup photo for details.

9. EUT PHOTOGRAPHS

Reference to the external and internal photo for details.

***** END OF REPORT *****