

Inverted F Antenna Specification




Figure 2 0.8*20mmBT


Summary

ITEM	ANT SPEC					
Model Name	2.4G ANT					
Center Frequency	Horizontal			Vertical		
	2400MHz	2450MHz	2500MHz	2400MHz	2450MHz	2500MHz
	-1.26	-0.52	-1.00	-5.25	0.00	-1.86
MAX. Gain	0.0(dBi)					
Polarization	Horizontal and Vertical					
Azimuth Beam Pattern	Omni-directional					
Impedance	50 Ohm					
Antenna Length	38.20mm					
Manufacture	ZHUHAI JIELI TECHNOLOGY CO.,LTD					

Horizontal: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -40 Scale: 5/div

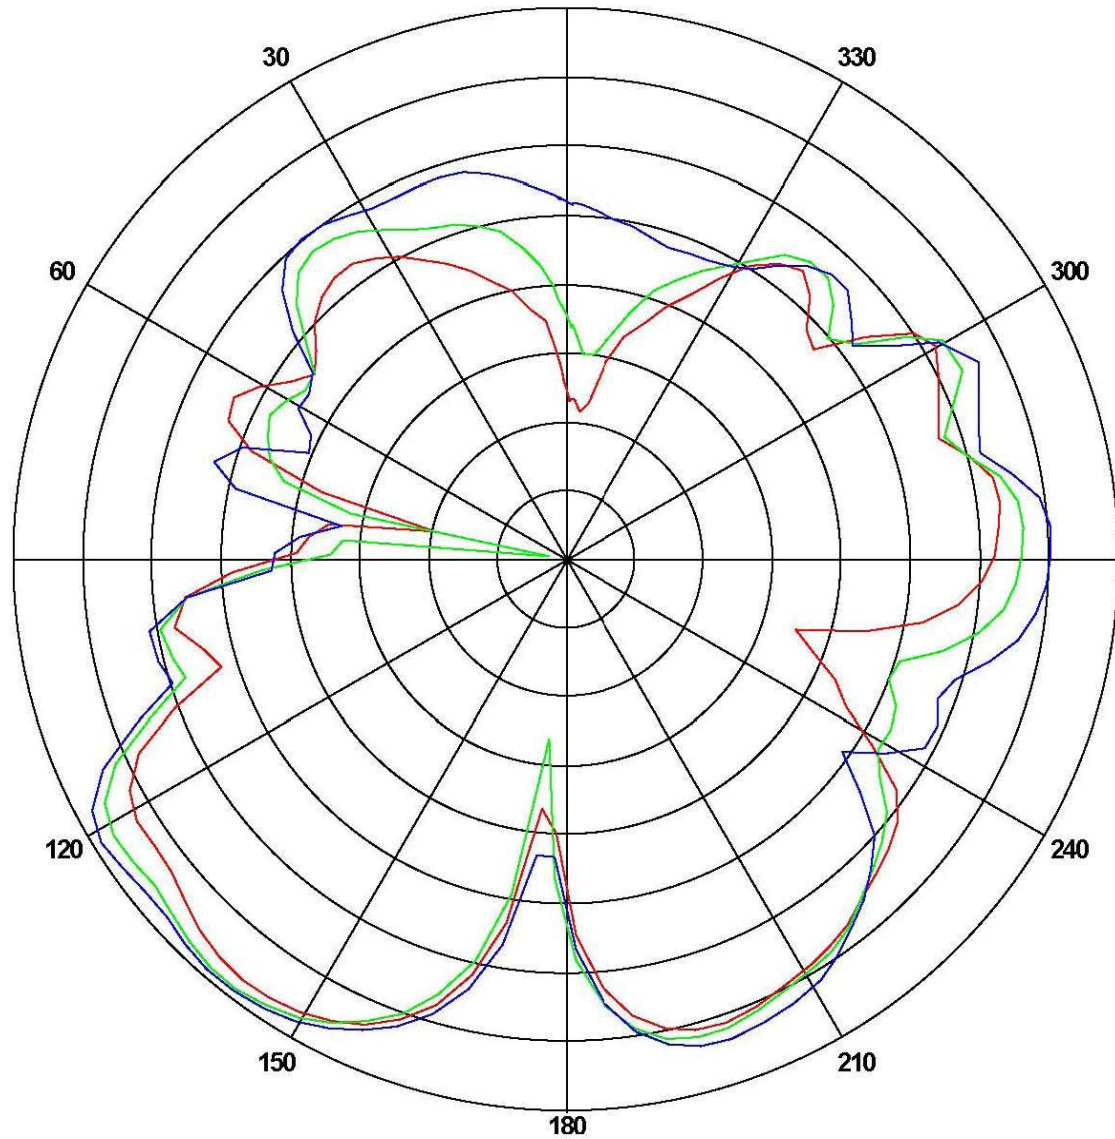


Frequency (MHz)	Gain(dBi)		
	Max	Min	Avg
2400	-1.26174	-30.0801	-7.18716
2450	-0.52000	-36.5604	-7.48023
2500	-1.00000	-22.0315	-6.59127

Vertical: 2400 MHz 2450 MHz 2500 MHz


Power (dBm)

Max: 0 Min: -30 Scale: 5/div

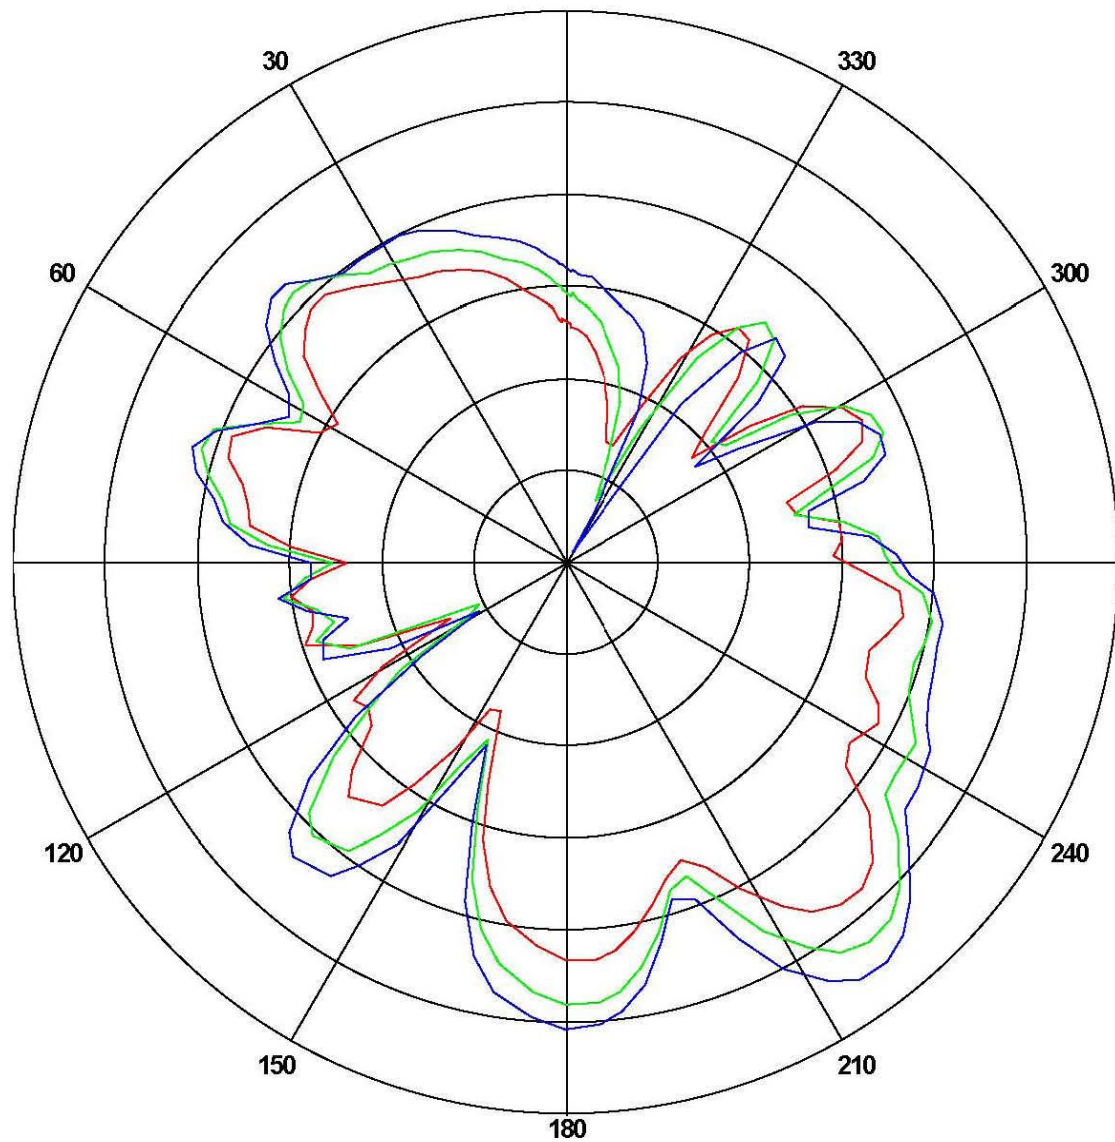

Frequency (MHz)	Gain(dBi)		
	Max	Min	Avg
2400	-5.25370	-22.1424	-12.4294
2450	0.00000	-24.5837	-10.4702
2500	-1.86000	-29.5214	-9.20432

ANT Test Labs: Attestation of Global Compliance Co., Ltd.

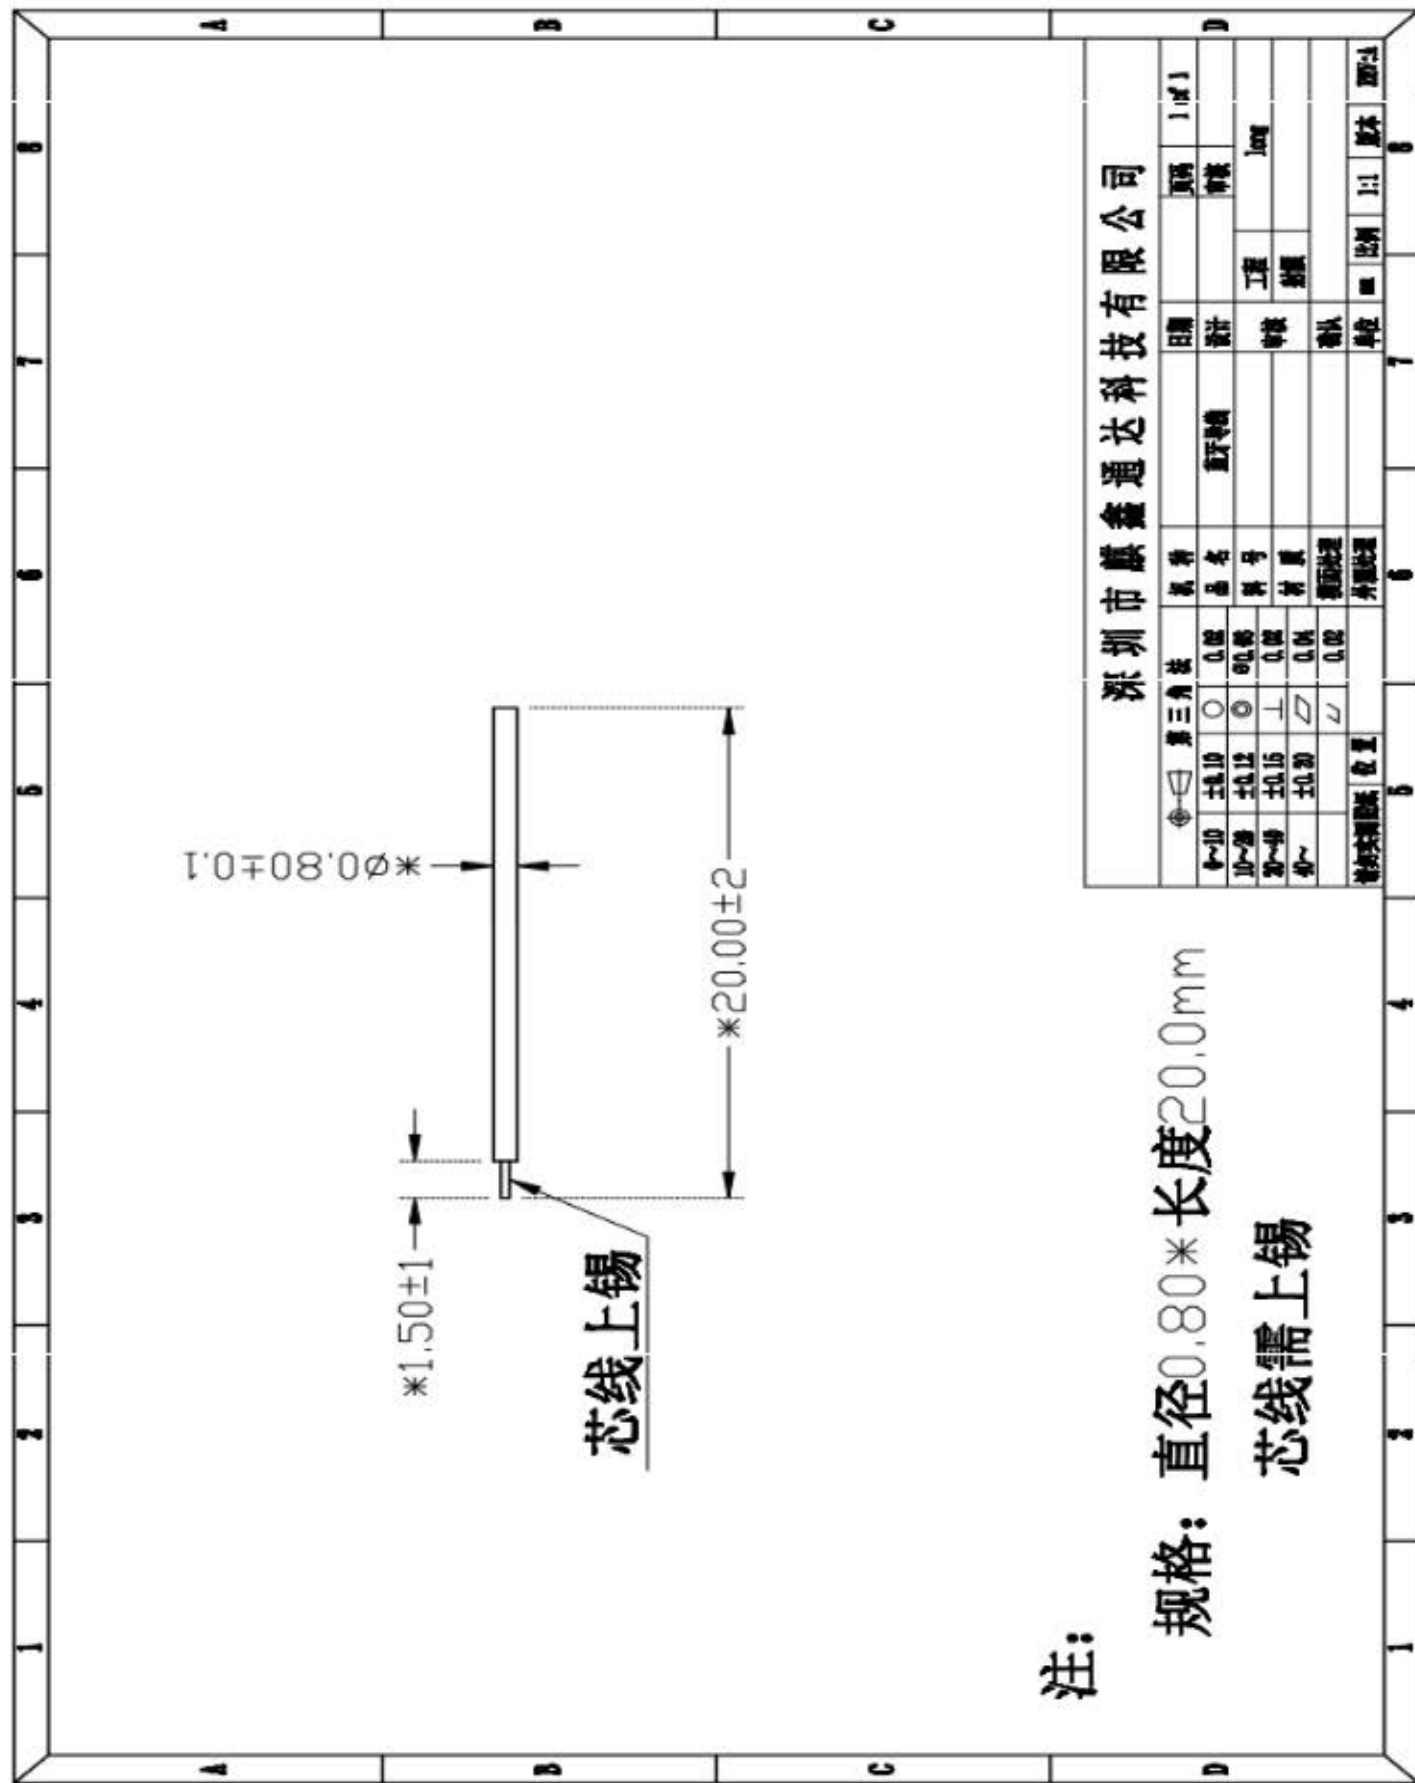

注:

规格: 直径0.80*长度20.0mm

芯线需上锡