

TEST REPORT

Reference No...... : WTX23X12290901W001
FCC ID..... : 2BEB4-H6
Applicant..... : Guangzhou Weiwei electronics co.,ltd
Address..... : No.3 on the second floor, No.12Yayao Middle Road,P.O. Box Huadu
District,Guangzhou,China
Product Name..... : Projector
Test Model..... : H6
Standards..... : FCC Part 15.247
Date of Receipt sample..... : December 27, 2023
Date of Test..... : December 27, 2023 to January 1, 2024
Date of Issue..... : January 1, 2024
Test Result..... : **Pass**

Remarks:


The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tested by:



Tom Wang/ Project Engineer

Approved & Authorized By:



Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	6
1.3 TEST METHODOLOGY	6
1.4 TEST FACILITY	6
1.5 EUT SETUP AND TEST MODE	7
1.6 MEASUREMENT UNCERTAINTY	8
1.7 TEST EQUIPMENT LIST AND DETAILS	9
2. SUMMARY OF TEST RESULTS	11
3. ANTENNA REQUIREMENT	12
3.1 STANDARD APPLICABLE	12
3.2 EVALUATION INFORMATION	12
4. POWER SPECTRAL DENSITY	13
4.1 STANDARD APPLICABLE	13
4.2 TEST SETUP BLOCK DIAGRAM	13
4.3 TEST PROCEDURE	13
4.4 SUMMARY OF TEST RESULTS/PLOTS	13
5. DTS BANDWIDTH	14
5.1 STANDARD APPLICABLE	14
5.2 TEST SETUP BLOCK DIAGRAM	14
5.3 TEST PROCEDURE	14
5.4 SUMMARY OF TEST RESULTS/PLOTS	14
6. RF OUTPUT POWER	15
6.1 STANDARD APPLICABLE	15
6.2 TEST SETUP BLOCK DIAGRAM	15
6.3 TEST PROCEDURE	15
6.4 SUMMARY OF TEST RESULTS/PLOTS	15
7. FIELD STRENGTH OF SPURIOUS EMISSIONS	16
7.1 STANDARD APPLICABLE	16
7.2 TEST PROCEDURE	16
7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	18
7.4 SUMMARY OF TEST RESULTS/PLOTS	18
8. OUT OF BAND EMISSIONS	22
8.1 STANDARD APPLICABLE	22
8.2 TEST PROCEDURE	22
8.3 SUMMARY OF TEST RESULTS/PLOTS	23
9. CONDUCTED EMISSIONS	27
9.1 TEST PROCEDURE	27
9.2 BASIC TEST SETUP BLOCK DIAGRAM	27
9.3 TEST RECEIVER SETUP	27
9.4 SUMMARY OF TEST RESULTS/PLOTS	27
APPENDIX SUMMARY	30
APPENDIX A	31
APPENDIX B	36
APPENDIX C	41
APPENDIX D	42
APPENDIX E	54
APPENDIX PHOTOGRAPHS	58

Report version

Version No.	Date of issue	Description
Rev.00	January 1, 2024	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Guangzhou Weiwei electronics co.,ltd
 Address of applicant: No.3 on the second floor, No.12Yayao Middle Road,P.O. Box
 Huadu District,Guangzhou,China

Manufacturer: Guangzhou Weiwei electronics co.,ltd
 Address of manufacturer: No.3 on the second floor, No.12Yayao Middle Road,P.O. Box
 Huadu District,Guangzhou,China

General Description of EUT	
Product Name:	Projector
Trade Name:	/
Model No.:	H6
Adding Model(s):	JS1, JS2, JS3, JS4, JS5, JS6, JS7, JS8, JS9, H80, H89, H90, H2, H3, H5, T2, T3, T5, T6, T9, S1, S2, S3, S5, S6, S8, S9, A6X Pro, CS9 Pro, V2 Pro, MX8 Pro, GX6 Pro, KS6 Pro, KS8 Pro, TF90 Pro, SF90 Pro, KT8 Pro, M9S Pro, MAX10 Pro, VR9 Pro, G9K Pro, RS8 Pro, RS9 Pro, DX9 Pro, ZX6 Pro, ZX8 Pro, ZX9 Pro, FX8 Pro, FX9 Pro, MG8 Pro, HS6 Pro, A6X, CS9, V2 PRO, MX8, GX6, KS6, KS8, TF90, SF90, KT8, M9S, MAX10, VR9, G9K, RS8, RS9, DX9, ZX6, ZX8, ZX9, FX8, FX9, MG8, HS6
Rated Voltage:	AC 120V/60Hz
Power Adapter Model:	/
Serial number:	S-01
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
RF Output Power:	17.41dBm (Conducted)
Type of Modulation:	DBPSK,BPSK,DQPSK,QPSK,16QAM,64QAM
Quantity of Channels:	11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)

Reference No.: WTX23X12290901W001

Channel Separation:	5MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	3dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the FCC rules.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

Test software(Fix the Tx frequency)	Power level(Testing)
Name	level
Putty	Index

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-26GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2023-03-27	2024-03-26
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2023-03-27	2024-03-26
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2023-03-27	2024-03-26
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2023-03-27	2024-03-26
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2023-03-27	2024-03-26
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2023-03-27	2024-03-26
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2023-03-27	2024-03-26
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2023-03-27	2024-03-26
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2023-03-27	2024-03-26
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2023-03-27	2024-03-26
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2023-04-12	2024-04-11
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2023-04-12	2024-04-11
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2023-03-19	2025-03-18
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2023-03-19	2025-03-18
SEMT-1042	Horn Antenna	ETS	3117	00086197	2023-03-19	2025-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2023-03-27	2024-03-26
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2023-03-27	2024-03-26
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2023-03-27	2024-03-26
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2023-03-27	2024-03-26
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2023-03-19	2025-03-18
SEMT-1096	Power Sensor	Agilent	U2021XA	MY54250019	2023-03-27	2024-03-26
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information


This product has an integral antenna, fulfill the requirement of this section.

4. Power Spectral Density

4.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

4.2 Test Setup Block Diagram

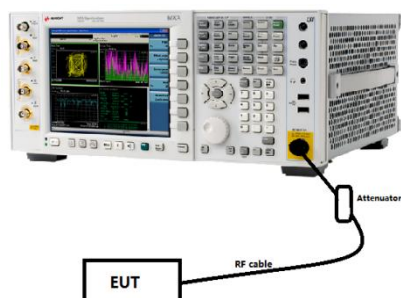

4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.3, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

4.4 Summary of Test Results/Plots


Please refer to Appendix A

5. DTS Bandwidth

5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

5.2 Test Setup Block Diagram

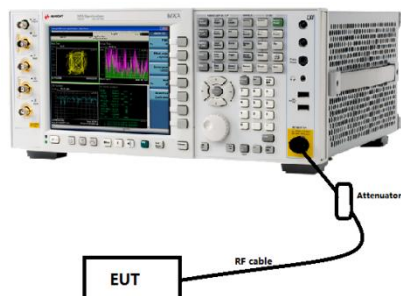

5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- Set RBW = 100kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.4 Summary of Test Results/Plots


Please refer to Appendix B

6. RF Output Power

6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands: 1 Watt.

6.2 Test Setup Block Diagram

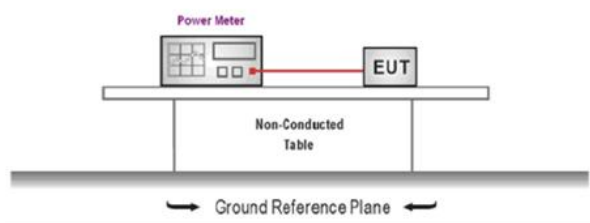

6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.1.1 and ANSI C63.10-2013 Subclause 11.9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) The maximum peak conducted output power may be measured using a broadband peak RF power meter.
- b) The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.
- c) Record the measurement data.

6.4 Summary of Test Results/Plots

Please refer to Appendix C

7. Field Strength of Spurious Emissions

7.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


7.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

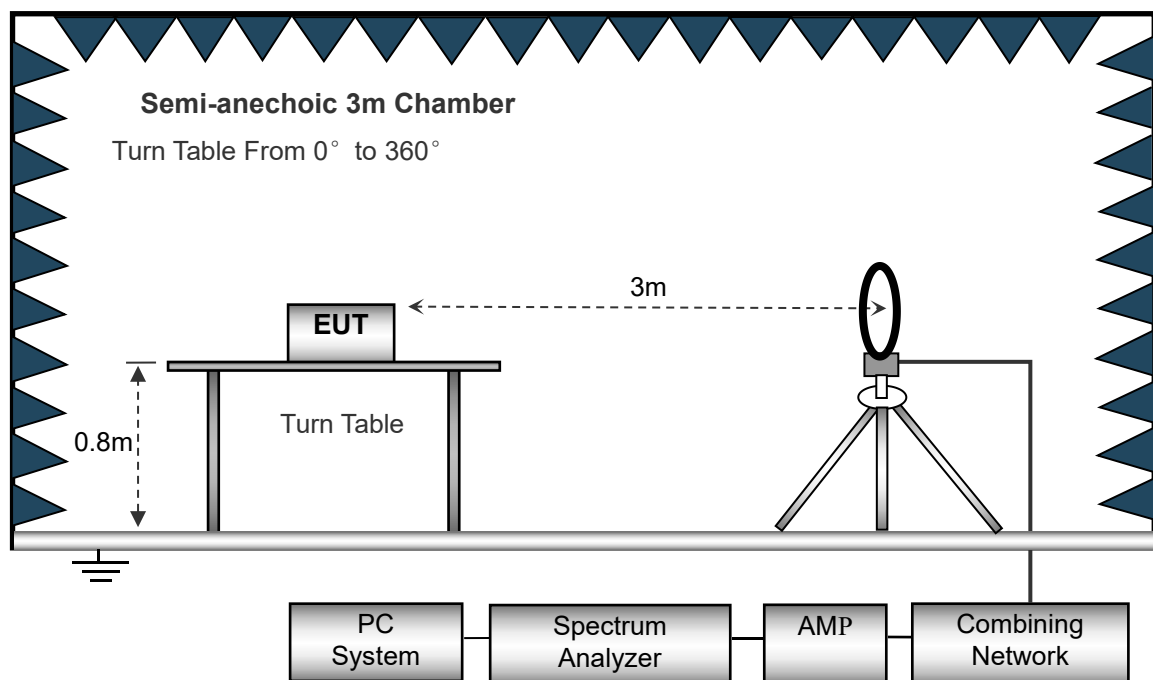

The test setup for emission measurement from 30MHz to 1GHz.

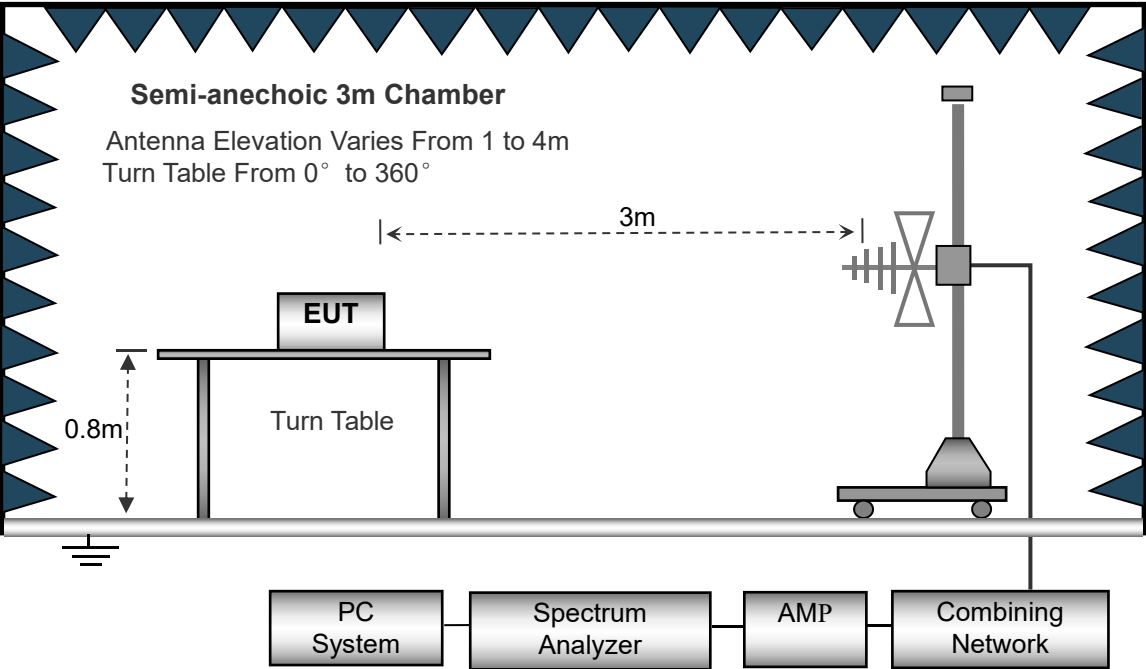

The test setup for emission measurement above 1GHz.

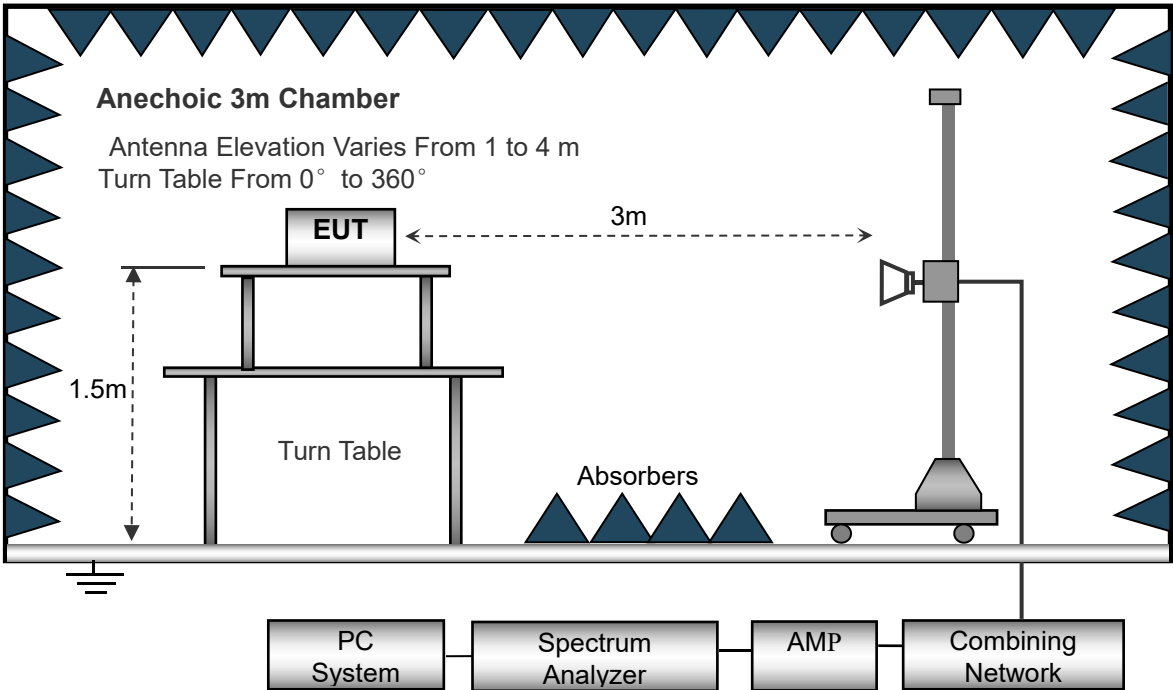

Frequency :9kHz-30MHz RBW=10KHz, VBW =30KHz Sweep time= Auto Trace = max hold Detector function = peak	Frequency :30MHz-1GHz RBW=120KHz, VBW=300KHz Sweep time= Auto Trace = max hold Detector function = peak, QP	Frequency :Above 1GHz RBW=1MHz, VBW=3MHz(Peak), 10Hz(AV) Sweep time= Auto Trace = max hold Detector function = peak, AV
---	--	--

7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\begin{aligned}\text{Result} &= \text{Indicated Reading} + \text{Correct} \\ \text{Correct} &= \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}\end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Result} - \text{FCC Part 15 Limit}$$

7.4 Summary of Test Results/Plots

*Note: 1.This EUT was tested in 3 orthogonal positions and the worst case position data was reported.
All test modes (different data rate and different modulation) are performed, but only the worst case(802.11b_low channel 11Mbps) is recorded in this report.*


➤ Spurious Emissions Below 1GHz

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal

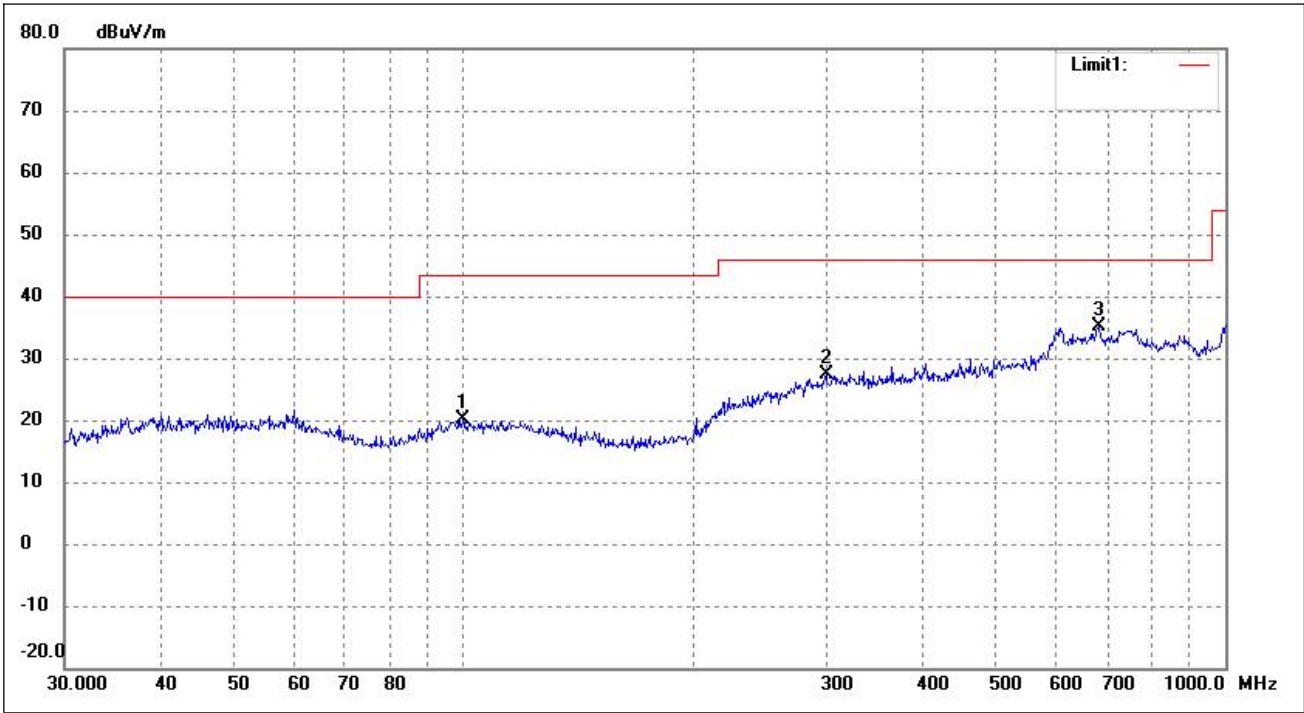

No.	Frequency (MHz)	Reading (dBuV)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	99.8777	15.14	5.11	20.25	43.50	-23.25	-	-	peak
2	299.3158	15.19	12.15	27.34	46.00	-18.66	-	-	peak
3	682.3485	15.96	19.08	35.04	46.00	-10.96	-	-	peak

802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical

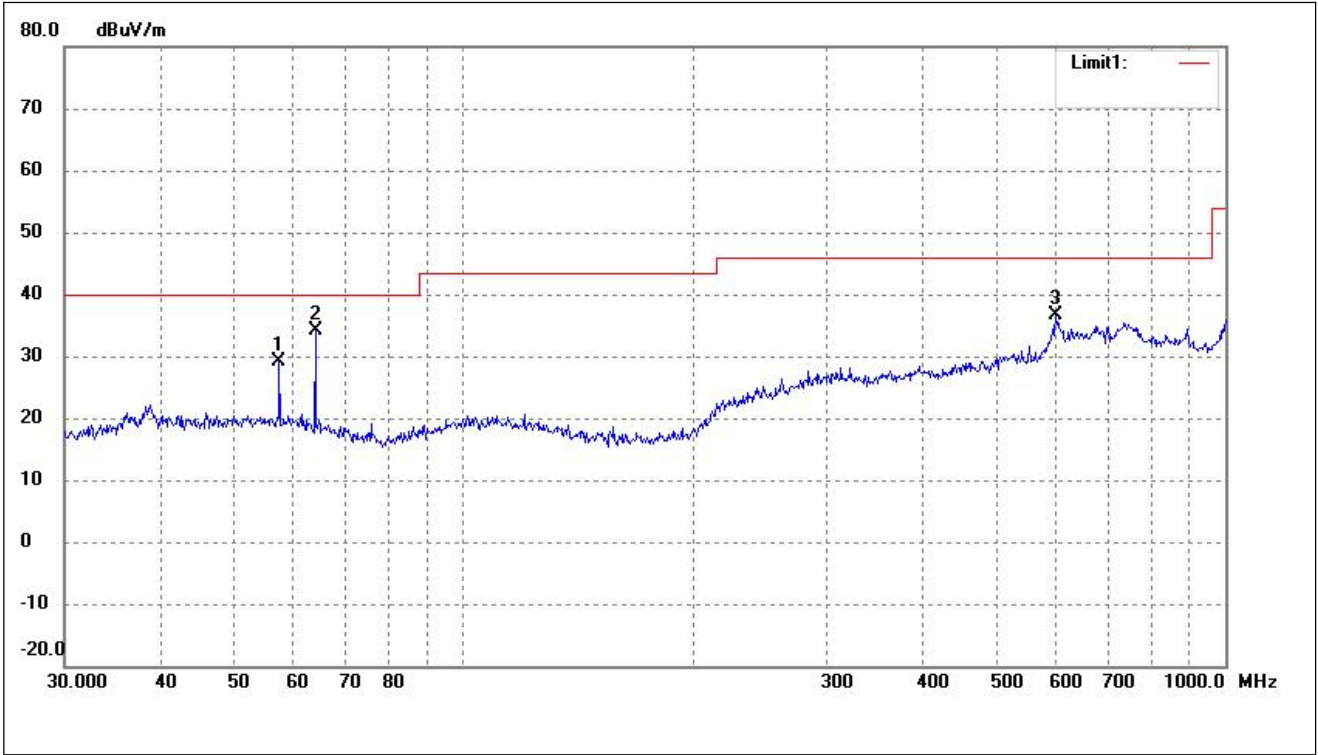

No.	Frequency (MHz)	Reading (dBuV)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	57.3923	23.91	5.34	29.25	40.00	-10.75	-	-	peak
2	63.9828	29.75	4.50	34.25	40.00	-5.75	-	-	peak
3	599.3213	17.38	19.19	36.57	46.00	-9.43	-	-	peak

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emissions Above 1GHz
- Test Mode: 802.11b_11Mbps (worst case)

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	54.09	-3.87	50.22	74.00	-23.78	H	PK
4824.000	38.84	-3.87	34.97	54.00	-19.03	H	AV
7236.000	46.30	1.14	47.44	74.00	-26.56	H	PK
7236.000	34.98	1.19	36.17	54.00	-17.83	H	AV
4824.000	57.31	-3.86	53.45	74.00	-20.55	V	PK
4824.000	40.50	-3.86	36.64	54.00	-17.36	V	AV
7236.000	49.11	1.10	50.21	74.00	-23.79	V	PK
7236.000	37.44	1.10	38.54	54.00	-15.46	V	AV
Middle Channel-2437MHz							
4874.000	54.74	-3.74	51.00	74.00	-23.00	H	PK
4874.000	39.99	-3.74	36.25	54.00	-17.75	H	AV
7311.000	47.77	1.47	49.24	74.00	-24.76	H	PK
7311.000	33.10	1.47	34.57	54.00	-19.43	H	AV
4874.000	53.97	-3.74	50.23	74.00	-23.77	V	PK
4874.000	40.89	-3.74	37.15	54.00	-16.85	V	AV
7311.000	47.98	1.47	49.45	74.00	-24.55	V	PK
7311.000	34.08	1.47	35.55	54.00	-18.45	V	AV
High Channel-2462MHz							
4924.000	55.82	-3.59	52.23	74.00	-21.77	H	PK
4924.000	41.76	-3.59	38.17	54.00	-15.83	H	AV
7386.000	46.38	1.79	48.17	74.00	-25.83	H	PK
7386.000	34.83	1.79	36.62	54.00	-17.38	H	AV
4924.000	54.94	-3.59	51.35	74.00	-22.65	V	PK
4924.000	42.04	-3.59	38.45	54.00	-15.55	V	AV
7386.000	47.99	1.79	49.78	74.00	-24.22	V	PK
7386.000	35.18	1.79	36.97	54.00	-17.03	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. Out of Band Emissions

8.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

8.2 Test Procedure

According to the KDB 558074D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement

KDB publication number: 913591 may be used for the radiated bandedge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) $VBW \geq [3 \times RBW]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Table 9—RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

8.3 Summary of Test Results/Plots

Note: All test modes (different data rate and different modulation) are performed, but only the worst case(802.11b_11Mbps Vertical) is recorded in this report.


➤ Radiated test

802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical(worst case)

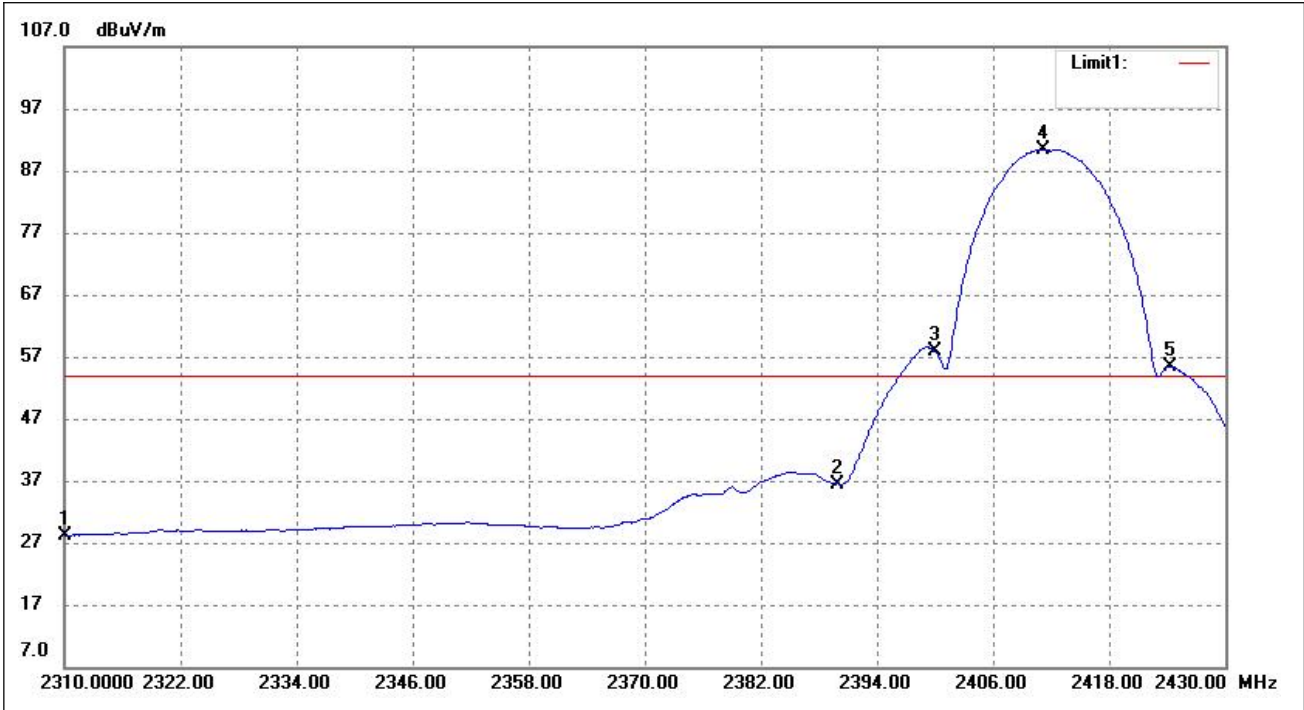

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	31.53	-3.35	28.18	54.00	-25.82	Average Detector
	2310.000	45.17	-3.35	41.82	74.00	-32.18	Peak Detector
2	2390.000	40.78	-4.29	36.49	54.00	-17.51	Average Detector
	2390.000	56.38	-4.29	52.09	74.00	-21.91	Peak Detector
3	2400.000	62.25	-4.40	57.85	/		Average Detector
4	2411.160	94.88	-4.44	90.44			Average Detector

802.11b_11Mbps			
Test Channel	High	Polarity:	Vertical(worst case)

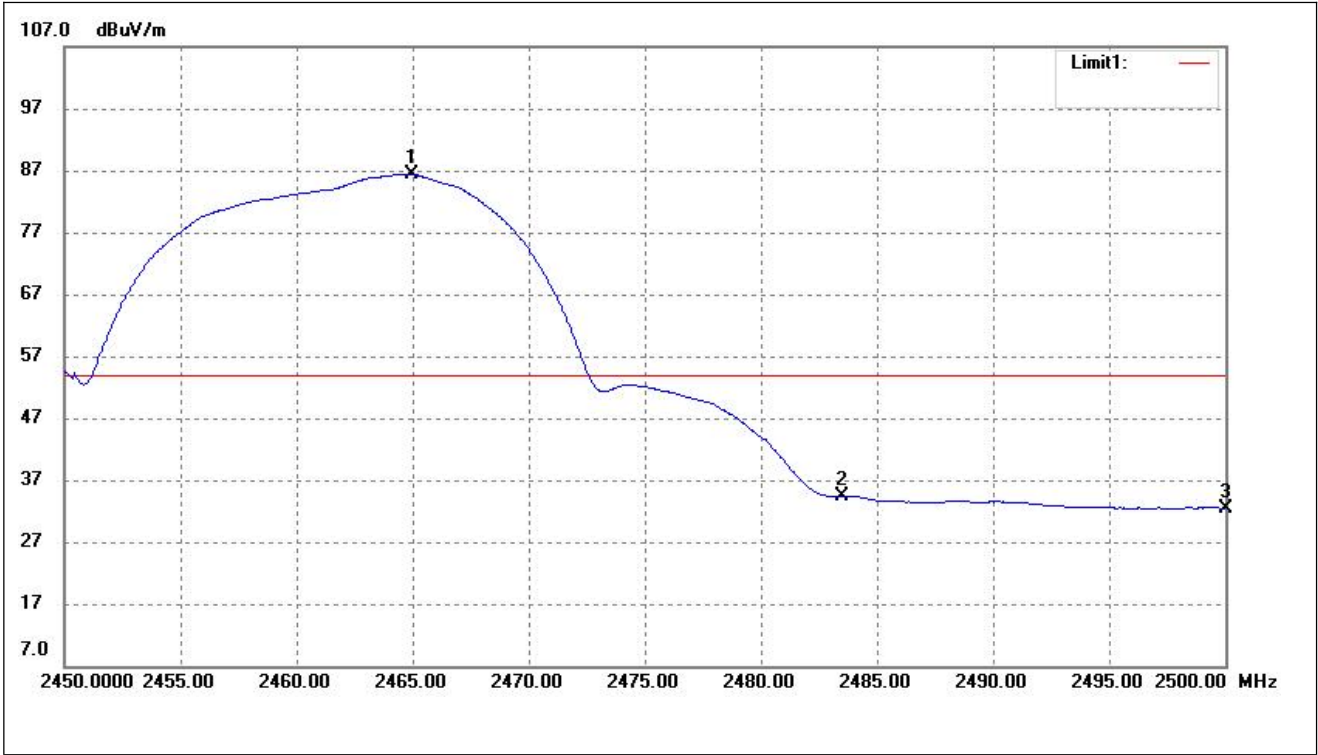

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2464.950	89.68	-3.29	86.39	/	/	Average Detector
	2463.650	97.45	-3.29	94.16	/	/	Peak Detector
2	2483.500	89.68	-3.29	34.43	54.00	-19.57	Average Detector
	2483.500	97.45	-3.29	46.87	74.00	-27.13	Peak Detector
3	2500.000	35.64	-3.20	32.44	54.00	-21.56	Average Detector
	2500.000	47.53	-3.20	44.33	74.00	-29.67	Peak Detector

Reference No.: WTX23X12290901W001

➤ Conducted test

Please refer to Appendix D and E

9. Conducted Emissions


9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.

9.2 Basic Test Setup Block Diagram

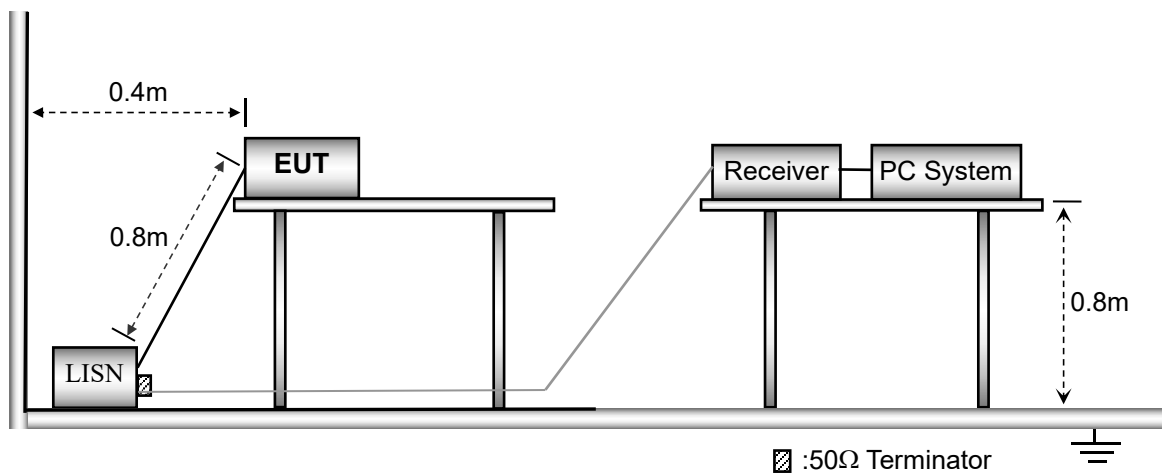

9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency.....	150kHz
Stop Frequency.....	30MHz
Sweep Speed.....	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth.....	9kHz
Quasi-Peak Adapter Mode.....	Normal

9.4 Summary of Test Results/Plots


Remark:

Result = Indicated Reading + Correct

Correct=Cable lose + Pulse Limiter Factor + Artificial Mains Factor


Margin=Result- Limit

Test Mode	Communication	Polarity:	Line
-----------	---------------	-----------	------

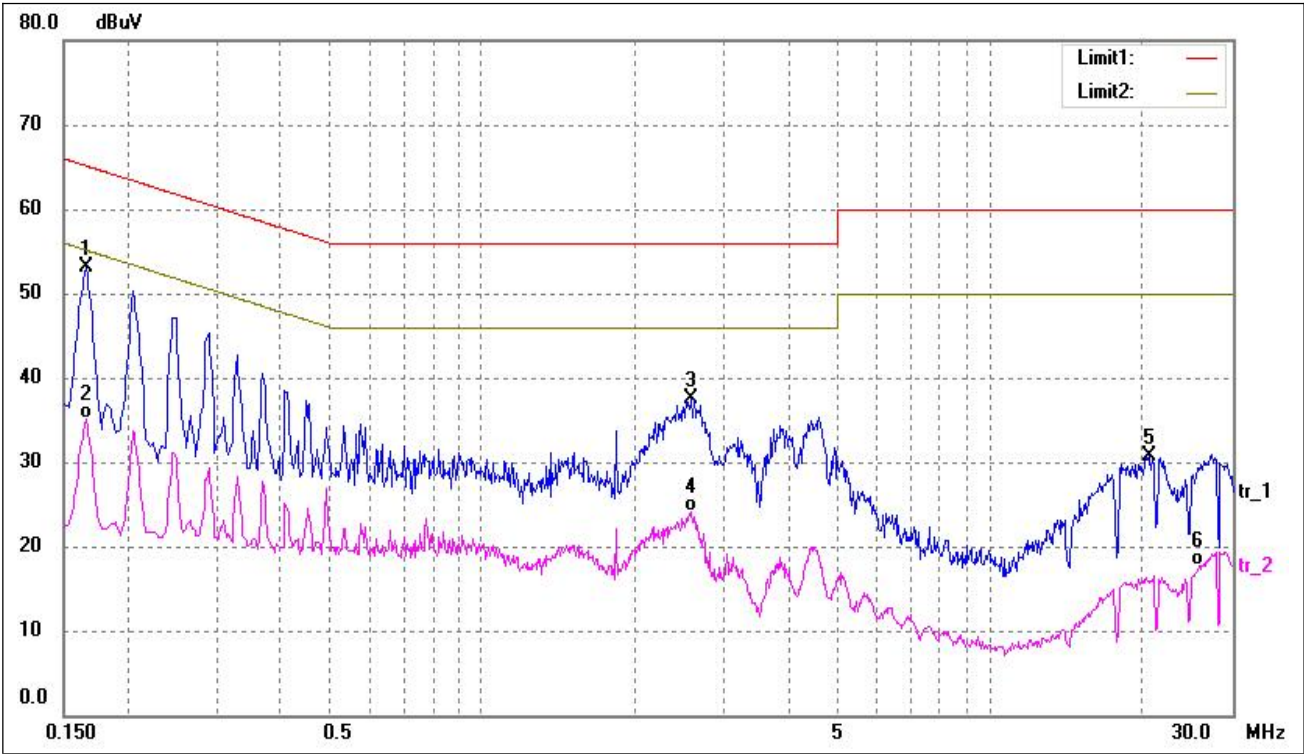

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1660	43.70	9.50	53.20	65.16	-11.96	peak
2	0.1660	25.58	9.50	35.08	55.16	-20.08	AVG
3	2.5940	27.57	10.00	37.57	56.00	-18.43	peak
4	2.5940	14.09	10.00	24.09	46.00	-21.91	AVG
5	20.5060	18.76	12.00	30.76	60.00	-29.24	peak
6	25.8260	4.75	13.00	17.75	50.00	-32.25	AVG

Test Mode	Communication	Polarity:	Neutral
-----------	---------------	-----------	---------

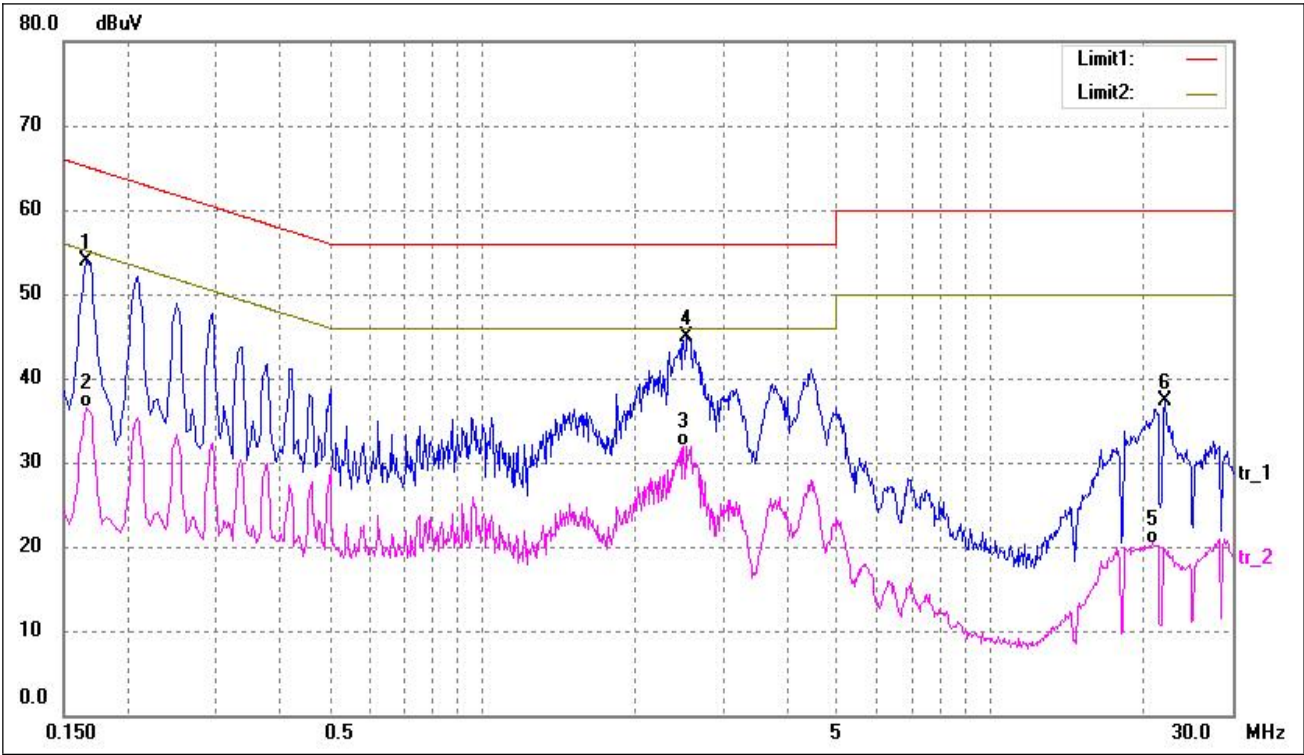

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1660	44.47	9.50	53.97	65.16	-11.19	peak
2	0.1660	27.02	9.50	36.52	55.16	-18.64	AVG
3	2.4980	21.94	10.00	31.94	46.00	-14.06	AVG
4*	2.5380	34.84	10.00	44.84	56.00	-11.16	peak
5	20.8660	8.40	12.00	20.40	50.00	-29.60	AVG
6	22.0820	25.20	12.03	37.23	60.00	-22.77	peak




APPENDIX SUMMARY




Project No.	WTX23X12290901W001	Test Engineer	Tom Wang
Start date	2023/12/27	Finish date	2023/01/01
Temperature	24.1℃	Humidity	52%
RF specifications	WIFI-2.4G		




APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	DTS Bandwidth	Compliant
C	RF Output Power	Compliant
D	Conducted Out of Band Emissions	Compliant
E	Conducted Spurious Emissions	Compliant




APPENDIX A

Power Spectral Density			
Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b_11Mbps	2412	-18.81	8
	2437	-20.18	8
	2462	-21.97	8
802.11g_54Mbps	2412	-20.57	8
	2437	-21.53	8
	2462	-23.47	8
802.11n-HT20_MCS7	2412	-20.38	8
	2437	-21.79	8
	2462	-23.76	8
802.11n-HT40_MCS7	2422	-23.50	8
	2437	-24.07	8
	2452	-24.90	8

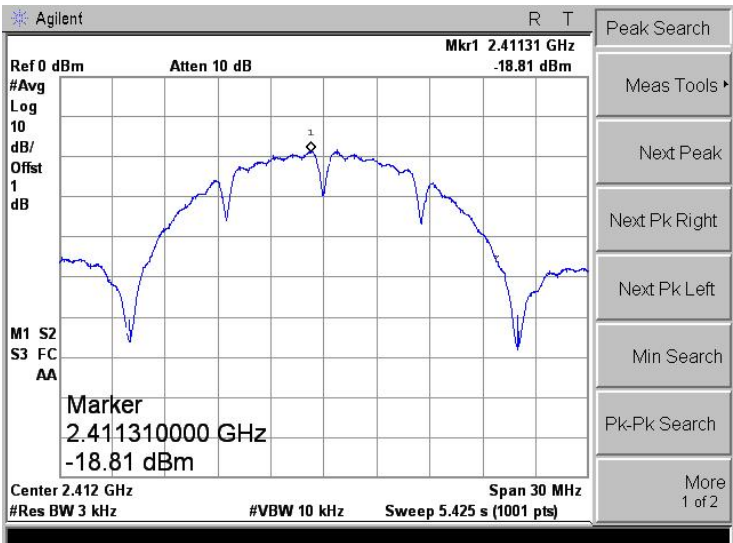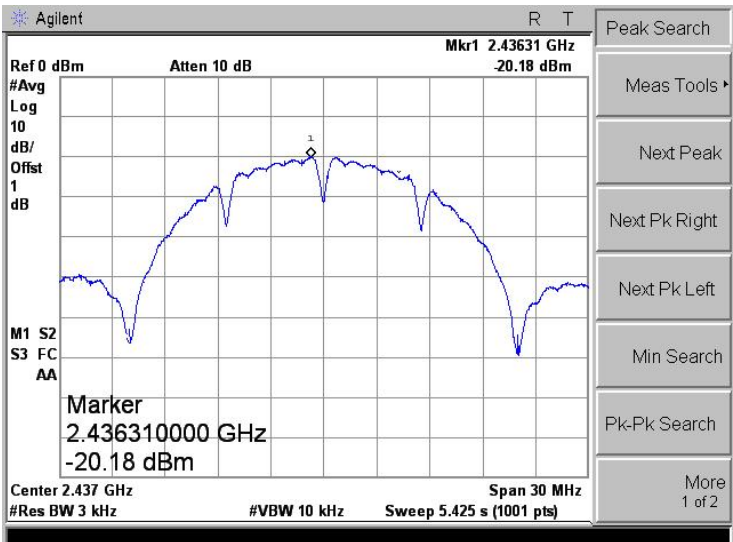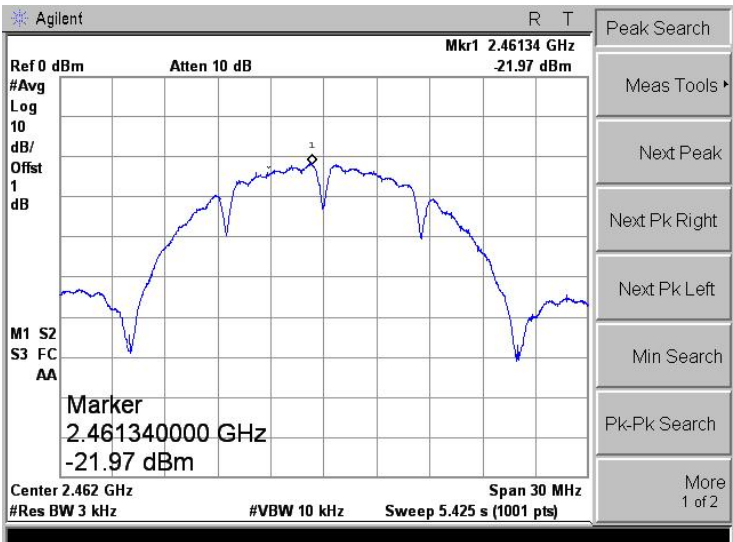802.11b-Low	
802.11b-Middle	
802.11b-High	

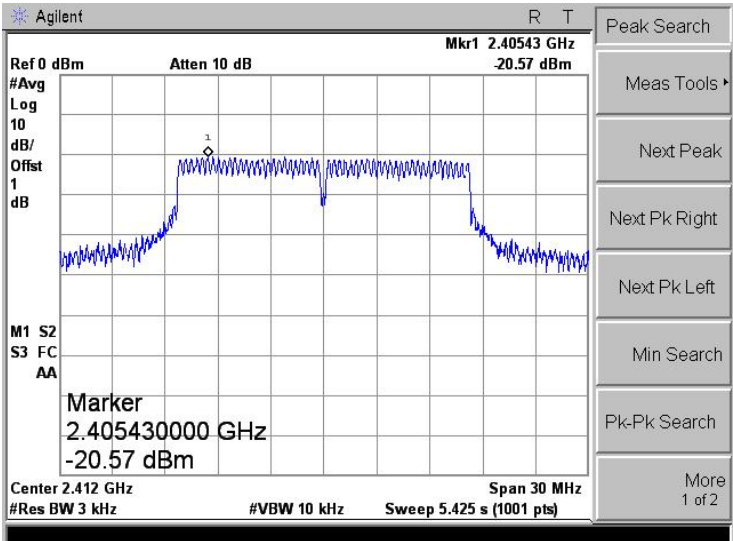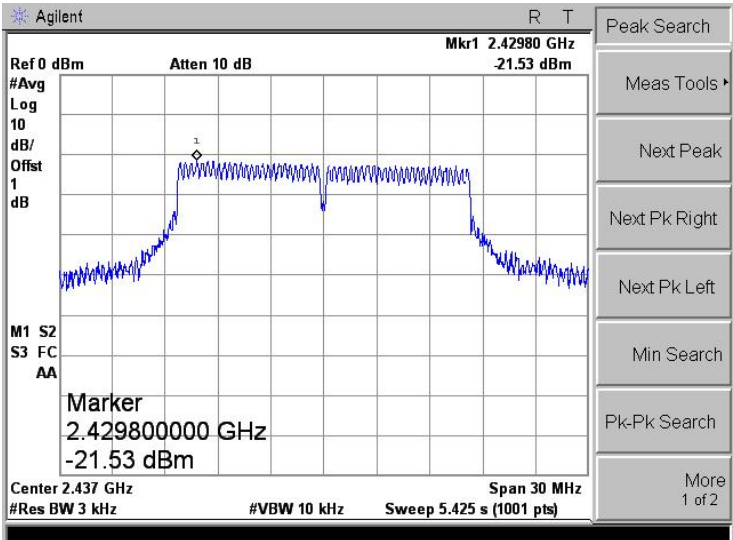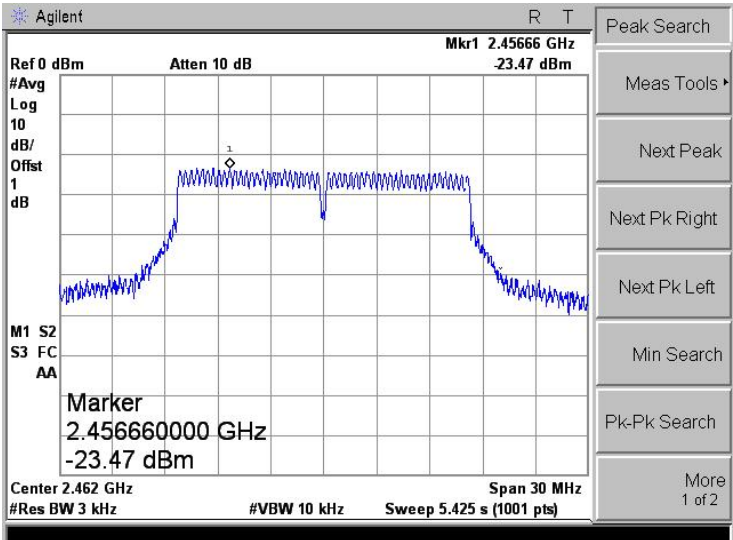802.11g-Low	
802.11g-Middle	
802.11g-High	

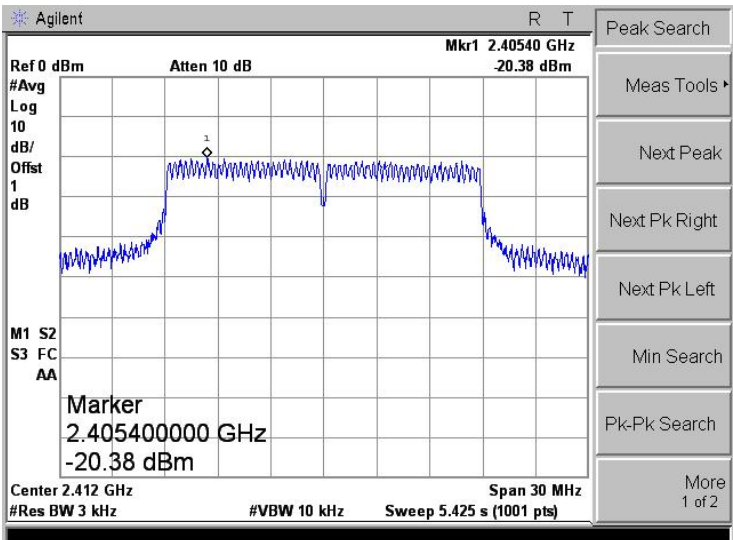
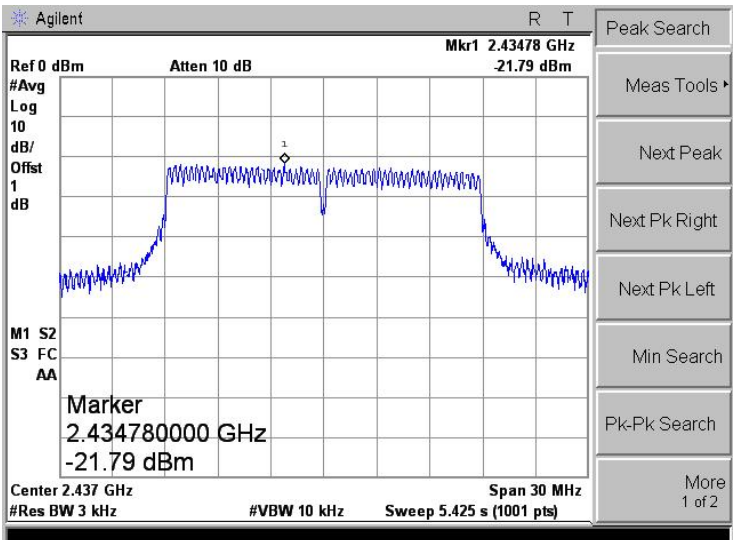
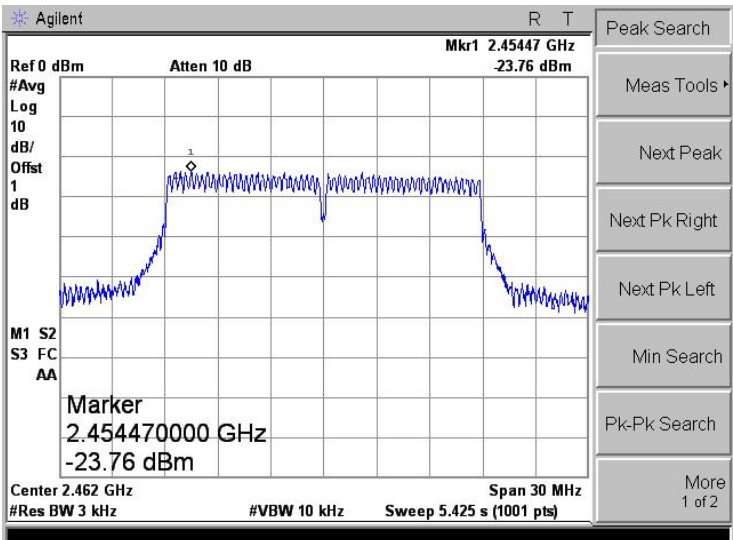
802.11n-HT20-Low	
802.11n-HT20-Middle	
802.11n-HT20-High	

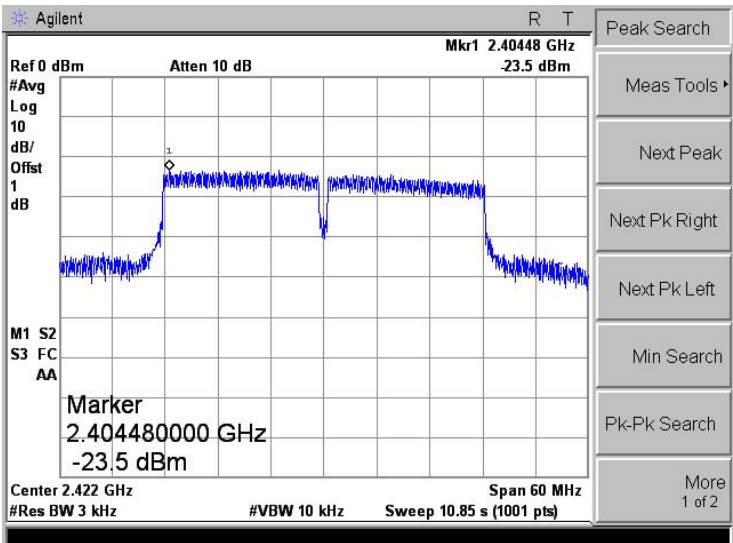
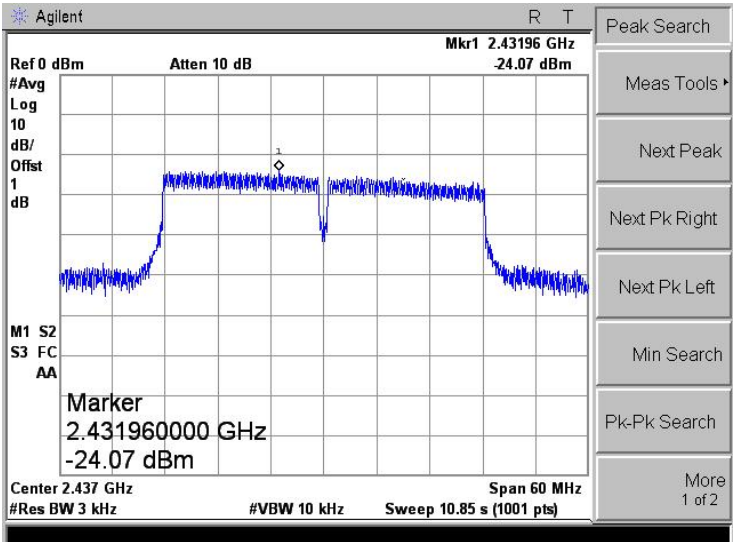
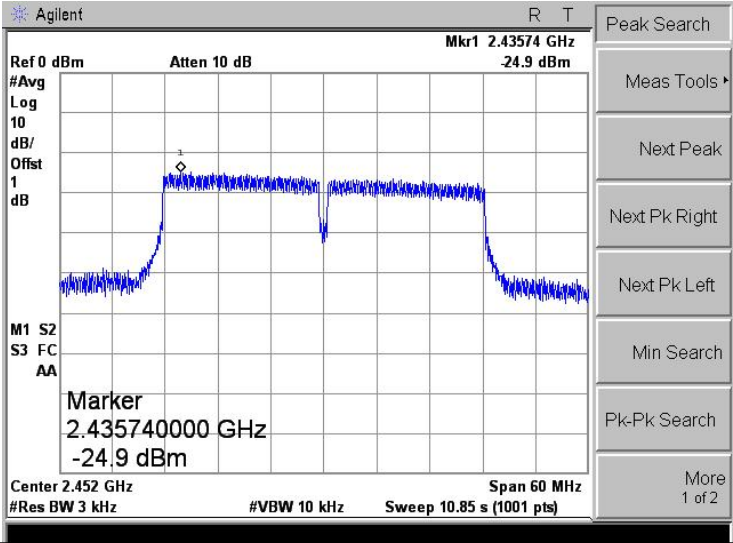
802.11n-HT40-Low	
802.11n-HT40-Middle	
802.11n-HT40-High	

APPENDIX B

DTS Bandwidth			
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	Limit kHz
802.11b_11Mbps	2412	10.056	≥500
	2437	10.063	≥500
	2462	10.036	≥500
802.11g_54Mbps	2412	16.348	≥500
	2437	16.342	≥500
	2462	16.363	≥500
802.11n-HT20_MCS7	2412	17.592	≥500
	2437	17.588	≥500
	2462	17.589	≥500
802.11n-HT40_MCS7	2422	36.101	≥500
	2437	36.319	≥500
	2452	36.326	≥500

802.11b-Low	Agilent R T Ch Freq 2.412 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 2.412 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 15.0867 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -16.131 kHz x dB Bandwidth 10.056 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
802.11b-Middle	Agilent R T Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 2.437 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 15.0884 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -63.660 kHz x dB Bandwidth 10.063 MHz Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.42200000 GHz Stop Freq 2.45200000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
802.11b-High	Agilent R T Ch Freq 2.462 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 2.462 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 15.0603 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -32.187 kHz x dB Bandwidth 10.036 MHz Freq/Channel Center Freq 2.46200000 GHz Start Freq 2.44700000 GHz Stop Freq 2.47700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

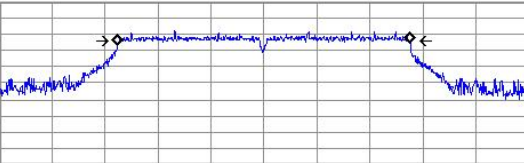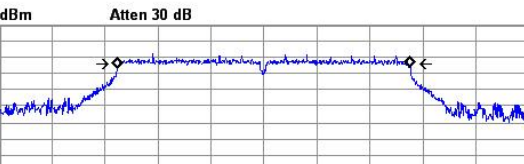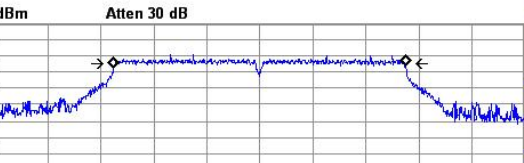802.11g-Low	Agilent R T Ch Freq 2.412 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB  Center 2.412 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 16.5274 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -32.481 kHz x dB Bandwidth 16.348 MHz Freq/Channel Center Freq 2.41200000 GHz Start Freq 2.39700000 GHz Stop Freq 2.42700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
802.11g-Middle	Agilent R T Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB  Center 2.437 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 16.5292 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -47.380 kHz x dB Bandwidth 16.342 MHz Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.42200000 GHz Stop Freq 2.45200000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
802.11g-High	Agilent R T Ch Freq 2.462 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB  Center 2.462 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 16.5257 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -39.702 kHz x dB Bandwidth 16.363 MHz Trace/View 1 Trace 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

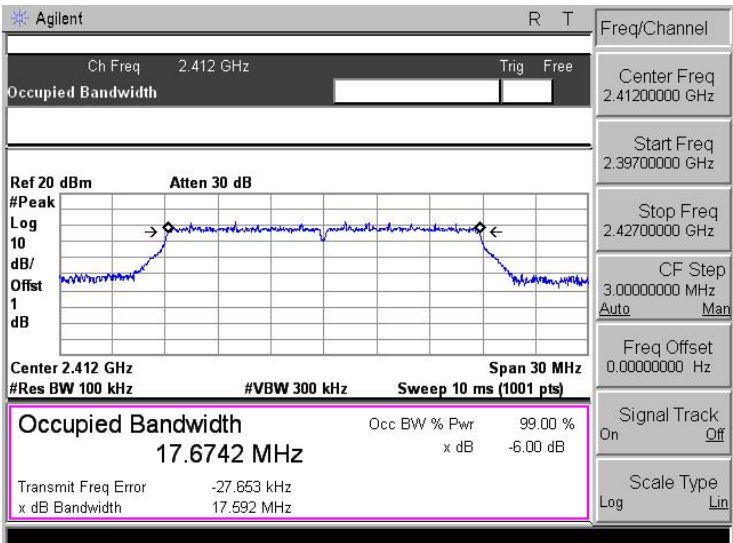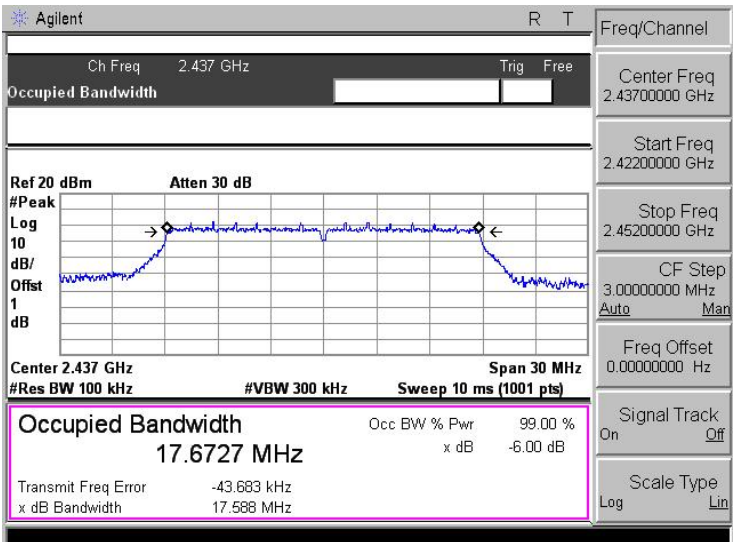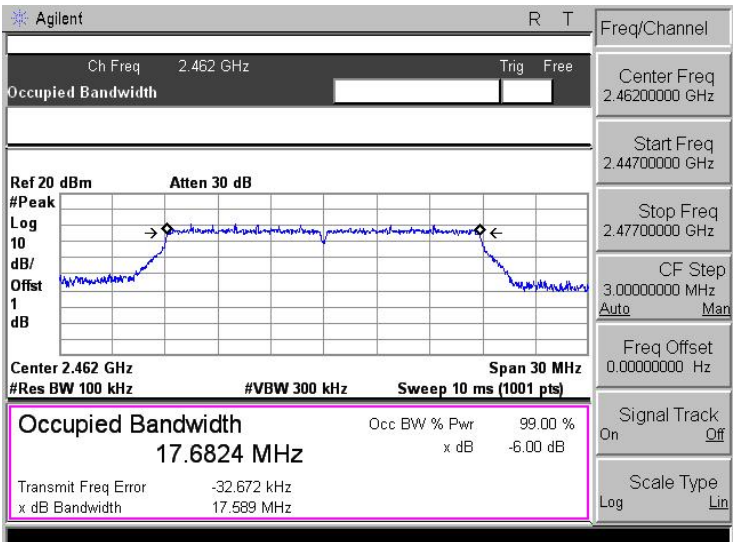802.11n-HT20-Low	 Agilent R T Ch Freq 2.412 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/Offset 1 dB Center 2.412 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 17.6742 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -27.653 kHz x dB Bandwidth 17.592 MHz Freq/Channel Center Freq 2.41200000 GHz Start Freq 2.39700000 GHz Stop Freq 2.42700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
802.11n-HT20-Middle	 Agilent R T Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/Offset 1 dB Center 2.437 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 17.6727 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -43.683 kHz x dB Bandwidth 17.588 MHz Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.42200000 GHz Stop Freq 2.45200000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
802.11n-HT20-High	 Agilent R T Ch Freq 2.462 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/Offset 1 dB Center 2.462 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 17.6824 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -32.672 kHz x dB Bandwidth 17.589 MHz Freq/Channel Center Freq 2.46200000 GHz Start Freq 2.44700000 GHz Stop Freq 2.47700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin


802.11n-HT40-Low	Agilent R T Ch Freq 2.422 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 2.422 GHz Span 60 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 36.1550 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -40.770 kHz x dB Bandwidth 36.101 MHz Freq/Channel Center Freq 2.42200000 GHz Start Freq 2.39200000 GHz Stop Freq 2.45200000 GHz CF Step 6.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
802.11n-HT40-Middle	Agilent R T Ch Freq 2.437 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 2.437 GHz Span 60 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 36.1762 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -53.437 kHz x dB Bandwidth 36.319 MHz Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.40700000 GHz Stop Freq 2.46700000 GHz CF Step 6.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
802.11n-HT40-High	Agilent R T Ch Freq 2.452 GHz Trig Free Occupied Bandwidth Center 2.45200000 GHz Span 60 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 35.7932 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error -33.845 kHz x dB Bandwidth 36.326 MHz Freq/Channel Center Freq 2.45200000 GHz Start Freq 2.42200000 GHz Stop Freq 2.48200000 GHz CF Step 6.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

APPENDIX C



Output power			
Test Mode	Frequency MHz	Reading dBm	Limit dBm
802.11b_11Mbps	2412	17.24	30.00
	2437	17.41	30.00
	2462	17.26	30.00
802.11g_54Mbps	2412	15.17	30.00
	2437	15.24	30.00
	2462	14.11	30.00
802.11n HT20_MCS7	2412	14.58	30.00
	2437	14.69	30.00
	2462	13.87	30.00
802.11n HT40_MCS7	2422	13.57	30.00
	2437	13.55	30.00
	2452	13.69	30.00


APPENDIX D


802.11B-Low

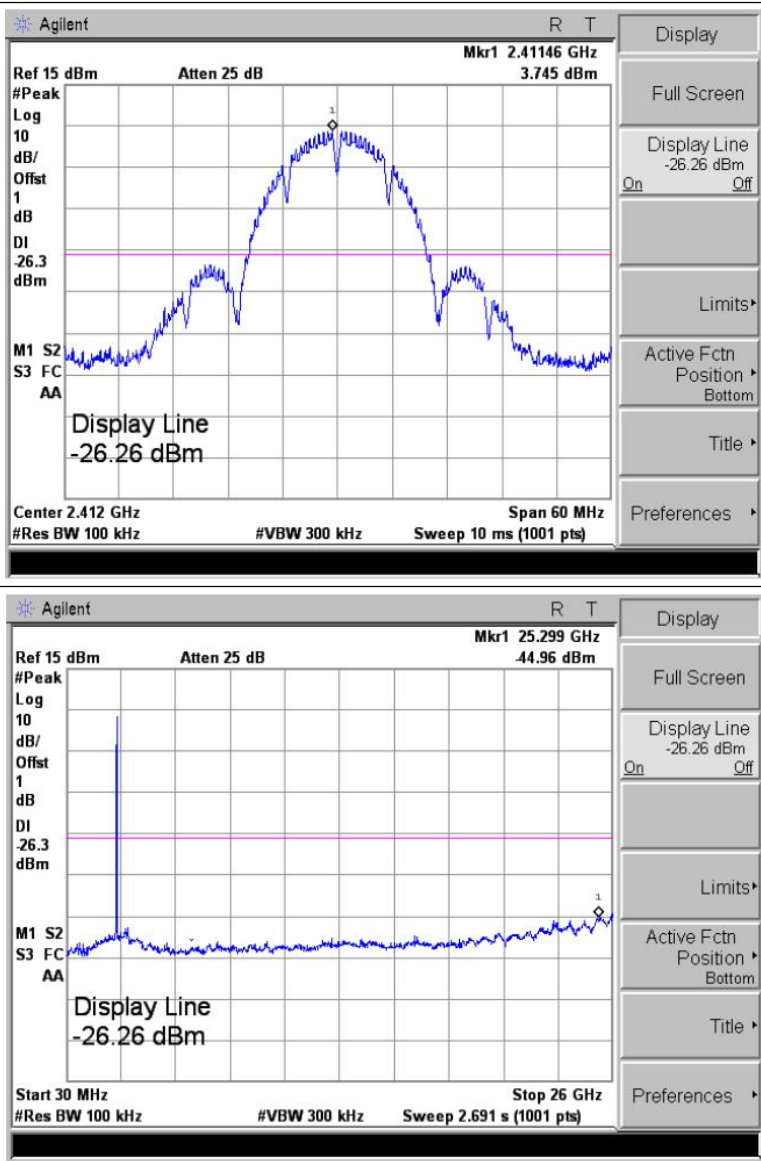



802.11B-Middle

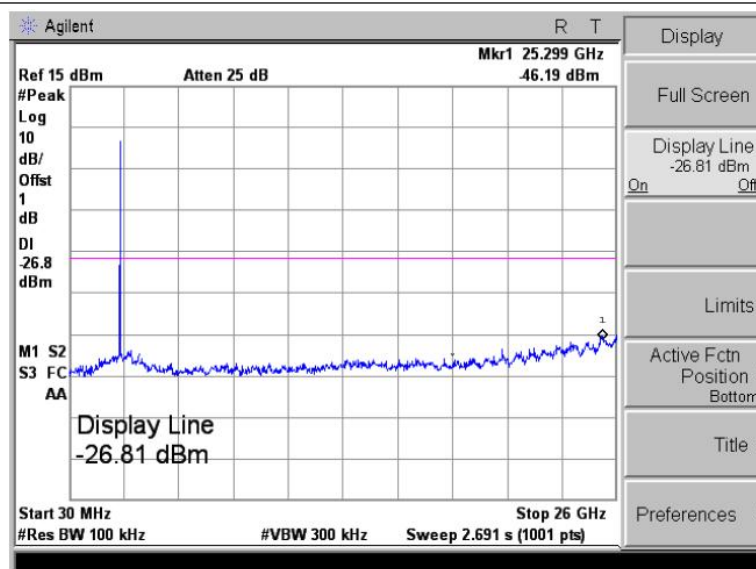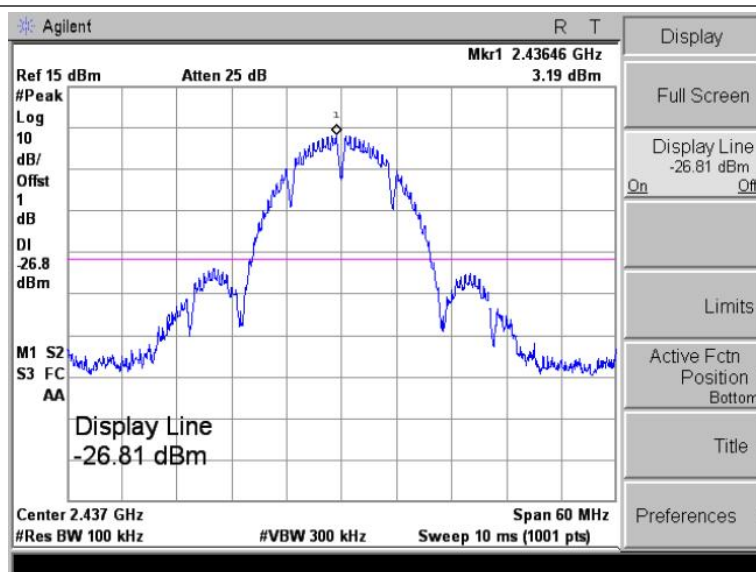


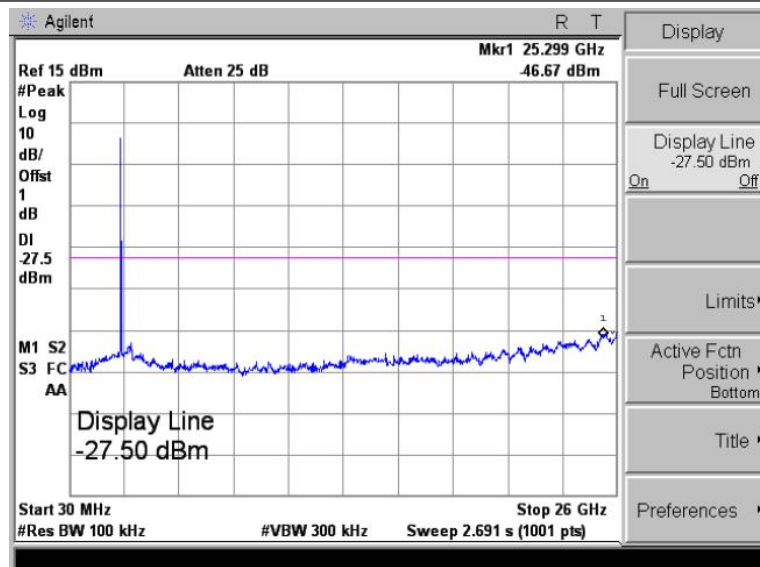


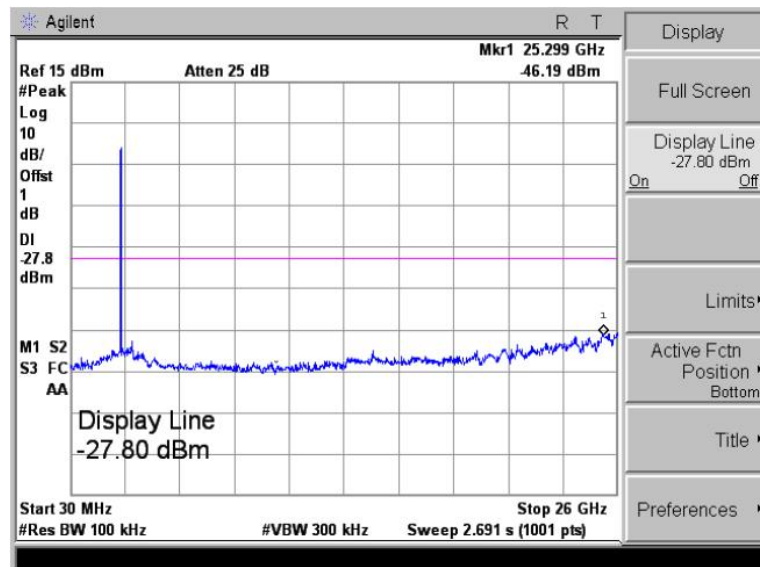



802.11G-Middle

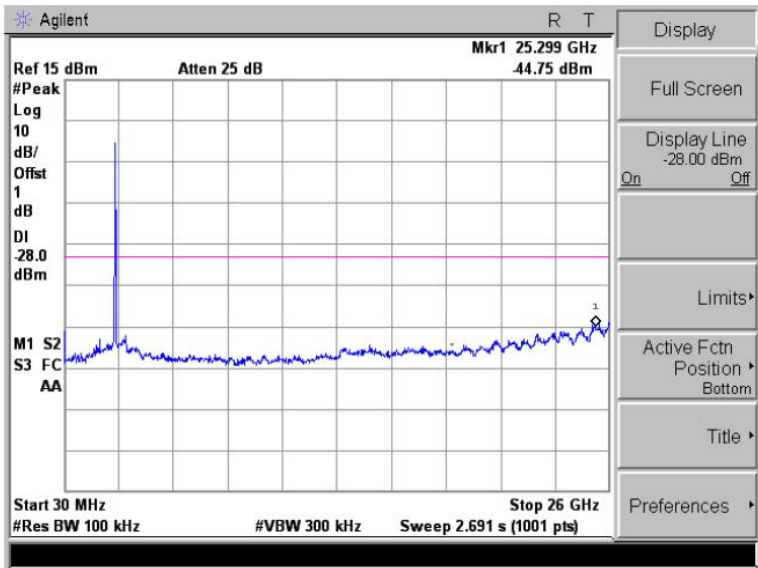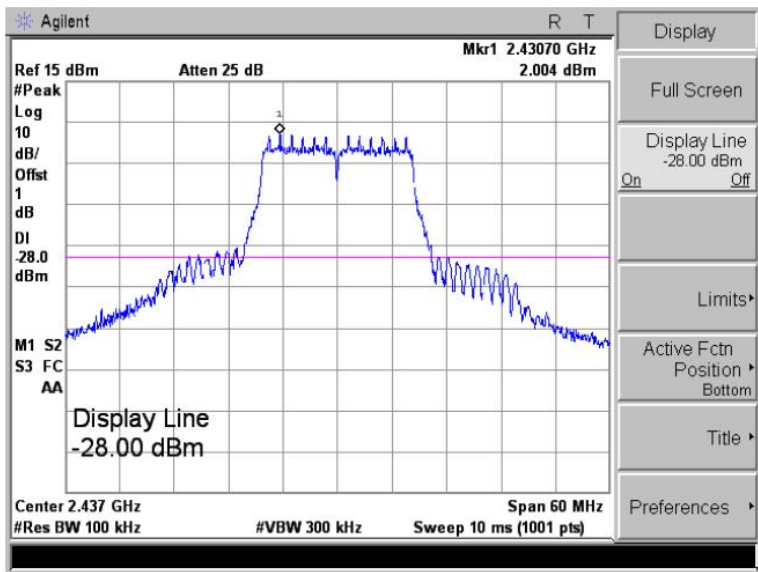



802.11G-High

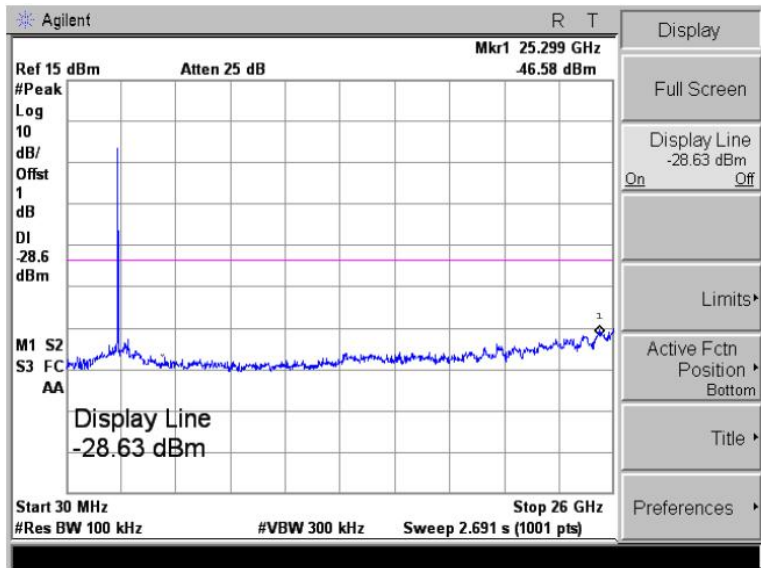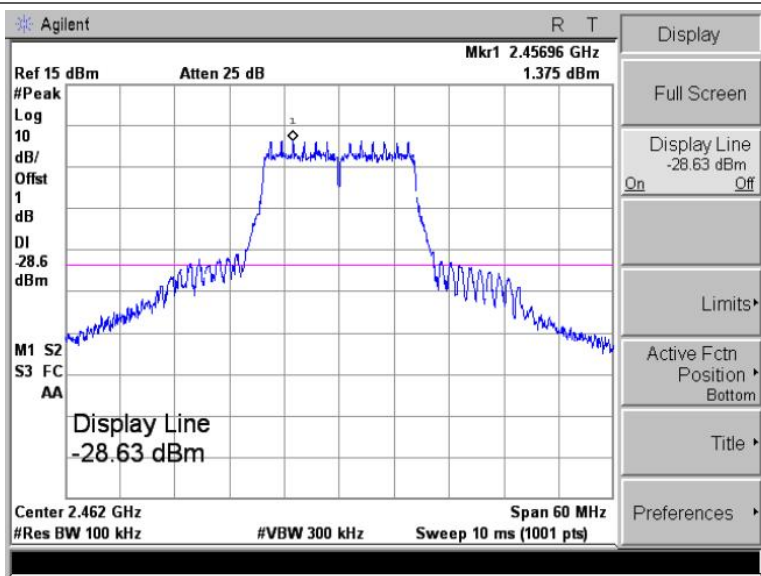



802.11N-HT20-Low

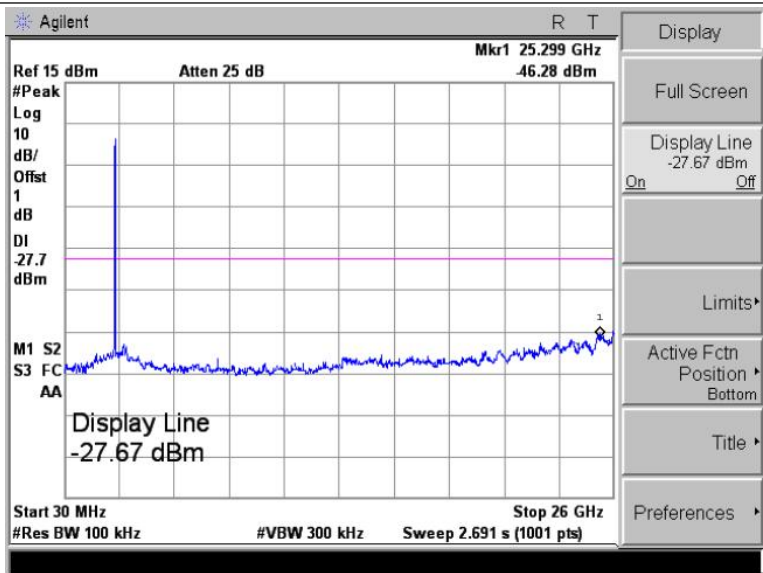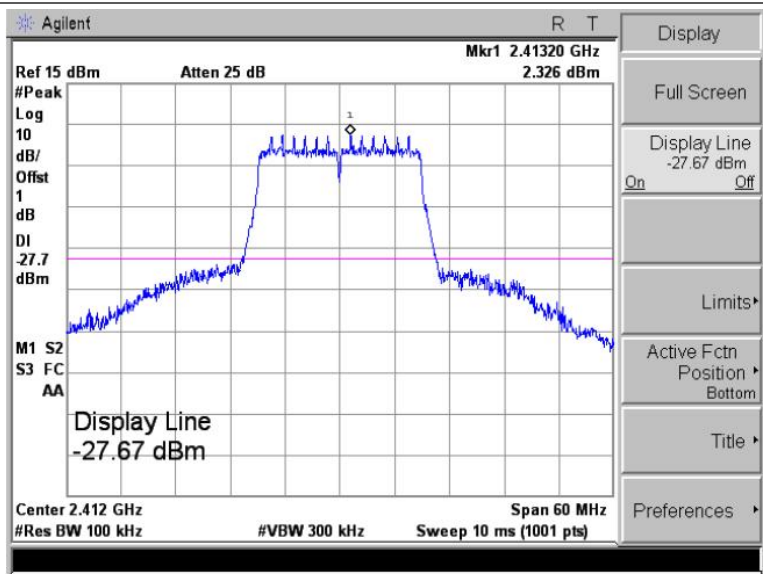



802.11N-HT20-Middle

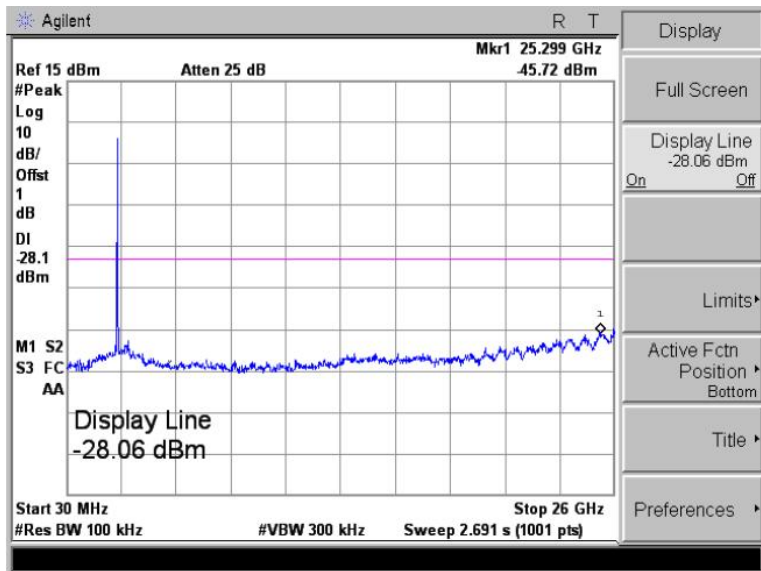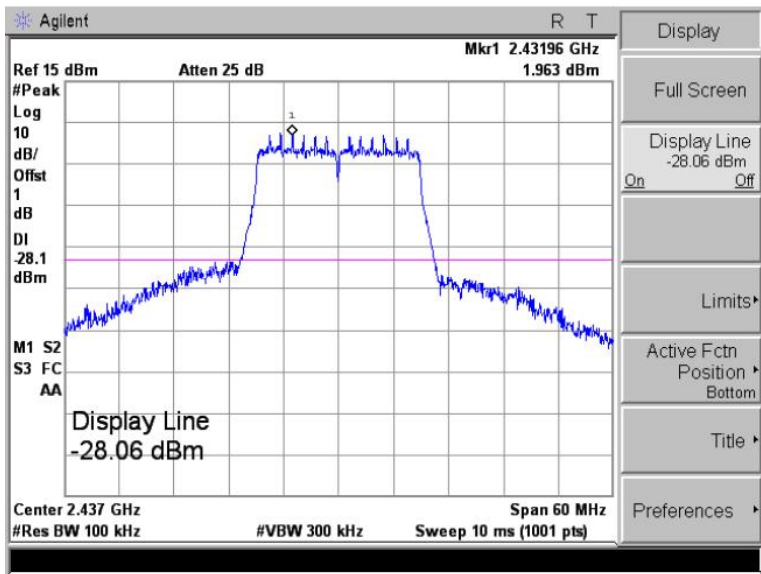



802.11N-HT20-High

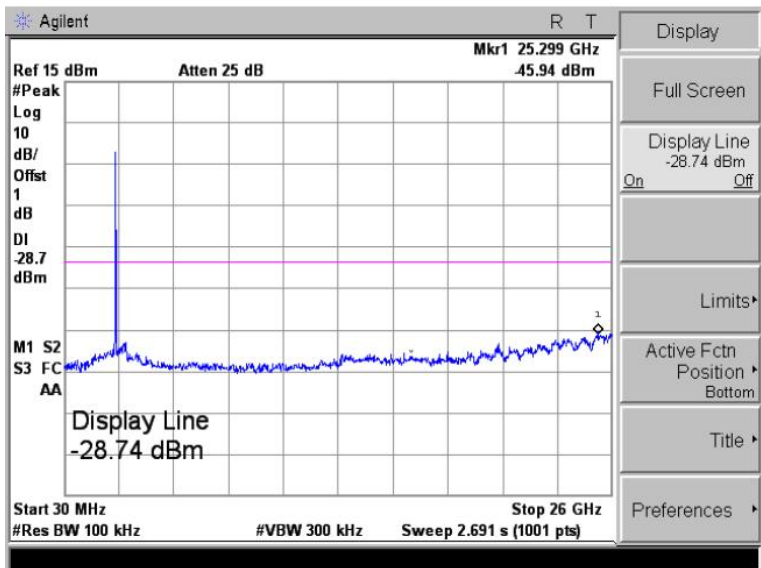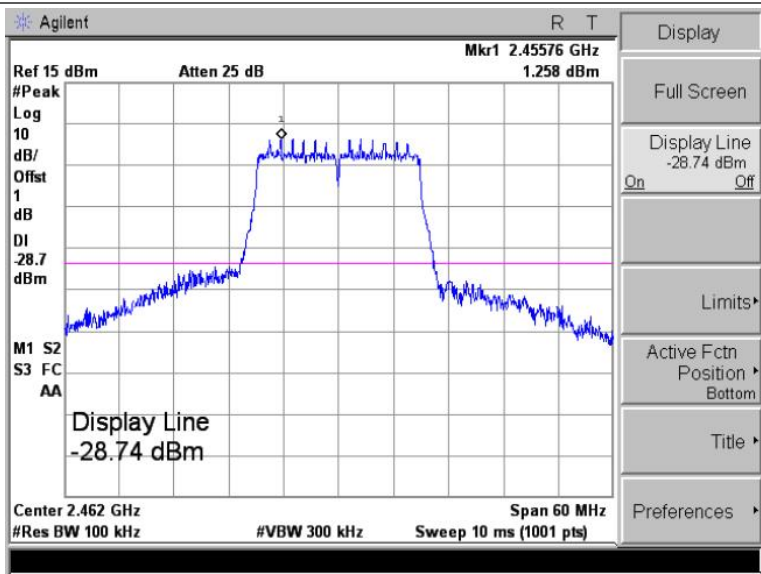



802.11N-HT40-Low

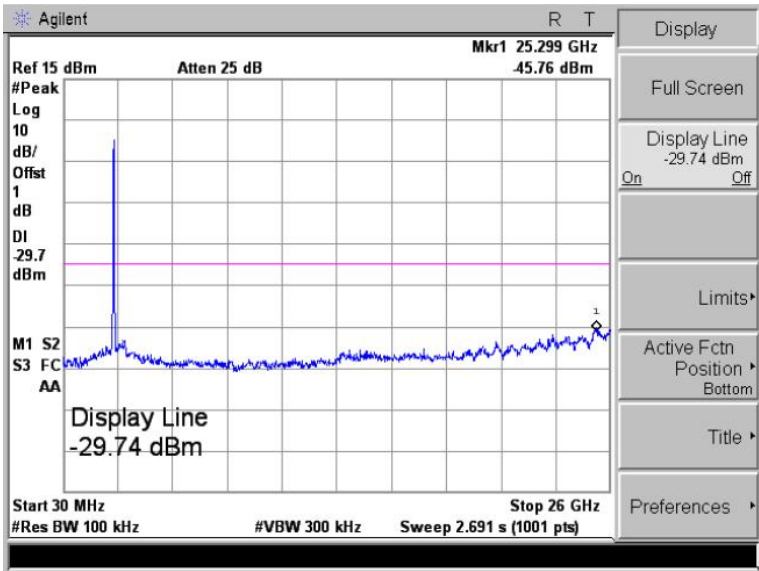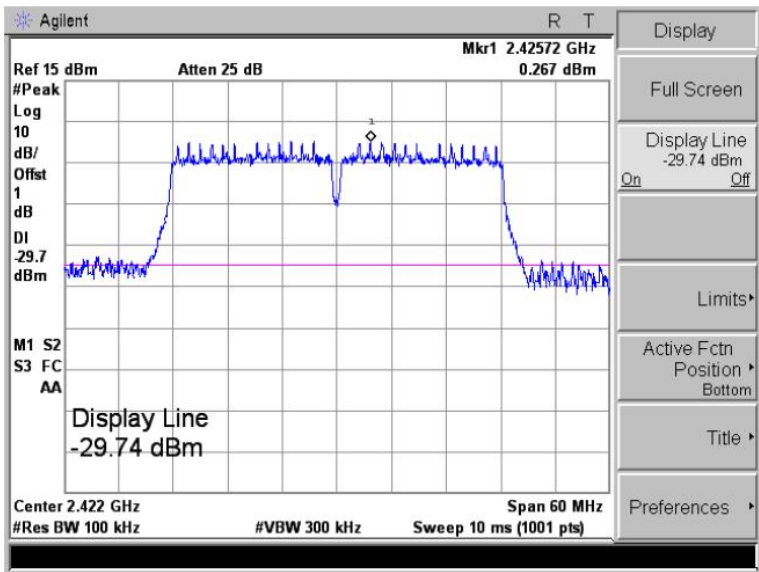

802.11N-HT40-Middle

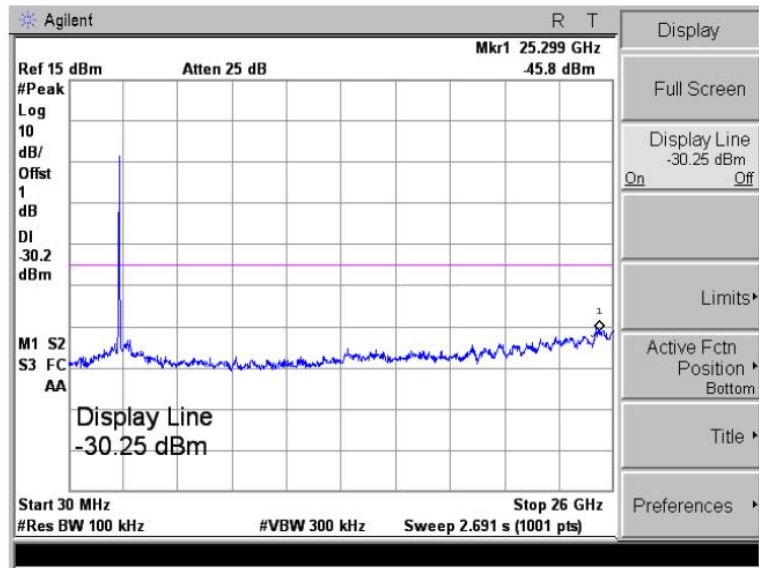
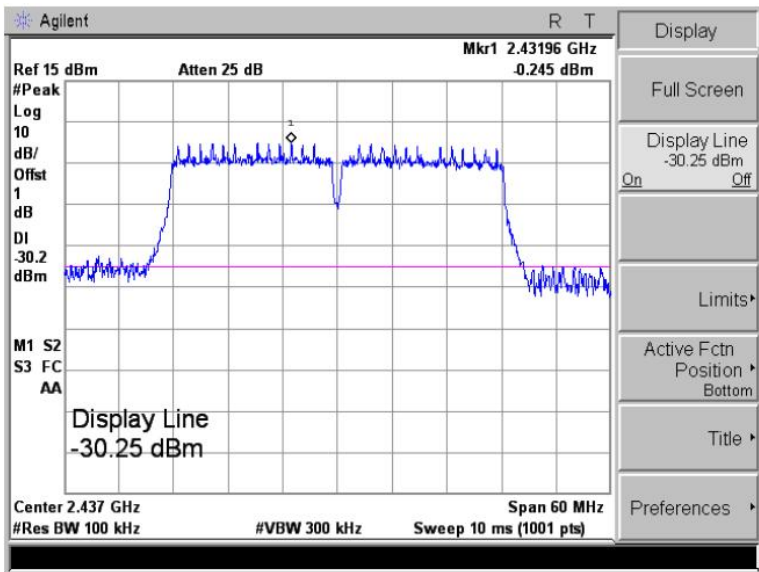


802.11N-HT40-High

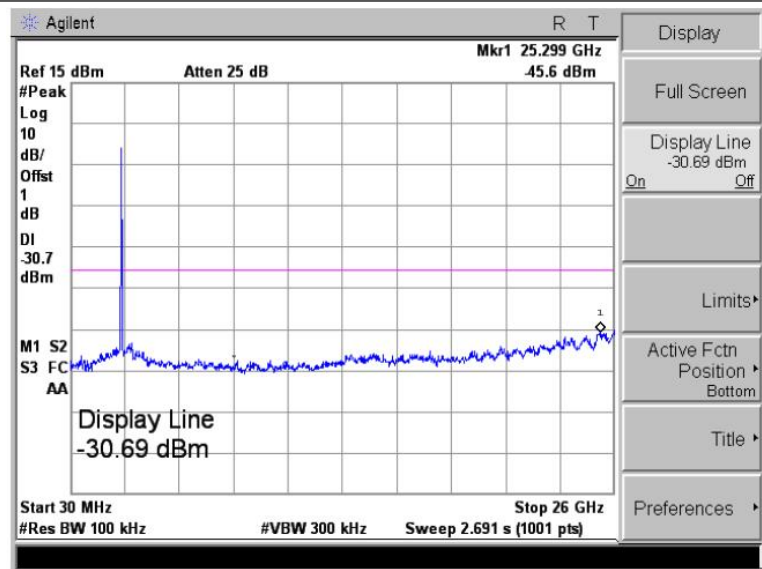
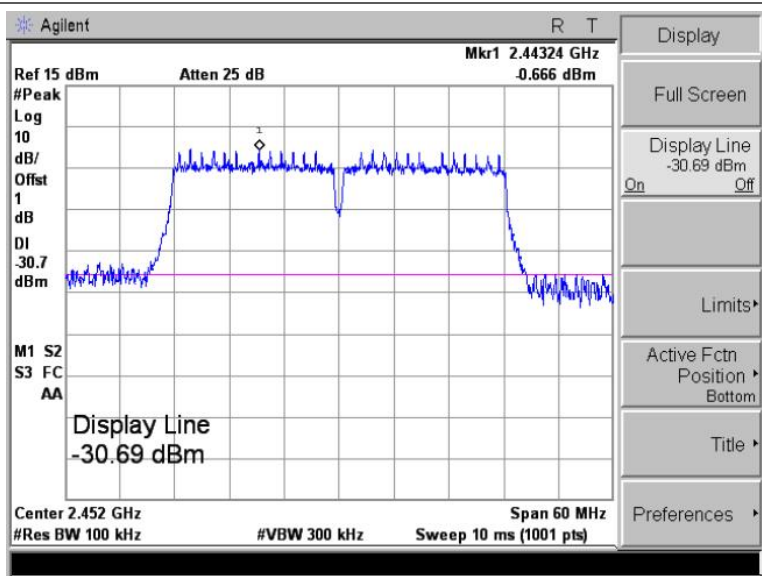


APPENDIX E



802.11B

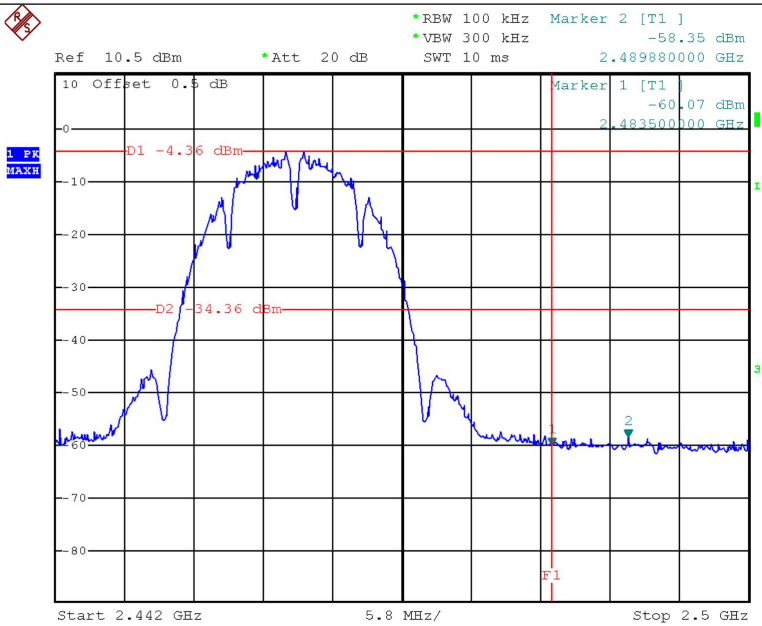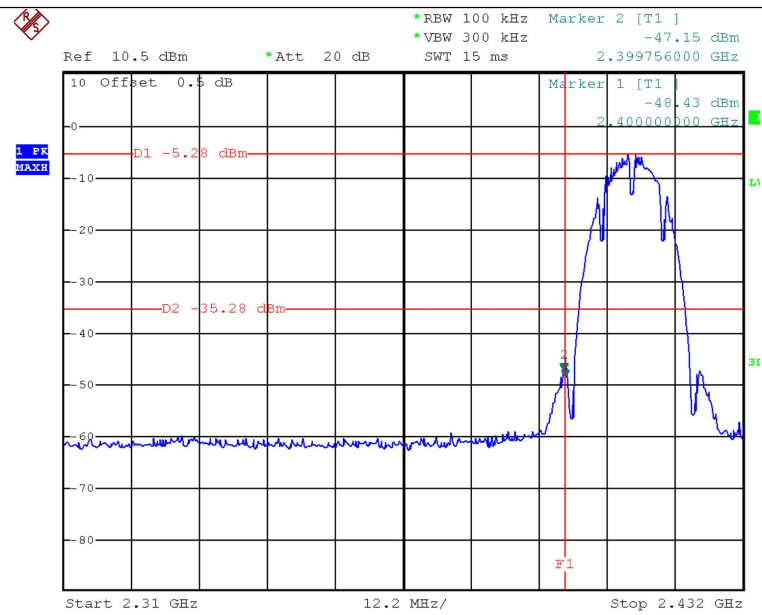



802.11G

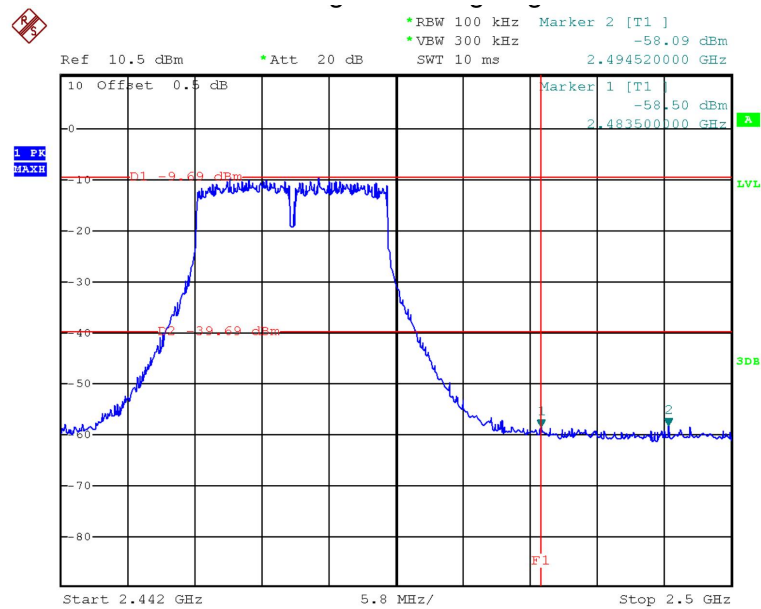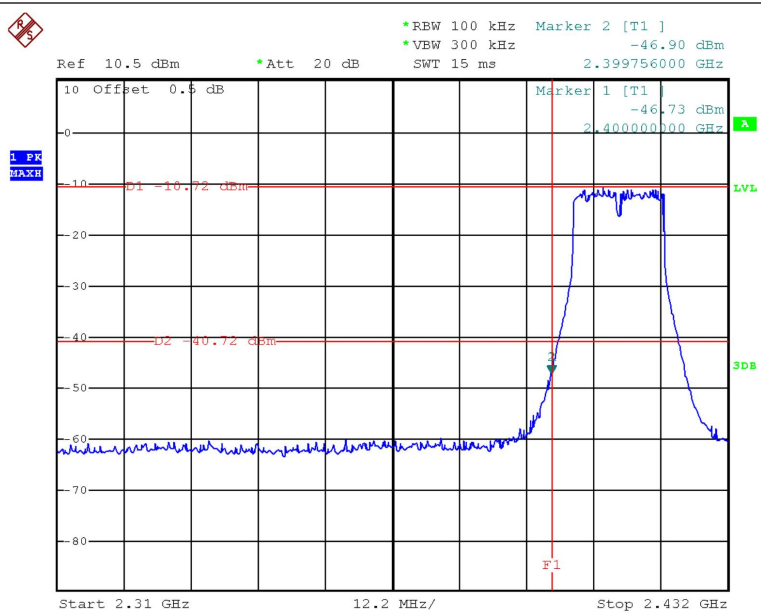

802.11N-HT20

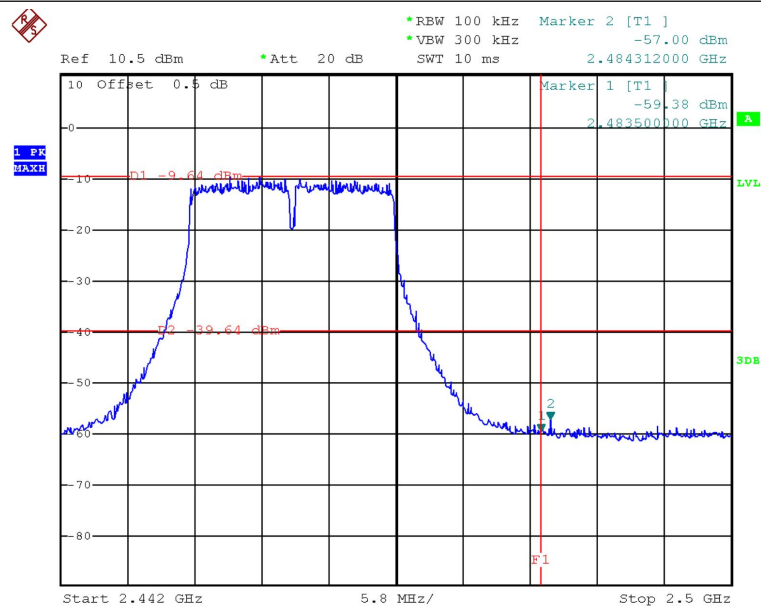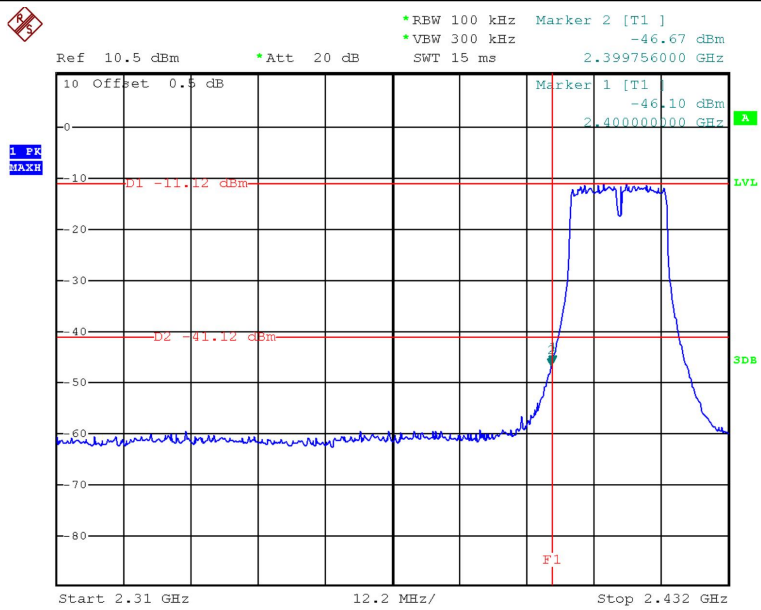

802.11N-HT40

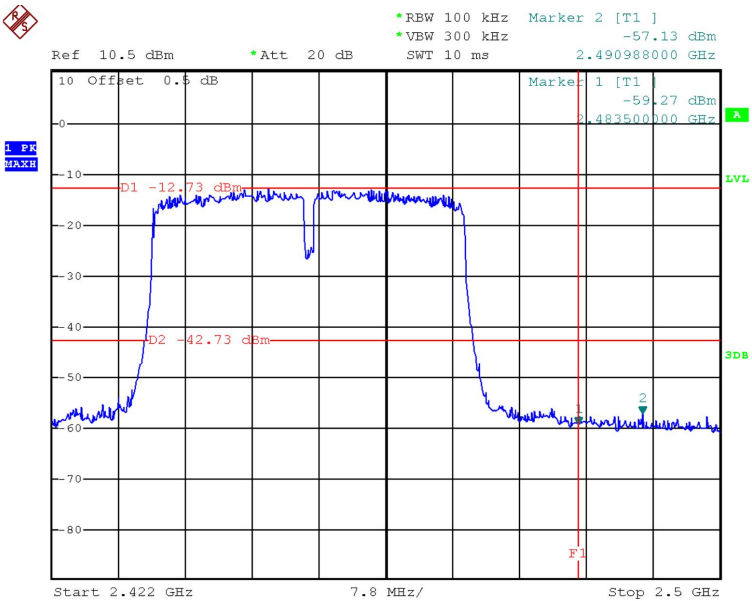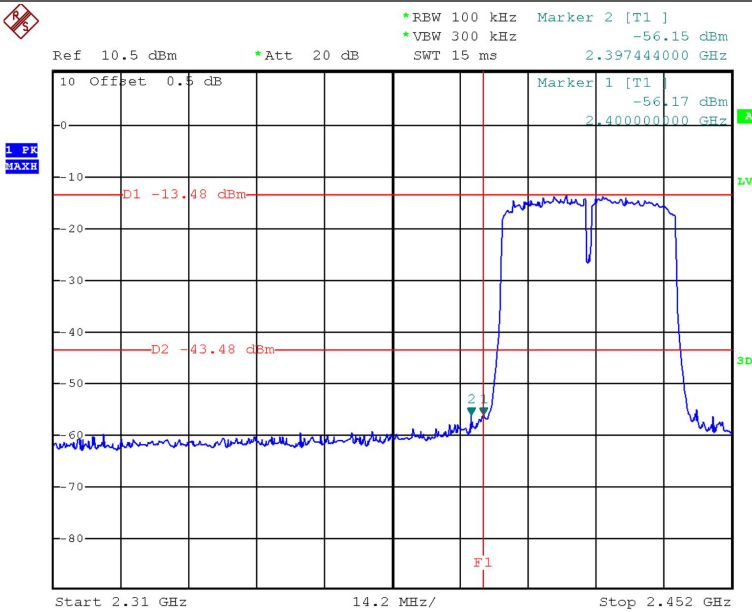

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******