
Antenna specification


1、Antenna introduction

The Bluetooth module antenna is directly used on the PCB.

Manufacturer: Simpoll Technology Co.,LTD.

Address: 301, No.1, Longyue Road, Tangxiayong Community, Yanluo Street,
Bao'an District, Shenzhen, China.

2、Antenna shape

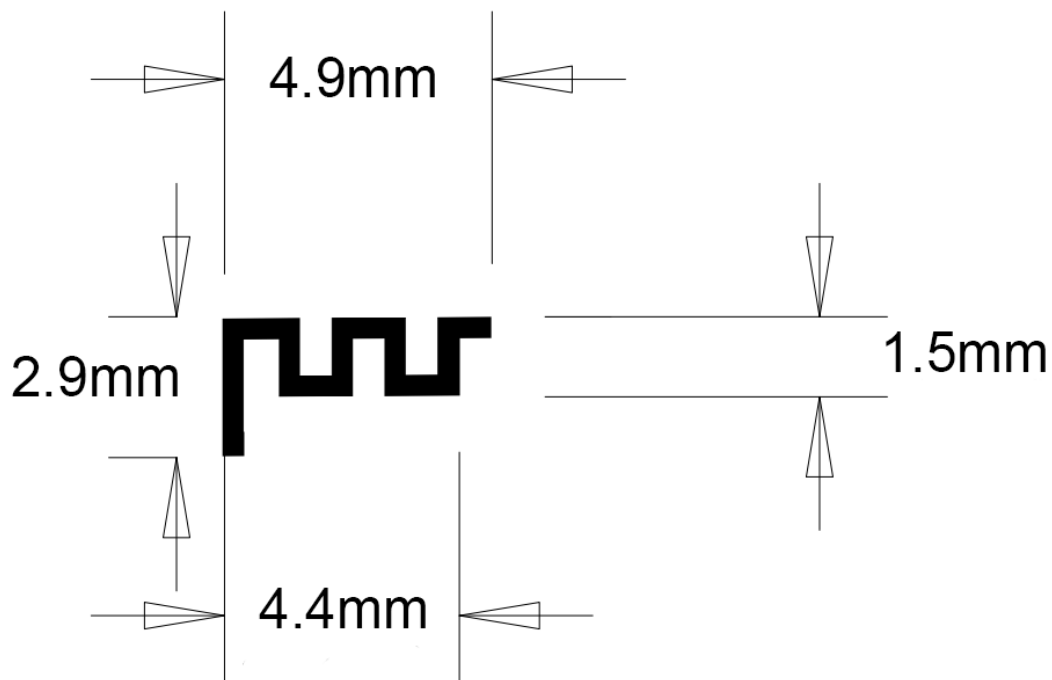

3、Antenna parameter

The Bluetooth antenna operates at 2402-2480 MHz and generates resonance in this band. The table below shows the main parameters of the antenna.


Frequency (MHz)	2402 ~ 2480 MHz
VSWR	≤ 1.95
Impedance	50 Ohm Nominal
Return Loss	-15 dB Max
Radiation	Omni-directional
Gain (Peak)	-1.5 dBi
Polarization	Linear, Vertical
Admitted Power	1MW
Connector	Tin

4、Antenna gain report


Spectrum Detector:	PK	Test Date :	Feb 18, 2022
Test By:	Mark	Temperature :	25°C
Test Result:	PASS	Humidity :	52 %
Modulation:	GFSK		

Frequency VNA (MHz)	E Total. dB(dB)
2400MHz	0.0403503
2410MHz	0.0886264
2420MHz	0.267381
2430MHz	0.193012
2440MHz	0.26366
2450MHz	0.0723139
2460MHz	0.36895
2470MHz	0.551525
2480MHz	0.640702
2490MHz	1.05232
2500MHz	1.08443


Direction map:

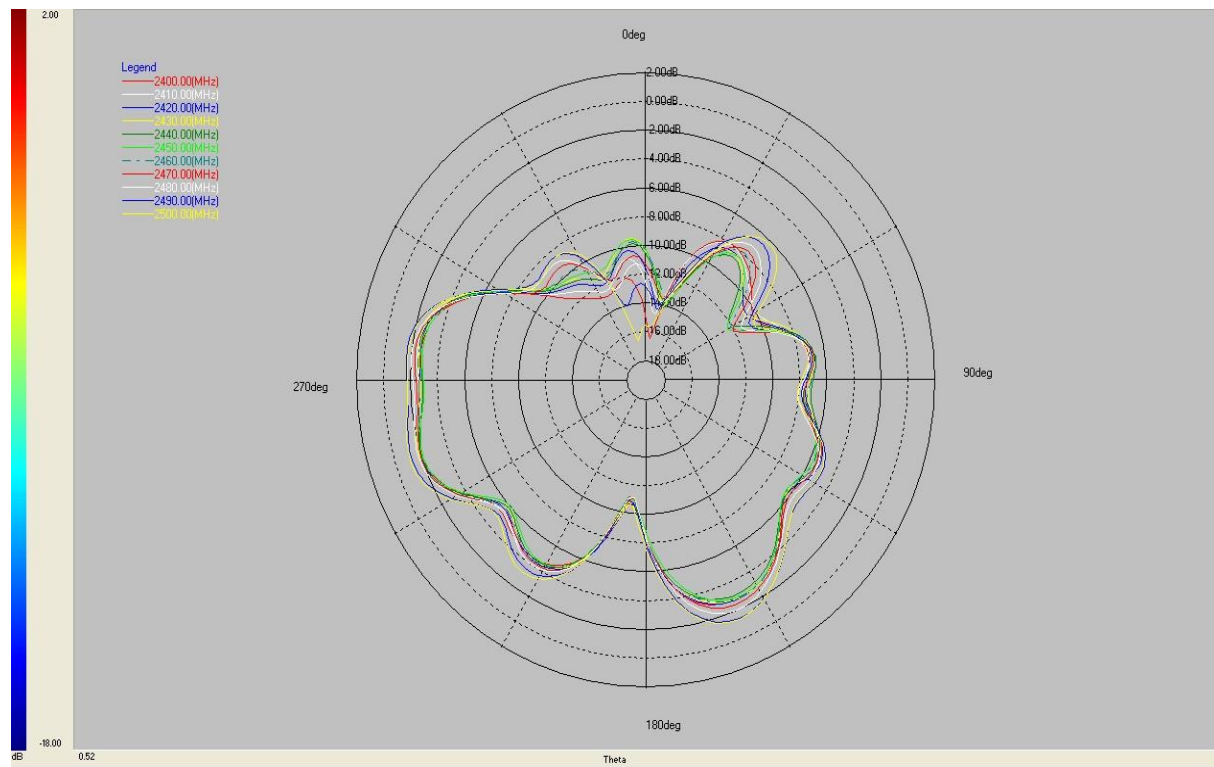

$\text{PHI } 0^\circ$

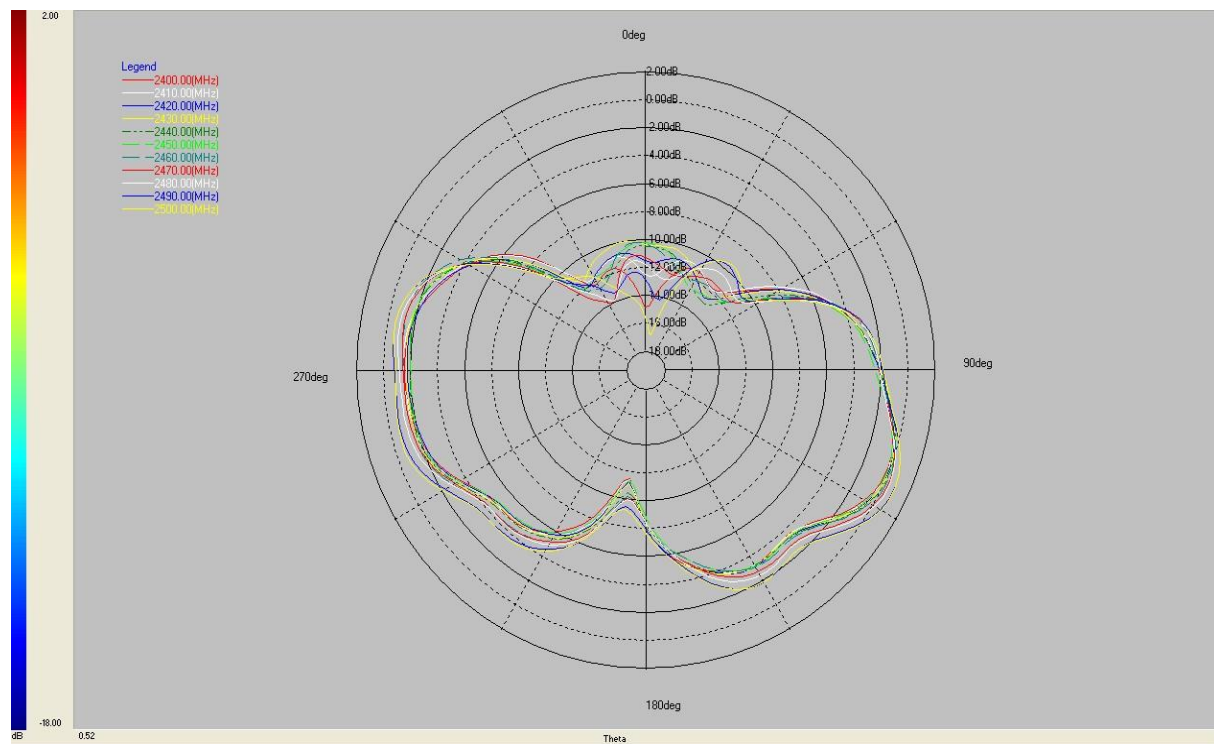

$\text{PHI } 90^\circ$

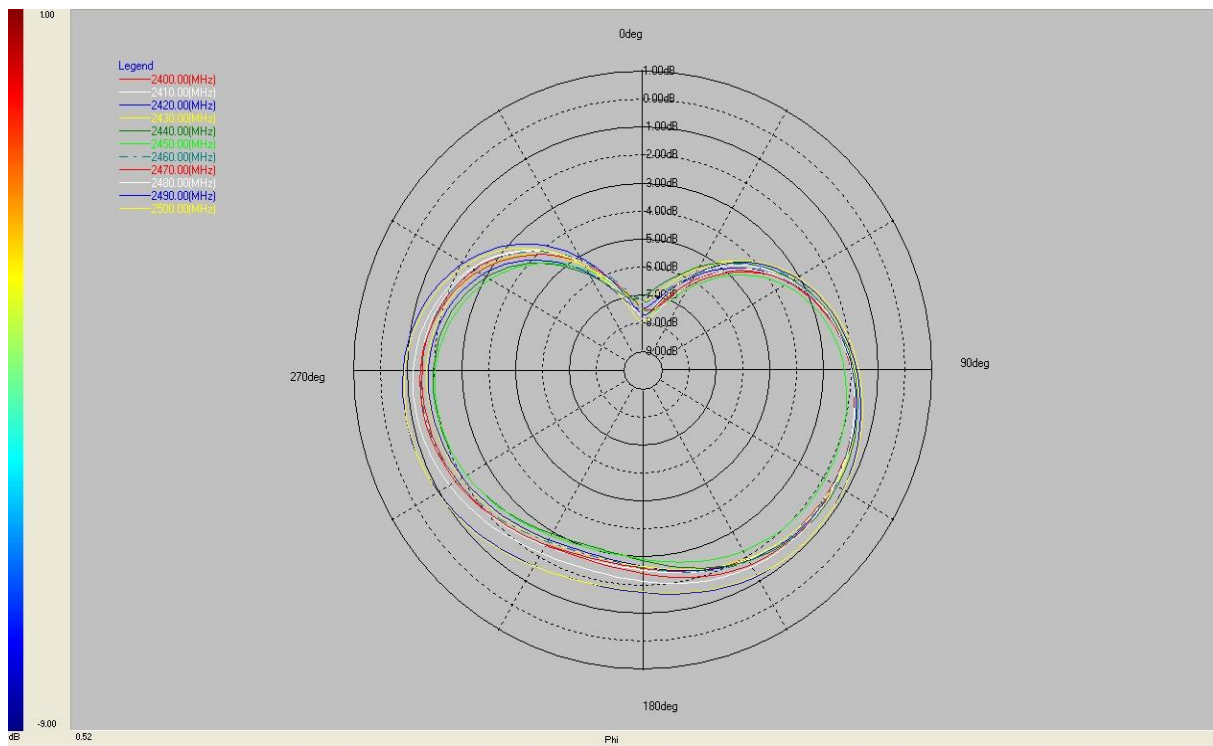

THETA 90°