

RF TEST REPORT

For

Nanchang Nuankui Technology Co., Ltd

Product Name: Magnetic wireless charging car holder

Test Model(s): RCZJW-XK01

Report Reference No. : POCE240104001RL001

FCC ID : 2BEDN-RCZJW-XK01

Applicant's Name : Nanchang Nuankui Technology Co., Ltd

Address : Room 1304, Jintian Apartment, No. 48, Lixin Road, Changchun Town,
Xinjian District, Nanchang City, Jiangxi Province

Testing Laboratory : Shenzhen POCE Technology Co., Ltd.

Address : 102 Building H1 & 1/F., Building H, Hongfa Science & Technology Park,
Tangtou, Shiyan, Bao'an District, Shenzhen, Guangdong, China

Test Specification Standard : 47 CFR Part 15.209

Date of Receipt : January 4, 2024

Date of Test : January 4, 2024 to January 8, 2024

Data of Issue : January 8, 2024

Result : Pass

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen POCE Technology Co., Ltd. This document may be altered or revised by Shenzhen POCE Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample

Revision History Of Report

Version	Description	REPORT No.	Issue Date
V1.0	Original	POCE240104001RL001	January 8, 2024

NOTE1:

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

Compiled by:



Ben Tang / Test Engineer

Supervised by:



Tom Chen / Project Engineer

Approved by:



Machael Mo / Manager

CONTENTS

1 TEST SUMMARY	4
1.1 TEST STANDARDS	4
1.2 SUMMARY OF TEST RESULT	4
2 GENERAL INFORMATION	5
2.1 CLIENT INFORMATION	5
2.2 DESCRIPTION OF DEVICE (EUT)	5
2.3 DESCRIPTION OF TEST MODES	5
2.4 DESCRIPTION OF SUPPORT UNITS	5
2.5 EQUIPMENTS USED DURING THE TEST	6
2.6 STATEMENT OF THE MEASUREMENT UNCERTAINTY	8
2.7 IDENTIFICATION OF TESTING LABORATORY	8
2.8 ANNOUNCEMENT	8
3 EVALUATION RESULTS (EVALUATION)	9
3.1 ANTENNA REQUIREMENT	9
3.1.1 Conclusion:	9
4 RADIO SPECTRUM MATTER TEST RESULTS (RF)	10
4.1 CONDUCTED EMISSION AT AC POWER LINE	10
4.1.1 E.U.T. Operation:	10
4.1.2 Test Setup Diagram:	10
4.1.3 Test Data:	11
4.2 20dB OCCUPIED BANDWIDTH	13
4.2.1 E.U.T. Operation:	13
4.2.2 Test Setup Diagram:	14
4.2.3 Test Data:	14
4.3 EMISSIONS IN FREQUENCY BANDS (BELOW 30MHz)	15
4.3.1 E.U.T. Operation:	15
4.3.2 Test Data:	16
4.4 EMISSIONS IN FREQUENCY BANDS (30MHz - 1GHz)	18
4.4.1 E.U.T. Operation:	18
4.4.2 Test Data:	19
5 TEST SETUP PHOTOS	21
6 PHOTOS OF THE EUT	23

1 TEST SUMMARY

1.1 Test Standards

The tests were performed according to following standards:

47 CFR Part 15.209: Radiated emission limits; general requirements

1.2 Summary of Test Result

Item	Standard	Method	Requirement	Result
Antenna requirement	47 CFR Part 15.209		47 CFR Part 15.203	Pass
Conducted Emission at AC power line	47 CFR Part 15.209	ANSI C63.10-2013 section 6.2	47 CFR Part 15.207(a)	Pass
20dB Occupied Bandwidth	47 CFR Part 15.209	ANSI C63.10-2013, section 6.9.2	47 CFR Part 15.215(c)	Pass
Emissions in frequency bands (below 30MHz)	47 CFR Part 15.209	ANSI C63.10-2013 section 6.4	47 CFR Part 15.209	Pass
Emissions in frequency bands (30MHz - 1GHz)	47 CFR Part 15.209	ANSI C63.10-2013 section 6.5	47 CFR Part 15.209	Pass

2 GENERAL INFORMATION

2.1 Client Information

Applicant's Name : Nanchang Nuankui Technology Co., Ltd
Address : Room 1304, Jintian Apartment, No. 48, Lixin Road, Changchun Town, Xinjian District, Nanchang City, Jiangxi Province

Manufacturer : Jiangxi Chensheng Technology Co., Ltd
Address : Room 1611, Cuilin International Building, No. 1266, Fenghe Middle Avenue, Honggutan District, Nanchang City, Jiangxi Province

2.2 Description of Device (EUT)

Product Name:	Magnetic wireless charging car holder
Model/Type reference:	RCZJW-XK01
Series Model:	RCZJW-XKA01,RCZJW-XKB01,RCZJW-XKC01
Model Difference:	The product has many models, only the model name and Appearance color is different, and the other parts such as the circuit principle, pcb and electrical structure are the same.
Trade Mark:	ROCOREN
Power Supply:	DC 5V/3A from adapter
Operation Frequency:	128KHz
Number of Channels:	N/A
Modulation Type:	MSK
Antenna Type:	Inductive loop coil Antenna
Antenna Gain:	0dBi (Max)
Hardware Version:	V1.0
Software Version:	V1.0

2.3 Description of Test Modes

No	Title	Description
TM1	Full load test	Keep the EUT in wireless charging mode
TM2	half load test	Keep the EUT in wireless charging mode
TM3	No-load load test	Keep the EUT in wireless charging mode
Remark:TM1 is the full load mode, and the full load mode is the worst mode,Only the data of the worst mode would be recorded in this report.		

Test channel	Frequency (KHz)
Middle channel	128

2.4 Description of Support Units

The EUT was tested as an independent device.

2.5 Equipments Used During The Test

Conducted Emission at AC power line					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
loop antenna	EVERFINE	LLA-2	80900L-C	2023-02-27	2024-02-26
Power absorbing clamp	SCHWARZ BECK	MESS-ELEKTRONIK	/	2023-02-28	2024-02-27
Electric Network	SCHWARZ BECK	CAT5 8158	CAT5 8158#207	/	/
Cable	SCHWARZ BECK	/	/	2023-12-27	2024-12-26
Pulse Limiter	SCHWARZ BECK	VTSD 9561-F Pulse limiter 10dB Ateennator	561-G071	2023-02-27	2024-02-26
50ΩCoaxial Switch	Anritsu	MP59B	M20531	/	/
Test Receiver	Rohde & Schwarz	ESPI TEST RECEIVER	ID:1164.6607K 03-102109-MH	2023-06-13	2024-06-12
L.I.S.N	R&S	ESH3-Z5	831.5518.52	2023-12-12	2024-12-11

20dB Occupied Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RF Test Software	TACHOY	RTS-01	V2.0.0.0	/	/
High Pass filter	ZHINAN	OQHPF1-M1.5-18G-224	6210075	/	/
Power divider	MIDEWEST	PWD-2533	SMA-79	2023-05-11	2026-05-10
DC power	HP	66311B	38444359	/	/
RF Sensor Unit	Tachoy Information Technology(she nzheng) Co.,Ltd.	TR1029-2	000001	/	/
Wideband radio communication tester	R&S	CMW500	113410	2023-06-13	2024-06-12
Vector signal generator	Keysight	N5181A	MY48180415	2023-11-09	2024-11-08
Signal generator	Keysight	N5182A	MY50143455	2023-11-09	2024-11-08
Spectrum Analyzer	Keysight	N9020A	MY53420323	2023-12-12	2024-12-11

Emissions in frequency bands (below 30MHz)
Emissions in frequency bands (30MHz - 1GHz)

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test software	Farad	EZ -EMC	V1.1.42	/	/
Positioning Controller	/	MF-7802	/	/	/
High Pass filter	ZHINAN	OQHPF1-M1.5-18G-224	6210075	/	/
Amplifier(18-40G)	COM-POWER	AH-1840	10100008-1	2022-04-05	2025-04-04
Horn antenna	COM-POWER	AH-1840 (18-40G)	10100008	2023-04-05	2025-04-04
Loop antenna	ZHINAN	ZN30900C	ZN30900C	2021-07-05	2024-07-04
Cable(LF)#2	Schwarzbeck	/	/	2023-02-27	2024-02-26
Cable(LF)#1	Schwarzbeck	/	/	2023-02-27	2024-02-26
Cable(HF)#2	Schwarzbeck	AK9515E	96250	2023-02-28	2024-02-27
Cable(HF)#1	Schwarzbeck	SYV-50-3-1	/	2023-02-27	2024-02-26
Power amplifier(LF)	Schwarzbeck	BBV9743	9743-151	2023-06-13	2024-06-12
Power amplifier(HF)	Schwarzbeck	BBV9718	9718-282	2023-06-13	2024-06-12
Wideband radio communication tester	R&S	CMW500	113410	2023-06-13	2024-06-12
Spectrum Analyzer	R&S	FSP30	1321.3008K40-101729-jR	2023-06-14	2024-06-13
Horn Antenna	Sunol Sciences	DRH-118	A091114	2023-05-13	2025-05-12
Broadband Antenna	Sunol Sciences	JB6 Antenna	A090414	2023-05-21	2025-05-20
Test Receiver	R&S	ESCI	102109	2023-06-13	2024-06-12

2.6 Statement Of The Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Disturbance (0.15~30MHz)	$\pm 3.41\text{dB}$
Occupied Bandwidth	$\pm 3.63\%$
Radiated Emission (Below 1GHz)	$\pm 5.79\text{dB}$
Note: (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.	

2.7 Identification of Testing Laboratory

Company Name:	Shenzhen POCE Technology Co., Ltd.
Address:	101-102 Building H5 & 1/F., Building H, Hongfa Science & Technology Park, Tangtou, Shiyan, Bao'an District, Shenzhen, Guangdong, China
Phone Number:	+86-13267178997
Fax Number:	86-755-29113252

Identification of the Responsible Testing Location

Company Name:	Shenzhen POCE Technology Co., Ltd.
Address:	101-102 Building H5 & 1/F., Building H, Hongfa Science & Technology Park, Tangtou, Shiyan, Bao'an District, Shenzhen, Guangdong, China
Phone Number:	+86-13267178997
Fax Number:	86-755-29113252
FCC Registration Number:	0032847402
Designation Number:	CN1342

2.8 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by POCE and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

3 Evaluation Results (Evaluation)

3.1 Antenna requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
-------------------	---

3.1.1 Conclusion:



4 Radio Spectrum Matter Test Results (RF)


4.1 Conducted Emission at AC power line

Test Requirement:	Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
*Decreases with the logarithm of the frequency.			
Test Method:	ANSI C63.10-2013 section 6.2		
Procedure:	Refer to ANSI C63.10-2013 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		

4.1.1 E.U.T. Operation:


Operating Environment:					
Temperature:	22.9 °C	Humidity:	48.2 %	Atmospheric Pressure:	101 kPa
Pre test mode:	TM1				
Final test mode:	TM1				

4.1.2 Test Setup Diagram:

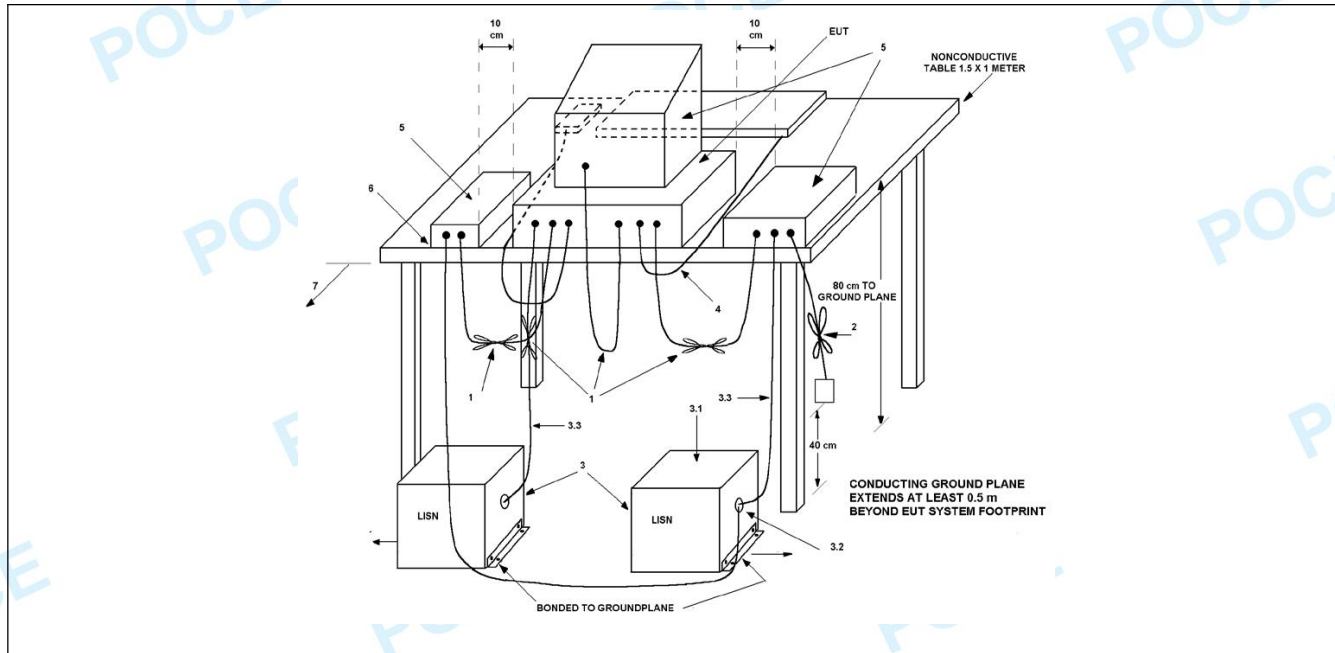


4.1.3 Test Data:

TM1 / Line: Line
Power: AC120V60Hz

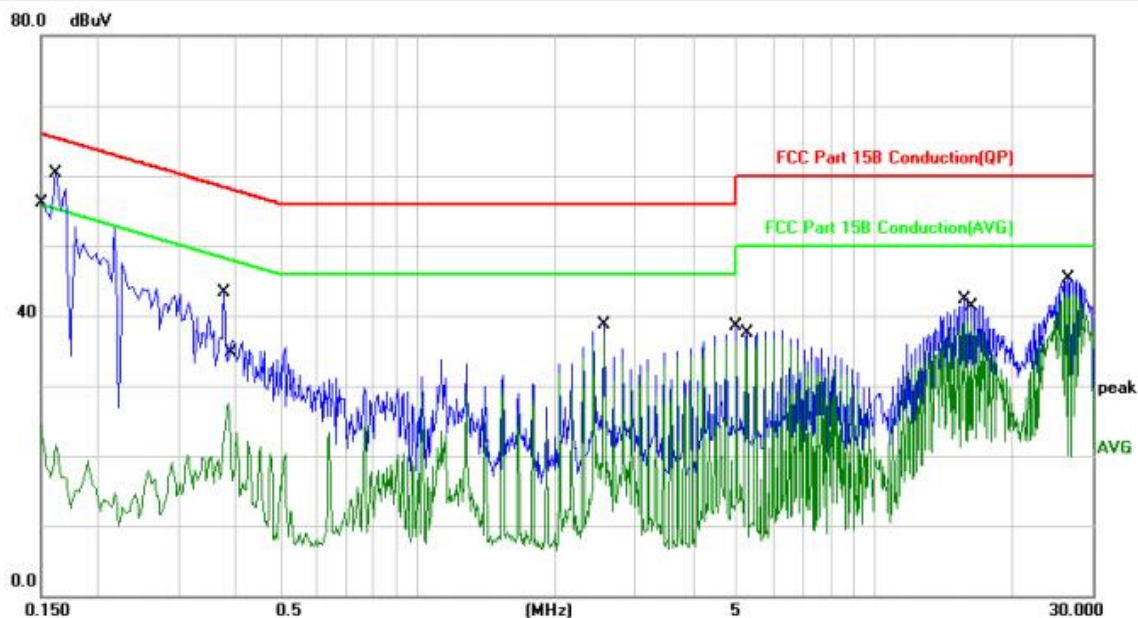

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	14.47	10.04	24.51	55.99	-31.48	AVG	
2	*	0.1620	50.27	10.03	60.30	65.36	-5.06	QP	
3		0.3780	33.21	10.00	43.21	58.32	-15.11	QP	
4		0.3860	17.60	10.00	27.60	48.15	-20.55	AVG	
5		2.5620	28.62	10.01	38.63	56.00	-17.37	QP	
6		2.5620	27.19	10.01	37.20	46.00	-8.80	AVG	
7		4.9940	28.44	10.14	38.58	56.00	-17.42	QP	
8		5.2500	26.41	10.15	36.56	50.00	-13.44	AVG	
9		15.7460	31.92	10.48	42.40	60.00	-17.60	QP	
10		16.2580	28.79	10.49	39.28	50.00	-10.72	AVG	
11		26.2340	32.61	10.61	43.22	50.00	-6.78	AVG	
12		26.5060	34.59	10.62	45.21	60.00	-14.79	QP	

TM1 / Line: Neutral
Power: AC120V60Hz

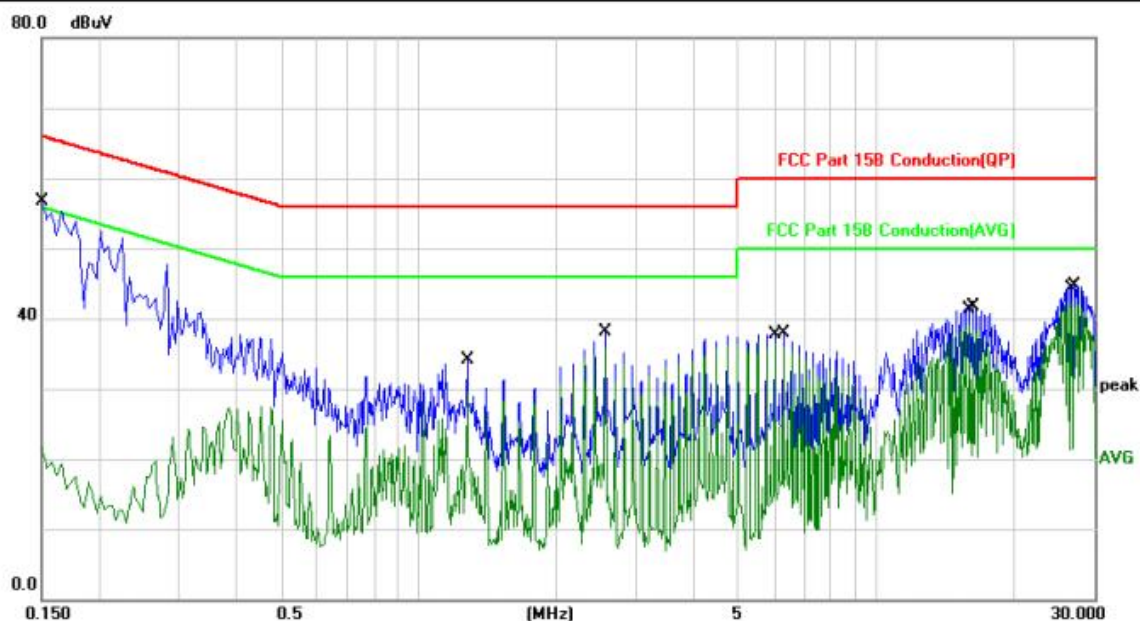

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	46.75	10.04	56.79	65.99	-9.20	QP	
2		0.1500	11.69	10.04	21.73	55.99	-34.26	AVG	
3		1.2820	24.12	9.92	34.04	56.00	-21.96	QP	
4		1.2820	19.48	9.92	29.40	46.00	-16.60	AVG	
5		2.5620	28.16	10.01	38.17	56.00	-17.83	QP	
6		2.5620	25.73	10.01	35.74	46.00	-10.26	AVG	
7		6.0180	26.29	10.19	36.48	50.00	-13.52	AVG	
8		6.2700	27.64	10.21	37.85	60.00	-22.15	QP	
9		16.0020	28.60	10.48	39.08	50.00	-10.92	AVG	
10		16.2580	31.31	10.49	41.80	60.00	-18.20	QP	
11	*	26.7620	31.66	10.62	42.28	50.00	-7.72	AVG	
12		27.2660	34.02	10.64	44.66	60.00	-15.34	QP	


4.2 20dB Occupied Bandwidth

Test Requirement:	47 CFR Part 15.215(c)
Test Limit:	Refer to 47 CFR 15.215(c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
Test Method:	ANSI C63.10-2013, section 6.9.2
Procedure:	a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW. b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement. c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2. d) Steps a) through c) might require iteration to adjust within the specified tolerances. e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value. f) Set detection mode to peak and trace mode to max hold. g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value). h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - \text{xx}]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument. i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j). j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth. k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

4.2.1 E.U.T. Operation:

Operating Environment:					
Temperature:	22.9 °C	Humidity:	48.2 %	Atmospheric Pressure:	101 kPa
Pre test mode:	TM1				
Final test mode:	TM1				


4.2.2 Test Setup Diagram:

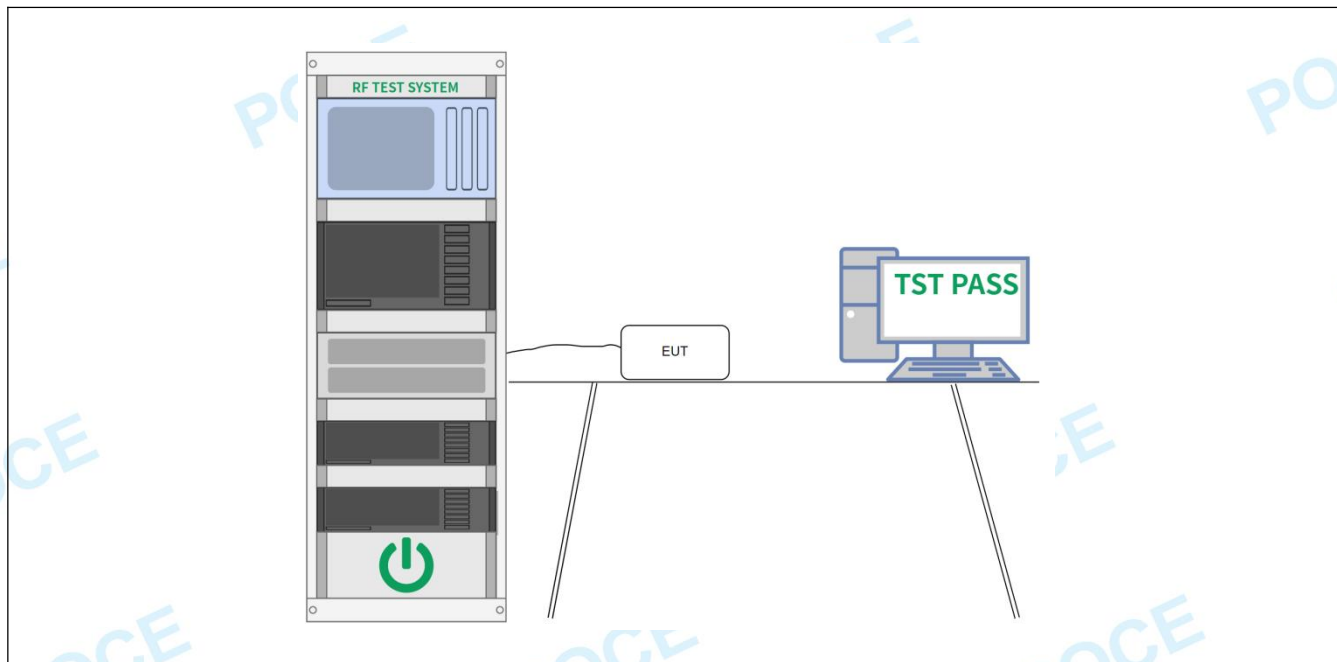

4.2.3 Test Data:

Frequency(KHz)	-20dB_Emission_Bandwidth(KHz)	Occupied Bandwidth(KHz)
128	8.363	7.309

Test Frequency:128KHz

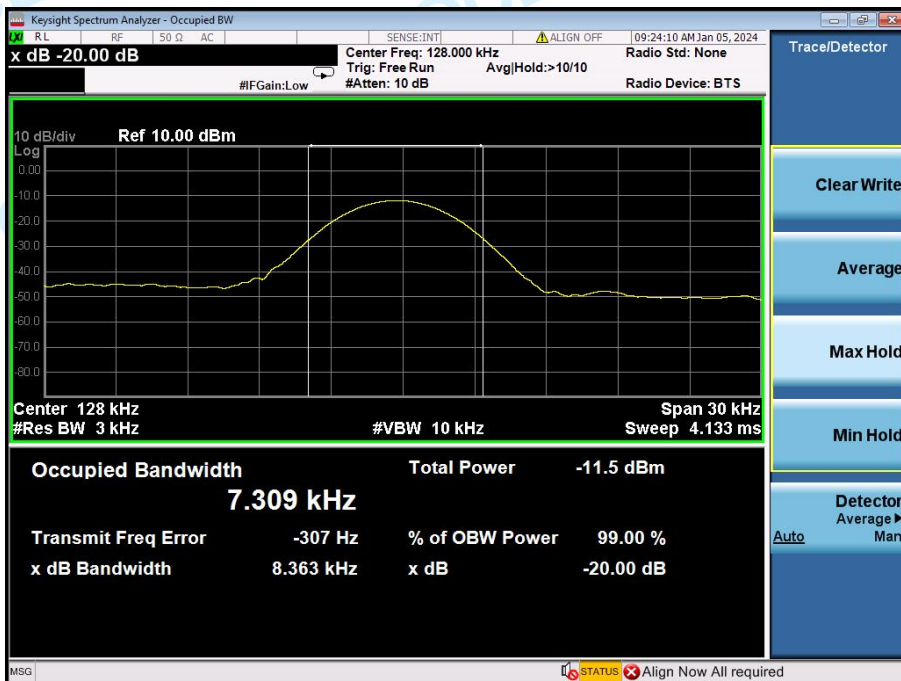

4.3 Emissions in frequency bands (below 30MHz)


Test Requirement:	47 CFR Part 15.209		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.			
Test Method:	ANSI C63.10-2013 section 6.4		
Procedure:	ANSI C63.10-2013 section 6.4		

4.3.1 E.U.T. Operation:

Operating Environment:					
Temperature:	22.9 °C	Humidity:	48.2 %	Atmospheric Pressure:	101 kPa
Pre test mode:	TM1				
Final test mode:	TM1				

4.3.2 Test Data:

Concentric

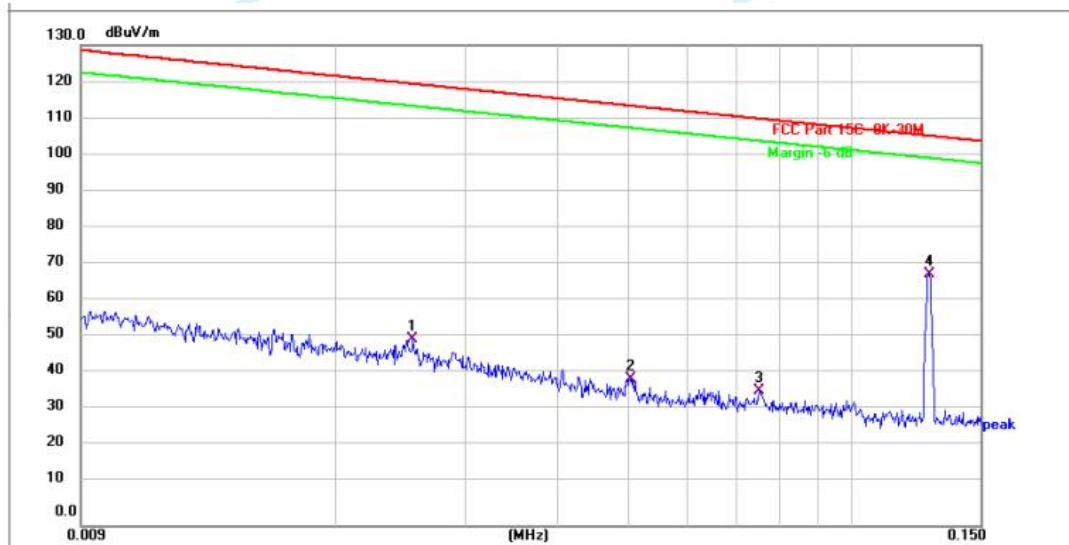

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	0.0253	19.61	31.00	50.61	119.54	-68.93	QP	100		P	
2	0.0502	16.31	23.65	39.96	113.59	-73.63	QP	100		P	
3	0.0751	15.38	21.08	36.46	110.09	-73.63	QP	100		P	
4 *	0.1278	48.60	19.48	68.08	105.47	-37.39	QP	100		P	




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	0.1904	25.96	19.93	45.89	102.01	-56.12	QP	100		P	
2	0.2521	28.86	20.38	49.24	99.57	-50.33	QP	100		P	
3	0.3791	25.50	20.89	46.39	96.03	-49.64	QP	100		P	
4 *	2.6500	33.13	21.30	54.43	69.54	-15.11	QP	100		P	
5	4.6469	31.92	21.12	53.04	69.54	-16.50	QP	100		P	
6	12.7837	33.18	20.93	54.11	69.54	-15.43	QP	100		P	

Remark: Margin=Level - Limit

Level=Test receiver reading + correction factor

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

Coplanar

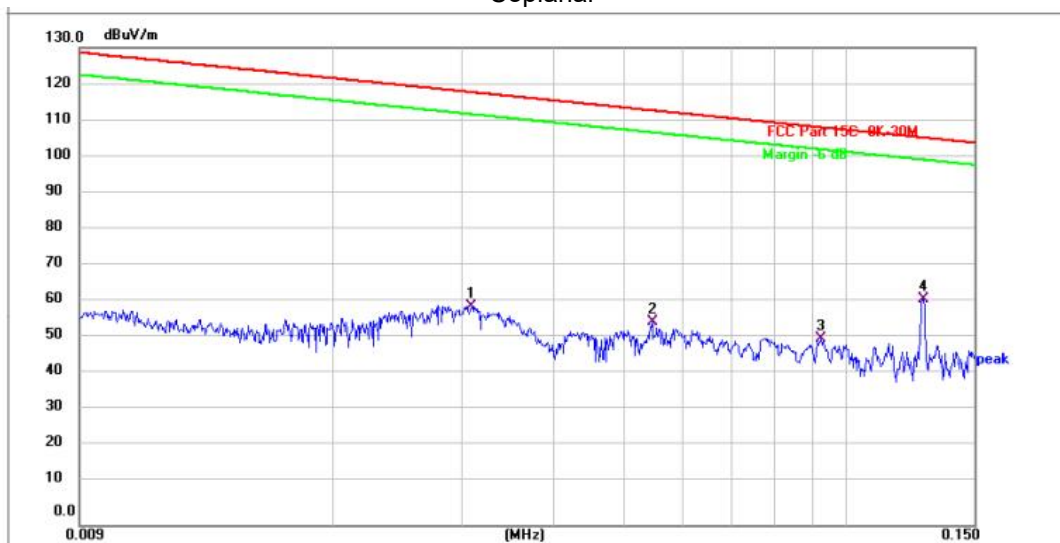

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	0.0309	29.77	29.99	59.76	117.81	-58.05	QP	100		P	
2	0.0545	32.07	23.20	55.27	112.88	-57.61	QP	100		P	
3	0.0926	31.01	19.76	50.77	108.27	-57.50	QP	100		P	
4 *	0.1278	42.17	19.48	61.65	105.47	-43.82	QP	100		P	



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	0.1901	30.19	19.93	50.12	102.02	-51.90	QP			P	
2	0.9943	30.51	21.43	51.94	67.67	-15.73	QP			P	
3	2.6360	32.28	21.31	53.59	69.54	-15.95	QP			P	
4	4.4069	28.39	21.14	49.53	69.54	-20.01	QP			P	
5 *	12.9198	33.81	20.91	54.72	69.54	-14.82	QP			P	
6	25.5911	26.02	19.95	45.97	69.54	-23.57	QP			P	

Remark: Margin=Level - Limit

Level=Test receiver reading + correction factor

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

4.4 Emissions in frequency bands (30MHz - 1GHz)

Test Requirement:	47 CFR Part 15.209		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.			
Test Method:	ANSI C63.10-2013 section 6.5		
Procedure:	ANSI C63.10-2013 section 6.5		

4.4.1 E.U.T. Operation:

Operating Environment:					
Temperature:	22.9 °C	Humidity:	48.2 %	Atmospheric Pressure:	101 kPa
Pre test mode:	TM1				
Final test mode:	TM1				

4.4.2 Test Data:

TM1 / Polarization: Horizontal



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	35.6240	30.80	-4.38	26.42	40.00	-13.58	QP	100		P	
2	69.6005	34.05	-8.60	25.45	40.00	-14.55	QP	100		P	
3	124.5690	30.67	-4.69	25.98	43.50	-17.52	QP	100		P	
4	191.7450	29.06	-3.01	26.05	43.50	-17.45	QP	100		P	
5 *	373.3112	42.28	1.59	43.87	46.00	-2.13	QP	100		P	
6	958.7943	24.29	9.34	33.63	46.00	-12.37	QP	100		P	


TM1 / Polarization: Vertical




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 !	31.2893	39.25	-3.21	36.04	40.00	-3.96	QP	100		P	
2 *	51.8430	45.77	-9.70	36.07	40.00	-3.93	QP	100		P	
3 !	68.8721	44.49	-8.64	35.85	40.00	-4.15	QP	100		P	
4	124.1330	37.28	-4.70	32.58	43.50	-10.92	QP	100		P	
5	373.3112	37.99	1.05	39.04	46.00	-6.96	QP	100		P	
6	570.6100	29.11	3.69	32.80	46.00	-13.20	QP	100		P	

5 TEST SETUP PHOTOS


Conducted Emission at AC power line

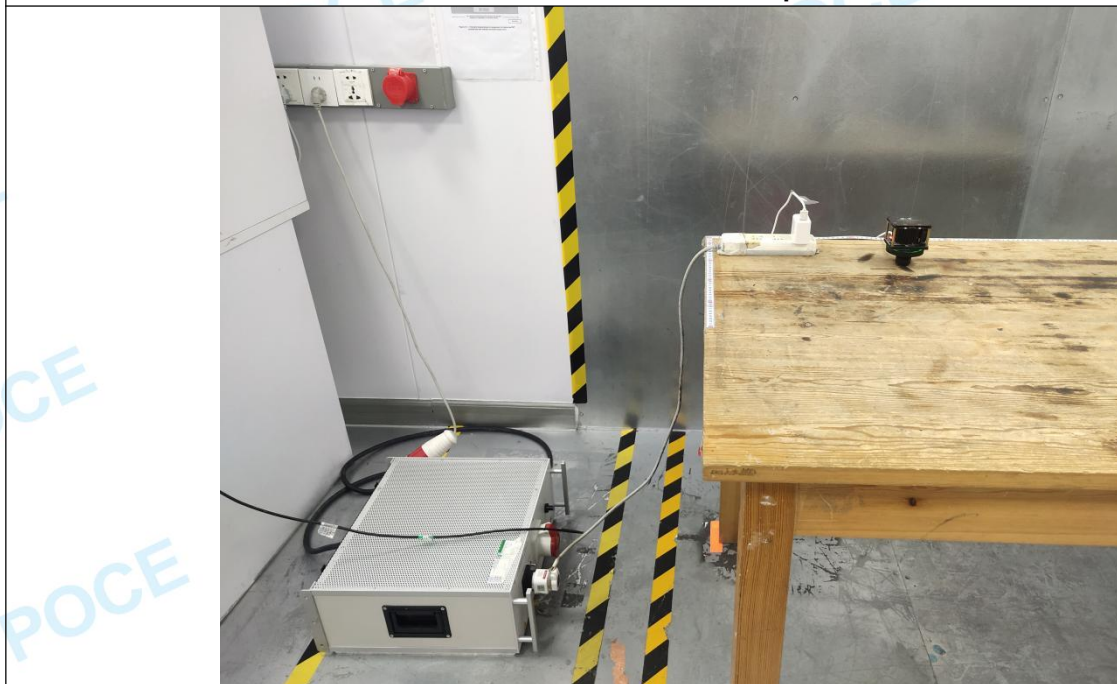

Emissions in frequency bands (below 30MHz)

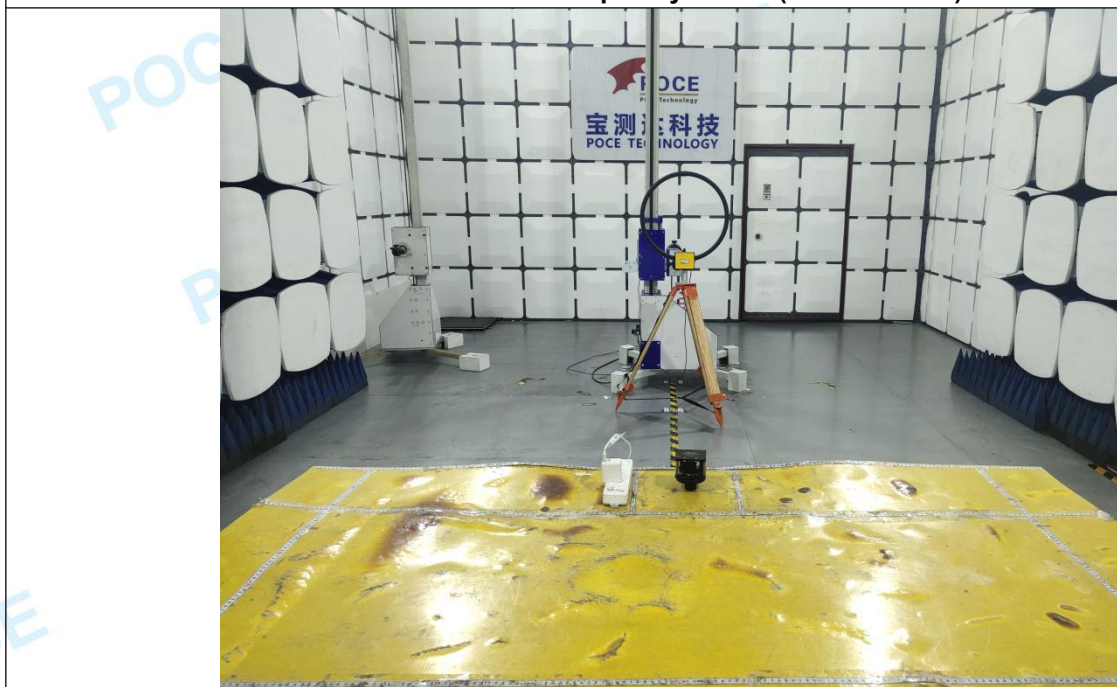

Emissions in frequency bands (30MHz - 1GHz)

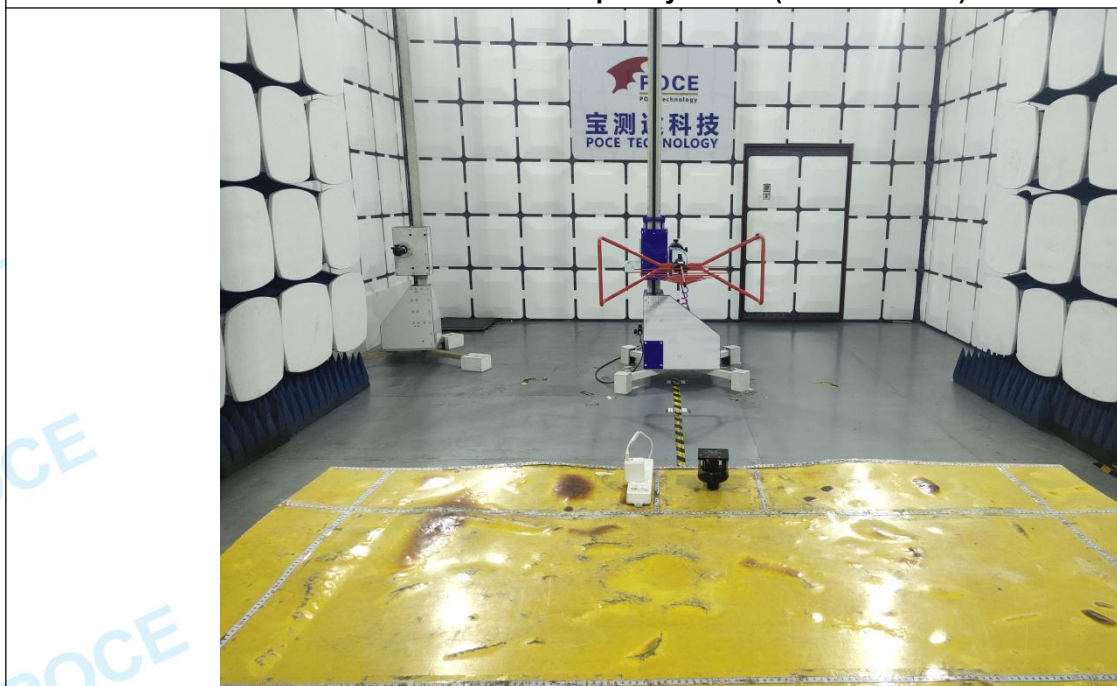

6 PHOTOS OF THE EUT

External










Internal





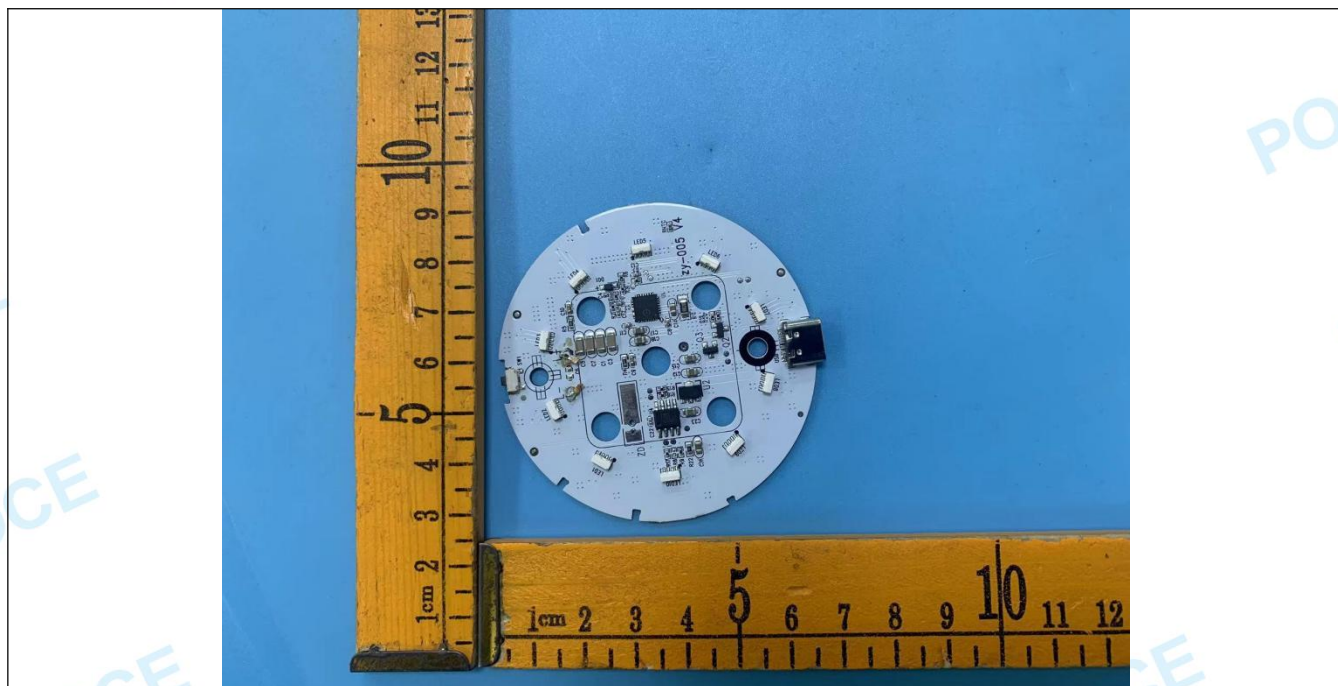

***** End of Report *****