



FCC Part 15C Test Report

FCC ID: 2BEFB-HXG0008FS2

Applicant: Huizhou Huaxinwei Technology Co., Ltd.

Address: Building 3, 6th Floor, Factory Building, No. 280 Wanxiang Avenue, Jinglong Village, Zhenlong Town, Huiyang District, Huizhou City, Guangdong Province, China

Manufacturer: Huizhou Huaxinwei Technology Co., Ltd.

Address: Building 3, 6th Floor, Factory Building, No. 280 Wanxiang Avenue, Jinglong Village, Zhenlong Town, Huiyang District, Huizhou City, Guangdong Province, China

Product Name: camera

Trade Mark: N/A

Model Number: HX-G0008F-S2
HX-C1006A-S2, HX-A1536B-S2

Date of Receipt: Jul. 11, 2025

Test Date: Jul. 11, 2025 - Aug. 08, 2025

Date of Report: Aug. 08, 2025

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Applicable Standards: FCC PART 15 C 15.247
ANSI C63.10:2013

Test Result: Pass

Report Number: DLE-250711037R

Prepared (Test Engineer): Alisa Song

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents

Page

1 . SUMMARY OF TEST RESULTS	4
1.1 MEASUREMENT UNCERTAINTY	4
2 . GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 DESCRIPTION OF TEST MODES	6
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	6
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	7
2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	7
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	8
3 . EMC EMISSION TEST	9
3.1 CONDUCTED EMISSION MEASUREMENT	9
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	9
3.1.2 TEST PROCEDURE	9
3.1.3 DEVIATION FROM TEST STANDARD	9
3.1.4 TEST SETUP	10
3.1.5 EUT OPERATING CONDITIONS	10
3.1.6 TEST RESULTS	10
3.2 RADIATED EMISSION MEASUREMENT	17
3.2.1 RADIATED EMISSION LIMITS	17
3.2.2 TEST PROCEDURE	18
3.2.3 DEVIATION FROM TEST STANDARD	18
3.2.4 TEST SETUP	18
3.2.5 EUT OPERATING CONDITIONS	19
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	20
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	21
3.2.8 TEST RESULTS (1GHZ~25GHZ)	27
3.3 RADIATED BAND EMISSION MEASUREMENT	31
3.3.1 TEST REQUIREMENT:	31
3.3.2 TEST PROCEDURE	31
3.3.3 DEVIATION FROM TEST STANDARD	31
3.3.4 TEST SETUP	32
3.3.5 EUT OPERATING CONDITIONS	32
3.4 CONDUCTED BAND EDGE EMISSION&CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	37
3.4.1 APPLICABLE STANDARD	37
3.4.2 TEST PROCEDURE	37
3.4.3 DEVIATION FROM STANDARD	37



Table of Contents	Page
3.4.4 TEST SETUP	37
3.4.5 EUT OPERATION CONDITIONS	37
3.4.6 TEST RESULTS	37
4 . AVERAGE OUTPUT POWER	42
4.1 APPLIED PROCEDURES / LIMIT	42
4.1.1 TEST PROCEDURE	42
4.1.2 DEVIATION FROM STANDARD	42
4.1.3 TEST SETUP	42
4.1.4 EUT OPERATION CONDITIONS	42
4.1.5 TEST RESULTS	43
5 . POWER SPECTRAL DENSITY TEST	46
5.1 APPLIED PROCEDURES / LIMIT	46
5.1.1 TEST PROCEDURE	46
5.1.2 DEVIATION FROM STANDARD	46
5.1.3 TEST SETUP	46
5.1.4 EUT OPERATION CONDITIONS	46
5.1.5 TEST RESULTS	47
6 . 6DB BANDWIDTH TEST	50
6.1 APPLIED PROCEDURES / LIMIT	50
6.1.1 TEST PROCEDURE	50
6.1.2 DEVIATION FROM STANDARD	50
6.1.3 TEST SETUP	50
6.1.4 EUT OPERATION CONDITIONS	50
6.1.5 TEST RESULTS	51
7 . ANTENNA REQUIREMENT	56
7.1 STANDARD REQUIREMENT	56
7.2 EUT ANTENNA	56
8 . TEST SEUUP PHOTO	56
9 . EUT PHOTO	56



1.. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.205, 15.209, 15.247(d)	Radiated Spurious Emission	PASS	
15.209, 15.205	Band Edge Emission	PASS	
15.247(d)	Conducted Spurious Emissions	PASS	
15.247(b)	Average Output Power	PASS	
15.247(a)(2)	6dB Bandwidth	PASS	
15.247(e)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

Test lab: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1
Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen,
China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118

1.1. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power,conducted	$\pm 0.42\text{dB}$
3	Spurious emissions,conducted	$\pm 2.76\text{dB}$
4	All emissions,radiated(<1G)	$\pm 3.65\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$
8	6dB Bandwidth	$\pm 0.2\%$
9	Power Spectral Density	$\pm 2.45\text{dBm}$



2.. GENERAL INFORMATION

2.1. GENERAL DESCRIPTION OF EUT

Product Name:	camera
Trade Mark:	N/A
Model Number:	HX-G0008F-S2 HX-C1006A-S2, HX-A1536B-S2
Test Model:	HX-G0008F-S2
Sample number:	250711037-01
Model Difference	The differences among the products, apart from the model names and appearances (number of antennas, internal light panels, DC small panels), Internal mainboard circuit design, PCB layout, RF module/circuit, antenna type and antenna position, components on PCB All etc are the same.
Operation Frequency:	2412~2462 MHz for 802.11b/g/nHT20 2422~2452 MHz for 802.11nHT40
Channel numbers:	11 Channels for 802.11b/g/n(HT20) 7 channels for 802.11nHT40
Channel separation:	5MHz
Modulation technology:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n(20/40): OFDM(QPSK, BPSK, 16-QAM, 64-QAM)
Rate of Transmitter	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 150Mbps
Antenna Type:	Internal Antenna
Antenna gain:	2.65dBi
Power Supply:	DC 5V

Note:

- 1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.The EUT's all information provided by client.

2. Channel List(802.11b/g/nHT20)

Channel	Frequency (GHz)	Channel	Frequency (GHz)
01	2.412	07	2.442
02	2.417	08	2.447
03	2.422	09	2.452
04	2.427	10	2.457
05	2.432	11	2.462
06	2.437		

Channel List(802.11nHT40)

Channel	Frequency (GHz)	Channel	Frequency (GHz)
03	2.422	07	2.442
04	2.427	08	2.447
05	2.432	09	2.452
06	2.437		



2.2. DESCRIPTION OF TEST MODES


To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Modulation	Channel
Mode 1	802.11b	CH01
Mode 2		CH06
Mode 3		CH11
Mode 4	802.11g	CH01
Mode 5		CH06
Mode 6		CH11
Mode 7	802.11nHT20	CH01
Mode 8		CH06
Mode 9		CH11
Mode 10	802.11nHT40	CH03
Mode 11		CH06
Mode 12		CH09


Note: (1) The measurements are performed at the highest, middle, lowest available channels.
(2) During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.
(3) For the two items of conducted disturbance at the power supply end and space radiation below 1GHz, all modes have undergone pre-tests. The report only shows the worst test results of mode 3.

2.3. BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Power Line Conducted Emission Test





2.4. DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	Adapter	HW-0501000E	N/A	Adapter (Provide by test lab): Manufacturer: HAIWEI Model: HW-0501000E I/P: AC 100-240V 50/60Hz O/P: DC 5V 1A

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5. TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Max output power Setting				
Test software Version	Test program: RF Test_V2.1.0			
Mode	802.11b	802.11g	802.11n HT20	802.11n HT40
Data Rate	1Mbps	6Mbps	MSC0	MSC0
Power Setting of Software	60	60	60	66



2.6. EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Nov. 01, 2024	Oct. 31, 2025
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Nov. 01, 2024	Oct. 31, 2025
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Nov. 01, 2024	Oct. 31, 2025
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Nov. 01, 2024	Oct. 31, 2025
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Nov. 01, 2024	Oct. 31, 2025
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Nov. 01, 2024	Oct. 31, 2025
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Nov. 01, 2024	Oct. 31, 2025
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Nov. 01, 2024	Oct. 31, 2025
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Nov. 01, 2024	Oct. 31, 2025
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Nov. 01, 2024	Oct. 31, 2025
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Nov. 01, 2024	Oct. 31, 2025
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Nov. 01, 2024	Oct. 31, 2025
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Nov. 01, 2024	Oct. 31, 2025
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Nov. 01, 2024	Oct. 31, 2025
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Nov. 01, 2024	Oct. 31, 2025
16	D.C. Power Supply	LongWei	PS-305D	010964729	Nov. 01, 2024	Oct. 31, 2025
17	Power Meter	Ceyear	2438PA/PB	/	Nov. 01, 2024	Oct. 31, 2025
18	Peak/continuous wave power probe	Ceyear	81702F	/	Nov. 01, 2024	Oct. 31, 2025

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	YIHENG	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
2	EMI Receiver	R&S	ESR	101421	Nov. 01, 2024	Oct. 31, 2025
3	LISN	R&S	ENV216	102417	Nov. 01, 2024	Oct. 31, 2025
4	843 Cable 1#	ChengYu	CE Cable	001	Nov. 01, 2024	Oct. 31, 2025

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMCC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMCC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



3.. EMC EMISSION TEST

3.1. CONDUCTED EMISSION MEASUREMENT

3.1.1. POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.50	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2. TEST PROCEDURE


- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3. DEVIATION FROM TEST STANDARD

No deviation



3.1.4. TEST SETUP

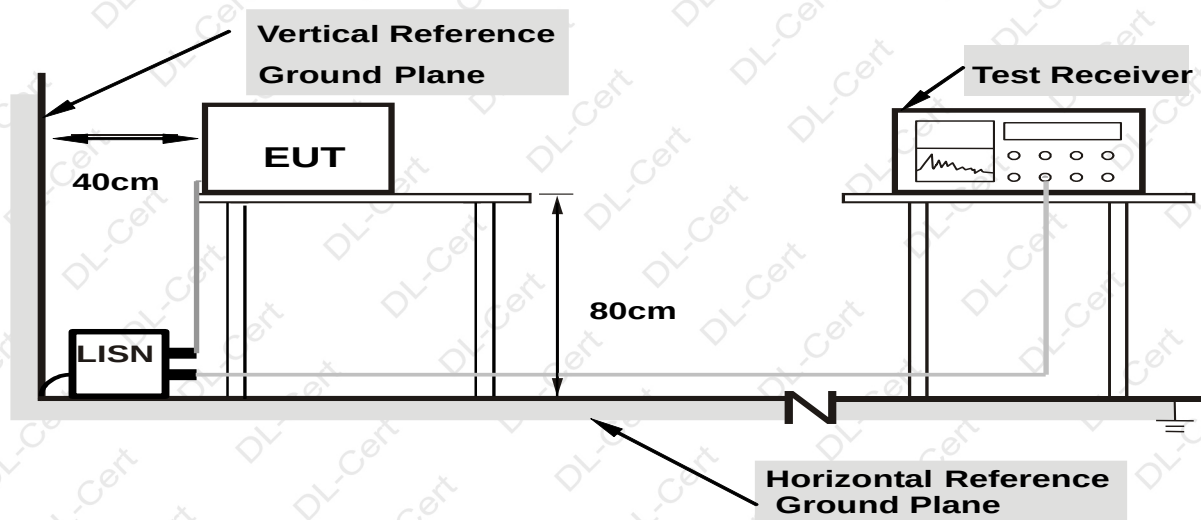

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5. EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

3.1.6. TEST RESULTS



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 3(HX-G0008F-S2)

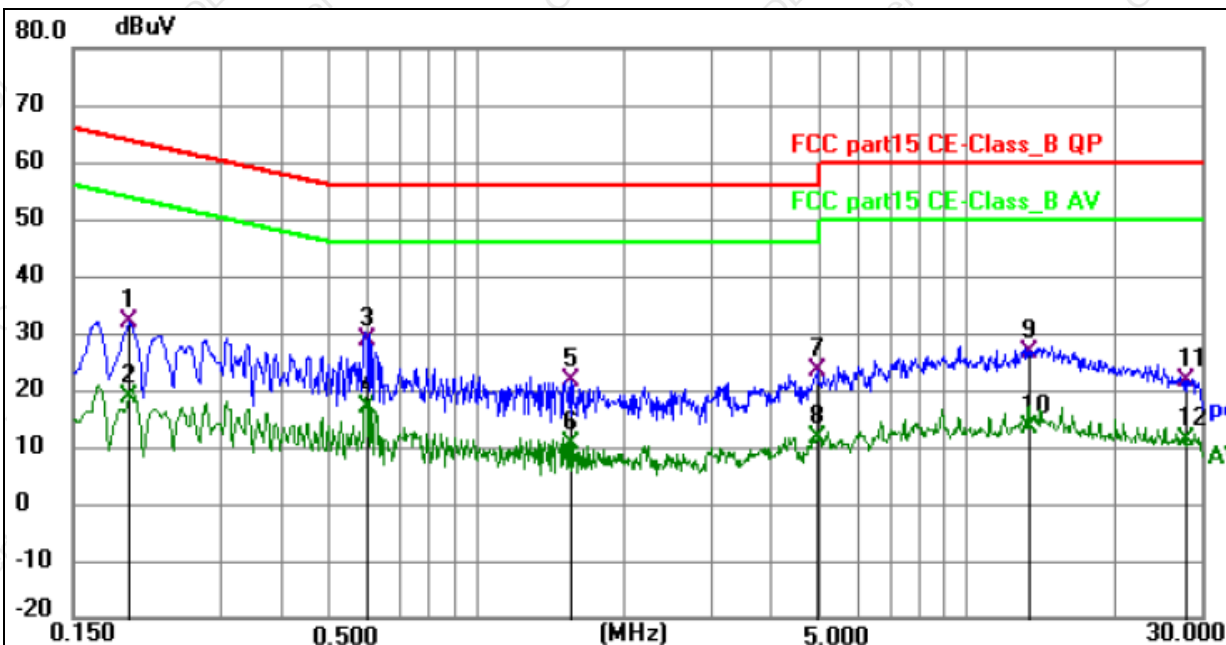


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1965	21.97	10.08	32.05	63.76	-31.71	QP	P	
2	0.1965	8.66	10.08	18.74	53.76	-35.02	AVG	P	
3 *	0.5955	18.74	10.14	28.88	56.00	-27.12	QP	P	
4	0.5955	6.75	10.14	16.89	46.00	-29.11	AVG	P	
5	1.5675	11.66	10.06	21.72	56.00	-34.28	QP	P	
6	1.5675	0.44	10.06	10.50	46.00	-35.50	AVG	P	
7	4.9335	12.94	10.37	23.31	56.00	-32.69	QP	P	
8	4.9335	1.36	10.37	11.73	46.00	-34.27	AVG	P	
9	13.4610	14.95	11.54	26.49	60.00	-33.51	QP	P	
10	13.4610	2.02	11.54	13.56	50.00	-36.44	AVG	P	
11	28.0725	8.64	13.12	21.76	60.00	-38.24	QP	P	
12	28.0725	-1.96	13.12	11.16	50.00	-38.84	AVG	P	



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 3(HX-G0008F-S2)

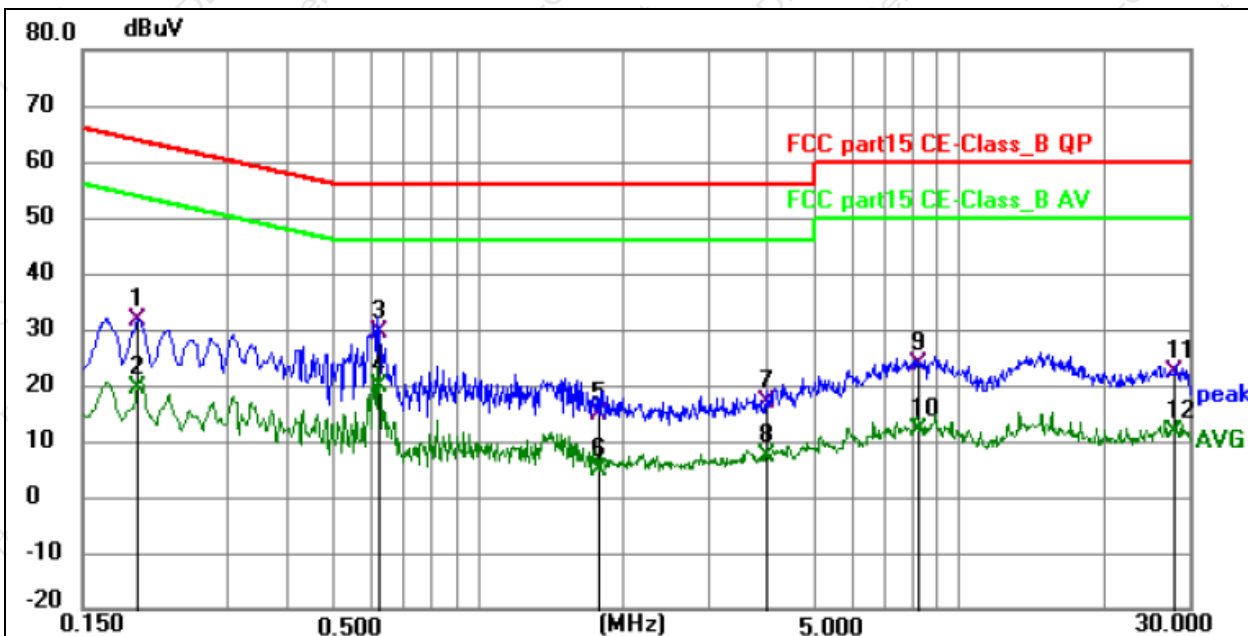


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1949	21.61	10.16	31.77	63.83	-32.06	QP	P	
2	0.1949	9.46	10.16	19.62	53.83	-34.21	AVG	P	
3	0.6225	19.45	10.16	29.61	56.00	-26.39	QP	P	
4 *	0.6225	9.77	10.16	19.93	46.00	-26.07	AVG	P	
5	1.7790	4.81	10.06	14.87	56.00	-41.13	QP	P	
6	1.7790	-5.16	10.06	4.90	46.00	-41.10	AVG	P	
7	3.9840	6.67	10.13	16.80	56.00	-39.20	QP	P	
8	3.9840	-2.65	10.13	7.48	46.00	-38.52	AVG	P	
9	8.2500	12.82	10.93	23.75	60.00	-36.25	QP	P	
10	8.2500	1.17	10.93	12.10	50.00	-37.90	AVG	P	
11	27.8745	9.40	12.92	22.32	60.00	-37.68	QP	P	
12	27.8745	-1.47	12.92	11.45	50.00	-38.55	AVG	P	



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 3(HX-C1006A-S2)

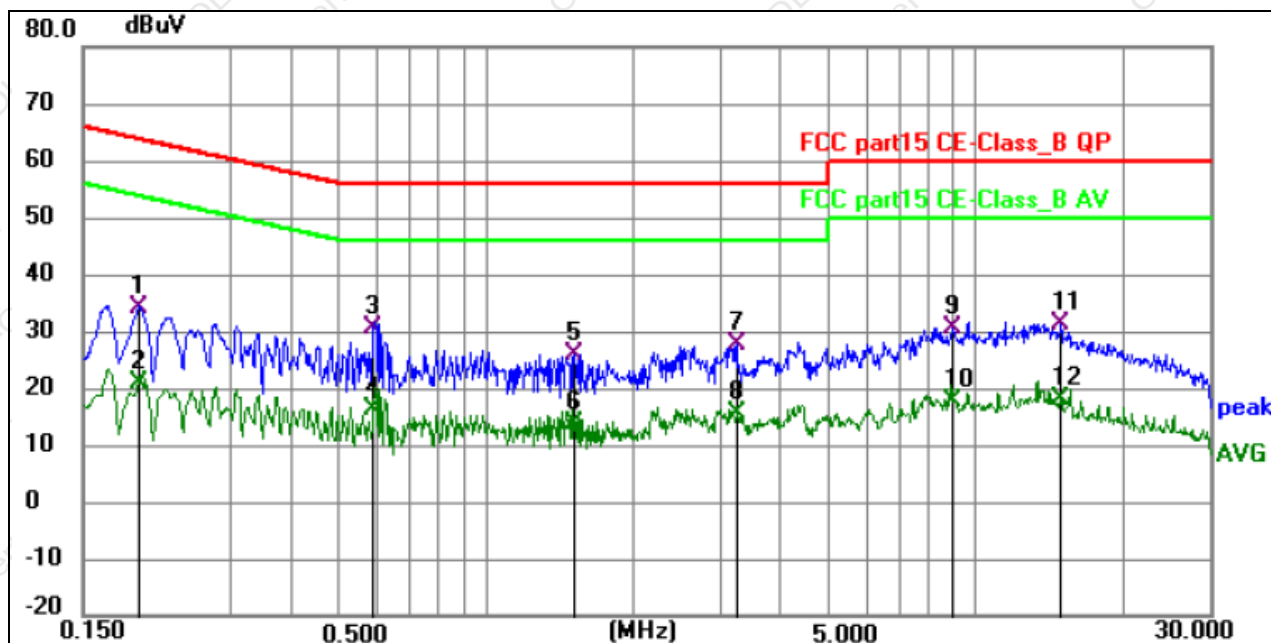


Remark:

 $\text{Margin} = \text{Limit} - \text{Level}$, $\text{Correct Factor} = \text{Cable lose} + \text{LISN insertion loss}$, $\text{Level} = \text{Reading} + \text{Correct factor}$

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1949	24.19	10.08	34.27	63.83	-29.56	QP	P	
2	0.1949	10.88	10.08	20.96	53.83	-32.87	AVG	P	
3 *	0.5910	20.34	10.14	30.48	56.00	-25.52	QP	P	
4	0.5910	6.17	10.14	16.31	46.00	-29.69	AVG	P	
5	1.5135	15.95	10.06	26.01	56.00	-29.99	QP	P	
6	1.5135	3.78	10.06	13.84	46.00	-32.16	AVG	P	
7	3.2414	17.61	10.15	27.76	56.00	-28.24	QP	P	
8	3.2414	5.47	10.15	15.62	46.00	-30.38	AVG	P	
9	8.9700	19.37	11.10	30.47	60.00	-29.53	QP	P	
10	8.9700	6.75	11.10	17.85	50.00	-32.15	AVG	P	
11	14.9235	19.50	11.67	31.17	60.00	-28.83	QP	P	
12	14.9235	6.26	11.67	17.93	50.00	-32.07	AVG	P	



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 3(HX-C1006A-S2)

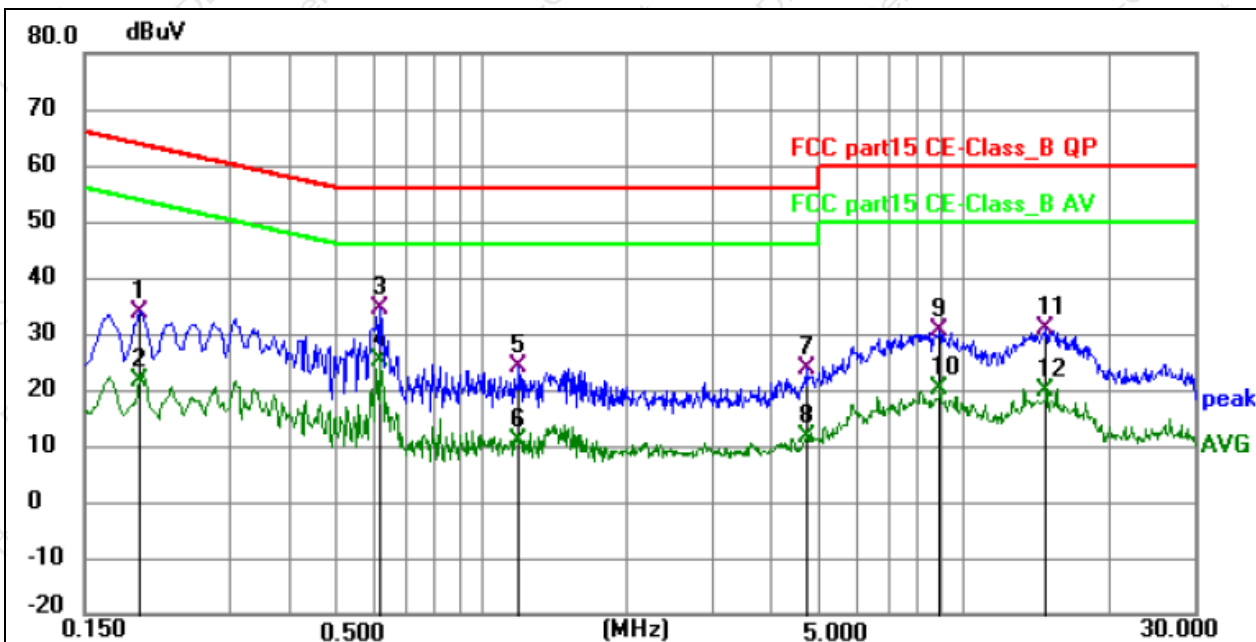


Remark:

Margin = Limit – Level, Correct Factor = Cable loss + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1949	23.61	10.16	33.77	63.83	-30.06	QP	P	
2	0.1949	11.46	10.16	21.62	53.83	-32.21	AVG	P	
3	0.6180	24.19	10.16	34.35	56.00	-21.65	QP	P	
4 *	0.6180	15.07	10.16	25.23	46.00	-20.77	AVG	P	
5	1.1940	13.94	10.10	24.04	56.00	-31.96	QP	P	
6	1.1940	0.67	10.10	10.77	46.00	-35.23	AVG	P	
7	4.7175	13.60	10.27	23.87	56.00	-32.13	QP	P	
8	4.7175	1.46	10.27	11.73	46.00	-34.27	AVG	P	
9	8.9024	19.66	11.04	30.70	60.00	-29.30	QP	P	
10	8.9024	9.30	11.04	20.34	50.00	-29.66	AVG	P	
11	14.7885	19.16	11.57	30.73	60.00	-29.27	QP	P	
12	14.7885	8.32	11.57	19.89	50.00	-30.11	AVG	P	



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 3(HX-A1536B-S2)

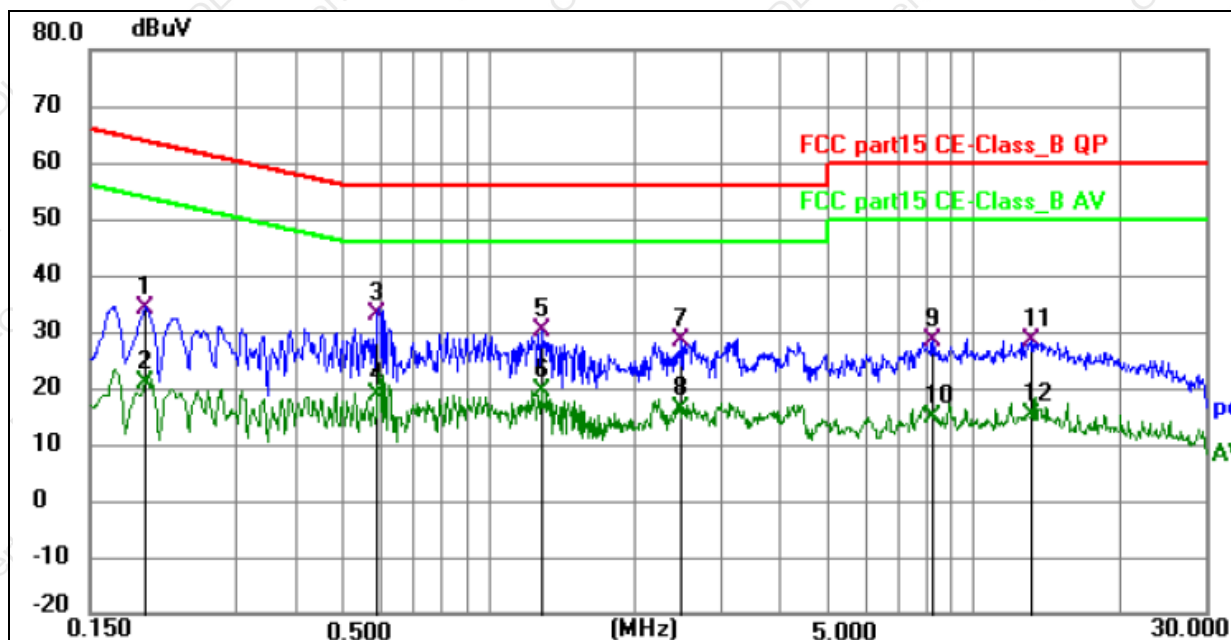


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1949	24.19	10.08	34.27	63.83	-29.56	QP	P	
2	0.1949	10.88	10.08	20.96	53.83	-32.87	AVG	P	
3 *	0.5910	22.84	10.14	32.98	56.00	-23.02	QP	P	
4	0.5910	8.67	10.14	18.81	46.00	-27.19	AVG	P	
5	1.2882	20.18	10.05	30.23	56.00	-25.77	QP	P	
6	1.2882	9.34	10.05	19.39	46.00	-26.61	AVG	P	
7	2.4900	18.16	10.09	28.25	56.00	-27.75	QP	P	
8	2.4900	6.31	10.09	16.40	46.00	-29.60	AVG	P	
9	8.2004	17.42	10.97	28.39	60.00	-31.61	QP	P	
10	8.2004	3.99	10.97	14.96	50.00	-35.04	AVG	P	
11	13.0602	16.78	11.51	28.29	60.00	-31.71	QP	P	
12	13.0602	3.53	11.51	15.04	50.00	-34.96	AVG	P	



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 3(HX-A1536B-S2)

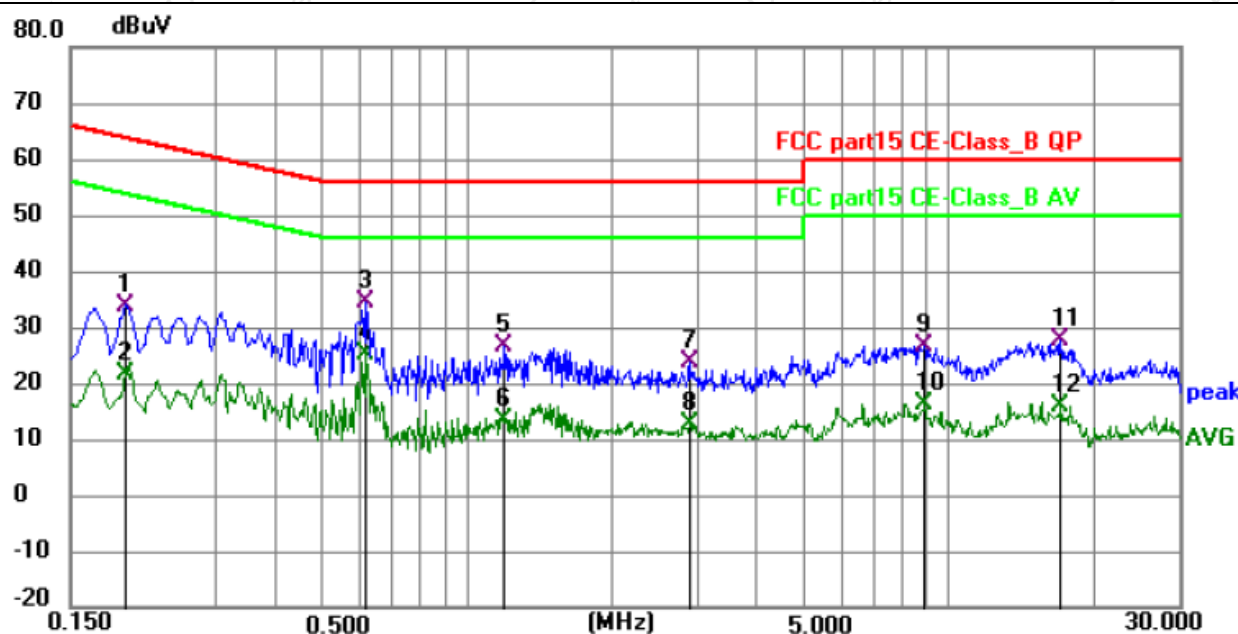

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1949	23.61	10.16	33.77	63.83	-30.06	QP	P	
2	0.1949	11.46	10.16	21.62	53.83	-32.21	AVG	P	
3	0.6180	24.19	10.16	34.35	56.00	-21.65	QP	P	
4 *	0.6180	15.07	10.16	25.23	46.00	-20.77	AVG	P	
5	1.1940	16.44	10.10	26.54	56.00	-29.46	QP	P	
6	1.1940	3.17	10.10	13.27	46.00	-32.73	AVG	P	
7	2.8995	13.62	10.08	23.70	56.00	-32.30	QP	P	
8	2.8995	2.44	10.08	12.52	46.00	-33.48	AVG	P	
9	8.9024	15.66	11.04	26.70	60.00	-33.30	QP	P	
10	8.9024	5.30	11.04	16.34	50.00	-33.66	AVG	P	
11	17.0880	15.85	11.74	27.59	60.00	-32.41	QP	P	
12	17.0880	4.04	11.74	15.78	50.00	-34.22	AVG	P	



3.2. RADIATED EMISSION MEASUREMENT

3.2.1. RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



3.2.2. TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre.
- Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


The horizontal and vertical polarities of the antenna were tested, and a pre-test was conducted on the EUT placement as three orthogonal axes X,Y,Z. The worst display of the test results was the Y-axis. The worst case emissions were reported.

3.2.3. DEVIATION FROM TEST STANDARD


No deviation

3.2.4. TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

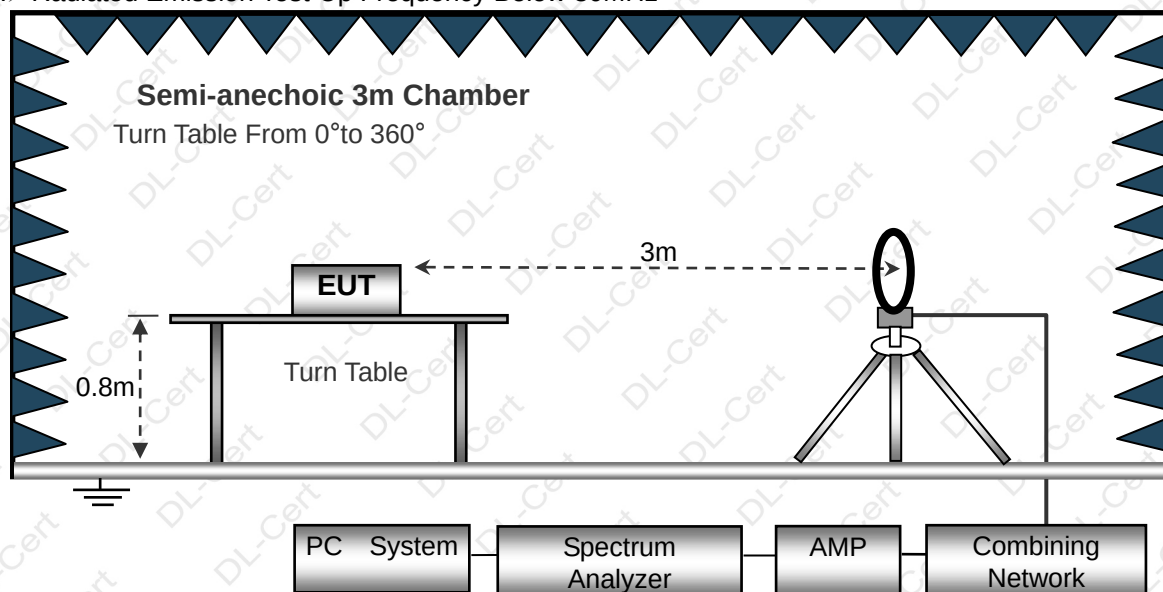

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

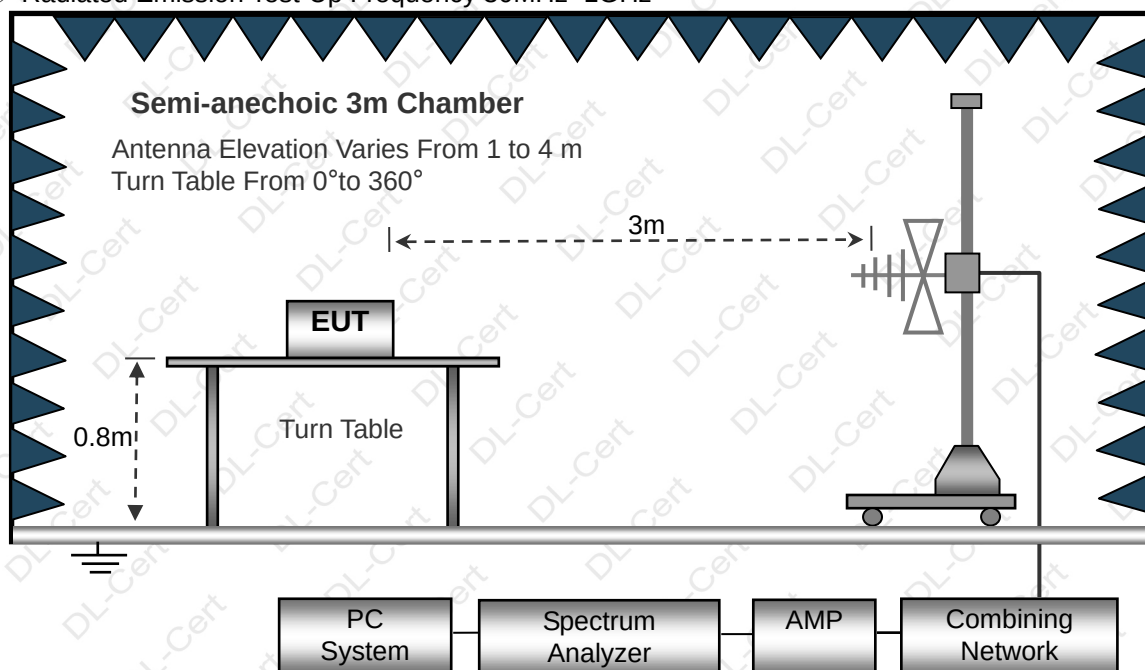

(C) Radiated Emission Test-Up Frequency Above 1GHz

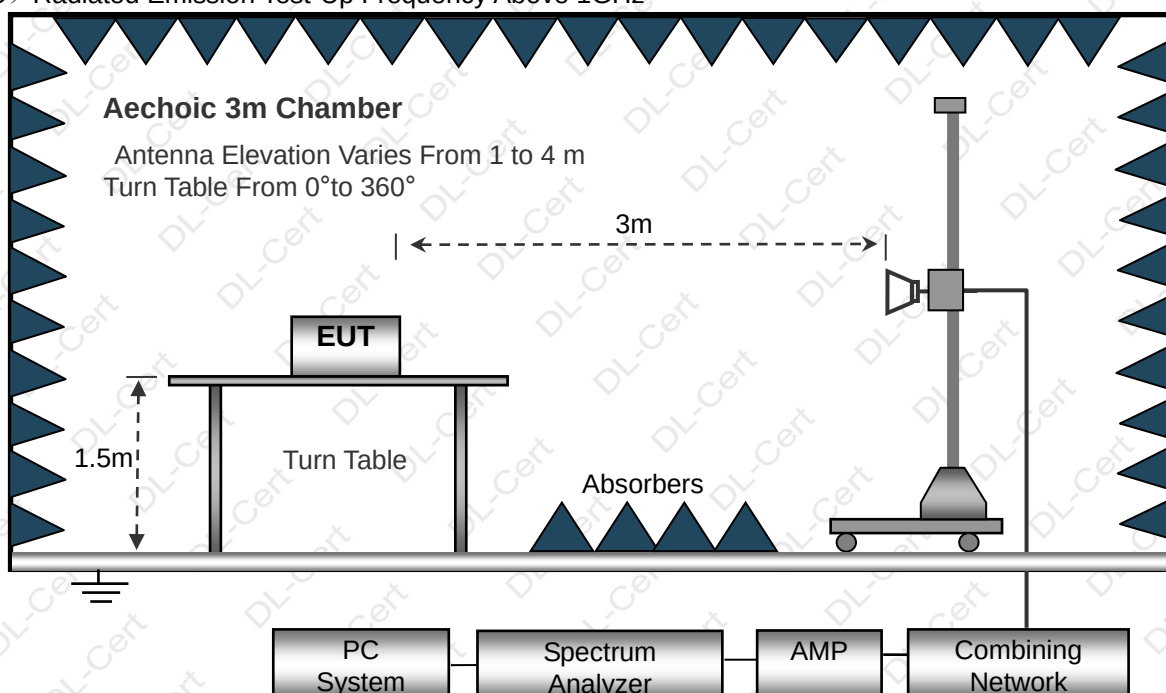

3.2.5. EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6. TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

Temperature:	20℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 3	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

**3.2.7. TEST RESULTS (BETWEEN 30MHZ – 1GHZ)**

Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 3(HX-G0008F-S2)		

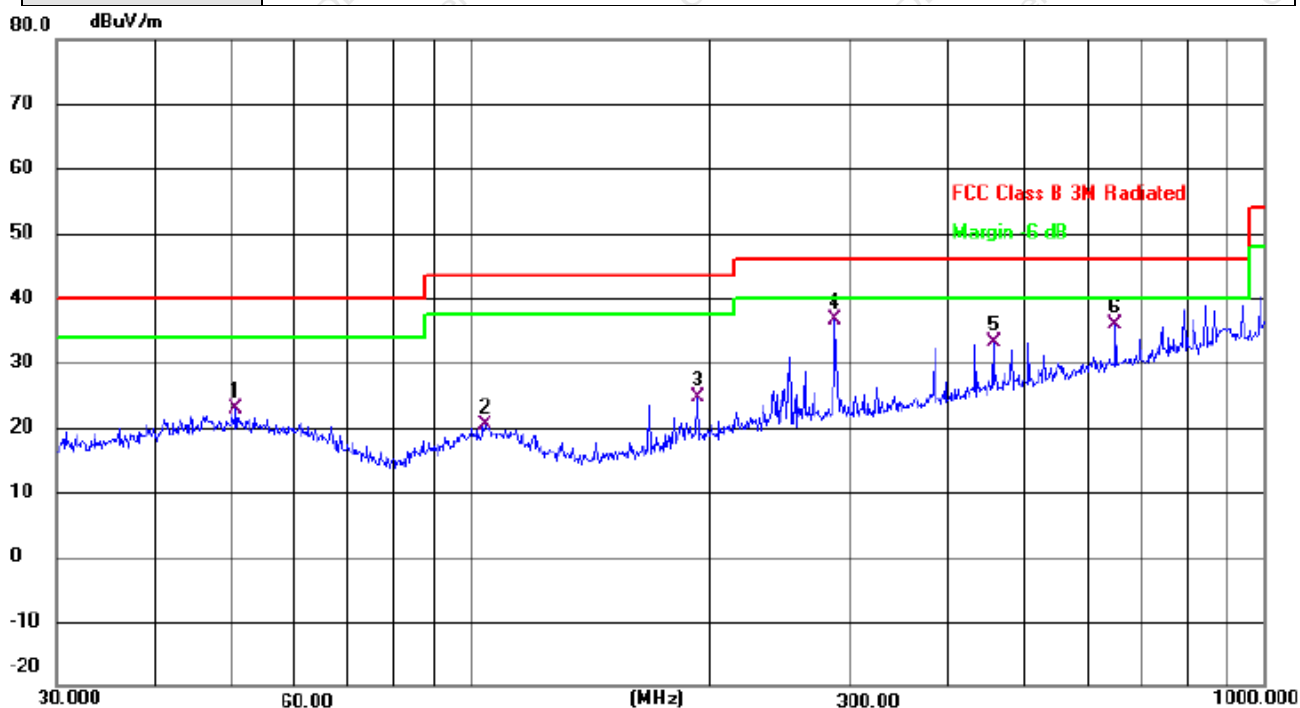

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		50.5860	29.57	-6.77	22.80	40.00	-17.20	QP
2		104.1701	28.81	-8.47	20.34	43.50	-23.16	QP
3		193.0945	34.25	-9.50	24.75	43.50	-18.75	QP
4	*	287.9904	42.86	-6.25	36.61	46.00	-9.39	QP
5		455.9058	35.26	-2.01	33.25	46.00	-12.75	QP
6		649.6597	34.35	1.41	35.76	46.00	-10.24	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 3(HX-G0008F-S2)		

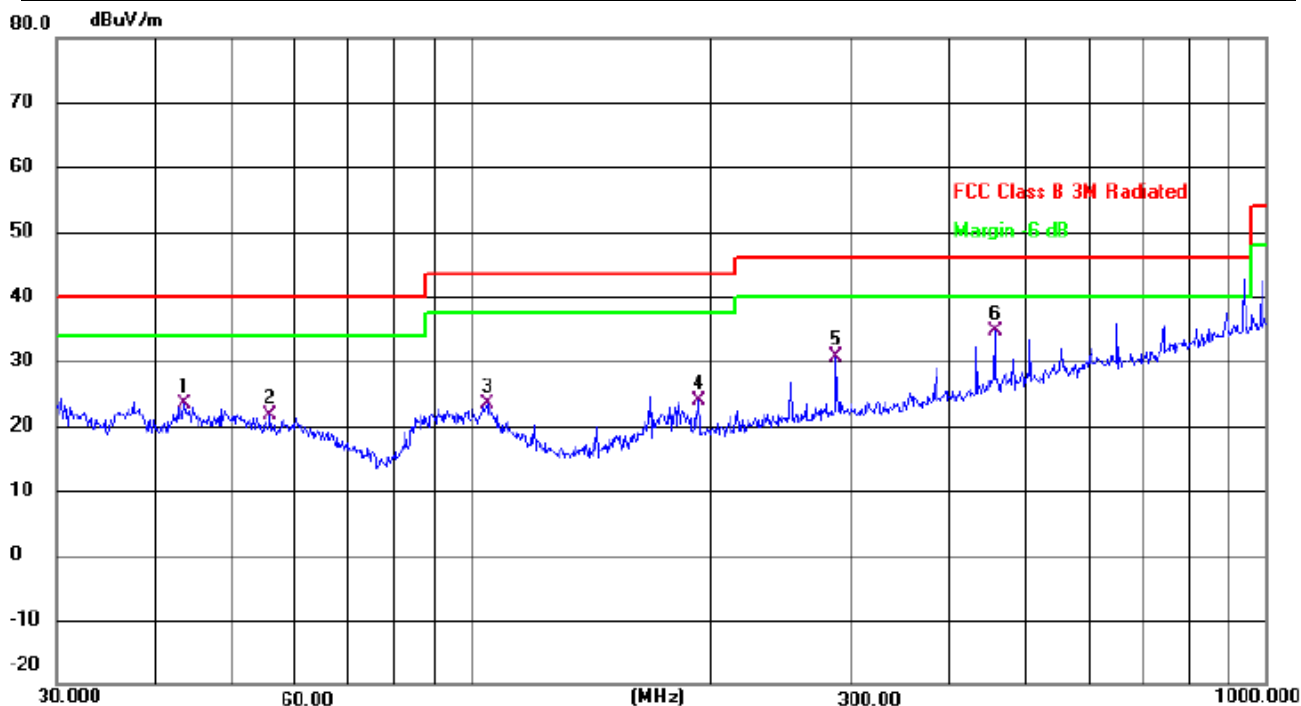

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		43.5057	30.83	-7.34	23.49	40.00	-16.51	QP
2		55.8047	28.96	-7.32	21.64	40.00	-18.36	QP
3		104.5361	31.69	-8.38	23.31	43.50	-20.19	QP
4		193.0945	33.45	-9.50	23.95	43.50	-19.55	QP
5		287.9904	36.99	-6.25	30.74	46.00	-15.26	QP
6	*	455.9058	36.64	-2.01	34.63	46.00	-11.37	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 3(HX-C1006A-S2)		

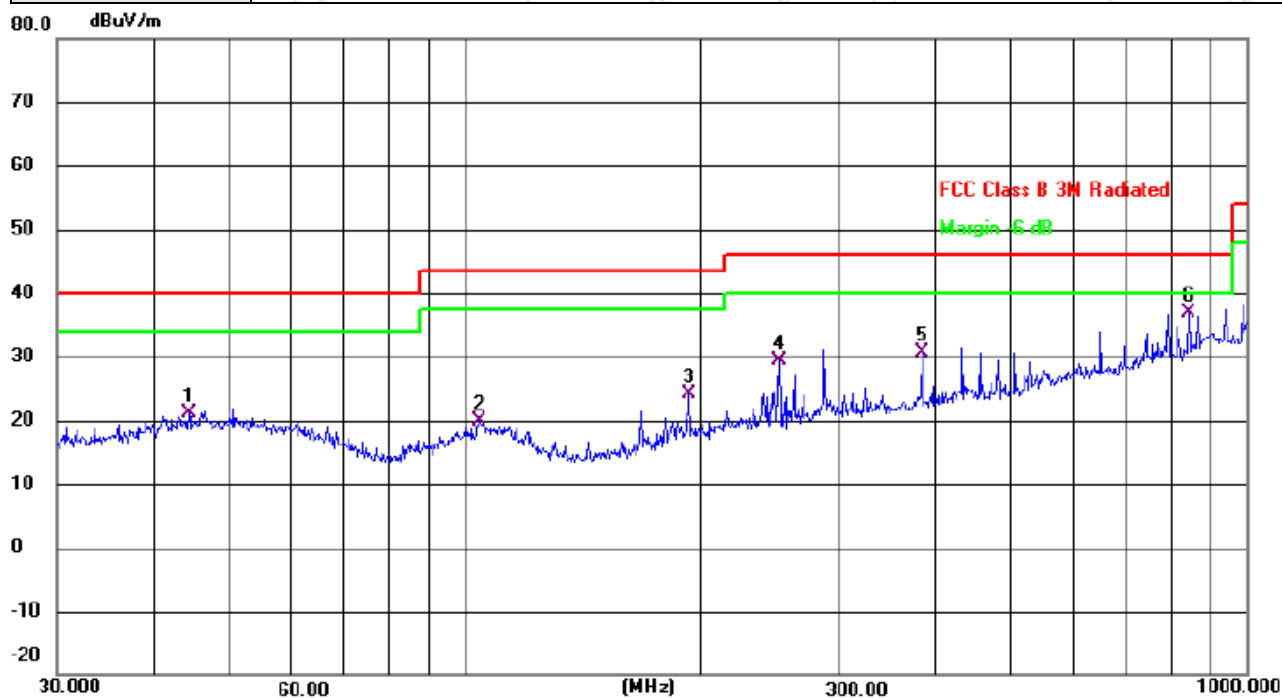

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		44.2751	28.27	-7.17	21.10	40.00	-18.90	QP
2		104.1701	28.31	-8.47	19.84	43.50	-23.66	QP
3		193.0944	33.75	-9.50	24.25	43.50	-19.25	QP
4		252.0627	36.79	-7.34	29.45	46.00	-16.55	QP
5		383.9318	34.79	-4.17	30.62	46.00	-15.38	QP
6	*	842.1295	32.39	4.44	36.83	46.00	-9.17	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 3(HX-C1006A-S2)		

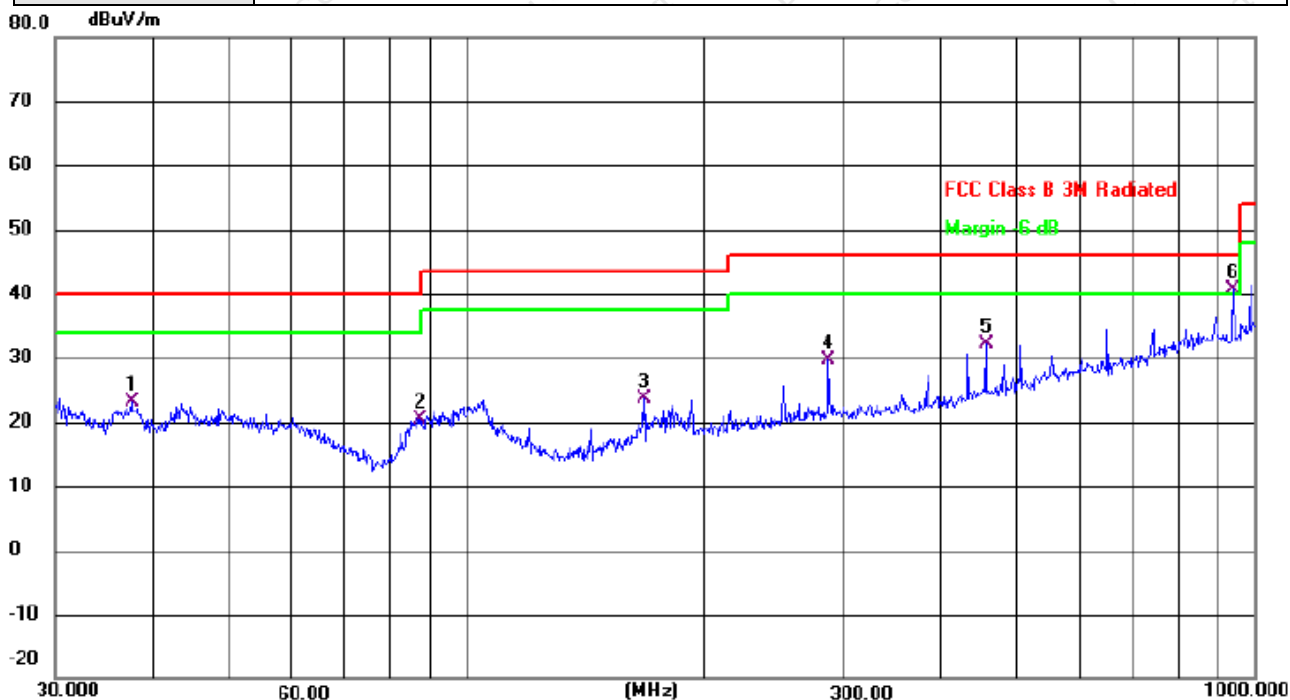

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		37.5478	31.81	-8.78	23.03	40.00	-16.97	QP
2		87.4175	32.01	-11.61	20.40	40.00	-19.60	QP
3		167.8241	35.27	-11.61	23.66	43.50	-19.84	QP
4		287.9904	35.99	-6.25	29.74	46.00	-16.26	QP
5		455.9057	34.14	-2.01	32.13	46.00	-13.87	QP
6	*	938.8325	34.60	5.97	40.57	46.00	-5.43	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 3(HX-A1536B-S2)		

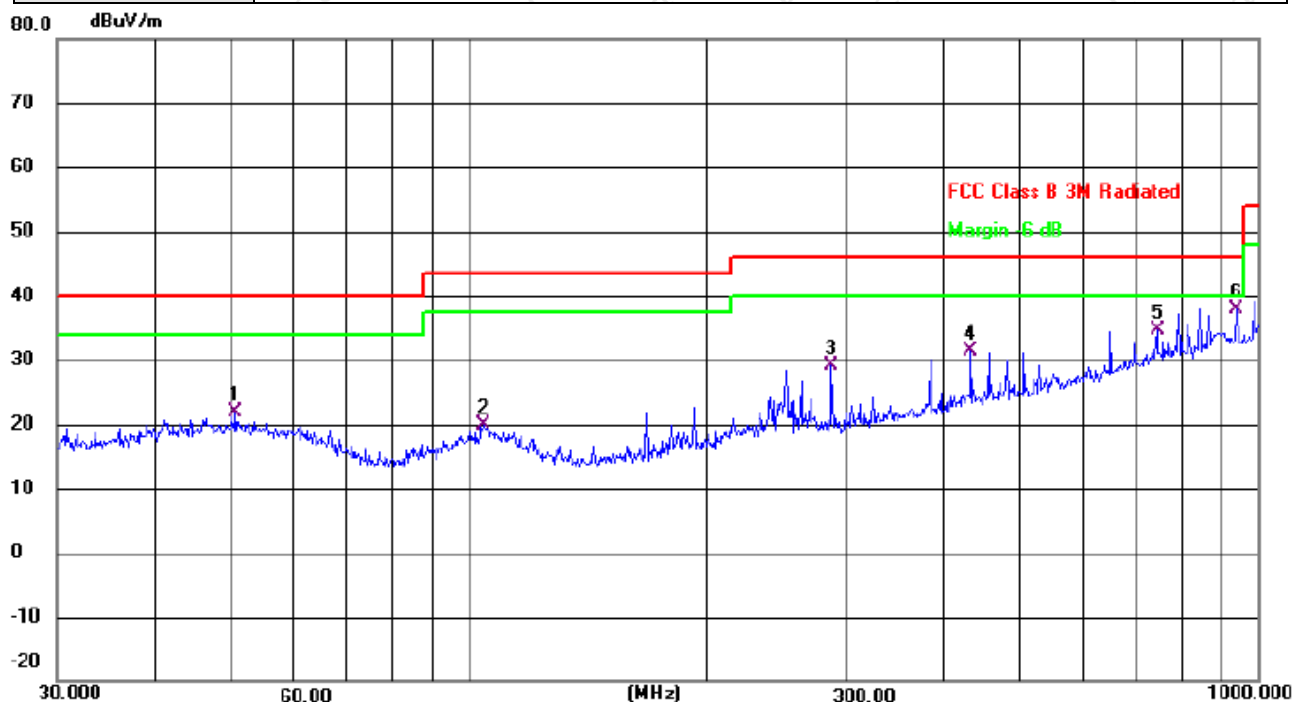

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		50.5859	28.57	-6.77	21.80	40.00	-18.20	QP
2		104.1701	28.31	-8.47	19.84	43.50	-23.66	QP
3		287.9904	35.36	-6.25	29.11	46.00	-16.89	QP
4		432.5455	34.29	-2.98	31.31	46.00	-14.69	QP
5		744.8659	31.95	2.75	34.70	46.00	-11.30	QP
6	*	938.8324	31.93	5.97	37.90	46.00	-8.10	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 3(HX-A1536B-S2)		

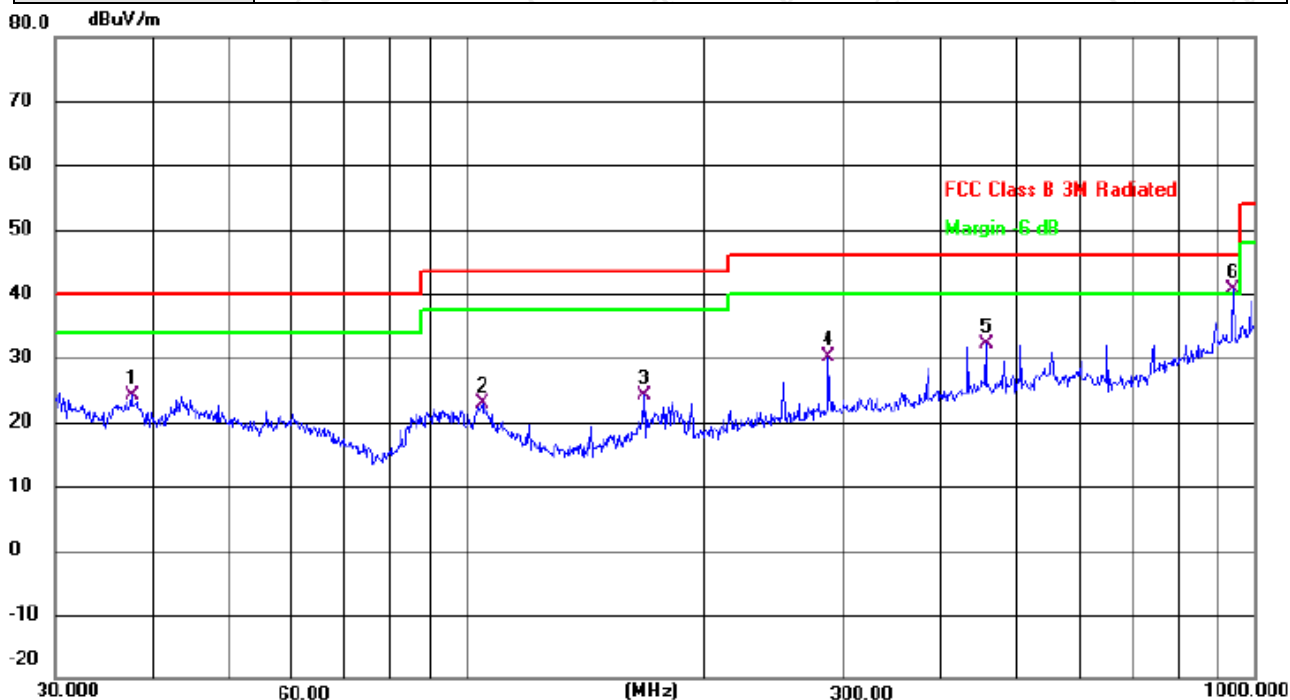

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		37.5478	32.81	-8.78	24.03	40.00	-15.97	QP
2		104.5360	31.19	-8.38	22.81	43.50	-20.69	QP
3		167.8241	35.77	-11.61	24.16	43.50	-19.34	QP
4		287.9904	36.49	-6.25	30.24	46.00	-15.76	QP
5		455.9057	34.14	-2.01	32.13	46.00	-13.87	QP
6	*	938.8325	34.60	5.97	40.57	46.00	-5.43	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;

**3.2.8. TEST RESULTS (1GHZ~25GHZ)**

802.11b

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2412									
V	4824	67.63	50.65	6.88	31.29	55.15	74	-18.85	PK
V	4824	55.38	50.65	6.88	31.29	42.9	54	-11.1	AV
V	7236	66.41	49.98	7.16	36.63	60.22	74	-13.78	PK
V	7236	46.53	49.98	7.16	36.63	40.34	54	-13.66	AV
V	16087	48.28	51.53	11.34	41.52	49.61	74	-24.39	PK
H	4824	66.55	50.65	6.88	31.29	54.07	74	-19.93	PK
H	4824	55.66	50.65	6.88	31.29	43.18	54	-10.82	AV
H	7236	69.85	49.98	7.16	36.63	63.66	74	-10.34	PK
H	7236	45.42	49.98	7.16	36.63	39.23	54	-14.77	AV
H	16087	48.87	51.53	11.34	41.52	50.2	74	-23.8	PK
operation frequency:2437									
V	4874	67.63	50.67	6.89	31.38	55.23	74	-18.77	PK
V	4874	55.21	50.67	6.89	31.38	42.81	54	-11.19	AV
V	7311	69.85	50.02	7.24	36.63	63.7	74	-10.3	PK
V	7311	46.56	50.02	7.24	36.63	40.41	54	-13.59	AV
V	16087	48.52	51.53	11.34	41.52	49.85	74	-24.15	PK
H	4874	66.14	50.67	6.89	31.38	53.74	74	-20.26	PK
H	4874	55.53	50.67	6.89	31.38	43.13	54	-10.87	AV
H	7311	69.85	50.02	7.24	36.63	63.7	74	-10.3	PK
H	7311	47.66	50.02	7.24	36.63	41.51	54	-12.49	AV
H	16087	48.45	51.53	11.34	41.52	49.78	74	-24.22	PK
operation frequency:2462									
V	4924	67.62	50.67	6.89	31.38	55.22	74	-18.78	PK
V	4924	55.88	50.67	6.89	31.38	43.48	54	-10.52	AV
V	7386	69.73	50.02	7.24	36.63	63.58	74	-10.42	PK
V	7386	46.52	50.02	7.24	36.63	40.37	54	-13.63	AV
V	16087	48.61	51.53	11.34	41.52	49.94	74	-24.06	PK
H	4924	66.36	50.67	6.89	31.38	53.96	74	-20.04	PK
H	4924	55.58	50.67	6.89	31.38	43.18	54	-10.82	AV
H	7386	69.63	50.02	7.24	36.63	63.48	74	-10.52	PK
H	7386	47.35	50.02	7.24	36.63	41.2	54	-12.8	AV
H	16087	48.85	51.53	11.34	41.52	50.18	74	-23.82	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11g

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2412									
V	4824	67.47	50.65	6.88	31.29	54.99	74	-19.01	PK
V	4824	55.26	50.65	6.88	31.29	42.78	54	-11.22	AV
V	7236	66.45	49.98	7.16	36.63	60.26	74	-13.74	PK
V	7236	46.52	49.98	7.16	36.63	40.33	54	-13.67	AV
V	16087	49.53	51.53	11.34	41.52	50.86	74	-23.14	PK
H	4824	69.18	50.65	6.88	31.29	56.7	74	-17.3	PK
H	4824	52.56	50.65	6.88	31.29	40.08	54	-13.92	AV
H	7236	66.45	49.98	7.16	36.63	60.26	74	-13.74	PK
H	7236	47.44	49.98	7.16	36.63	41.25	54	-12.75	AV
H	16087	47.78	51.53	11.34	41.52	49.11	74	-24.89	PK
operation frequency:2437									
V	4874	67.52	50.67	6.89	31.38	55.12	74	-18.88	PK
V	4874	55.63	50.67	6.89	31.38	43.23	54	-10.77	AV
V	7311	66.88	50.02	7.24	36.63	60.73	74	-13.27	PK
V	7311	46.41	50.02	7.24	36.63	40.26	54	-13.74	AV
V	16087	48.63	51.53	11.34	41.52	49.96	74	-24.04	PK
H	4874	66.85	50.67	6.89	31.38	54.45	74	-19.55	PK
H	4874	55.56	50.67	6.89	31.38	43.16	54	-10.84	AV
H	7311	65.44	50.02	7.24	36.63	59.29	74	-14.71	PK
H	7311	47.22	50.02	7.24	36.63	41.07	54	-12.93	AV
H	16087	48.53	51.53	11.34	41.52	49.86	74	-24.14	PK
operation frequency:2462									
V	4924	67.37	50.79	6.83	31.36	54.77	74	-19.23	PK
V	4924	55.81	50.79	6.83	31.36	43.21	54	-10.79	AV
V	7386	66.73	50.11	7.25	36.58	60.45	74	-13.55	PK
V	7386	47.68	50.11	7.25	36.58	41.4	54	-12.6	AV
V	16087	46.83	51.53	11.34	41.52	48.16	74	-25.84	PK
H	4924	66.68	50.79	6.83	31.36	54.08	74	-19.92	PK
H	4924	54.25	50.79	6.83	31.36	41.65	54	-12.35	AV
H	7386	65.63	50.11	7.25	36.58	59.35	74	-14.65	PK
H	7386	45.25	50.11	7.25	36.58	38.97	54	-15.03	AV
H	16087	47.71	51.53	11.34	41.52	49.04	74	-24.96	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.