

TEST REPORT

Applicant Name: Shenzhen Neutop Optoelectronics Co., Ltd
Address: 502, BLDG 4, Pingshan minQi Technology Park, No. 65 Lishan Road, Pingshan Community, Taoyuan Street, Nanshan District, Shenzhen China
Report Number: 2401A25033E-RF-00D
FCC ID: 2BEGB-A01A11

Test Standard (s)
FCC PART 15.407

Sample Description

Product Type: Projector
Model No.: A01A11
Multiple Model(s) No.: A**A11("***" =01-99 , indicates for different market or business purposes)
Trade Mark: N/A
Date Received: 2024-12-27
Issue Date: 2025-06-13

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Allen. Bai

Allen Bai
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked * is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.
This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.
This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
SUMMARY OF TEST RESULTS	11
TEST EQUIPMENT LIST	12
REQUIREMENTS AND TEST PROCEDURES	14
CONDUCTED EMISSIONS	14
UNDESIRABLE EMISSION	16
26 dB & 6dB EMISSION BANDWIDTH	20
CONDUCTED TRANSMITTER OUTPUT POWER	22
POWER SPECTRAL DENSITY	23
DUTY CYCLE	24
ANTENNA REQUIREMENT	25
TEST DATA AND RESULTS	26
CONDUCTED EMISSIONS	26
UNDESIRABLE EMISSION	29
RF CONDUCTED DATA	192
EMISSION BANDWIDTH	192
99% OCCUPIED BANDWIDTH	202
MAXIMUM CONDUCTED OUTPUT POWER	211
POWER SPECTRAL DENSITY	214
DUTY CYCLE	223
RF EXPOSURE EVALUATION	227
EUT PHOTOGRAPHS	229
TEST SETUP PHOTOGRAPHS	230

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401A25033E-RF-00D	Original Report	2025-06-13

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Projector
Tested Model	A01A11
Multiple Model(s)	A**A11(“***”=01-99 , indicates for different market or business purposes)
Frequency Range	5150-5250MHz;5250-5350MHz;5740-5725MHz;5725-5850MHz
Mode	802.11a/n20/n40
Maximum Conducted Average Output Power	5150-5250MHz: 14.63dBm; 5250-5350MHz: 14.73dBm; 5740-5725MHz: 15.51dBm; 5725-5850MHz: 15.29dBm
Modulation Technique	OFDM
Antenna Specification[#]	4.19dBi (provided by the applicant)
Voltage Range	AC 120V
Sample serial number	2WQQ-5 for Conducted and Radiated Emissions Test 2WQQ-9 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	N/A

Note: The Multiple models are electrically identical with the test model except for model number and sales channel. Please refer to the declaration letter[#] for more detail, which was provided by manufacturer.

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB789033 D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		109.2kHz(k=2, 95% level of confidence)
RF Frequency		56.6Hz(k=2, 95% level of confidence)
RF output power, conducted		0.86dB(k=2, 95% level of confidence)
Unwanted Emission, conducted		1.60dB(k=2, 95% level of confidence)
Power Spectral Density		0.90dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz-150kHz	3.63dB(k=2, 95% level of confidence)
	150kHz-30MHz	3.66dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.60dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	5.32dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	5.43dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	5.77dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.73dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.34dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.40dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.64dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.

For 5150-5250MHz Band, 6 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240

For 802.11a/n20 mode: channel 36, 40, 48 were tested;

For 802.11n40 mode: channel 38, 46 were tested.

For 5250-5350MHz Band, 6 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	60	5300
54	5270	62	5310
56	5280	64	5320

For 802.11a/n20 mode: channel 52, 56, 64 were tested;

For 802.11n40 mode: channel 54, 62 were tested.

For 5470-5725MHz Band, 18 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	124	5620
102	5510	126	5630
104	5520	128	5640
108	5540	132	5660
110	5550	134	5670
112	5560	136	5680
116	5580	140	5700
118	5590	142	5710
120	5600	144	5720

For 802.11a/n20mode: channel 100, 116, 140, 144 were tested;

For 802.11n40mode: channel 102, 110, 134, 142 were tested.

For 5725-5850MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	159	5795
151	5755	161	5805
153	5765	165	5825
157	5785	/	

For 802.11a/n20 mode: channel 149, 157, 165 were tested;

For 802.11n40 mode: channel 151, 159 were tested.

EUT Exercise Software

Exercise Software [#]	MP Tool		
5150-5250 MHz Band			
Mode	Test Channels	Data rate	Power Level [#]
802.11a	Low	6Mbps	95
	Middle	6Mbps	95
	High	6Mbps	95
802.11n-HT20	Low	MCS0	95
	Middle	MCS0	95
	High	MCS0	95
802.11n-HT40	Low	MCS0	95
	High	MCS0	95
5250-5350 MHz Band			
Mode	Test Channels	Data rate	Power Level [#]
802.11a	Low	6Mbps	95
	Middle	6Mbps	95
	High	6Mbps	95
802.11n-HT20	Low	MCS0	95
	Middle	MCS0	95
	High	MCS0	95
802.11n-HT40	Low	MCS0	85
	High	MCS0	85
5470-5725 MHz Band			
Mode	Test Channels	Data rate	Power Level [#]
802.11a	Low	6Mbps	90
	Middle	6Mbps	90
	High	6Mbps	90
	Cross	MCS0	90
802.11n-HT20	Low	MCS0	85
	Middle	MCS0	85
	High	MCS0	85
	Cross	MCS0	85
802.11n-HT40	Low	MCS0	85
	Middle	MCS0	85
	High	MCS0	85
	Cross	MCS0	85

5725-5850 MHz Band			
Mode	Test Channels	Data rate	Power Level [#]
802.11a	Low	6Mbps	95
	Middle	6Mbps	95
	High	6Mbps	95
802.11n-HT20	Low	MCS0	95
	Middle	MCS0	95
	High	MCS0	95
802.11n-HT40	Low	MCS0	95
	High	MCS0	95

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
OUPU	Receptacle	PDU-OP1606K	6971041358020
Sandisk	USB disk	CZ73-64G	Unknown
Vivo	Earphone(white)	XE160	Unknown
CRDC	Earphone(black)	YXEJ-01Z	Unknown
Lenono	Notebook	DESKTOP 9V9AN6E	1062222901869

External I/O Cable


Cable Description	Length (m)	From Port	To
Unshielded Un-Detachable AC Cable	1.5	Receptacle	AC Mains
Unshielded Detachable AC Cable	1.2	EUT	LISN/Receptacle
Unshielded Un-detachable Audio Cable	1.0	EUT	Earphone(white)
Unshielded Un-detachable Audio Cable	1.0	EUT	Earphone(black)
Unshielded Detachable HDMI Cable	2.0	EUT	Notebook

Block Diagram of Test Setup


For Conducted Emissions:

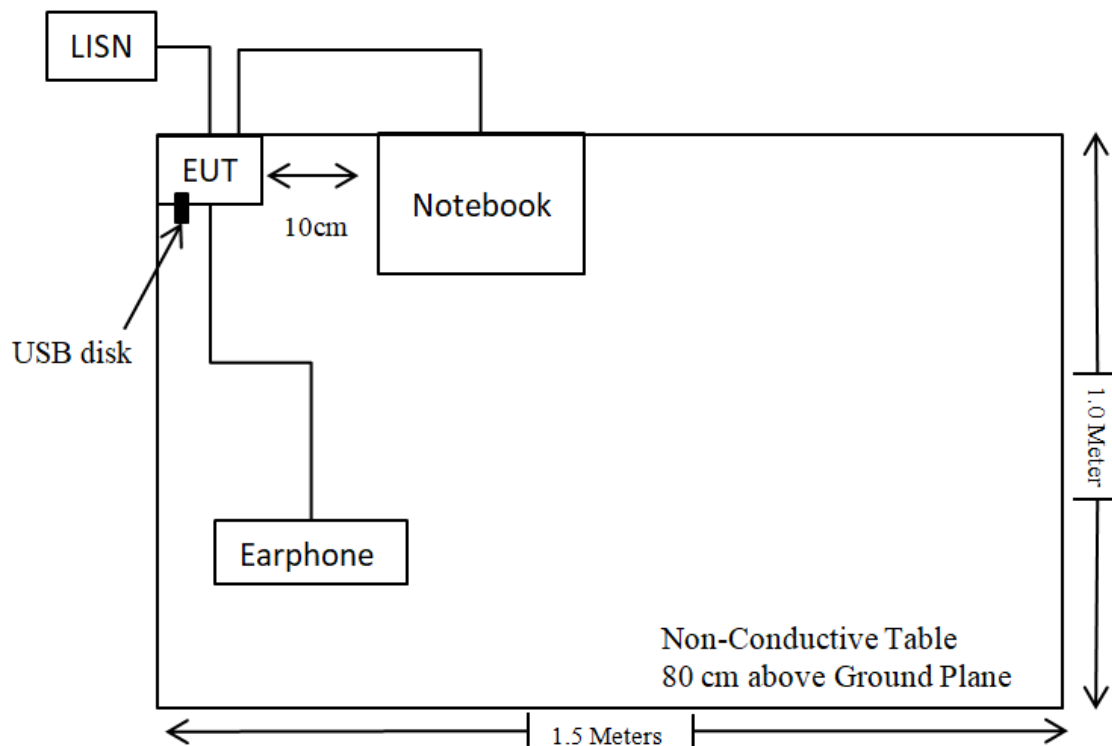

For Radiated Emissions below 1GHz:

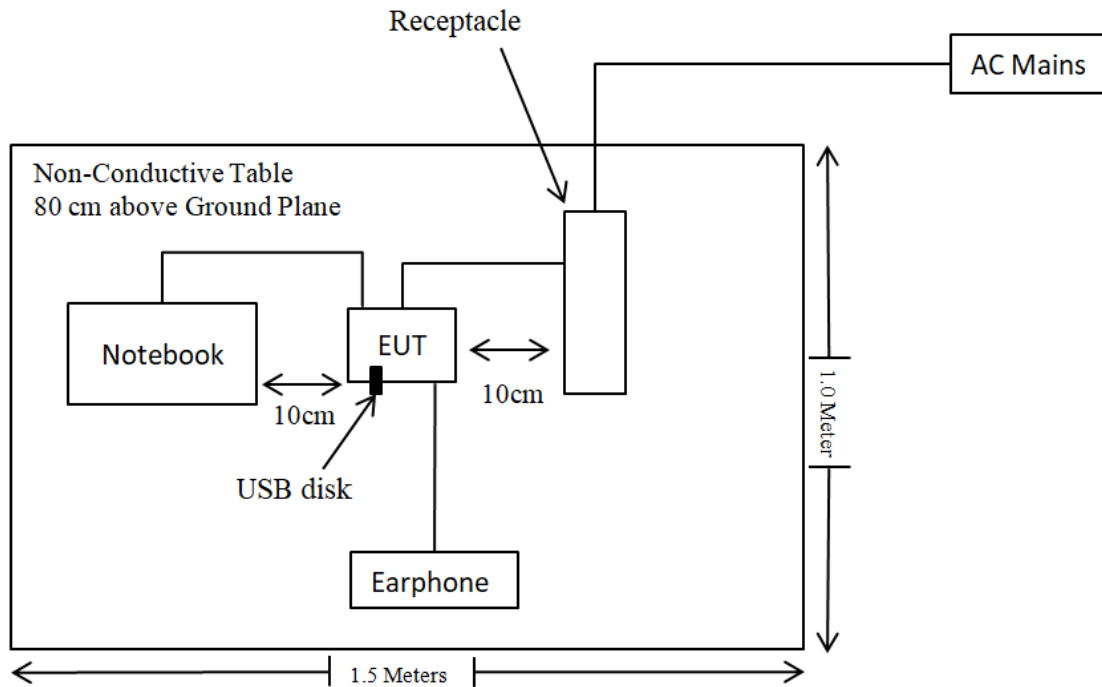

For Radiated Emissions above 1GHz:

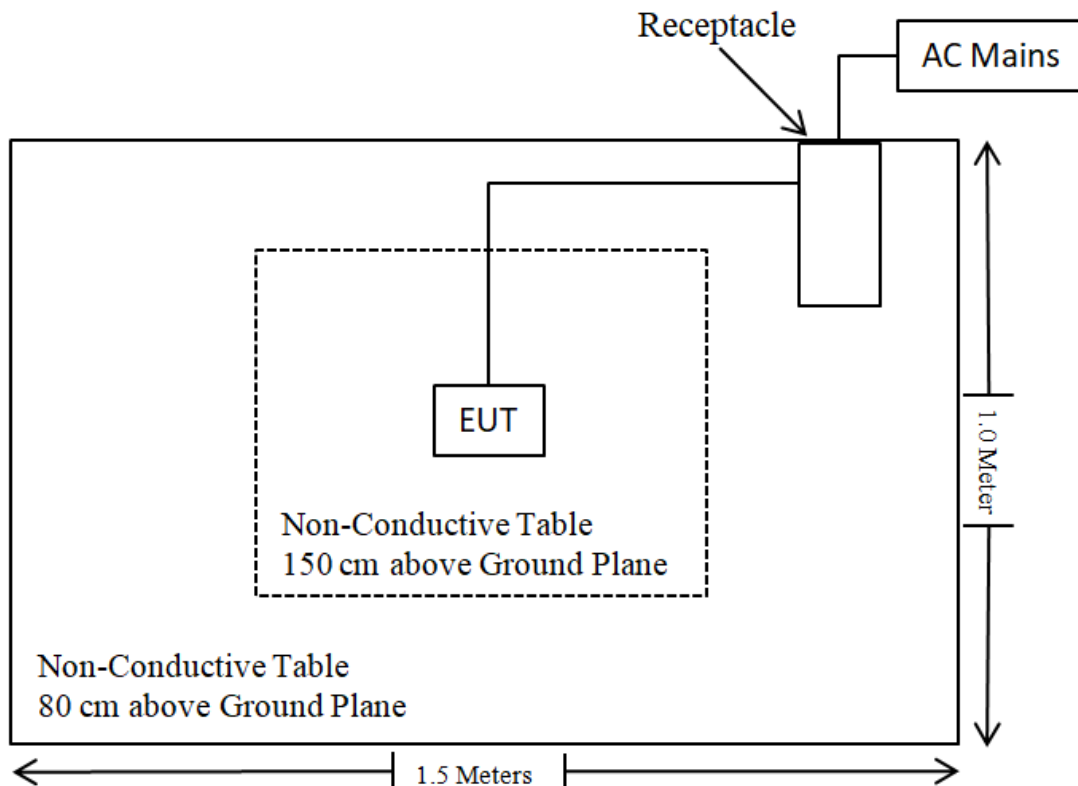

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.203	Antenna Requirement	Compliant
FCC §15.207(a)	AC Line Conducted Emissions	Compliant
FCC §15.205, §15.209, §15.407(b)	Undesirable Emission& Restricted Bands	Compliant
FCC§15.407(a) (e)	Emission Bandwidth	Compliant
FCC§15.407 (a)	Maximum Conducted Output Power	Compliant
FCC§15.407 (a)	Power Spectral Density	Compliant
C63.10 §11.6	Duty Cycle	/
§15.407 (h)	Transmit Power Control (TPC)	Not Applicable
§15.407 (h)	Dynamic Frequency Selection (DFS)	Compliant*
FCC §1.1307 (b) (3) & §2.1091	MPE-Based Exemption	Compliant

Compliant*: Please refer to the DFS report 2401A25033E-RF-00E.

Not Applicable: For 5250-5350MHz/5470-5725MHz, the maximum EIRP is 19.70dBm<27dBm (500mW).

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/12/04	2025/12/03
Rohde & Schwarz	LISN	ENV216	101613	2024/12/04	2025/12/03
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2024/05/21	2025/05/20
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2024/05/21	2025/05/20
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/12/04	2025/12/03
Sonoma instrument	Pre-amplifier	310N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	XH500C	J-10M-A	2024/06/18	2025/06/17
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Cable	2Y194	0735	2024/12/04	2025/12/03
Unknown	Cable	PNG214	1354	2024/12/04	2025/12/03
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde&Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
A.H.System	Preamplifier	PAM-0118P	489	2024/11/15	2025/11/14
Schwarzbeck	Horn Antenna	BBHA9120D (1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	0735	2024/12/06	2025/12/05
Unknown	RF Cable	UFA147	219661	2024/12/06	2025/12/05
Unknown	RF Cable	XH750A-N	J-10M	2024/12/06	2025/12/05
JD	Multiplex Switch Test Control Set	DT7220FSU	DQ77926	2024/06/18	2025/06/17
JD	Multiplex Switch Test Control Set	DT7220SCU	DS79903	2024/09/09	2025/09/08
A.H.System	Pre-amplifier	PAM-1840VH	190	2024/06/18	2025/06/17
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2024/12/18	2025/12/17
Audix	EMI Test software	E3	191218(V9)	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSV40-N	102259	2024/12/04	2025/12/03
Unknown	10dB Attenuator	Unknown	F-03-EM190	2024/06/27	2025/06/26
ANRITSU	Microwave peak power sensor	MA24418A	12622	2024/05/21	2025/05/20

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).


REQUIREMENTS AND TEST PROCEDURES

Conducted Emissions

Applicable Standard

FCC §15.207

EUT Setup

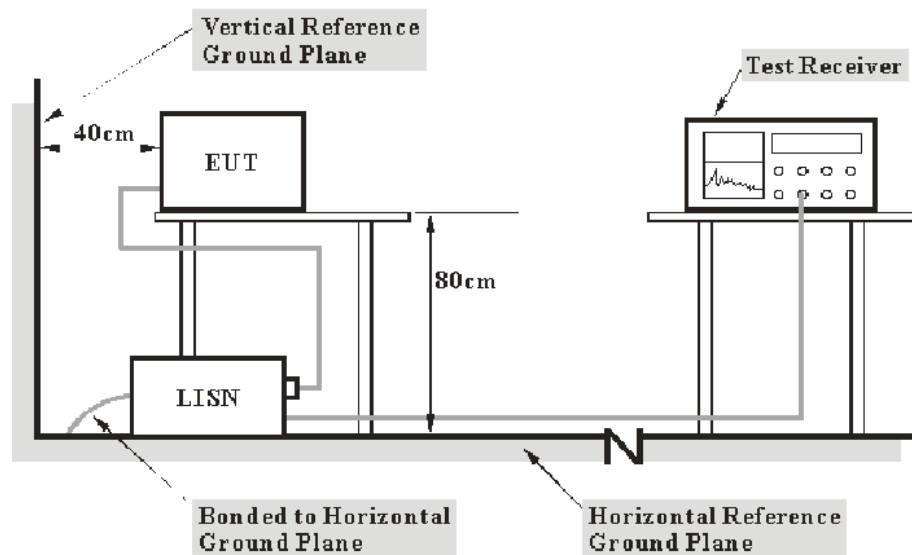

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and Average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Undesirable Emission

Applicable Standard

FCC §15.407 (b); §15.209; §15.205;


(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:



- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

EUT Setup

9 kHz-30MHz:

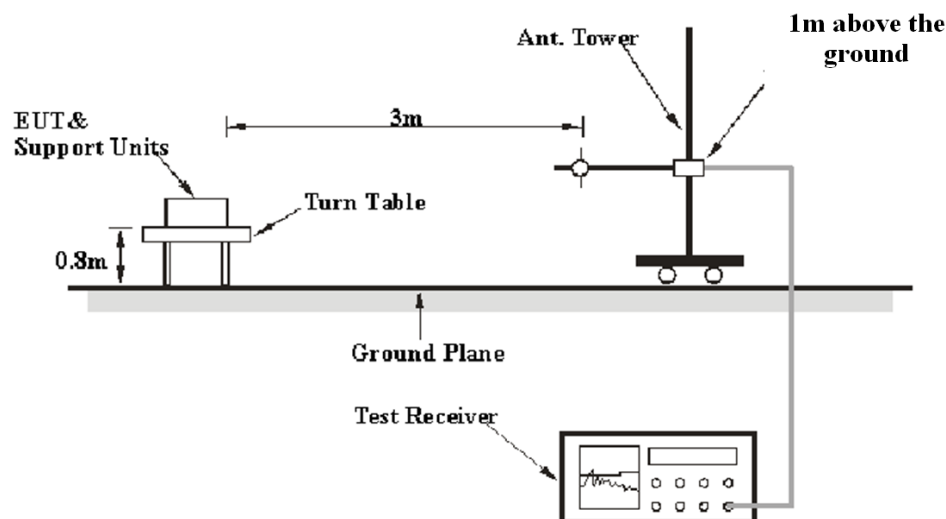

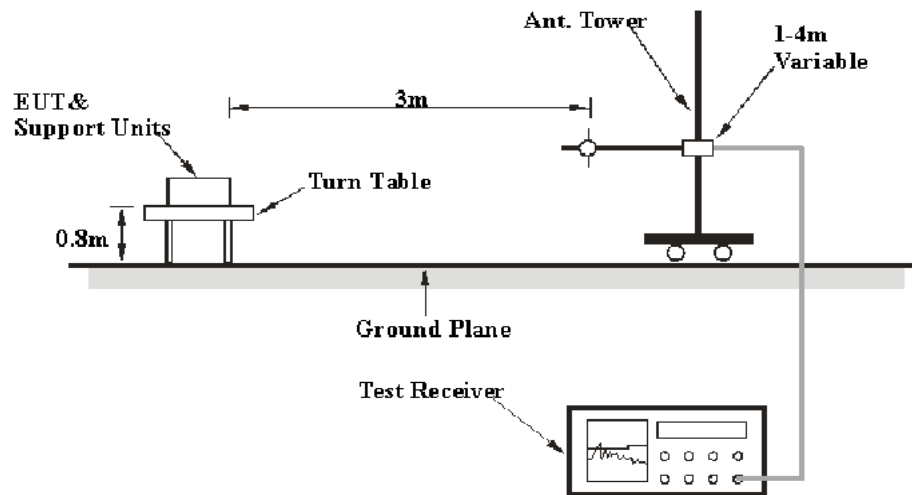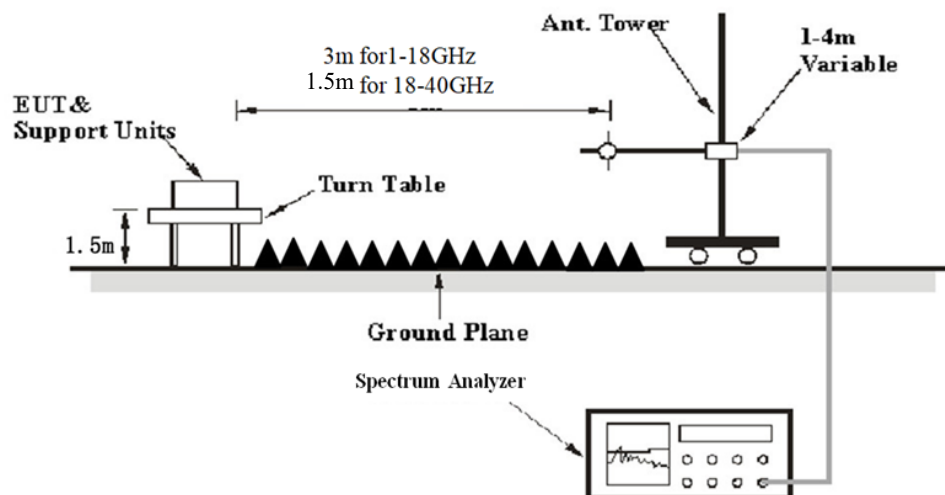30MHz-1GHz:**Above 1 GHz:**

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement	Detector
9 kHz – 150 kHz	/	/	200 Hz	QP	QP
	300 Hz	1 kHz	/	PK	Peak
150 kHz – 30 MHz	/	/	9 kHz	QP	QP
	10 kHz	30 kHz	/	PK	Peak
30 MHz – 1000 MHz	/	/	120 kHz	QP	QP
	100 kHz	300 kHz	/	PK	Peak

1-40GHz:

Pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	1 kHz	Peak
	<98%	1MHz	≥1/Ton	Peak

Final measurement for emission identified during pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	10 Hz	Peak
	<98%	1MHz	≥1/Ton	Peak

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Radiated Spurious Emission

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

According to ANSI C63.10-2013,9.4: For field strength measurements made at other than the distance at which the applicable limit is specified, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance). In some cases, a different distance correction factor may be required;

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \log \left(\frac{d_{\text{Meas}}}{d_{\text{SpecLimit}}} \right)$$

where

$E_{\text{SpecLimit}}$	is the field strength of the emission at the distance specified by the limit, in dB μ V/m
E_{Meas}	is the field strength of the emission at the measurement distance, in dB μ V/m
d_{Meas}	is the measurement distance, in m
$d_{\text{SpecLimit}}$	is the distance specified by the limit, in m

So the extrapolation factor of 1m is $20 \cdot \log(1/3) = -6.0$ dB, for 18-40GHz range, the limit of 1.5m distance was added by 6.0dB from limit of 3m to compared with the result measurement at 1.5m distance.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit} &= \text{Level} - \text{Limit}; \text{Margin} = \text{Limit} - \text{Corrected Amplitude} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

26 dB & 6dB Emission Bandwidth

Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

According to KDB789033 D02 section II.C and section II.D

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


3. 99% Occupied Bandwidth:

According to ANSI C63.10-2013 Section 12.4.2&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.

- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW/RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

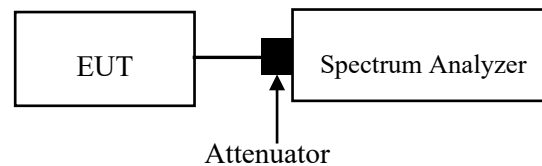

Conducted Transmitter Output Power

Applicable Standard

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method PM-G should be applied

- a. Place the EUT on a bench and set it in transmitting mode.
- b. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.

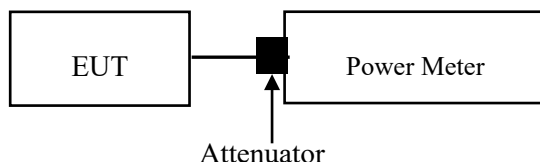

Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was added with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss

Power Spectral Density

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Duty cycle $\geq 98\%$


KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 should be applied.

Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 should be applied.

Duty cycle $< 98\%$, duty cycle variations exceed $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-3 should be applied.

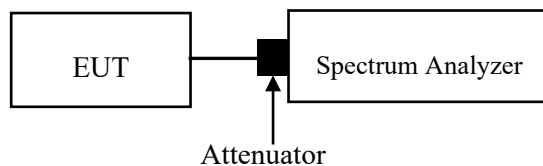

Note: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was added with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss


Duty Cycle

Test Procedure

According to ANSI C63.10-2013 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

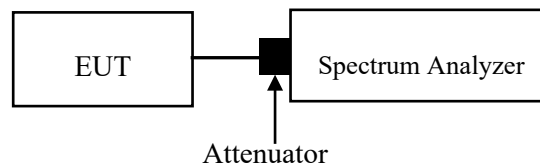

ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Antenna Connector Construction

The EUT has an internal antenna arrangement, which was permanently attached, the antenna gain[#] is 4.19dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant

TEST DATA AND RESULTS

Conducted Emissions

Temperature (°C)	23.5	Relative Humidity (%)	44
ATM Pressure (kPa)	101	Test engineer	Macy shi
Test date	2025/2/12		
EUT operation mode	Transmitting (Maximum output power mode, 802.11a 5500MHz)		

AC 120V 60 Hz, Line

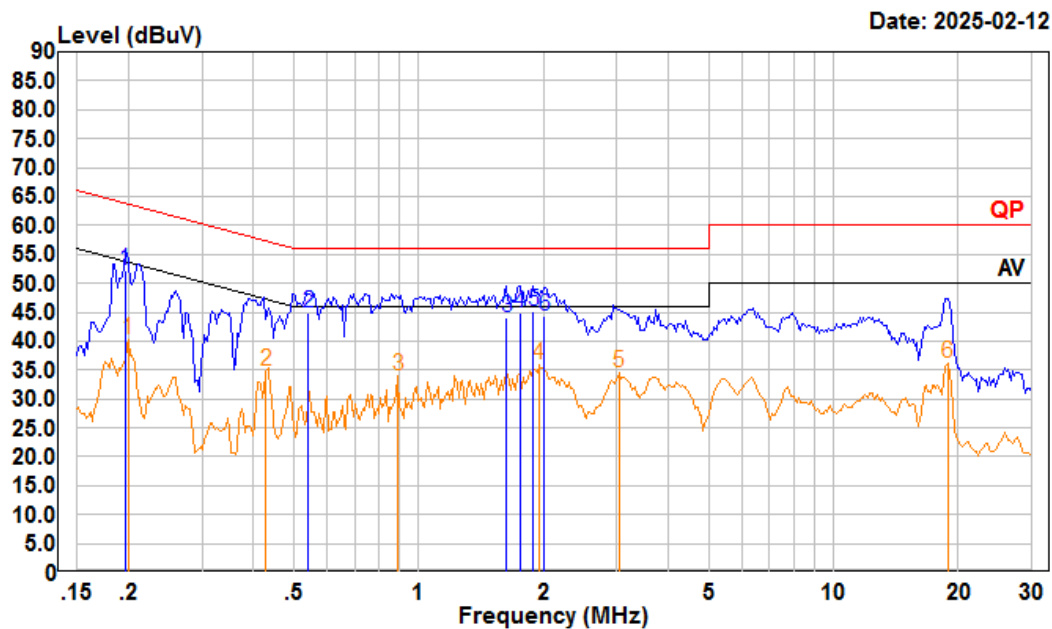

Trace: 1

Condition: Line


Project : 2401A25033E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.195	32.11	52.12	9.92	10.09	63.80	-11.68	QP
2	0.541	24.20	44.88	10.55	10.13	56.00	-11.12	QP
3	1.628	23.50	44.06	10.39	10.17	56.00	-11.94	QP
4	1.753	24.29	44.83	10.36	10.18	56.00	-11.17	QP
5	1.888	24.61	45.11	10.32	10.18	56.00	-10.89	QP
6	2.012	23.90	44.39	10.30	10.19	56.00	-11.61	QP
	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.200	20.25	40.24	9.90	10.09	53.62	-13.38	Average
2	0.428	14.25	34.76	10.40	10.11	47.29	-12.53	Average
3	0.890	13.26	33.99	10.63	10.10	46.00	-12.01	Average
4	1.949	15.51	36.01	10.31	10.19	46.00	-9.99	Average
5	3.041	14.35	34.65	10.12	10.18	46.00	-11.35	Average
6	18.820	15.65	36.19	10.36	10.18	50.00	-13.81	Average

AC 120V 60 Hz, Neutral

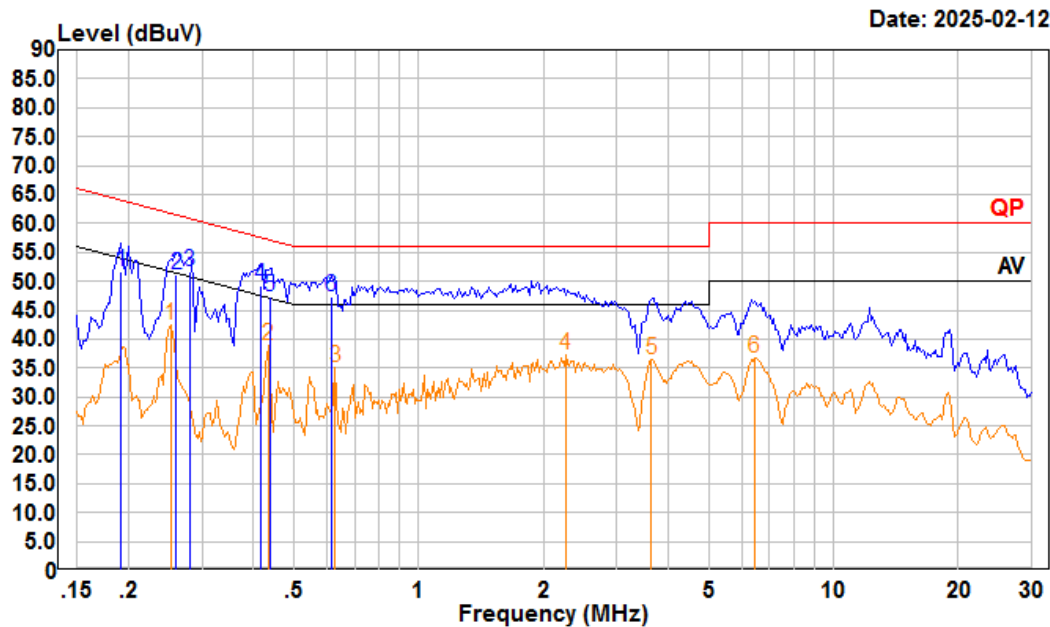

Condition: Neutral

Project : 2401A25033E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz


	Freq	Read Level	LISN Level	Cable Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.191	31.40	51.62	10.13	10.09	63.98	-12.36	QP
2	0.260	30.80	51.13	10.24	10.09	61.42	-10.29	QP
3	0.280	31.20	51.58	10.28	10.10	60.81	-9.23	QP
4	0.415	28.69	49.30	10.50	10.11	57.55	-8.25	QP
5	0.437	26.80	47.44	10.53	10.11	57.11	-9.67	QP
6	0.614	26.70	47.36	10.54	10.12	56.00	-8.64	QP
	Freq	Read Level	LISN Level	Cable Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.252	22.17	42.48	10.23	10.08	51.69	-9.21	Average
2	0.433	18.25	38.88	10.52	10.11	47.20	-8.32	Average
3	0.627	14.43	35.09	10.53	10.13	46.00	-10.91	Average
4	2.261	16.73	37.17	10.26	10.18	46.00	-8.83	Average
5	3.642	16.03	36.36	10.13	10.20	46.00	-9.64	Average
6	6.454	16.02	36.74	10.53	10.19	50.00	-13.26	Average

Undesirable Emission

Temperature (°C)	22.1-24.3	Relative Humidity (%)	35-50
ATM Pressure (kPa):	101	Test engineer:	Anson Su&Zenos Qiao
Test date:	2025/02/17-2025/02/21		
EUT operation mode:	Below 1GHz: Transmitting(Maximum output power mode, 802.11a 5500MHz) Above 1GHz: Transmitting		
Note:	1. For the radiated spurious emission below 30MHz, only the worst case (parallel) was recorded. 2. When the test result of peak was less than the limit of QP/Average more than 6dB, just peak value were recorded.		

Below 1GHz:


9kHz-150kHz

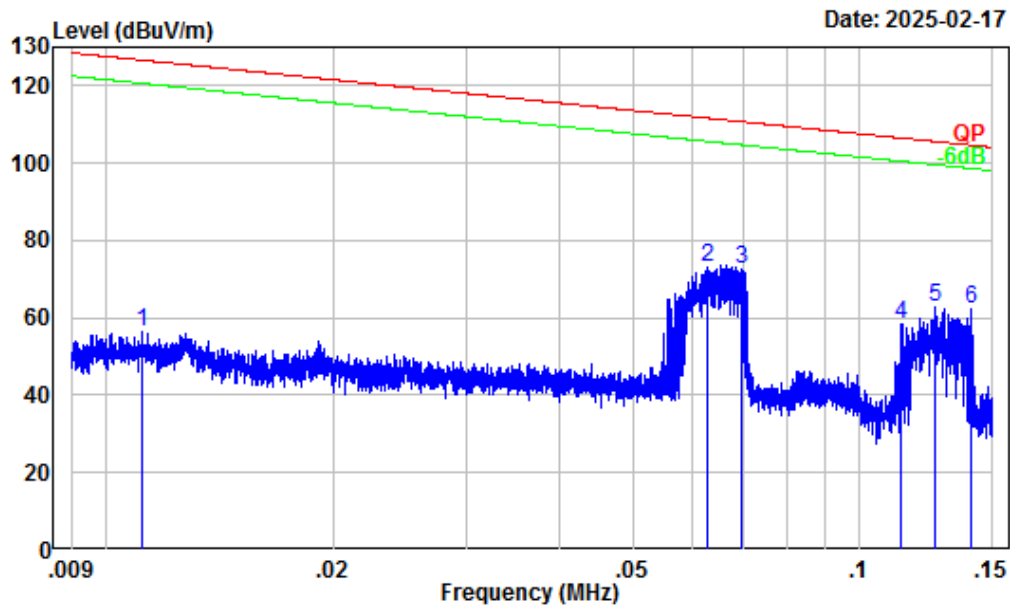

Site : Chamber A
Condition : 3m
Project Number : 2501Q43366E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	32.08	24.38	56.46	126.65	-70.19	Peak
2	0.06	25.12	47.81	72.93	111.64	-38.71	Peak
3	0.07	24.45	48.23	72.68	110.76	-38.08	Peak
4	0.11	21.19	37.21	58.40	106.49	-48.09	Peak
5	0.13	20.49	42.15	62.64	105.62	-42.98	Peak
6	0.14	19.59	42.96	62.55	104.63	-42.08	Peak


150kHz-30MHz

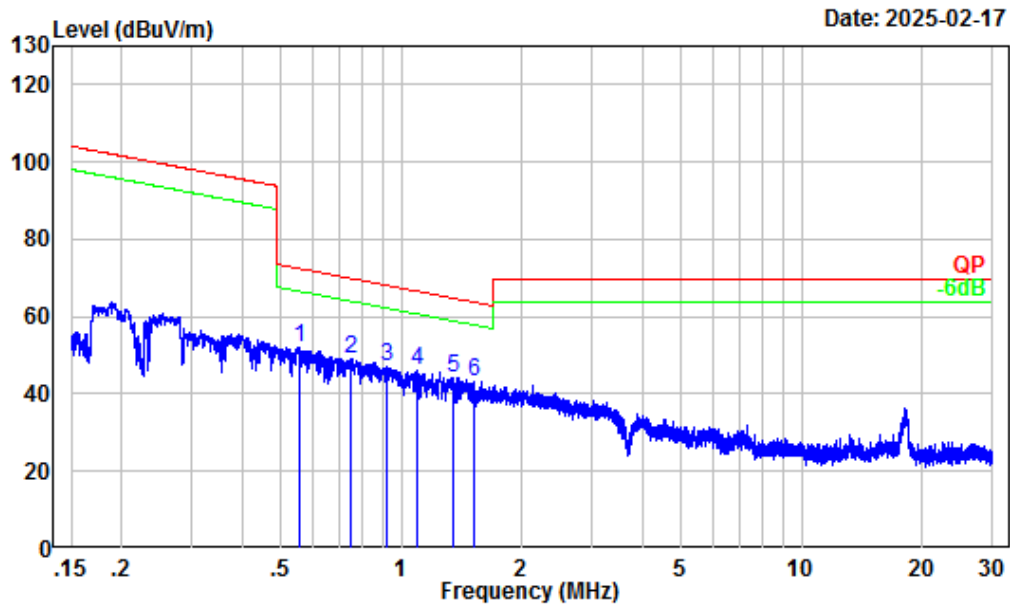

Site : Chamber A
Condition : 3m
Project Number : 2501Q43366E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.56	5.71	46.50	52.21	72.68	-20.47	Peak
2	0.75	3.36	45.64	49.00	70.07	-21.07	Peak
3	0.92	1.77	45.11	46.88	68.17	-21.29	Peak
4	1.09	0.94	45.39	46.33	66.69	-20.36	Peak
5	1.35	0.22	44.16	44.38	64.81	-20.43	Peak
6	1.52	-0.25	43.39	43.14	63.76	-20.62	Peak


30MHz-1GHz_Horizontal

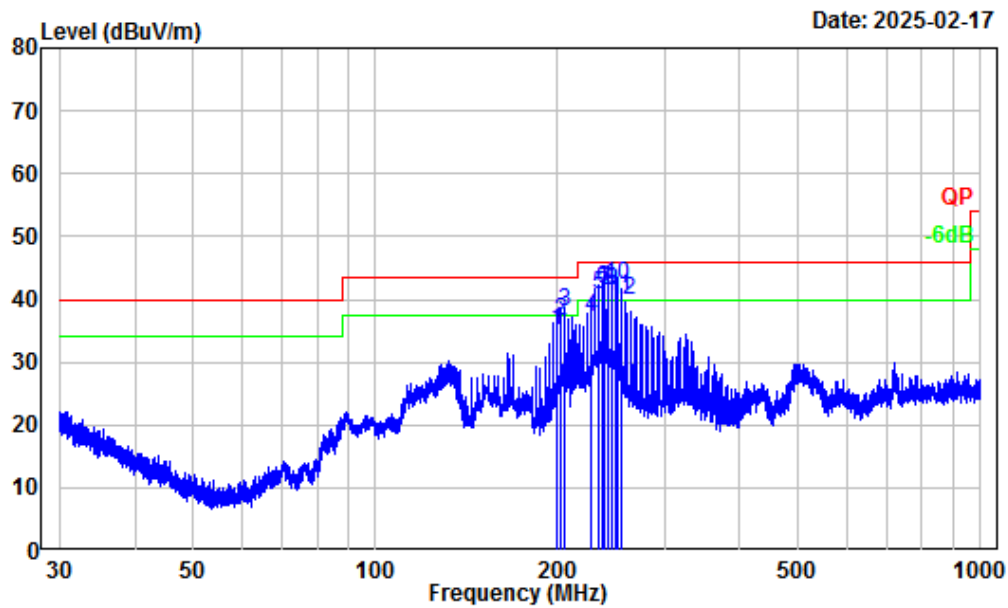

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2501Q43366E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	199.72	-13.08	48.02	34.94	43.50	-8.56	QP
2	202.81	-13.27	49.89	36.62	43.50	-6.88	QP
3	205.86	-13.54	51.50	37.96	43.50	-5.54	QP
4	227.29	-13.98	51.00	37.02	46.00	-8.98	QP
5	233.45	-13.64	54.50	40.86	46.00	-5.14	QP
6	236.54	-13.48	55.13	41.65	46.00	-4.35	QP
7	239.67	-13.33	54.59	41.26	46.00	-4.74	QP
8	242.74	-13.26	54.60	41.34	46.00	-4.66	QP
9	245.74	-13.20	54.41	41.21	46.00	-4.79	QP
10	248.88	-13.11	55.39	42.28	46.00	-3.72	QP
11	251.95	-13.08	53.59	40.51	46.00	-5.49	QP
12	254.95	-13.08	52.90	39.82	46.00	-6.18	QP

30MHz-1GHz_Vertical

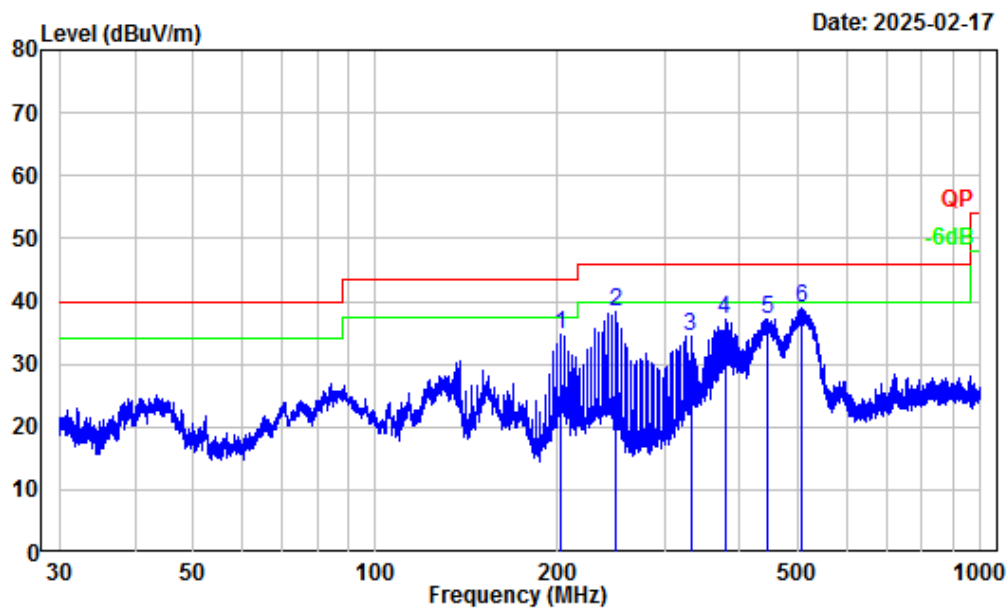

Site : Chamber A
Condition : 3m Vertical
Project Number : 2501Q43366E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	202.72	-13.27	47.98	34.71	43.50	-8.79	Peak
2	248.88	-13.11	51.33	38.22	46.00	-7.78	Peak
3	331.79	-10.61	45.08	34.47	46.00	-11.53	Peak
4	377.92	-9.20	46.48	37.28	46.00	-8.72	Peak
5	444.66	-7.52	44.67	37.15	46.00	-8.85	Peak
6	506.48	-5.76	44.58	38.82	46.00	-7.18	Peak

Above 1GHz:**5150-5250 MHz**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11a							
Low Channel							
10360	60.45	PK	H	2.53	62.98	68.2	-5.22
10360	61.97	PK	V	2.53	64.50	68.2	-3.70
Middle Channel							
10400	60.13	PK	H	2.55	62.68	68.2	-5.52
10400	61.64	PK	V	2.55	64.19	68.2	-4.01
High Channel							
10480	59.78	PK	H	2.25	62.03	68.2	-6.17
10480	61.32	PK	V	2.25	63.57	68.2	-4.63
802.11n20							
Low Channel							
10360	60.17	PK	H	2.53	62.70	68.2	-5.50
10360	61.70	PK	V	2.53	64.23	68.2	-3.97
Middle Channel							
10400	59.78	PK	H	2.55	62.33	68.2	-5.87
10400	61.35	PK	V	2.55	63.90	68.2	-4.30
High Channel							
10480	59.46	PK	H	2.25	61.71	68.2	-6.49
10480	60.99	PK	V	2.25	63.24	68.2	-4.96
802.11n40							
Low Channel							
10380	58.21	PK	H	2.54	60.75	68.2	-7.45
10380	59.68	PK	V	2.54	62.22	68.2	-5.98
High Channel							
10460	57.45	PK	H	2.32	59.77	68.2	-8.43
10460	58.97	PK	V	2.32	61.29	68.2	-6.91

5250-5350MHz

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a							
Low Channel							
10520	60.88	PK	H	2.18	63.06	68.2	-5.14
10520	62.35	PK	V	2.18	64.53	68.2	-3.67
Middle Channel							
10560	59.69	PK	H	2.18	61.87	68.2	-6.33
10560	61.24	PK	V	2.18	63.42	68.2	-4.78
High Channel							
10640	58.74	PK	H	2.59	61.33	74	-12.67
10640	44.50	AV	H	2.59	47.09	54	-6.91
10640	60.27	PK	V	2.59	62.86	74	-11.14
10640	45.32	AV	V	2.59	47.91	54	-6.09
802.11n20							
Low Channel							
10520	60.05	PK	H	2.18	62.23	68.2	-5.97
10520	61.59	PK	V	2.18	63.77	68.2	-4.43
Middle Channel							
10560	58.86	PK	H	2.18	61.04	68.2	-7.16
10560	60.37	PK	V	2.18	62.55	68.2	-5.65
High Channel							
10640	57.92	PK	H	2.59	60.51	74	-13.49
10640	44.35	AV	H	2.59	46.94	54	-7.06
10640	59.48	PK	V	2.59	62.07	74	-11.93
10640	45.16	AV	V	2.59	47.75	54	-6.25
802.11n40							
Low Channel							
10540	57.93	PK	H	2.18	60.11	68.2	-8.09
10540	59.44	PK	V	2.18	61.62	68.2	-6.58
High Channel							
10620	55.87	PK	H	2.37	58.24	74	-15.76
10620	43.35	AV	H	2.37	45.72	54	-8.28
10620	57.51	PK	V	2.37	59.88	74	-14.12
10620	44.18	AV	V	2.37	46.55	54	-7.45

5470-5725MHz

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a							
Low Channel							
11000	52.56	PK	H	4.29	56.85	74	-17.15
11000	37.94	AV	H	4.29	42.23	54	-11.77
11000	53.81	PK	V	4.29	58.10	74	-15.90
11000	38.47	AV	V	4.29	42.76	54	-11.24
Middle Channel							
11160	53.35	PK	H	3.50	56.85	74	-17.15
11160	38.61	AV	H	3.50	42.11	54	-11.89
11160	54.58	PK	V	3.50	58.08	74	-15.92
11160	39.14	AV	V	3.50	42.64	54	-11.36
High Channel							
11400	54.17	PK	H	3.32	57.49	74	-16.51
11400	39.42	AV	H	3.32	42.74	54	-11.26
11400	55.39	PK	V	3.32	58.71	74	-15.29
11400	39.98	AV	V	3.32	43.30	54	-10.70
Cross Channel							
11440	53.60	PK	H	3.42	57.02	74	-16.98
11440	38.74	AV	H	3.42	42.16	54	-11.84
11440	54.83	PK	V	3.42	58.25	74	-15.75
11440	39.37	AV	V	3.42	42.79	54	-11.21
802.11n20							
Low Channel							
11000	52.43	PK	H	4.29	56.72	74	-17.28
11000	37.78	AV	H	4.29	42.07	54	-11.93
11000	53.65	PK	V	4.29	57.94	74	-16.06
11000	38.31	AV	V	4.29	42.60	54	-11.40
Middle Channel							
11160	53.21	PK	H	3.50	56.71	74	-17.29
11160	38.46	AV	H	3.50	41.96	54	-12.04
11160	54.45	PK	V	3.50	57.95	74	-16.05
11160	38.99	AV	V	3.50	42.49	54	-11.51

Frequency (MHz)	Reading (dB μ V)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
High Channel							
11400	53.96	PK	H	3.32	57.28	74	-16.72
11400	39.29	AV	H	3.32	42.61	54	-11.39
11400	55.18	PK	V	3.32	58.50	74	-15.50
11400	39.82	AV	V	3.32	43.14	54	-10.86
Cross Channel							
11440	53.48	PK	H	3.42	56.90	74	-17.10
11440	38.60	AV	H	3.42	42.02	54	-11.98
11440	54.73	PK	V	3.42	58.15	74	-15.85
11440	39.12	AV	V	3.42	42.54	54	-11.46
802.11n40							
Low Channel							
11020	52.36	PK	H	4.10	56.46	74	-17.54
11020	38.71	AV	H	4.10	42.81	54	-11.19
11020	53.57	PK	V	4.10	57.67	74	-16.33
11020	39.25	AV	V	4.10	43.35	54	-10.65
Middle Channel							
11100	53.10	PK	H	3.34	56.44	74	-17.56
11100	39.44	AV	H	3.34	42.78	54	-11.22
11100	54.35	PK	V	3.34	57.69	74	-16.31
11100	39.97	AV	V	3.34	43.31	54	-10.69
High Channel							
11340	53.86	PK	H	3.46	57.32	74	-16.68
11340	40.12	AV	H	3.46	43.58	54	-10.42
11340	55.09	PK	V	3.46	58.55	74	-15.45
11340	40.64	AV	V	3.46	44.10	54	-9.90
Cross Channel							
11420	53.34	PK	H	3.37	56.71	74	-17.29
11420	39.67	AV	H	3.37	43.04	54	-10.96
11420	54.58	PK	V	3.37	57.95	74	-16.05
11420	40.21	AV	V	3.37	43.58	54	-10.42

5725-5850MHz

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11a							
Low Channel							
11490	52.38	PK	H	3.54	55.92	74	-18.08
11490	37.89	AV	H	3.54	41.43	54	-12.57
11490	53.63	PK	V	3.54	57.17	74	-16.83
11490	38.41	AV	V	3.54	41.95	54	-12.05
Middle Channel							
11570	53.01	PK	H	3.30	56.31	74	-17.69
11570	38.45	AV	H	3.30	41.75	54	-12.25
11570	54.19	PK	V	3.30	57.49	74	-16.51
11570	38.96	AV	V	3.30	42.26	54	-11.74
High Channel							
11650	53.69	PK	H	3.42	57.11	74	-16.89
11650	39.07	AV	H	3.42	42.49	54	-11.51
11650	54.85	PK	V	3.42	58.27	74	-15.73
11650	39.62	AV	V	3.42	43.04	54	-10.96
802.11n20							
Low Channel							
11490	52.19	PK	H	3.54	55.73	74	-18.27
11490	37.73	AV	H	3.54	41.27	54	-12.73
11490	53.40	PK	V	3.54	56.94	74	-17.06
11490	38.27	AV	V	3.54	41.81	54	-12.19
Middle Channel							
11570	52.84	PK	H	3.30	56.14	74	-17.86
11570	38.26	AV	H	3.30	41.56	54	-12.44
11570	54.03	PK	V	3.30	57.33	74	-16.67
11570	38.79	AV	V	3.30	42.09	54	-11.91
High Channel							
11650	53.46	PK	H	3.42	56.88	74	-17.12
11650	39.04	AV	H	3.42	42.46	54	-11.54
11650	54.68	PK	V	3.42	58.10	74	-15.90
11650	39.55	AV	V	3.42	42.97	54	-11.03

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave					
802.11n40							
Low Channel							
11510	51.64	PK	H	3.53	55.17	74	-18.83
11510	38.47	AV	H	3.53	42.00	54	-12.00
11510	52.82	PK	V	3.53	56.35	74	-17.65
11510	38.96	AV	V	3.53	42.49	54	-11.51
High Channel							
11590	52.86	PK	H	3.21	56.07	74	-17.93
11590	39.13	AV	H	3.21	42.34	54	-11.66
11590	54.04	PK	V	3.21	57.25	74	-16.75
11590	39.65	AV	V	3.21	42.86	54	-11.14

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Factor + Reading

Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

Test plots:**5150-5250 MHz:**


Left Band edge_Horizontal_Peak_802.11a

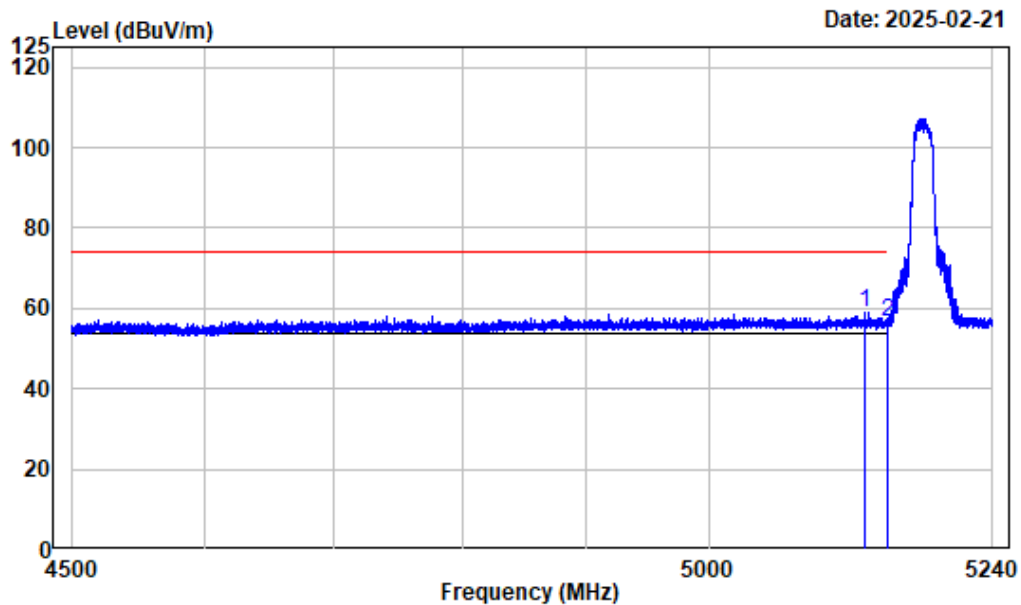

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5130.836	-7.47	66.48	59.01	74.00	-14.99 Peak
2	5150.000	-7.46	63.85	56.39	74.00	-17.61 Peak


Left Band edge_Horizontal_Average_802.11a

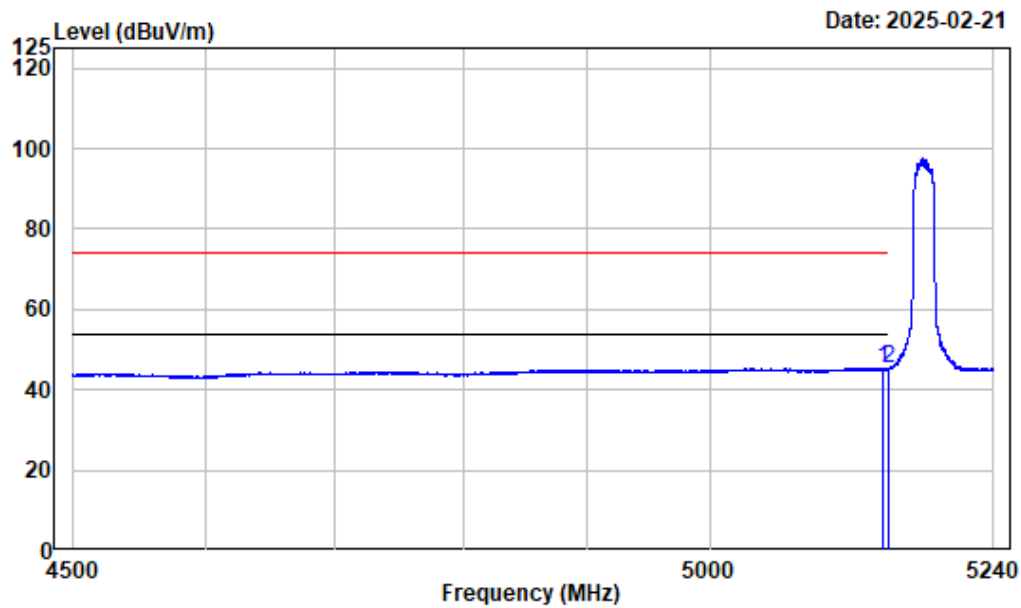

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1	5145.546	-7.46	52.83	45.37	54.00	-8.63 Average
2	5150.000	-7.46	52.53	45.07	54.00	-8.93 Average


Left Band edge_Vertical_Peak_802.11a

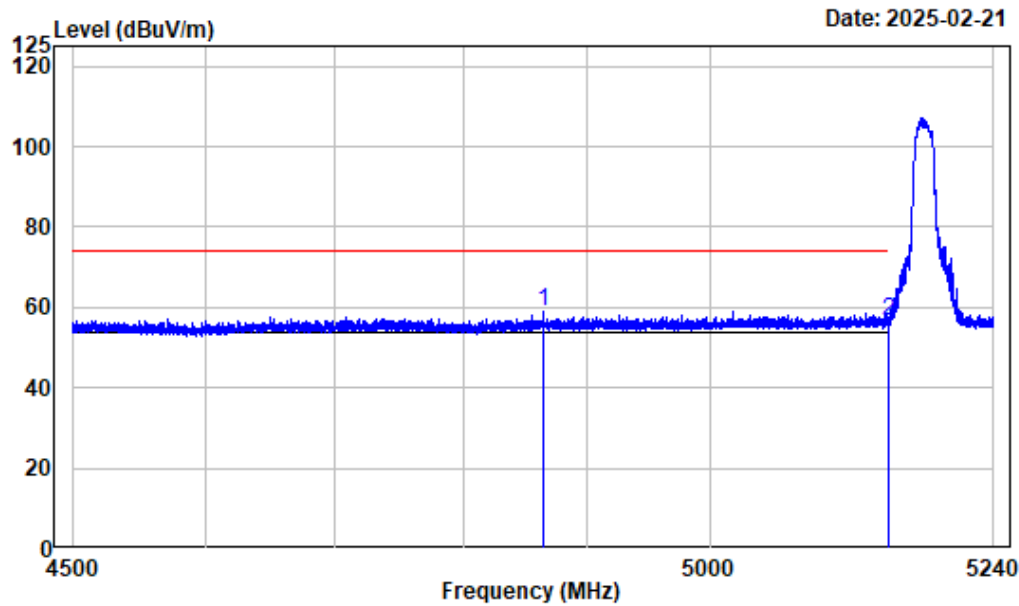

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4864.496	-7.65	66.84	59.19	74.00	-14.81	Peak
2 5150.000	-7.46	64.11	56.65	74.00	-17.35	Peak


Left Band edge_Vertical_Average_802.11a

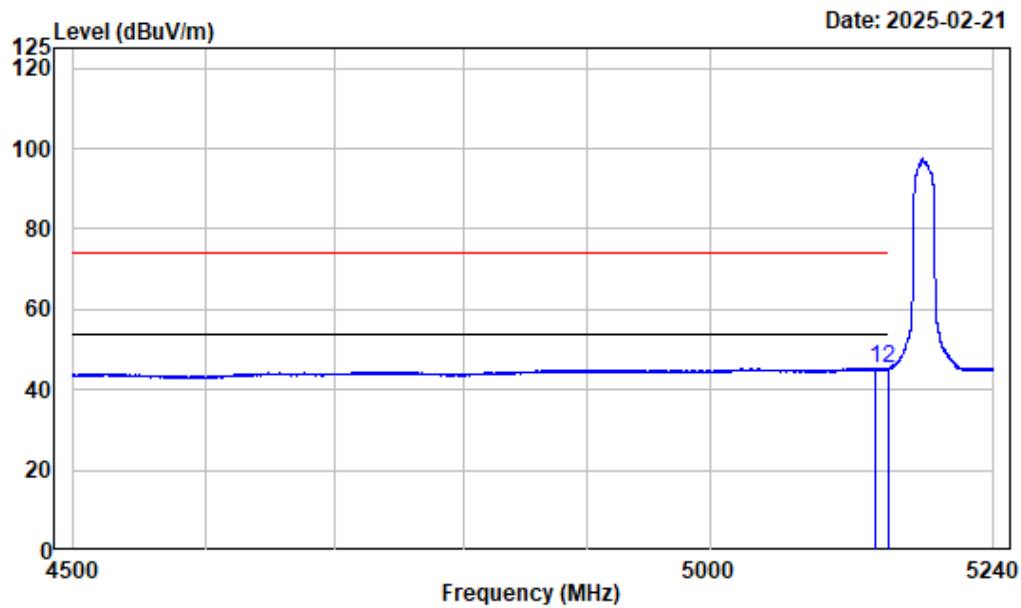

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1	5139.255	-7.47	52.88	45.41	54.00	-8.59 Average
2	5150.000	-7.46	52.64	45.18	54.00	-8.82 Average


Right Band edge_Horizontal_Peak_802.11a

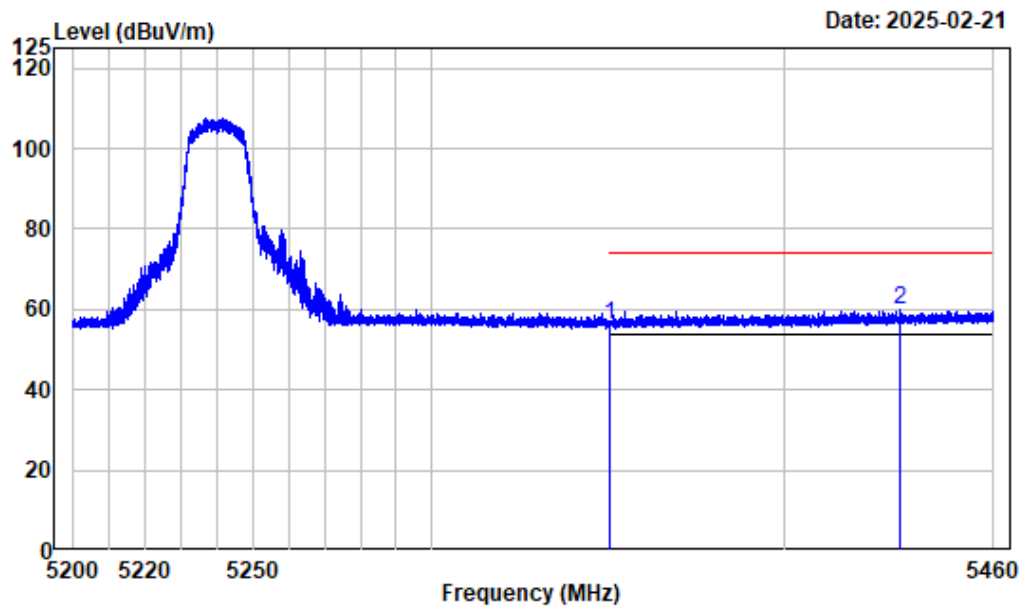

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	63.02	56.28	74.00	-17.72 Peak
2	5433.217	-6.41	66.19	59.78	74.00	-14.22 Peak


Right Band edge_Horizontal_Average_802.11a

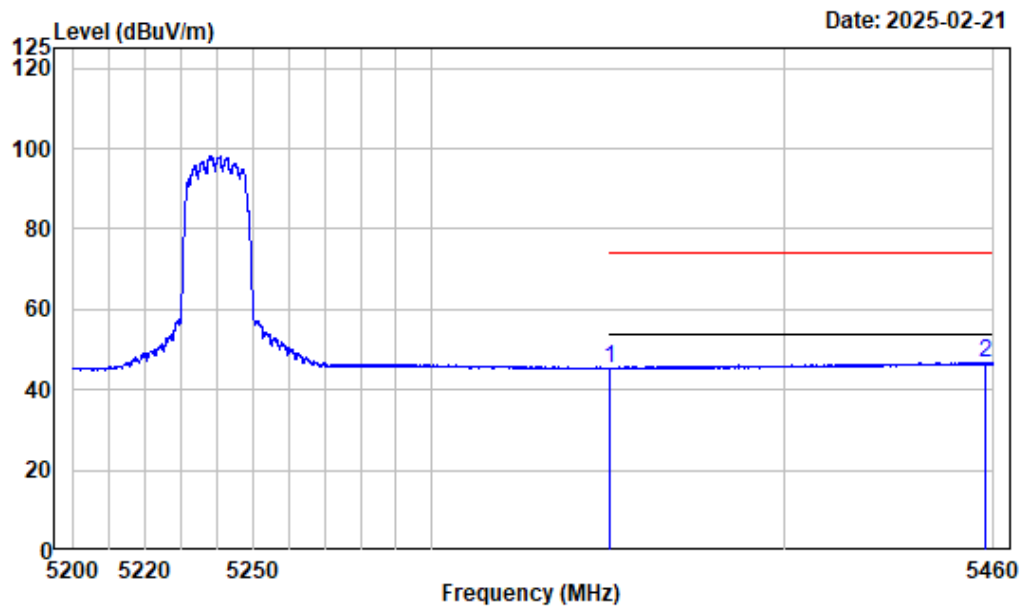

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5350.000	-6.74	52.20	45.46	54.00	-8.54 Average
2 5457.692	-6.30	53.16	46.86	54.00	-7.14 Average


Right Band edge_Vertical_Peak_802.11a

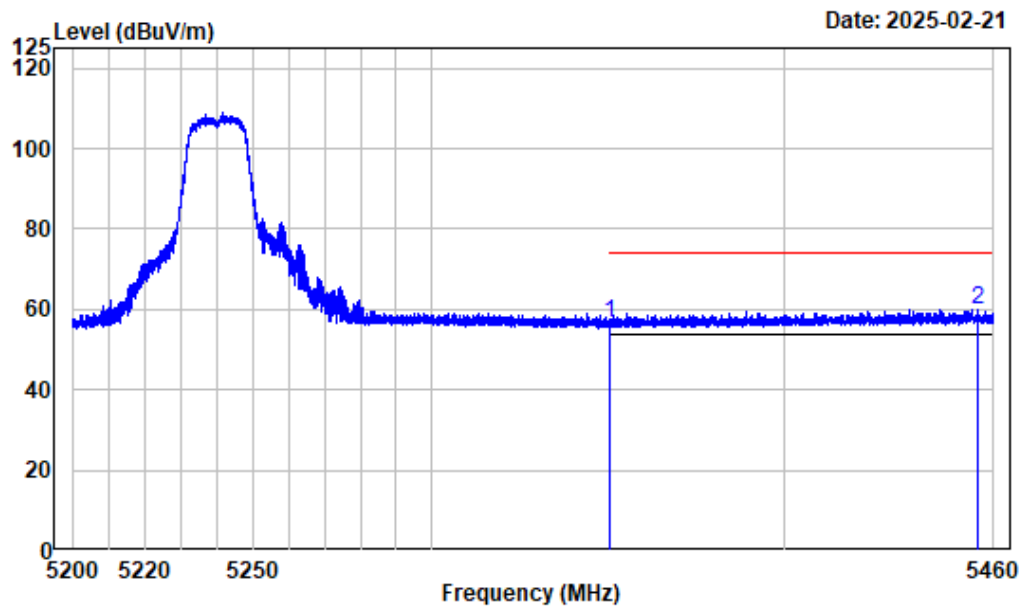

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	63.54	56.80	74.00	-17.20 Peak
2	5455.645	-6.31	66.41	60.10	74.00	-13.90 Peak


Right Band edge_Vertical_Average_802.11a

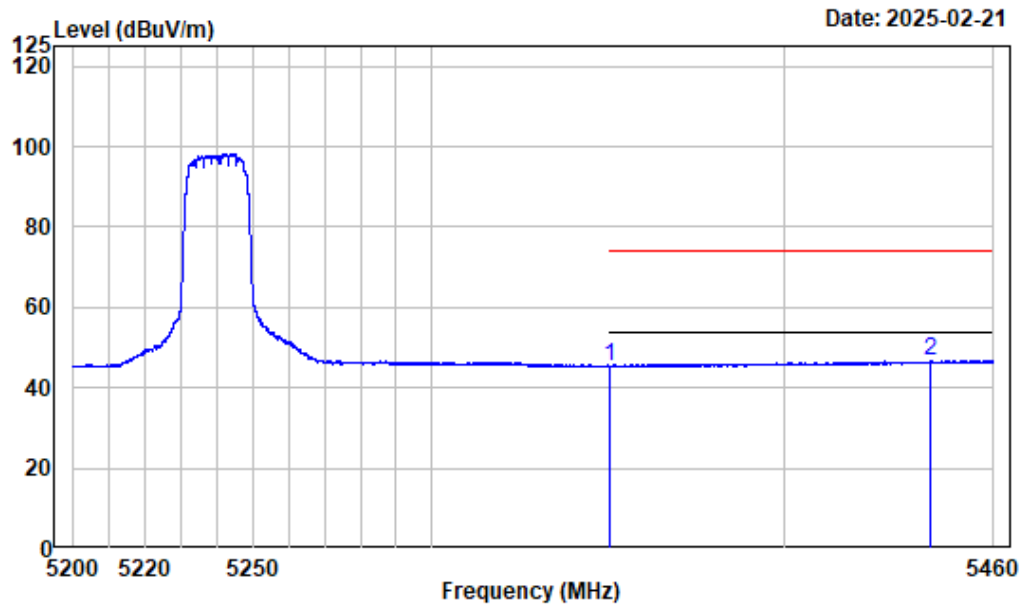

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.74	52.00	45.26	54.00	-8.74 Average
2	5441.700	-6.38	53.10	46.72	54.00	-7.28 Average


Left Band edge_Horizontal_Peak_802.11n-HT20

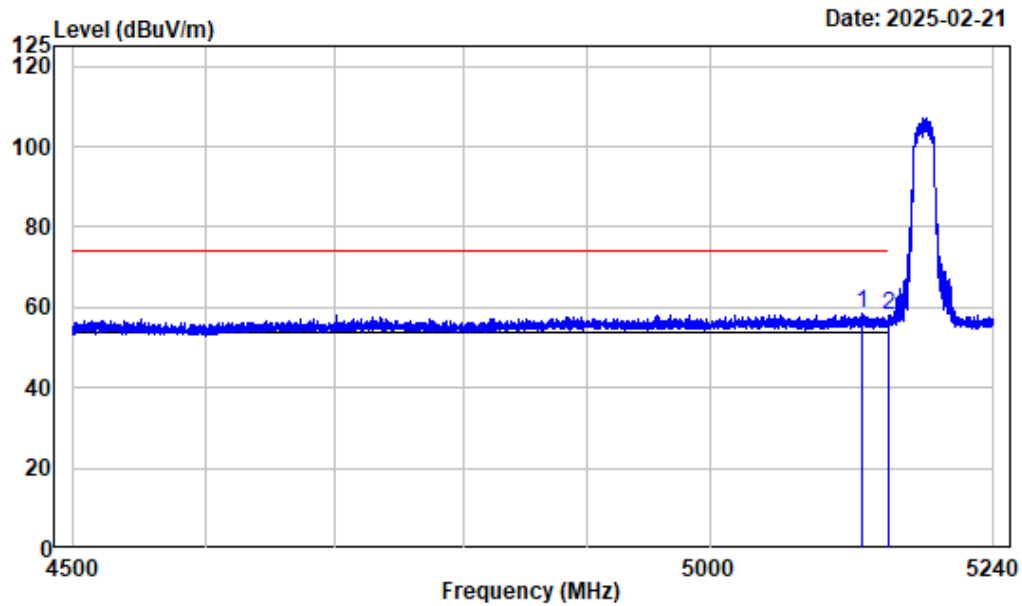

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N20-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5126.673	-7.47	66.14	58.67	74.00	-15.33	Peak
2 5150.000	-7.46	65.41	57.95	74.00	-16.05	Peak


Left Band edge_Horizontal_Average_802.11n-HT20

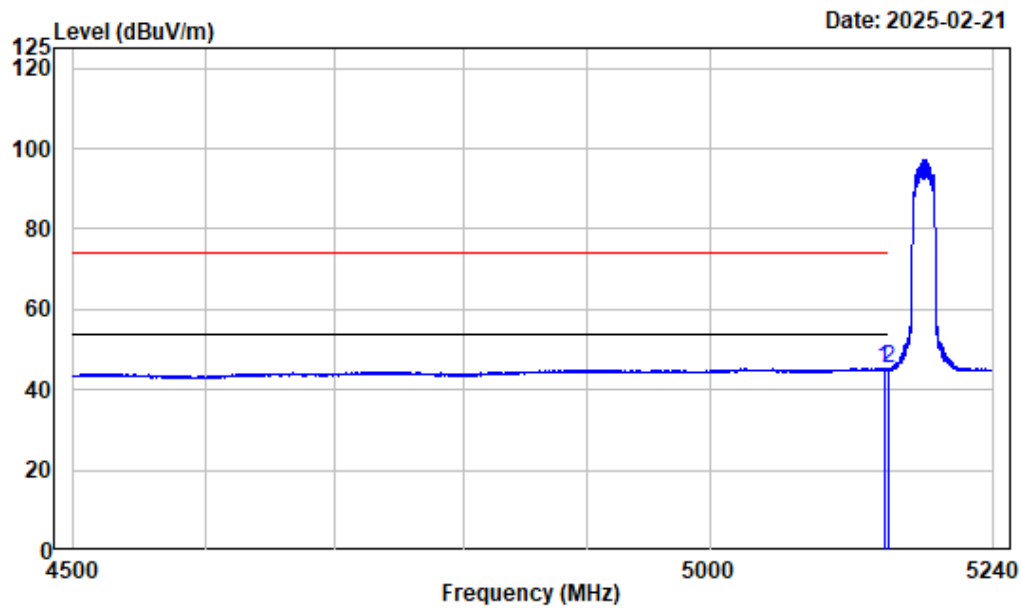

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-N20-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5145.916	-7.46	52.76	45.30	54.00	-8.70 Average
2	5150.000	-7.46	52.56	45.10	54.00	-8.90 Average


Left Band edge_Vertical_Peak_802.11n-HT20

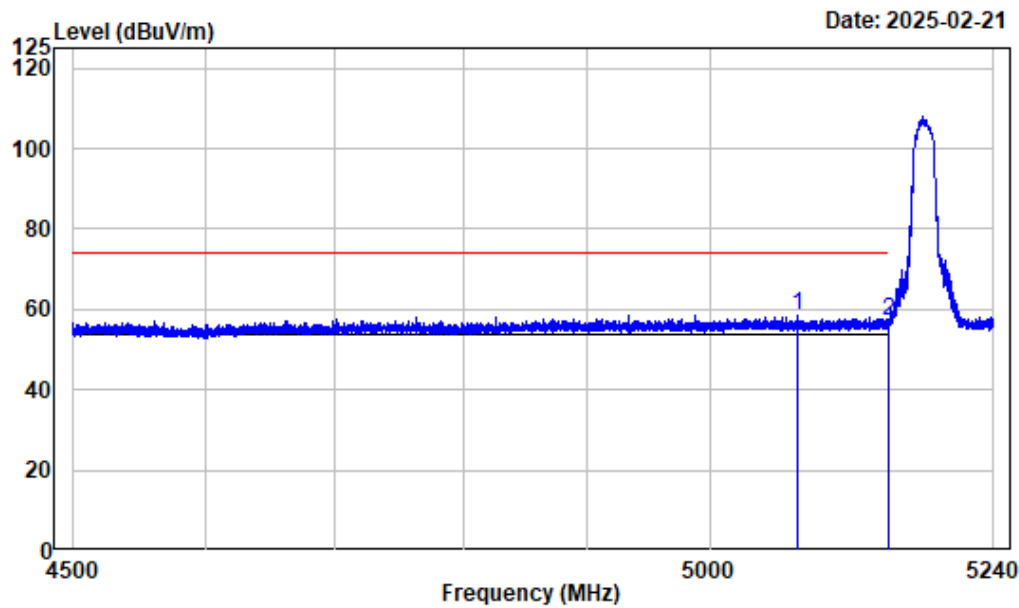

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N20-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5073.572	-7.38	65.96	58.58	74.00	-15.42	Peak
2 5150.000	-7.46	64.60	57.14	74.00	-16.86	Peak


Left Band edge_Vertical_Average_802.11n-HT20

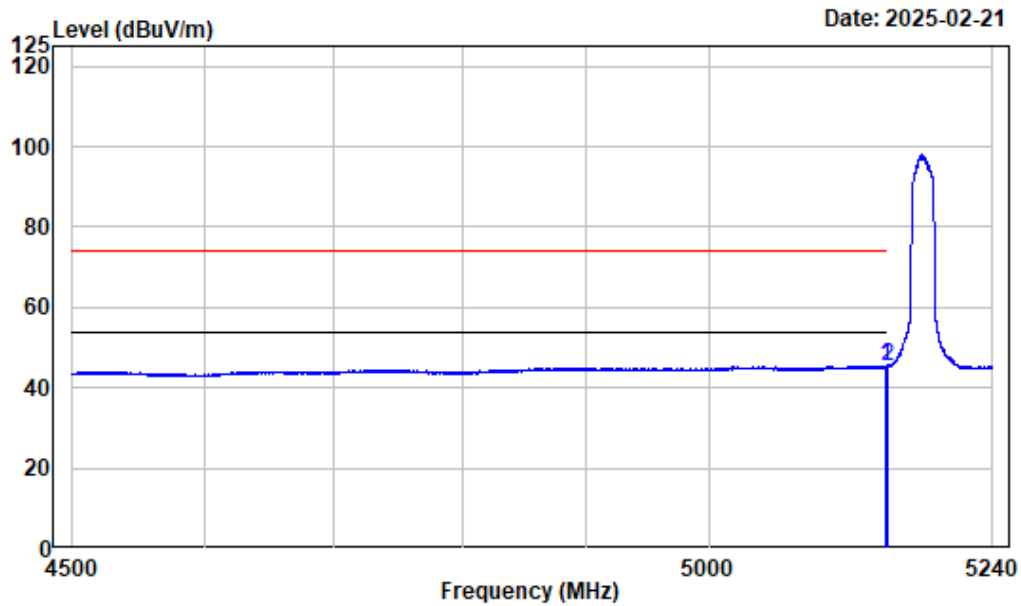

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-N20-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5148.784	-7.46	52.93	45.47	54.00	-8.53 Average
2	5150.000	-7.46	52.82	45.36	54.00	-8.64 Average


Right Band edge_Horizontal_Peak_802.11n-HT20

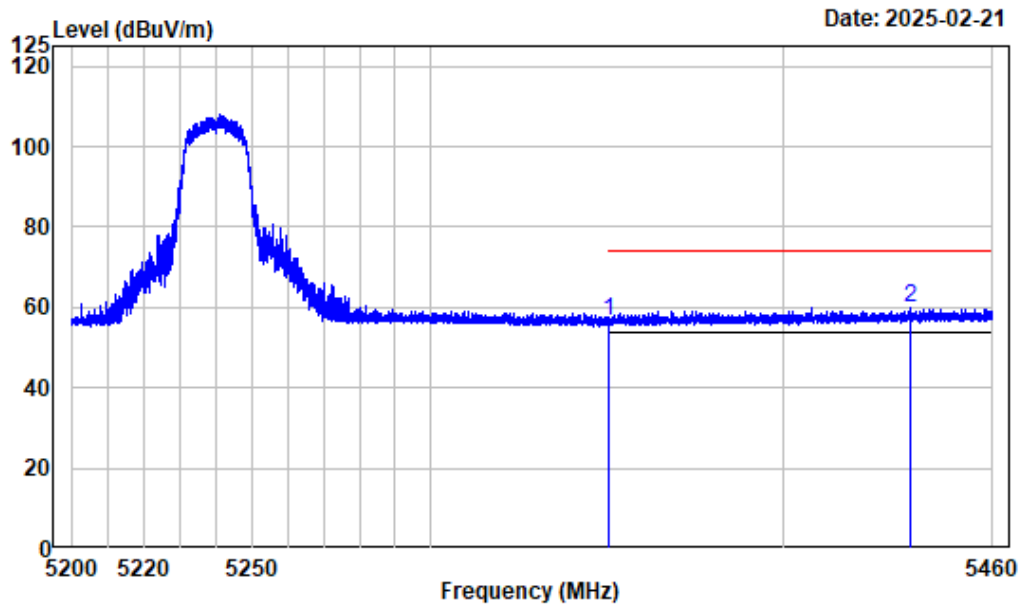

Condition : Horizontal
 Project No. : 2401A25033E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band1-N20-5240

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	63.22	56.48	74.00	-17.52	Peak
2 5436.305	-6.40	66.19	59.79	74.00	-14.21	Peak


Right Band edge_Horizontal_Average_802.11n-HT20

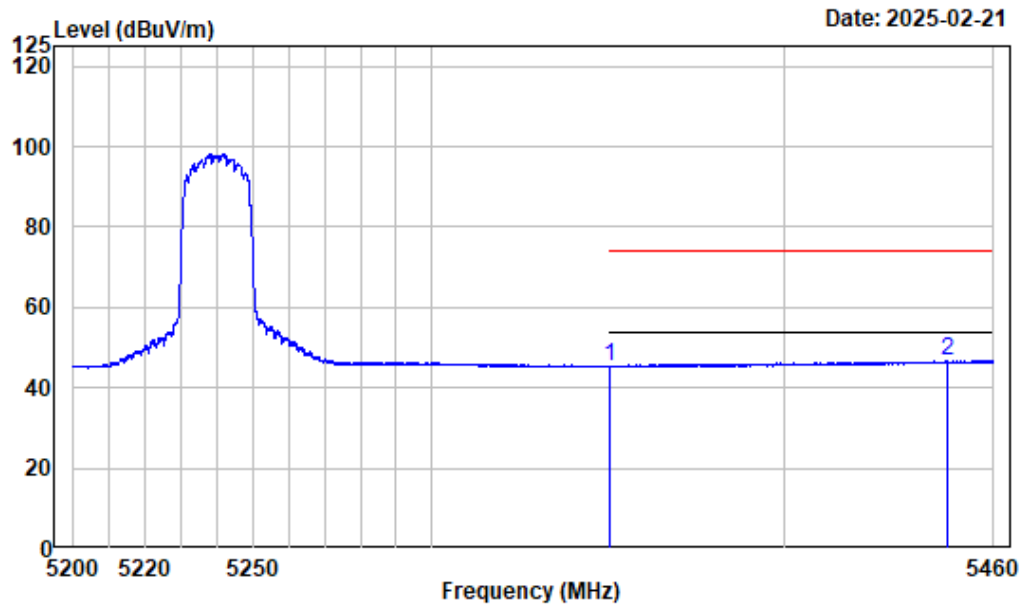

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-N20-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.74	52.02	45.28	54.00	-8.72 Average
2	5446.446	-6.35	52.98	46.63	54.00	-7.37 Average


Right Band edge_Vertical_Peak_802.11n-HT20

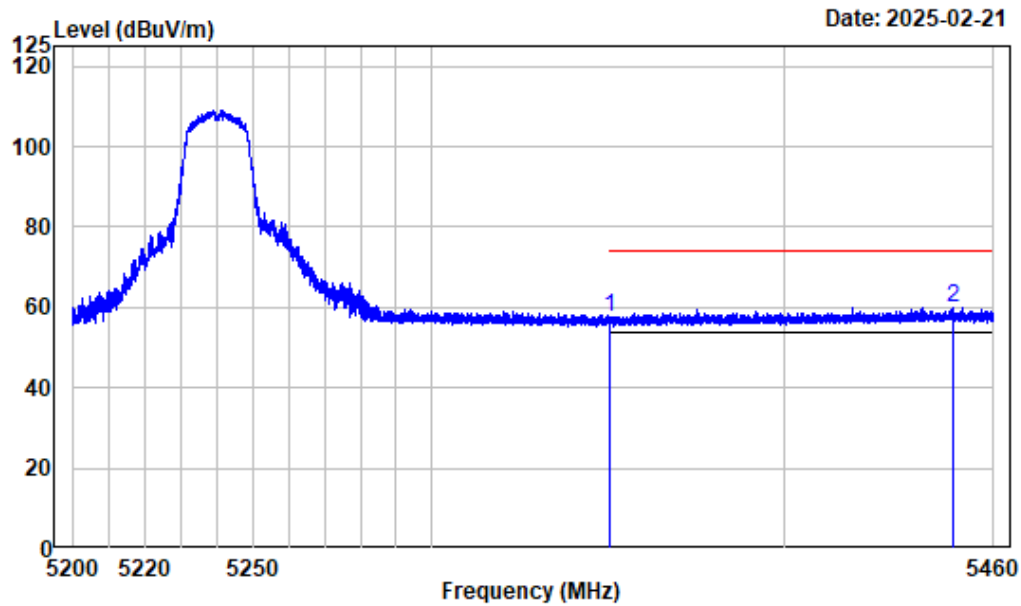

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N20-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.74	64.25	57.51	74.00	-16.49 Peak
2	5448.104	-6.33	66.40	60.07	74.00	-13.93 Peak


Right Band edge_Vertical_Average_802.11n-HT20

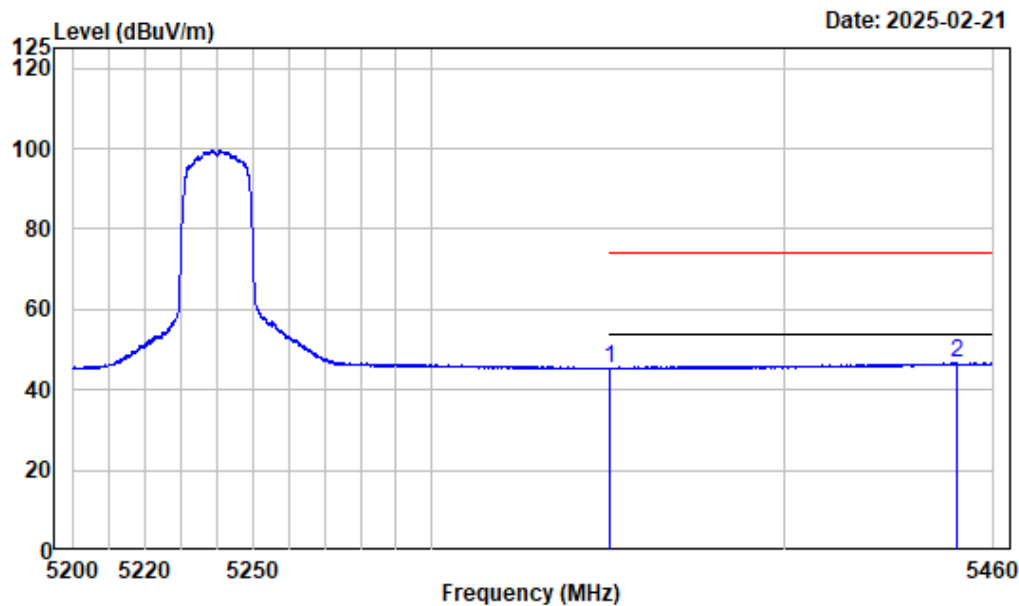

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-N20-5240

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	51.90	45.16	54.00	-8.84 Average
2	5449.371	-6.33	52.95	46.62	54.00	-7.38 Average


Left Band edge_Horizontal_Peak_802.11n-HT40

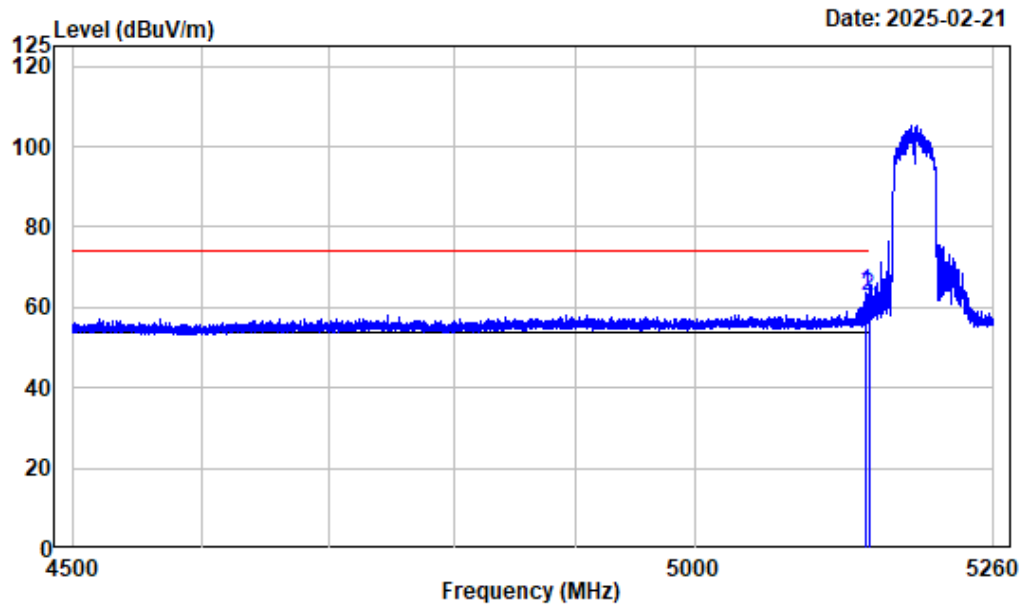

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N40-5190

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5148.266	-7.46	71.01	63.55	74.00	-10.45	Peak
2 5150.000	-7.46	70.00	62.54	74.00	-11.46	Peak


Left Band edge_Horizontal_Average_802.11n-HT40

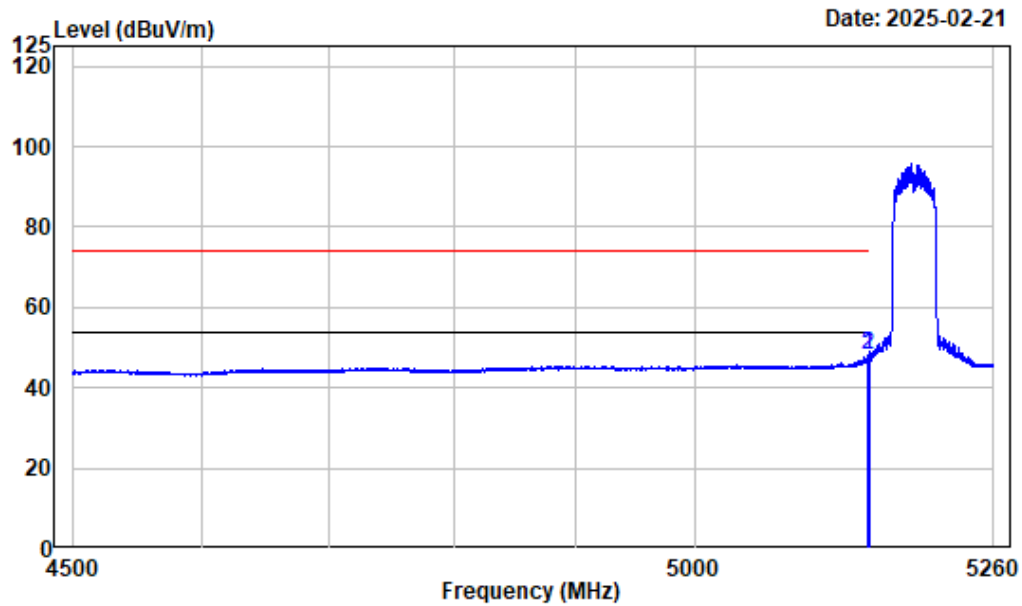

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-N40-5190

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1	5149.789	-7.46	55.55	48.09	54.00	-5.91 Average
2	5150.000	-7.46	55.41	47.95	54.00	-6.05 Average


Left Band edge_Vertical_Peak_802.11n-HT40

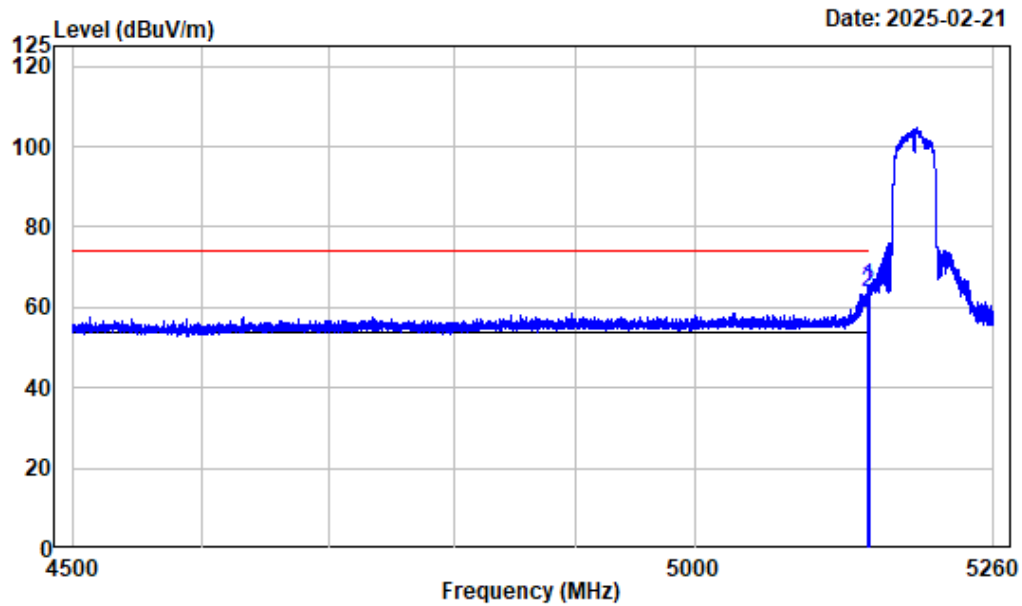

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N40-5190

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5149.406	-7.46	72.44	64.98	74.00	-9.02	Peak
2 5150.000	-7.46	71.15	63.69	74.00	-10.31	Peak


Left Band edge_Vertical_Average_802.11n-HT40

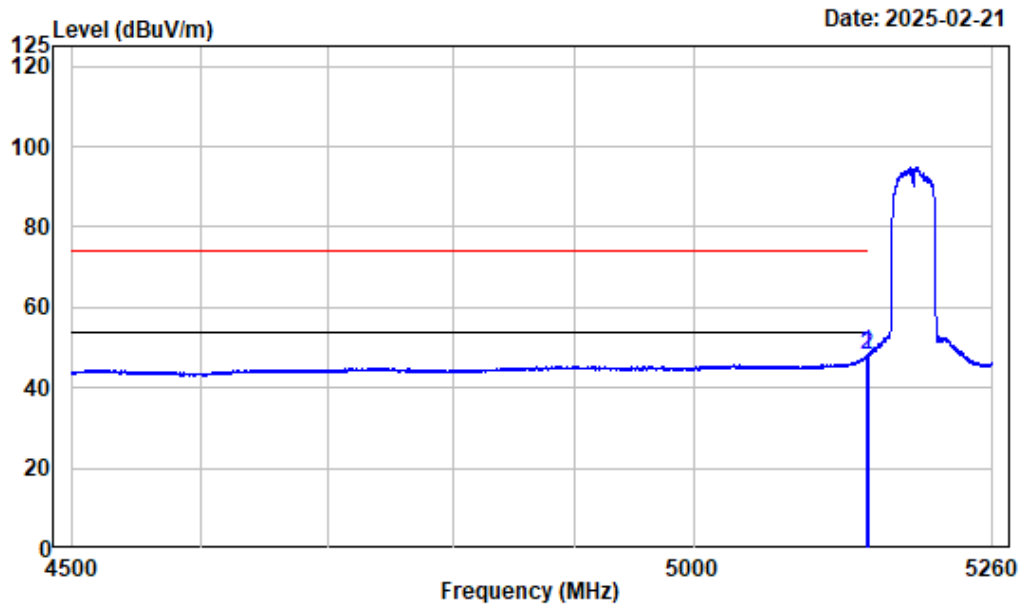

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-N40-5190

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1	5149.876	-7.46	55.85	48.39	54.00	-5.61 Average
2	5150.000	-7.46	55.71	48.25	54.00	-5.75 Average


Right Band edge_Horizontal_Peak_802.11n-HT40

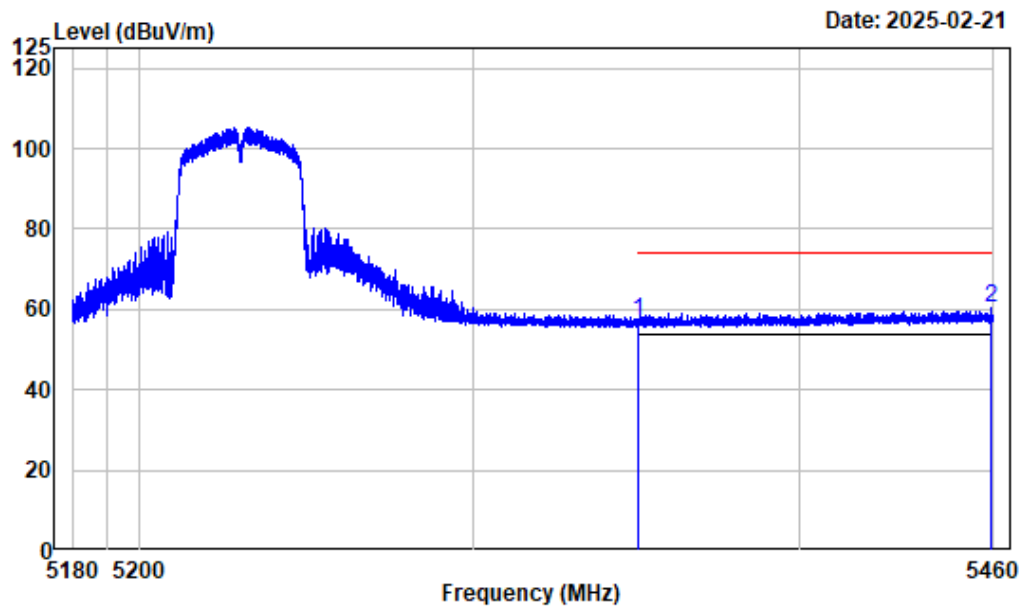

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N40-5230

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	63.94	57.20	74.00	-16.80 Peak
2	5459.230	-6.29	66.54	60.25	74.00	-13.75 Peak


Right Band edge_Horizontal_Average_802.11n-HT40

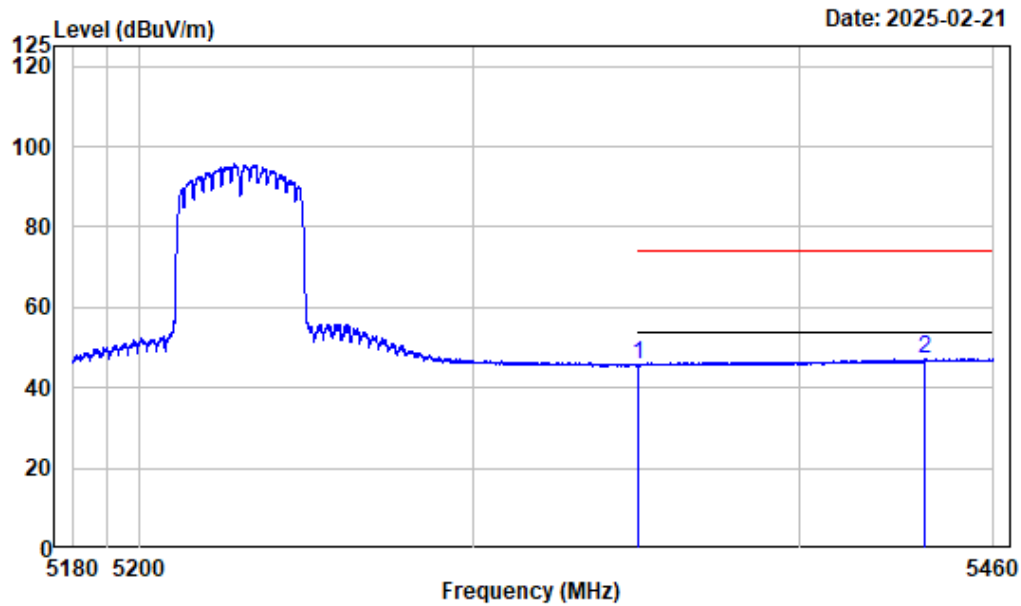

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-N40-5230

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	52.33	45.59	54.00	-8.41 Average
2	5438.752	-6.38	53.62	47.24	54.00	-6.76 Average


Right Band edge_Vertical_Peak_802.11n-HT40

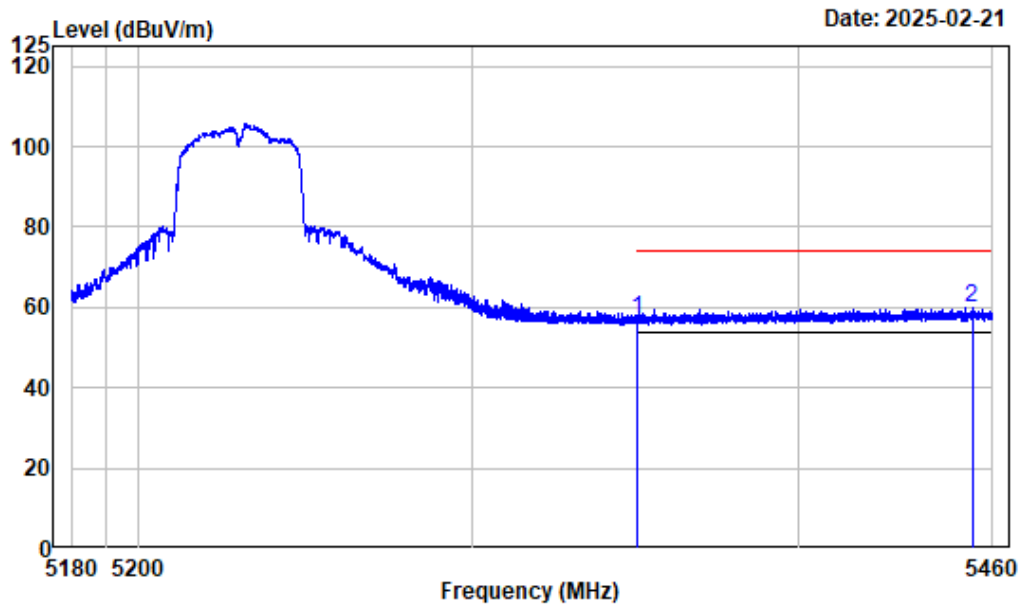

Condition : Vertical
 Project No. : 2401A25033E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band1-N40-5230

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	63.79	57.05	74.00	-16.95	Peak
2 5453.629	-6.31	66.16	59.85	74.00	-14.15	Peak

Right Band edge_Vertical_Average_802.11n-HT40

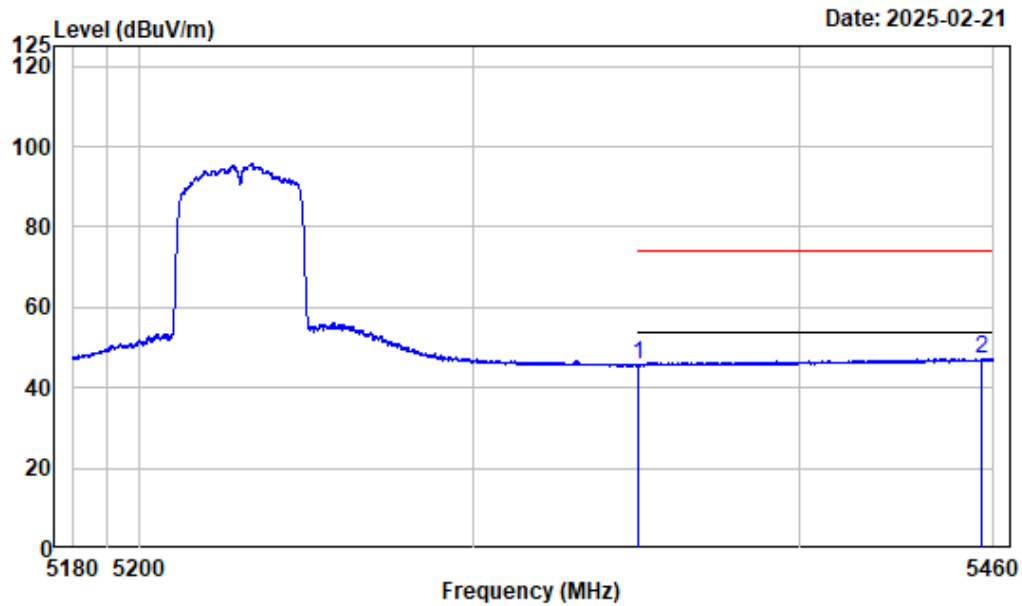


Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-N40-5230

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.74	52.50	45.76	54.00	-8.24 Average
2	5456.500	-6.31	53.50	47.19	54.00	-6.81 Average

5250-5350MHz:


Left Band edge_Horizontal_Peak_802.11a

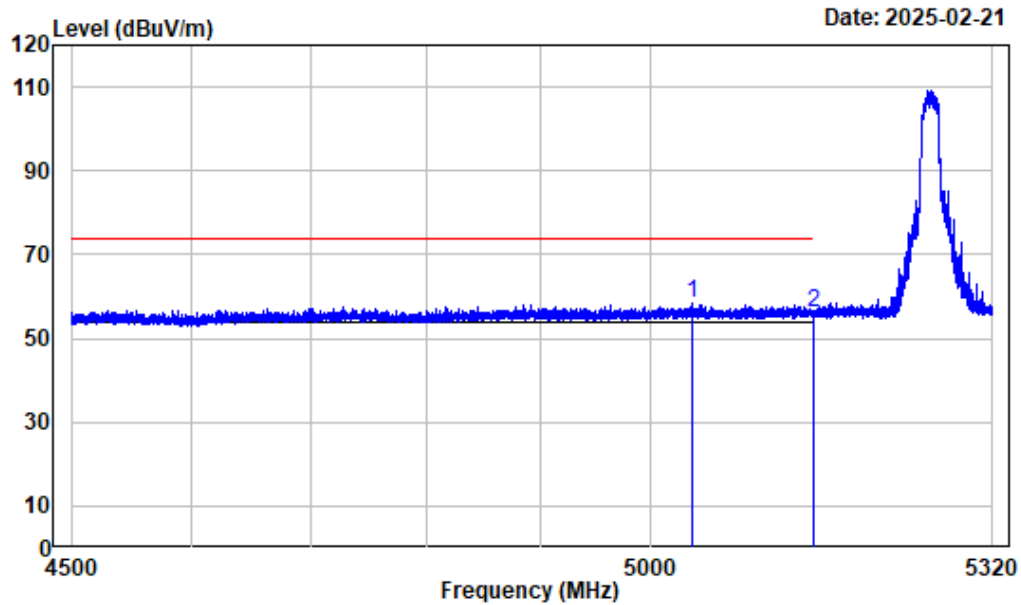

Condition : Horizontal
 Project No. : 2401A25033E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band2-A-5260

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5037.372	-7.32	65.85	58.53	74.00	-15.47	Peak
2 5150.000	-7.46	63.59	56.13	74.00	-17.87	Peak


Left Band edge_Horizontal_Average_802.11a

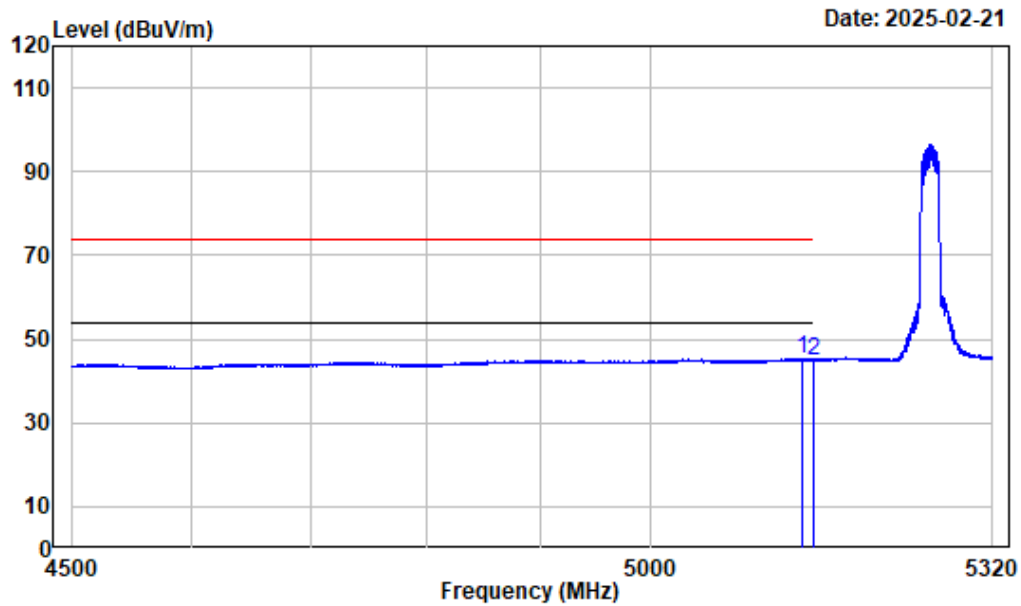

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-A-5260

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5138.860	-7.46	52.78	45.32	54.00	-8.68 Average
2	5150.000	-7.46	52.37	44.91	54.00	-9.09 Average


Left Band edge_Vertical_Peak_802.11a

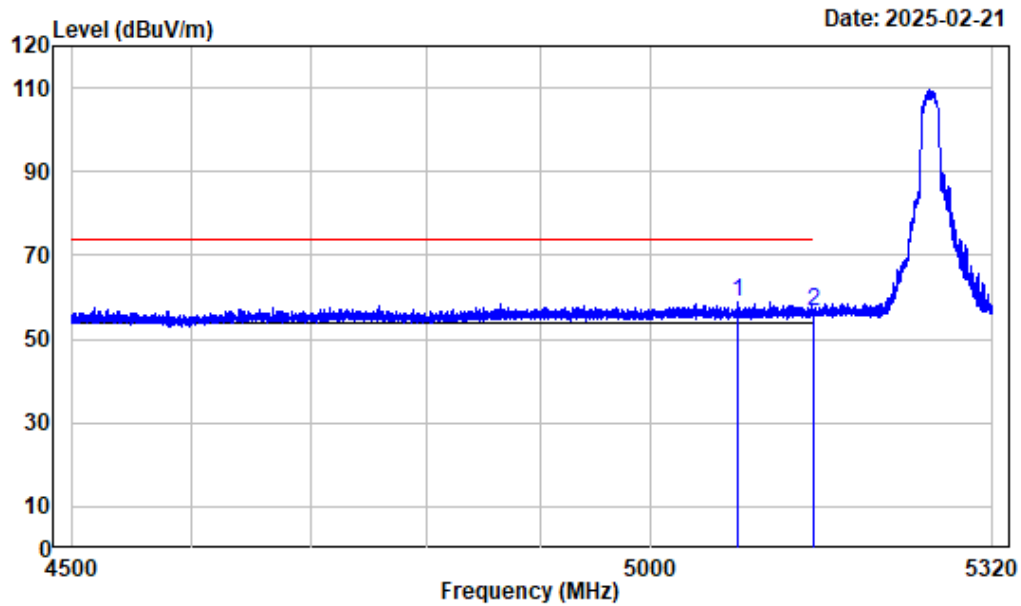

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5260

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5080.120	-7.42	66.18	58.76	74.00	-15.24 Peak
2	5150.000	-7.46	63.84	56.38	74.00	-17.62 Peak


Left Band edge_Vertical_Average_802.11a

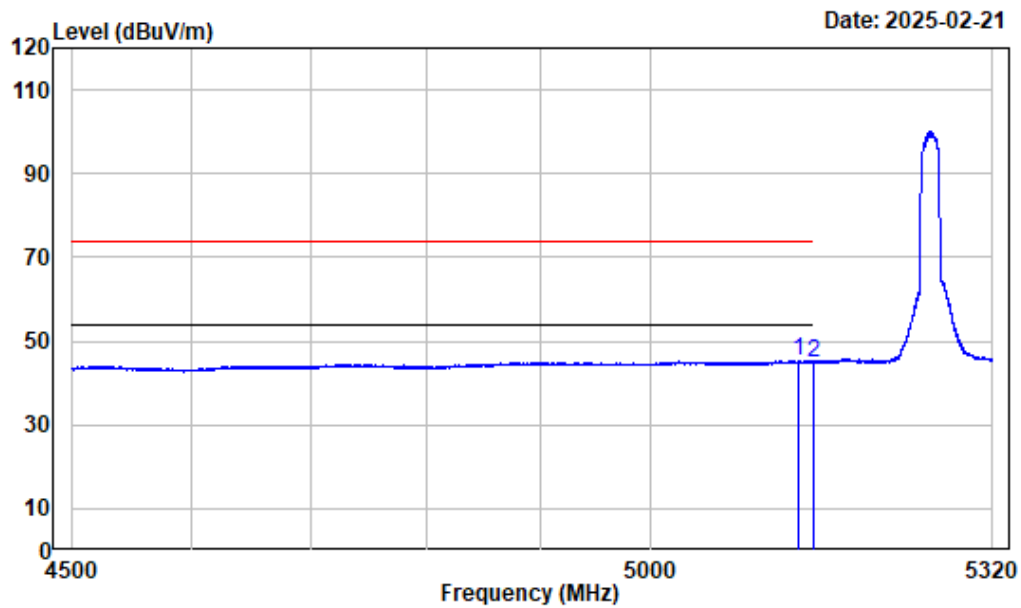

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-A-5260

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5136.502	-7.46	52.67	45.21	54.00	-8.79 Average
2	5150.000	-7.46	52.38	44.92	54.00	-9.08 Average


Right Band edge_Horizontal_Peak_802.11a

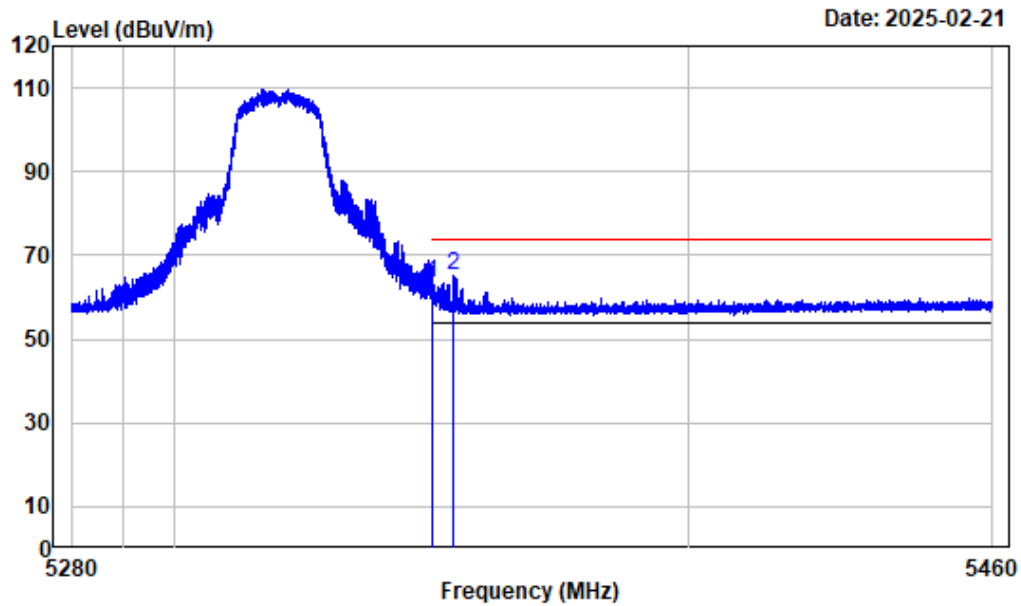

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.74	70.23	63.49	74.00	-10.51 Peak
2	5354.034	-6.73	71.90	65.17	74.00	-8.83 Peak


Right Band edge_Horizontal_Average_802.11a

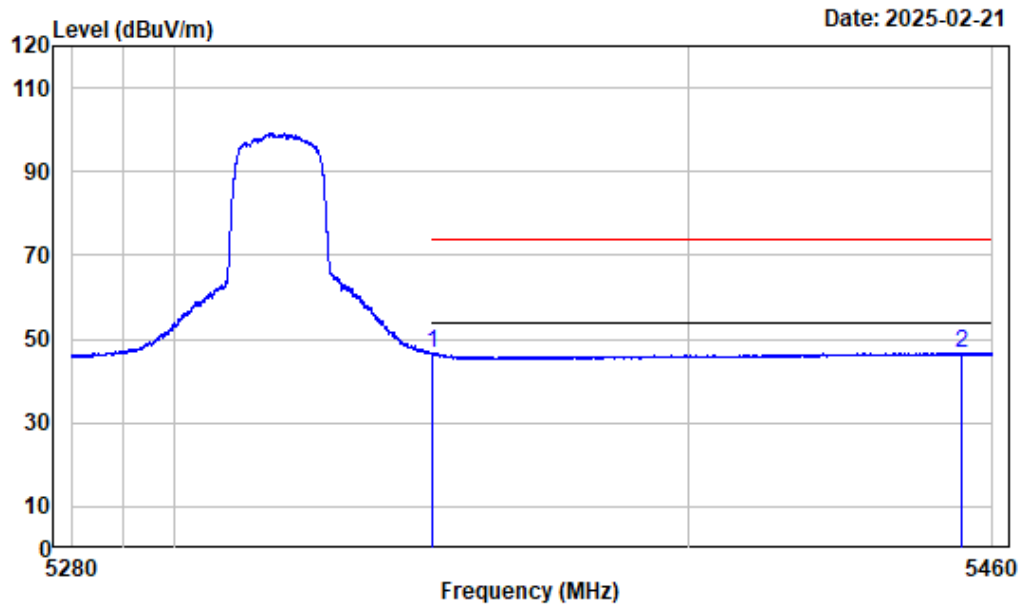

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.74	53.34	46.60	54.00	-7.40 Average
2	5453.744	-6.31	53.10	46.79	54.00	-7.21 Average


Right Band edge_Vertical_Peak_802.11a

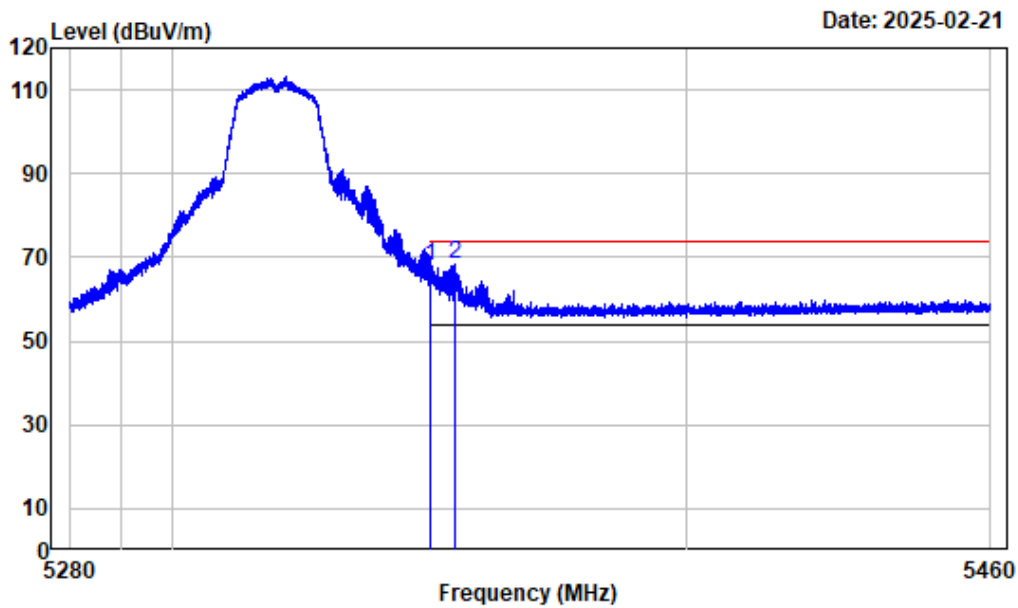

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.74	74.67	67.93	74.00	-6.07 Peak
2	5354.619	-6.73	75.25	68.52	74.00	-5.48 Peak


Right Band edge_Vertical_Average_802.11a

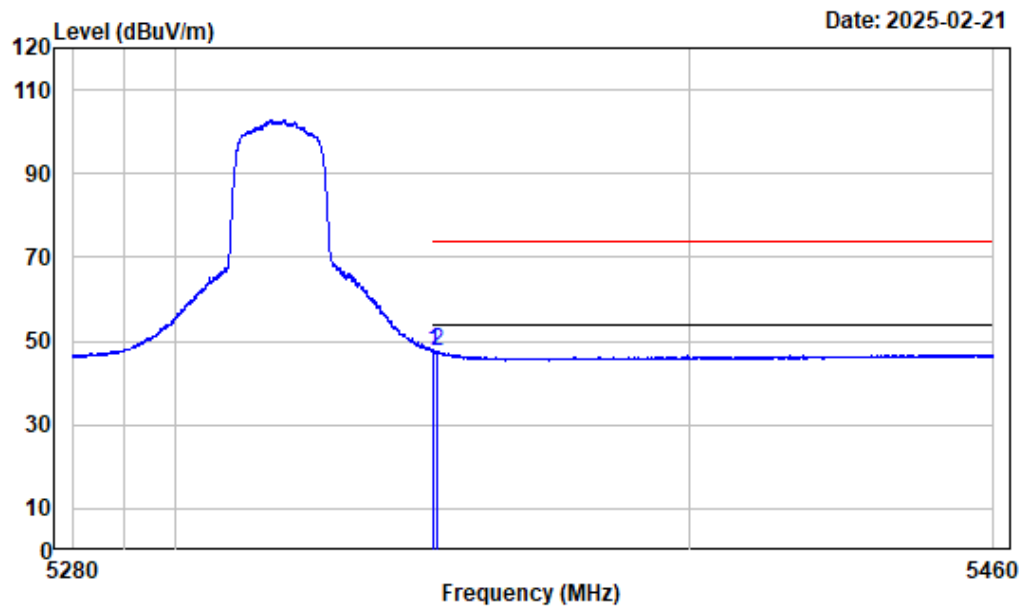

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-A-5320

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	54.28	47.54	54.00	-6.46 Average
2	5350.501	-6.74	54.39	47.65	54.00	-6.35 Average


Left Band edge_Horizontal_Peak_802.11n-HT20

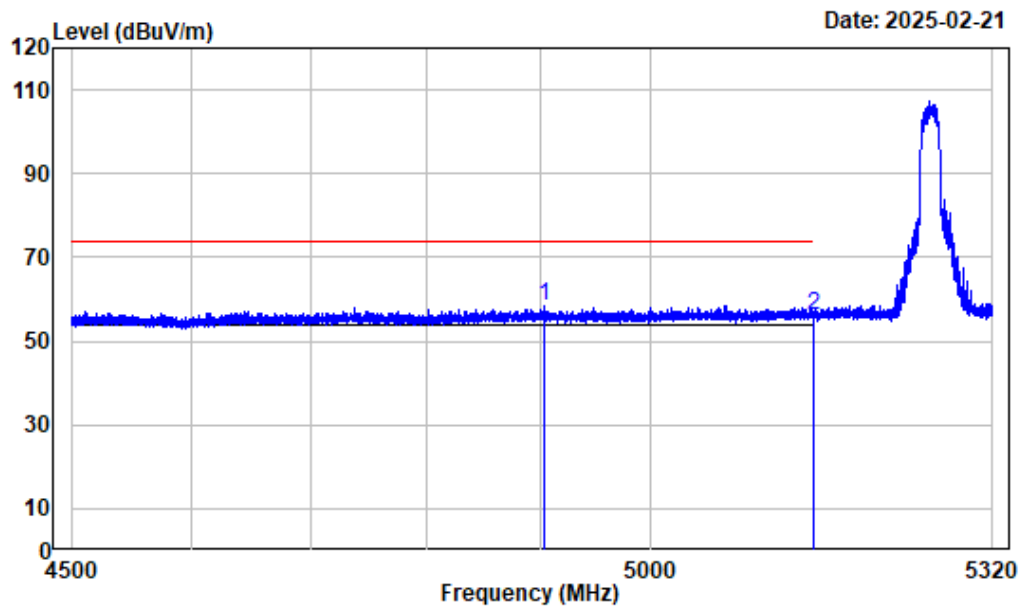

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N20-5260

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4903.286	-7.53	66.06	58.53	74.00	-15.47	Peak
2 5150.000	-7.46	63.58	56.12	74.00	-17.88	Peak


Left Band edge_Horizontal_Average_802.11n-HT20

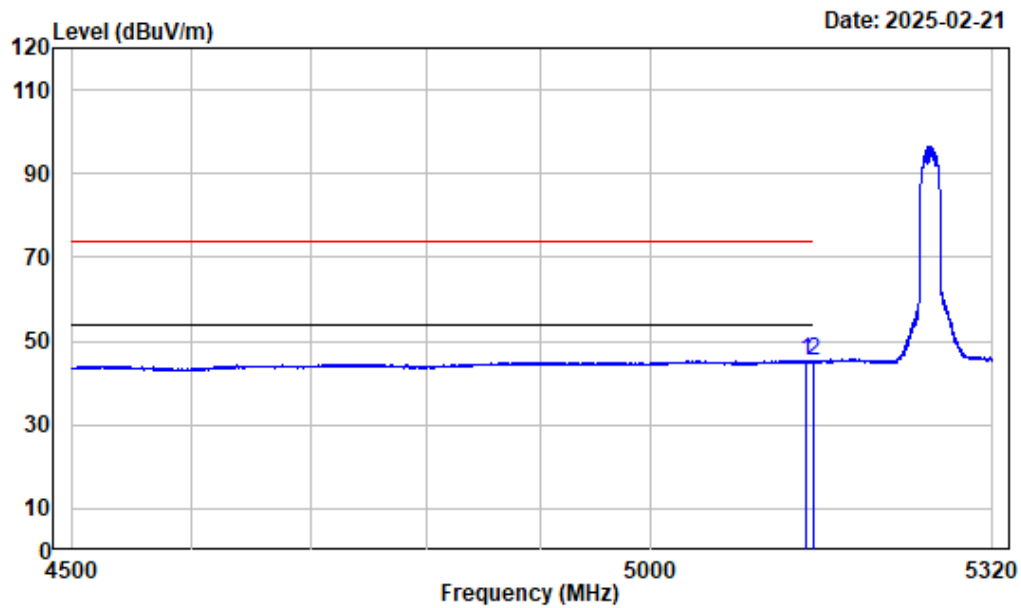

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-N20-5260

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5142.140	-7.47	52.91	45.44	54.00	-8.56 Average
2	5150.000	-7.46	52.52	45.06	54.00	-8.94 Average


Left Band edge_Vertical_Peak_802.11n-HT20

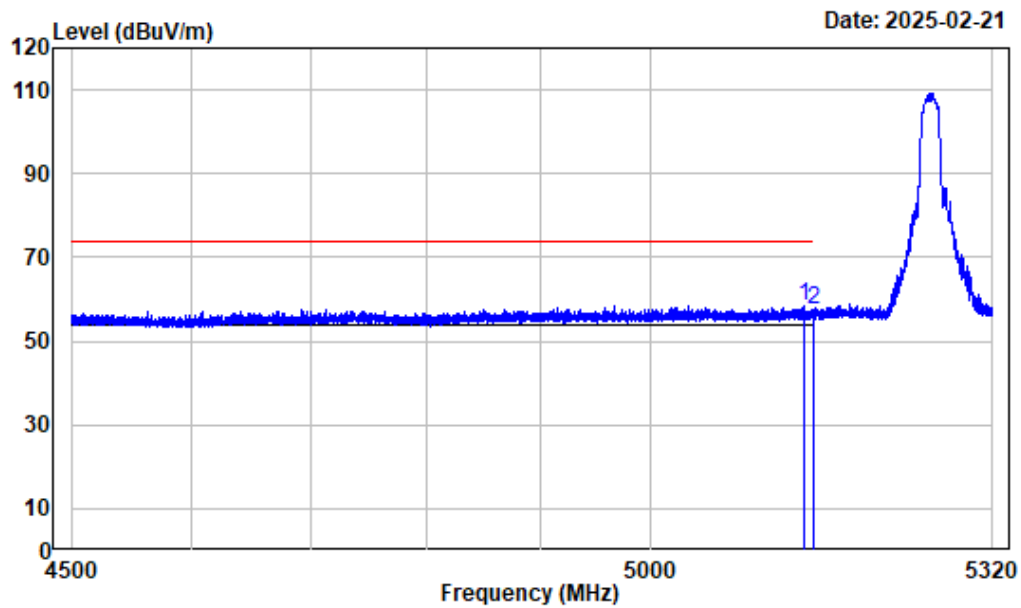

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N20-5260

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5140.705	-7.47	66.07	58.60	74.00	-15.40	Peak
2 5150.000	-7.46	65.13	57.67	74.00	-16.33	Peak


Left Band edge_Vertical_Average_802.11n-HT20

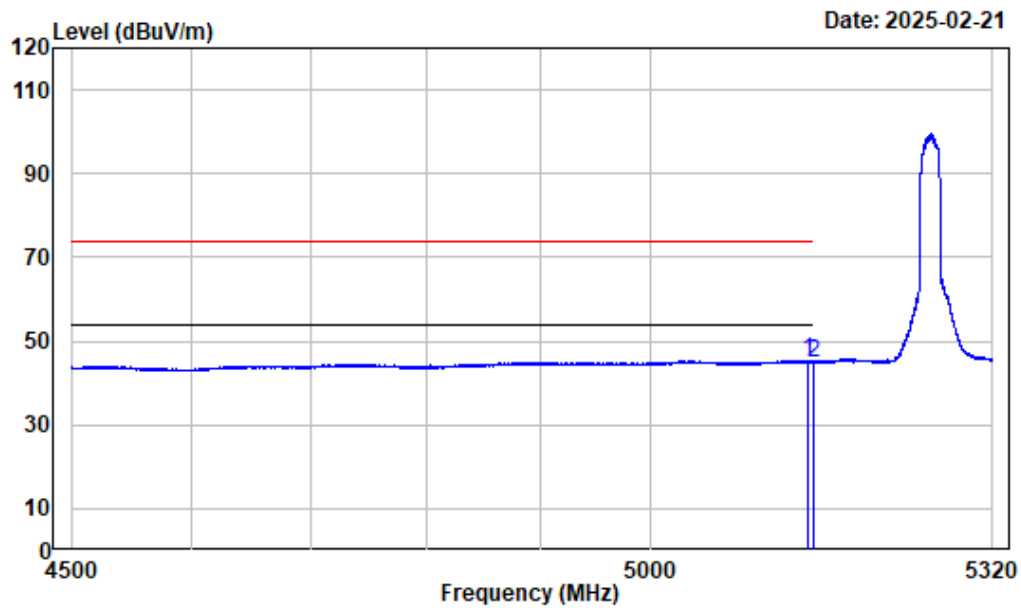

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-N20-5260

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1	5144.396	-7.46	52.70	45.24	54.00	-8.76 Average
2	5150.000	-7.46	52.50	45.04	54.00	-8.96 Average


Right Band edge_Horizontal_Peak_802.11n-HT20

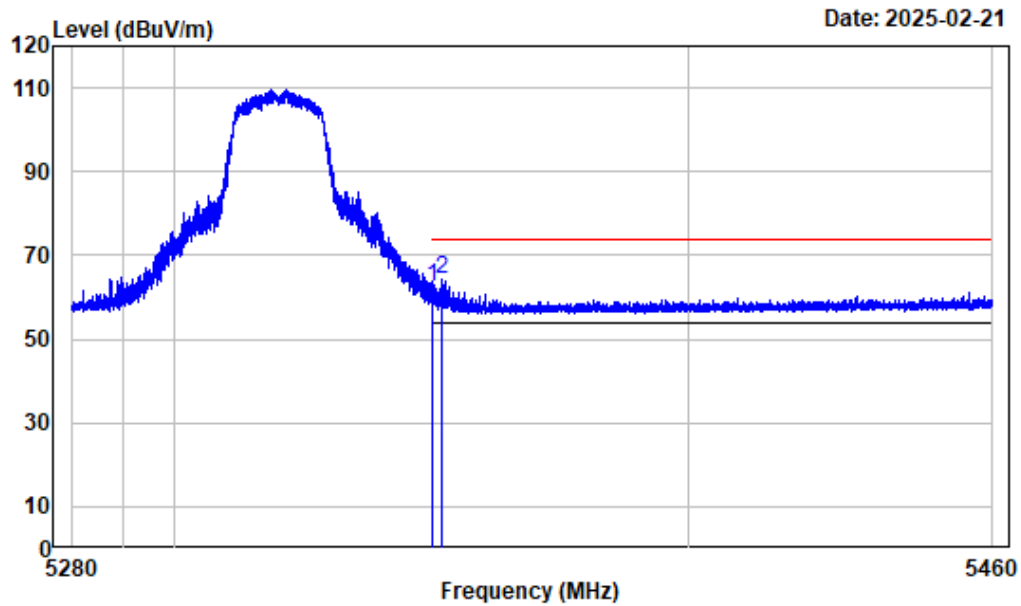

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N20-5320

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	69.25	62.51	74.00	-11.49 Peak
2	5351.784	-6.74	70.87	64.13	74.00	-9.87 Peak


Right Band edge_Horizontal_Average_802.11n-HT20

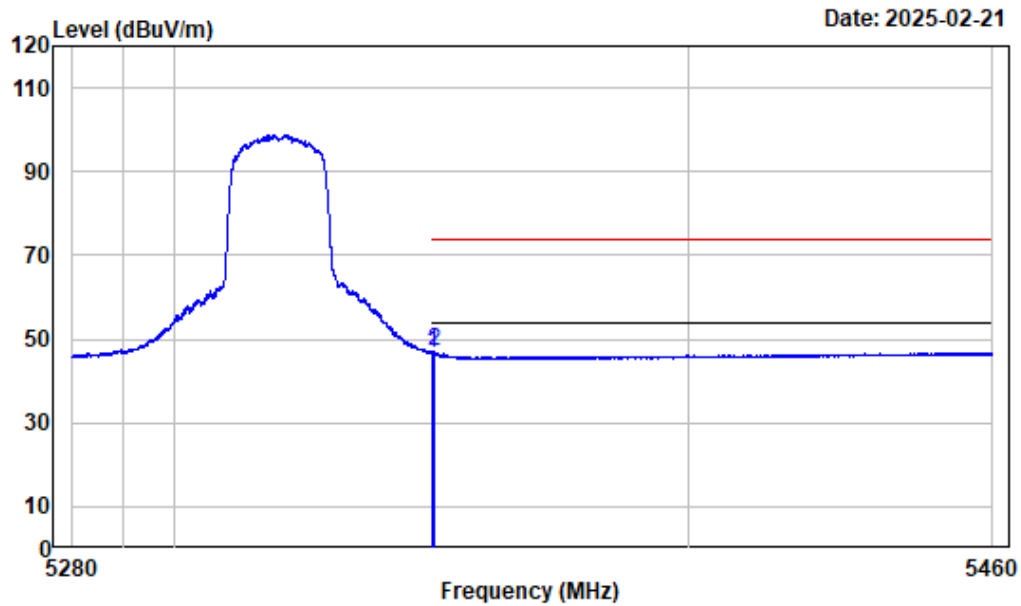

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-N20-5320

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.74	53.58	46.84	54.00	-7.16 Average
2	5350.029	-6.74	53.63	46.89	54.00	-7.11 Average


Right Band edge_Vertical_Peak_802.11n-HT20

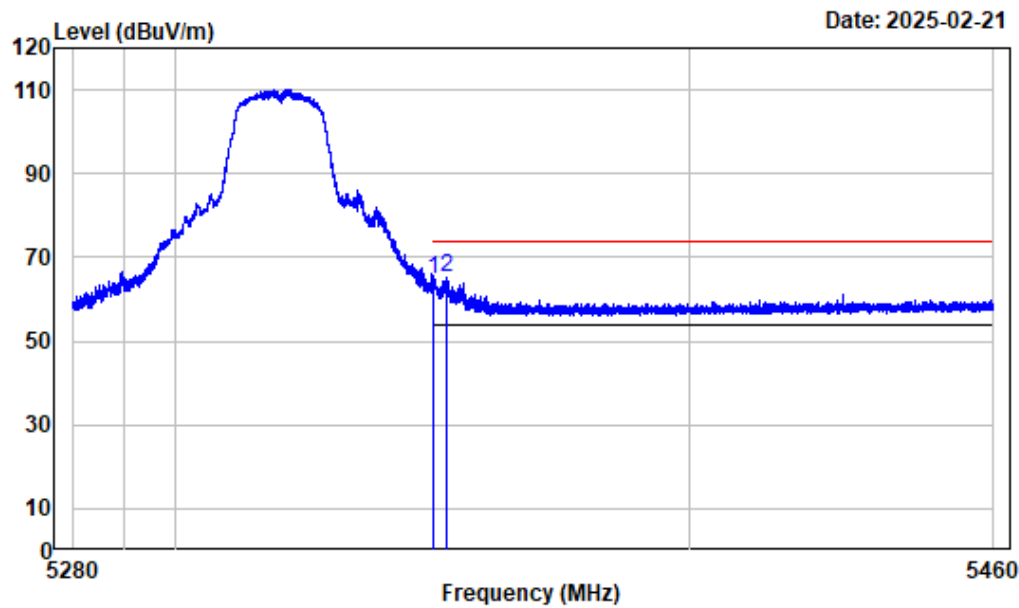

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N20-5320

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.74	71.29	64.55	74.00	-9.45 Peak
2	5352.324	-6.74	71.75	65.01	74.00	-8.99 Peak


Right Band edge_Vertical_Average_802.11n-HT20

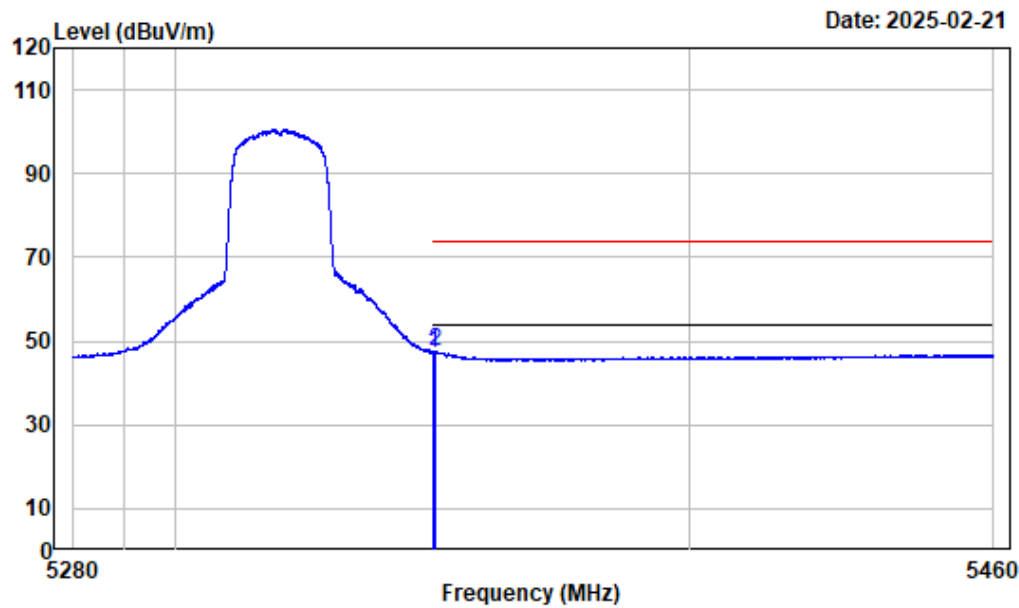

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-N20-5320

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBUV/m	dBUV/m	dB	
1 5350.000	-6.74	54.06	47.32	54.00	-6.68	Average
2 5350.231	-6.74	54.23	47.49	54.00	-6.51	Average


Left Band edge_Horizontal_Peak_802.11n-HT40

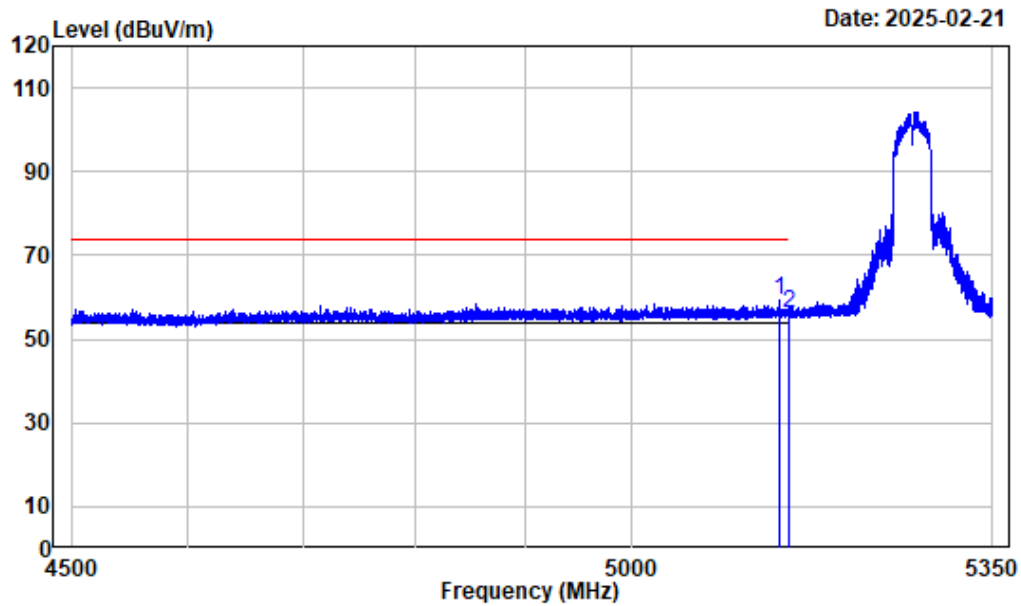

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N40-5270

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5140.661	-7.47	67.01	59.54	74.00	-14.46	Peak
2 5150.000	-7.46	63.77	56.31	74.00	-17.69	Peak


Left Band edge_Horizontal_Average_802.11n-HT40

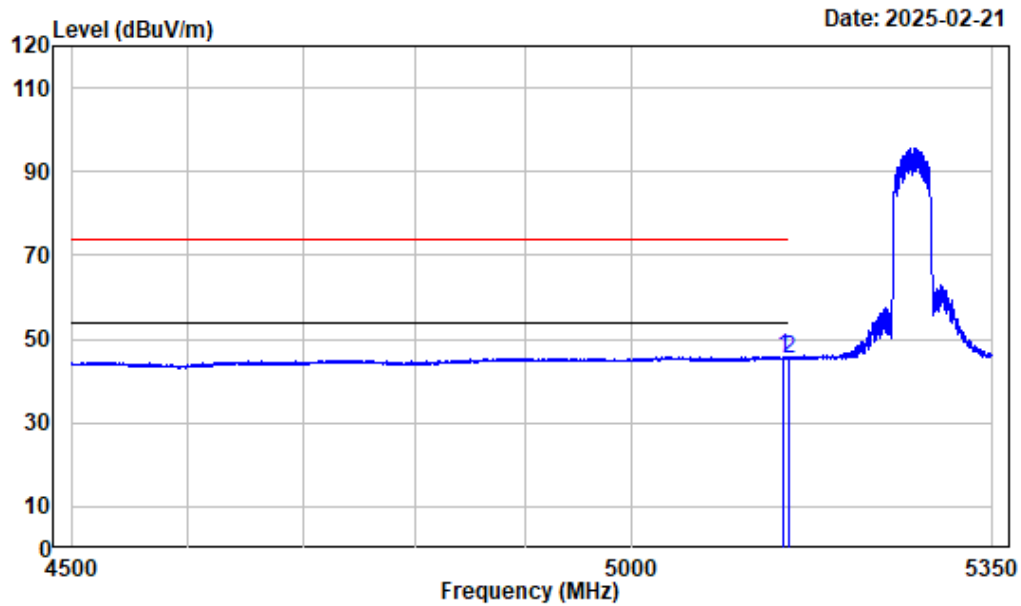

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band2-N40-5270

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5143.849	-7.46	53.24	45.78	54.00	-8.22 Average
2	5150.000	-7.46	52.78	45.32	54.00	-8.68 Average


Left Band edge_Vertical_Peak_802.11n-HT40

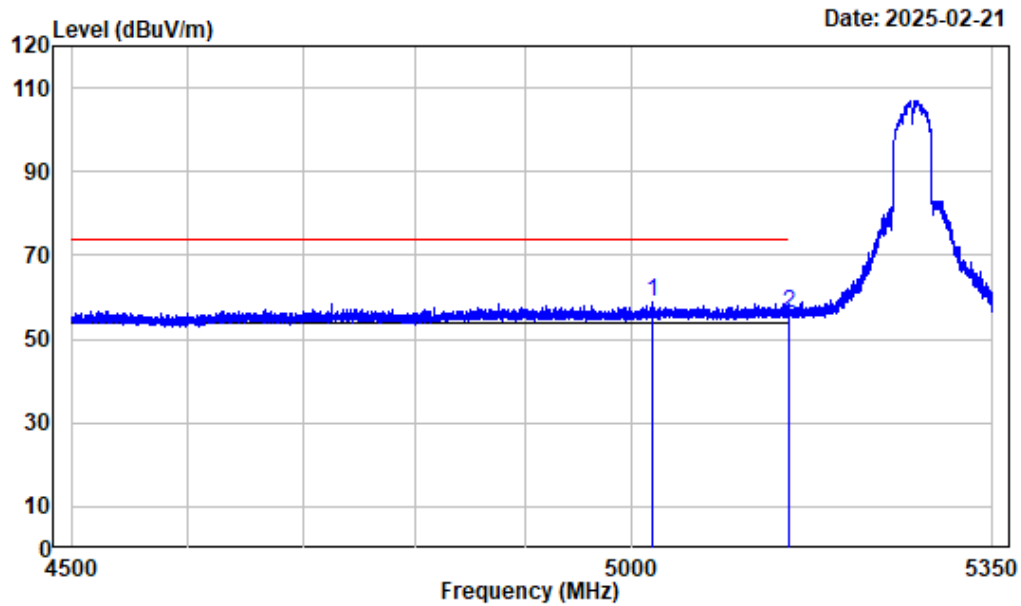

Condition : Vertical
 Project No. : 2401A25033E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band2-N40-5270

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
1	5019.309	-7.32	66.15	58.83	74.00	-15.17 Peak
2	5150.000	-7.46	63.59	56.13	74.00	-17.87 Peak


Left Band edge_Vertical_Average_802.11n-HT40

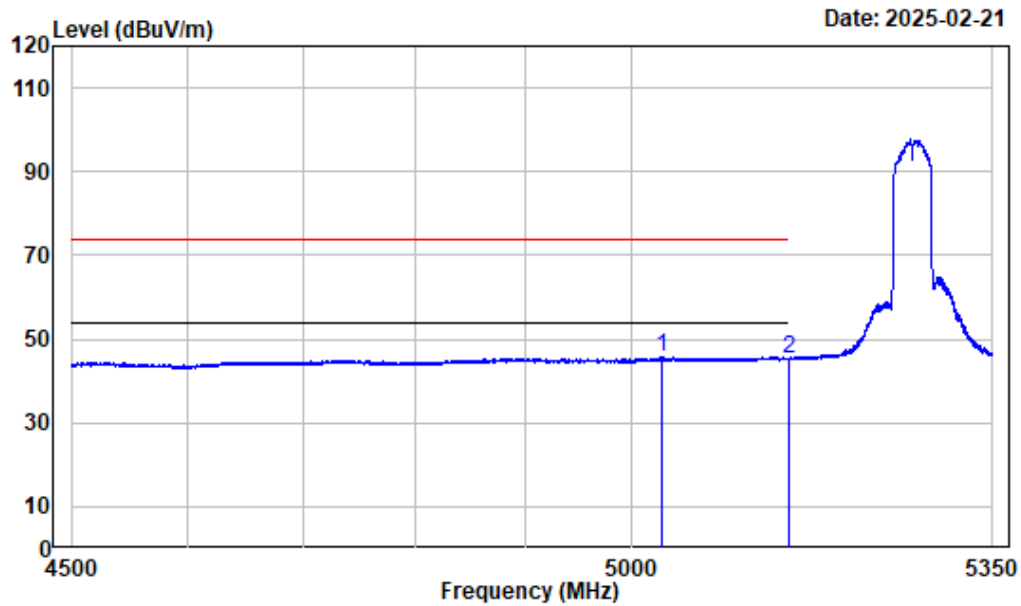

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band2-N40-5270

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1	5028.554	-7.32	53.17	45.85	54.00	-8.15 Average
2	5150.000	-7.46	52.64	45.18	54.00	-8.82 Average


Right Band edge_Horizontal_Peak_802.11n-HT40

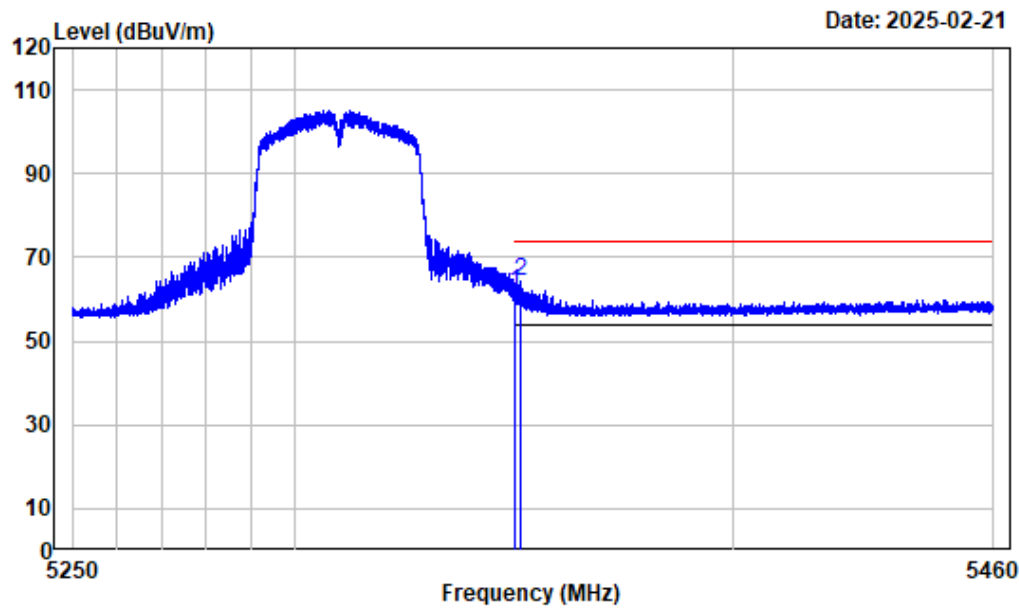

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N40-5310

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	68.16	61.42	74.00	-12.58	Peak
2 5351.102	-6.74	70.97	64.23	74.00	-9.77	Peak


Right Band edge_Horizontal_Average_802.11n-HT40

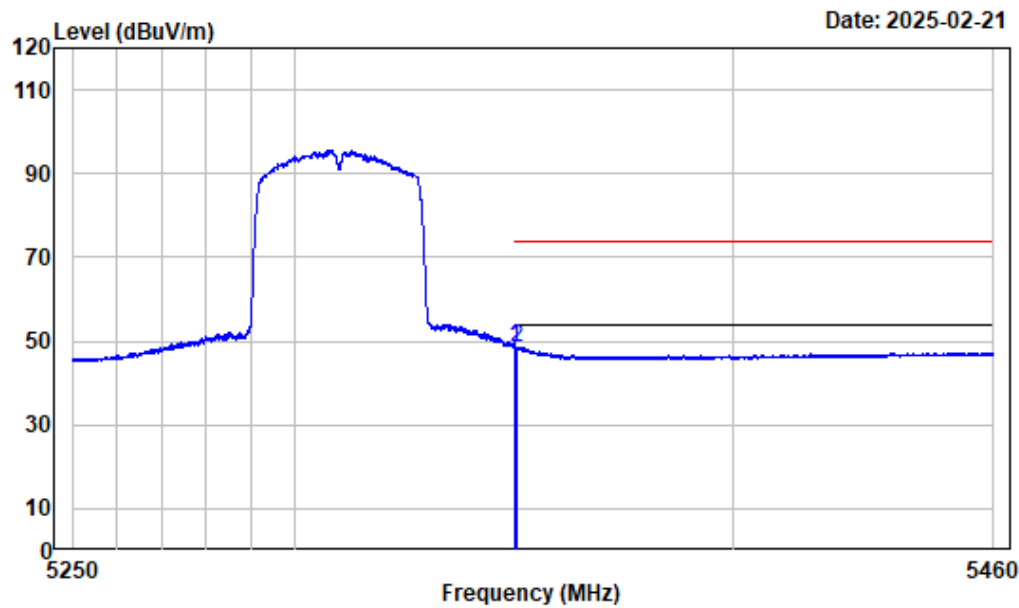

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band2-N40-5310

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	55.28	48.54	54.00	-5.46	Average
2 5350.393	-6.74	55.39	48.65	54.00	-5.35	Average


Right Band edge_Vertical_Peak_802.11n-HT40

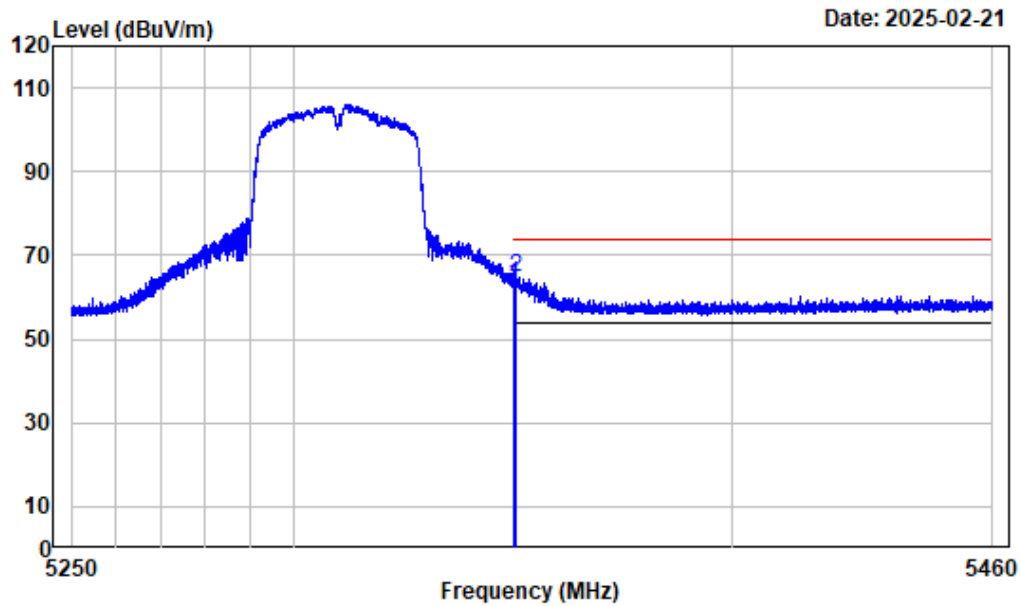

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N40-5310

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.74	69.73	62.99	74.00	-11.01 Peak
2	5350.445	-6.74	71.62	64.88	74.00	-9.12 Peak

Right Band edge_Vertical_Average_802.11n-HT40

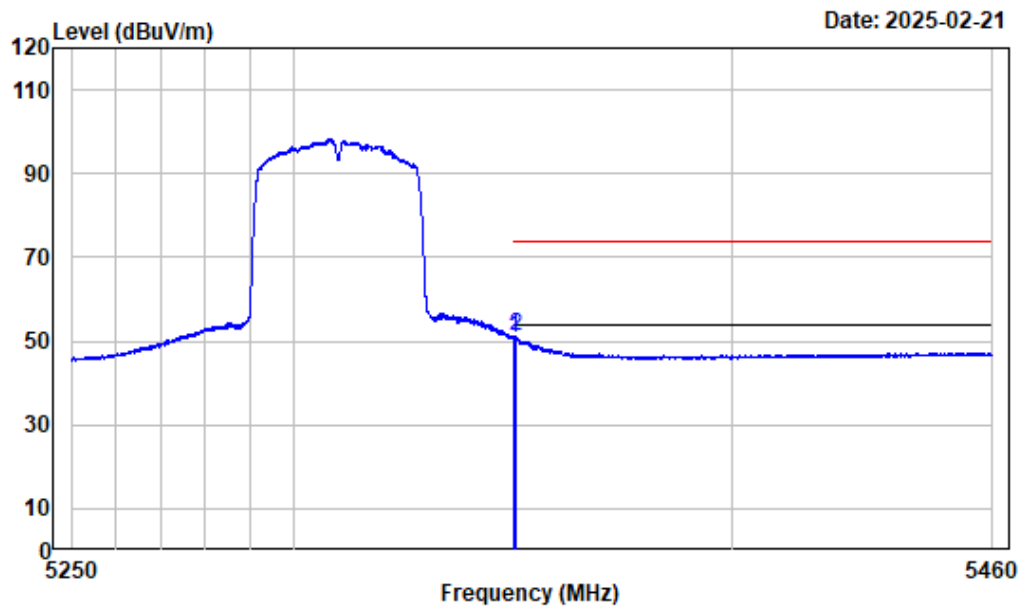


Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band2-N40-5310

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.74	57.61	50.87	54.00	-3.13	Average
2 5350.156	-6.74	57.73	50.99	54.00	-3.01	Average

5470-5725MHz:


Left Band edge_Horizontal_Peak_802.11a

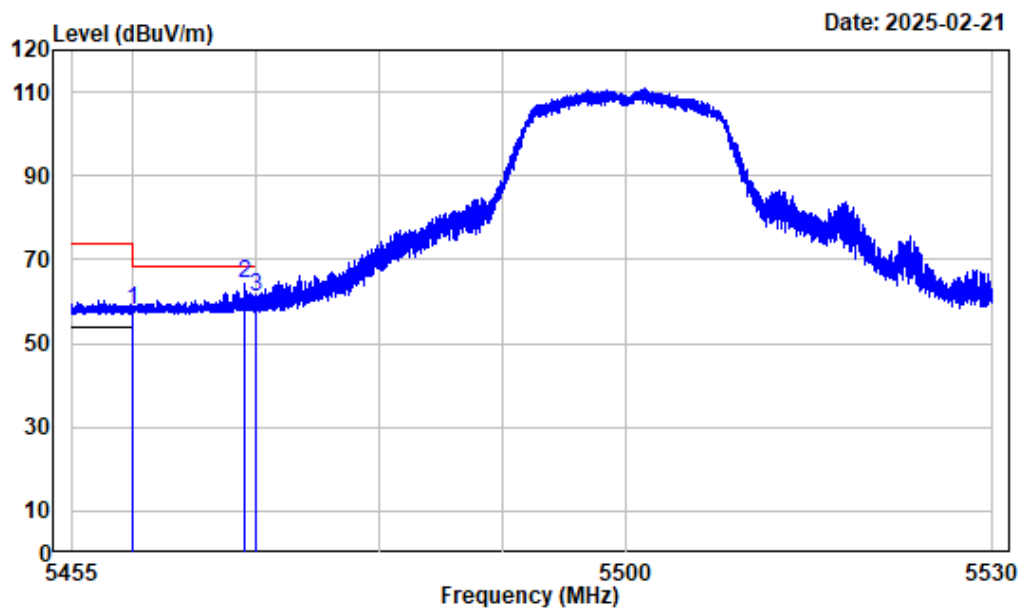

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5500

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	-6.29	64.35	58.06	74.00	-15.94	Peak
2 5468.980	-6.26	70.53	64.27	68.20	-3.93	Peak
3 5470.000	-6.26	67.46	61.20	68.20	-7.00	Peak


Left Band edge_Horizontal_Average_802.11a

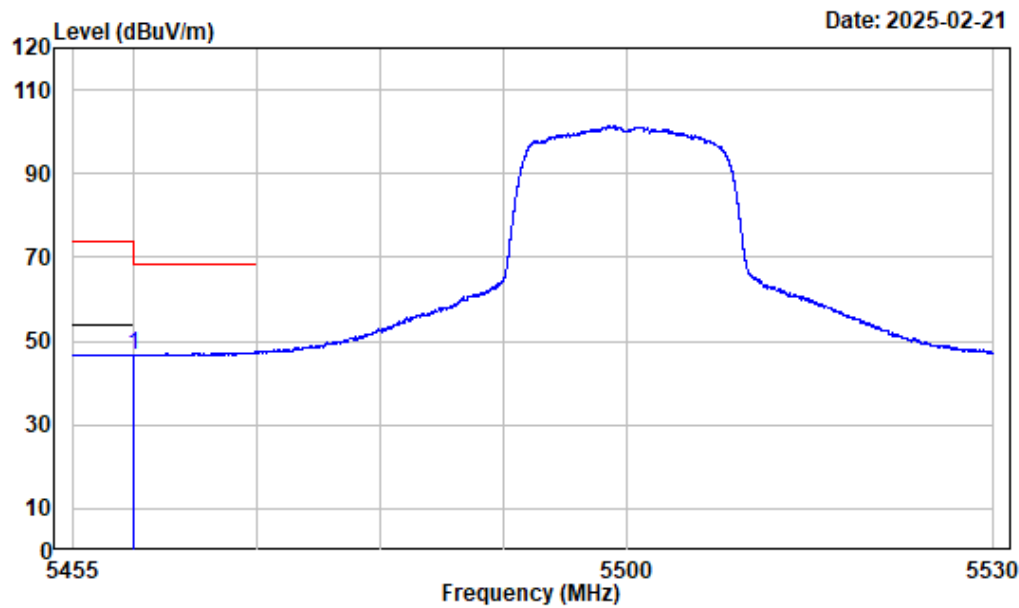

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-A-5500

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	52.92	46.63	54.00	-7.37 Average


Left Band edge_Vertical_Peak_802.11a

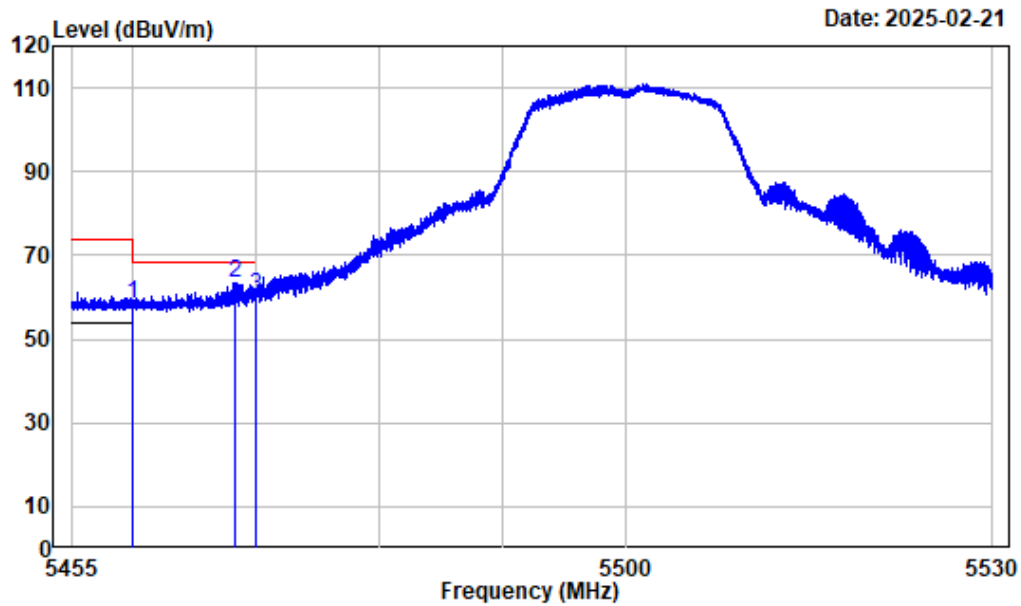

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5500

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	-6.29	64.83	58.54	74.00	-15.46 Peak
2 5468.324	-6.26	69.84	63.58	68.20	-4.62 Peak
3 5470.000	-6.26	66.37	60.11	68.20	-8.09 Peak


Left Band edge_Vertical_Average_802.11a

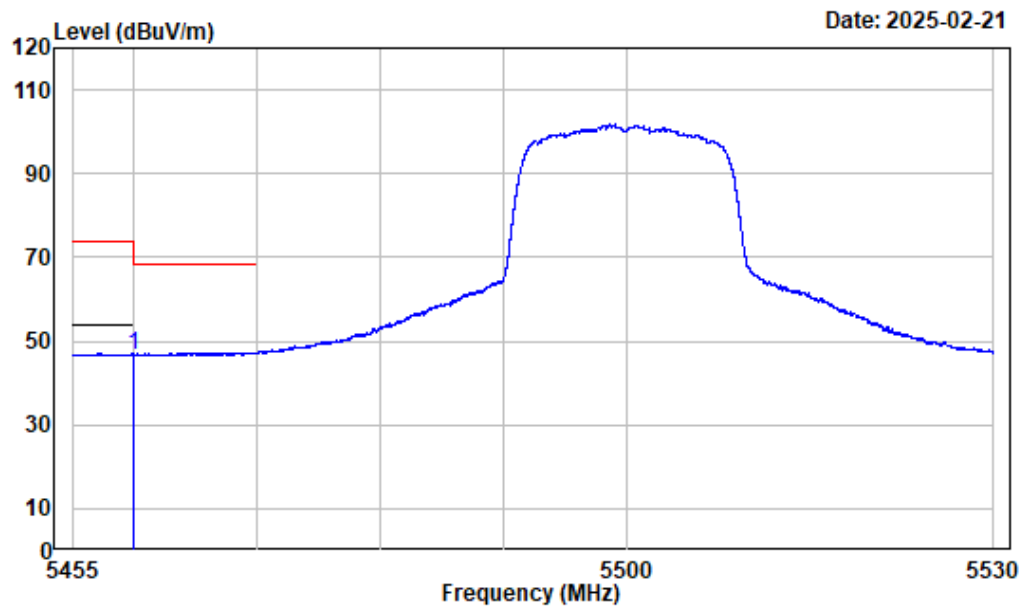

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-A-5500

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	52.94	46.65	54.00	-7.35 Average


Right Band edge_Horizontal_802.11a

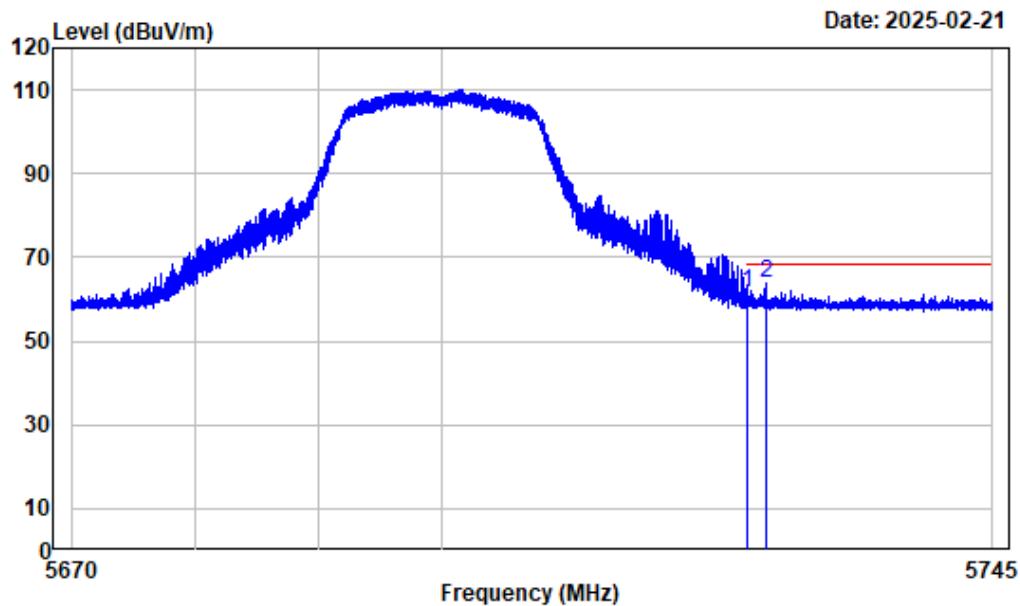

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-5.48	67.24	61.76	68.20	-6.44	Peak
2	5726.501	-5.48	69.45	63.97	68.20	-4.23	Peak


Right Band edge_Vertical_802.11a

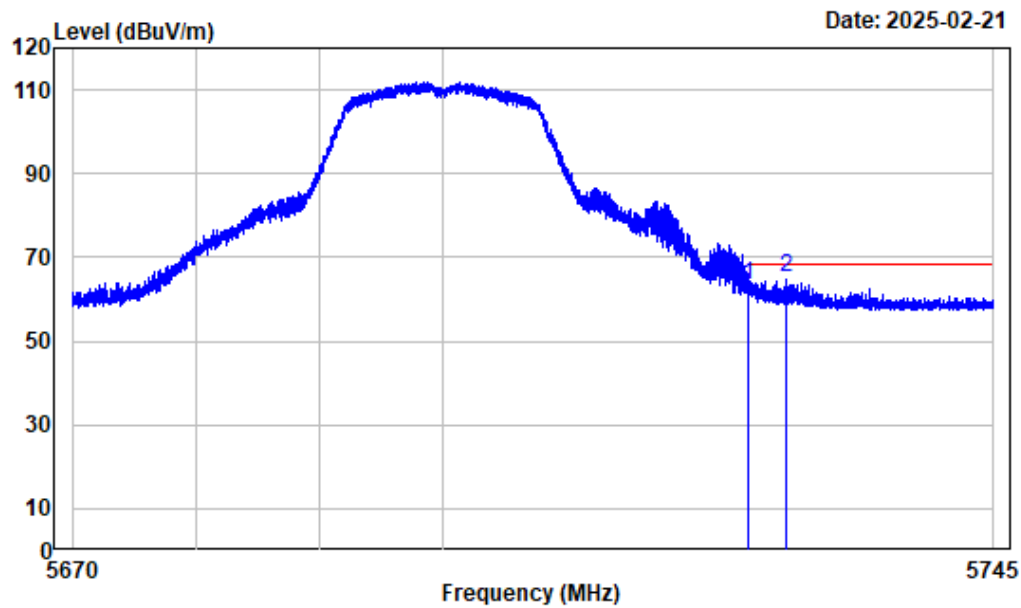

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5725.000	-5.48	68.74	63.26	68.20	-4.94	Peak
2 5728.001	-5.46	70.56	65.10	68.20	-3.10	Peak


Left Band edge_Horizontal_Peak_802.11n-HT20

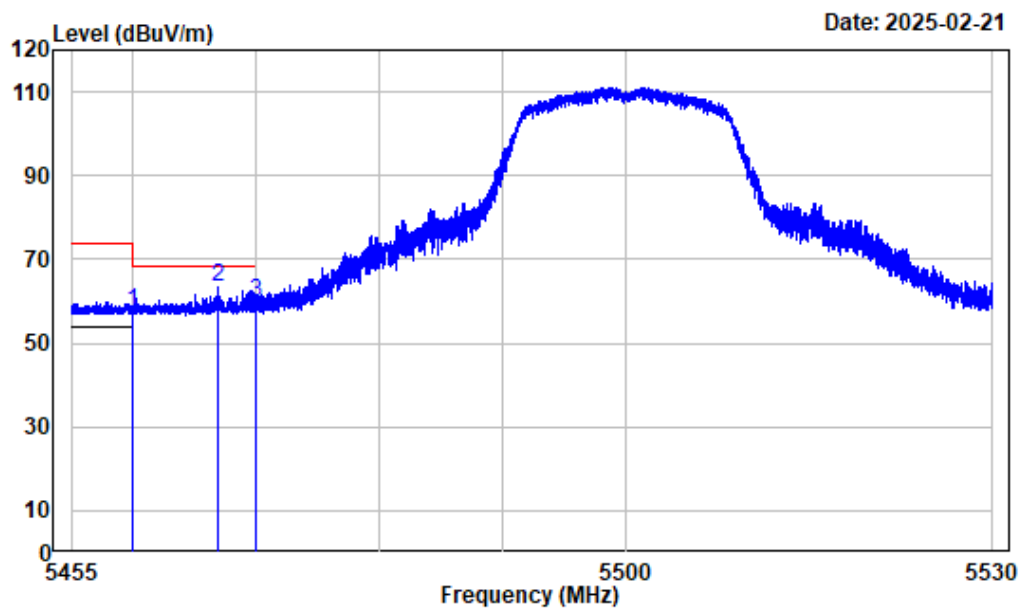

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N20-5500

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	-6.29	64.00	57.71	74.00	-16.29 Peak
2 5466.926	-6.27	69.66	63.39	68.20	-4.81 Peak
3 5470.000	-6.26	66.11	59.85	68.20	-8.35 Peak


Left Band edge_Horizontal_Average_802.11n-HT20

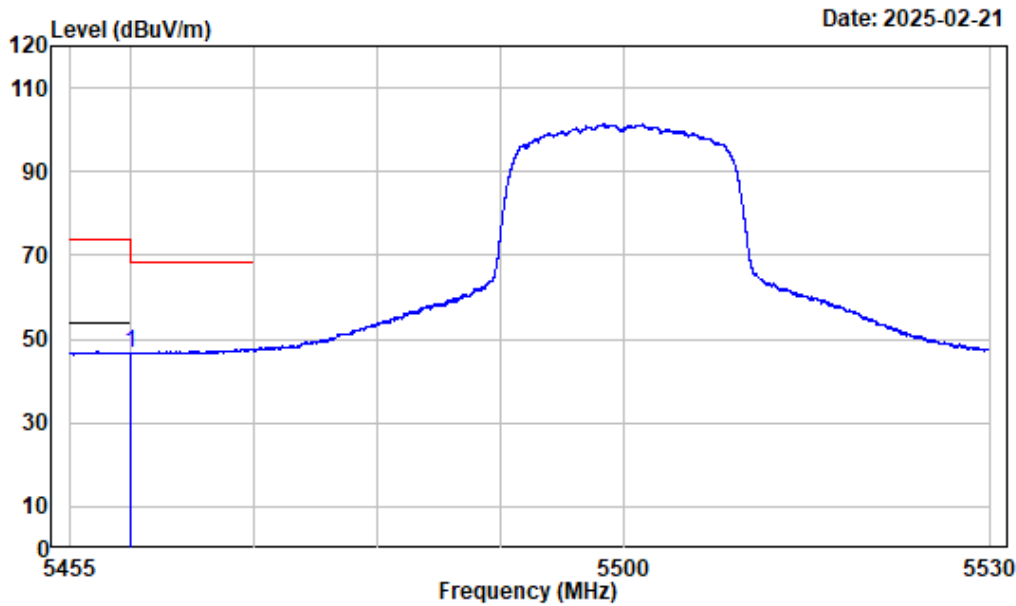

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-N20-5500

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	52.91	46.62	54.00	-7.38 Average


Left Band edge_Vertical_Peak_802.11n-HT20

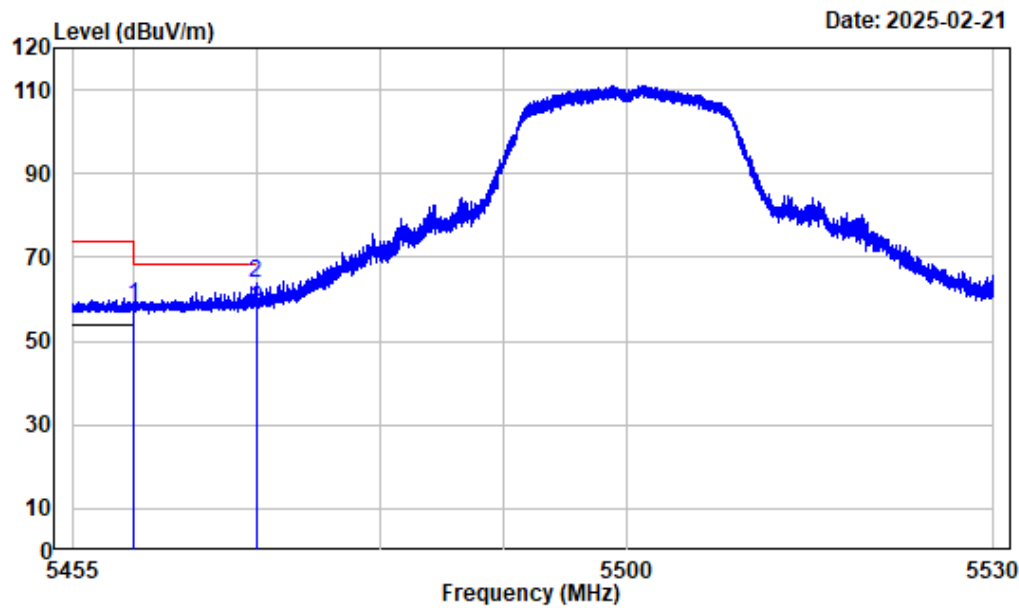

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N20-5500

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	-6.29	64.55	58.26	74.00	-15.74 Peak
2 5469.871	-6.26	70.01	63.75	68.20	-4.45 Peak
3 5470.000	-6.26	63.70	57.44	68.20	-10.76 Peak


Left Band edge_Vertical_Average_802.11n-HT20

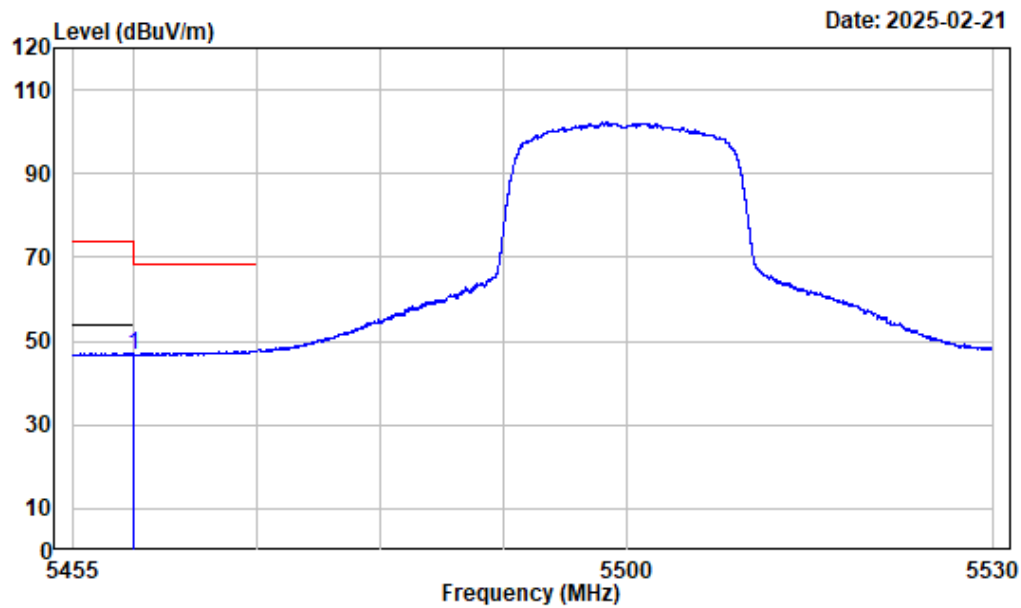

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-N20-5500

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	-6.29	52.99	46.70	54.00	-7.30	Average


Right Band edge_Horizontal_802.11n-HT20

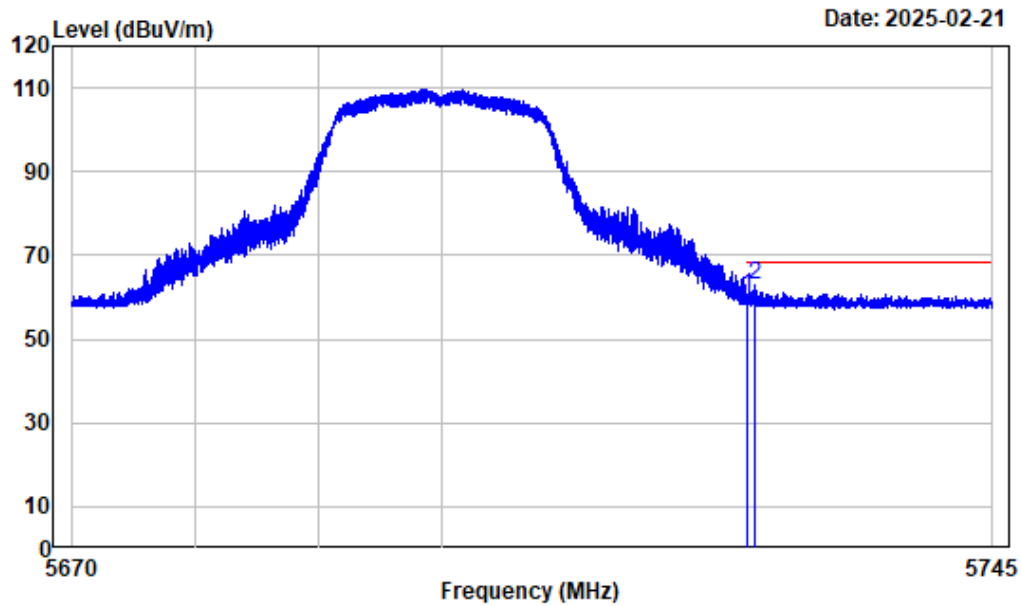

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N20-5700

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-5.48	65.89	60.41	68.20	-7.79	Peak
2	5725.498	-5.48	68.40	62.92	68.20	-5.28	Peak


Right Band edge_Vertical_802.11n-HT20

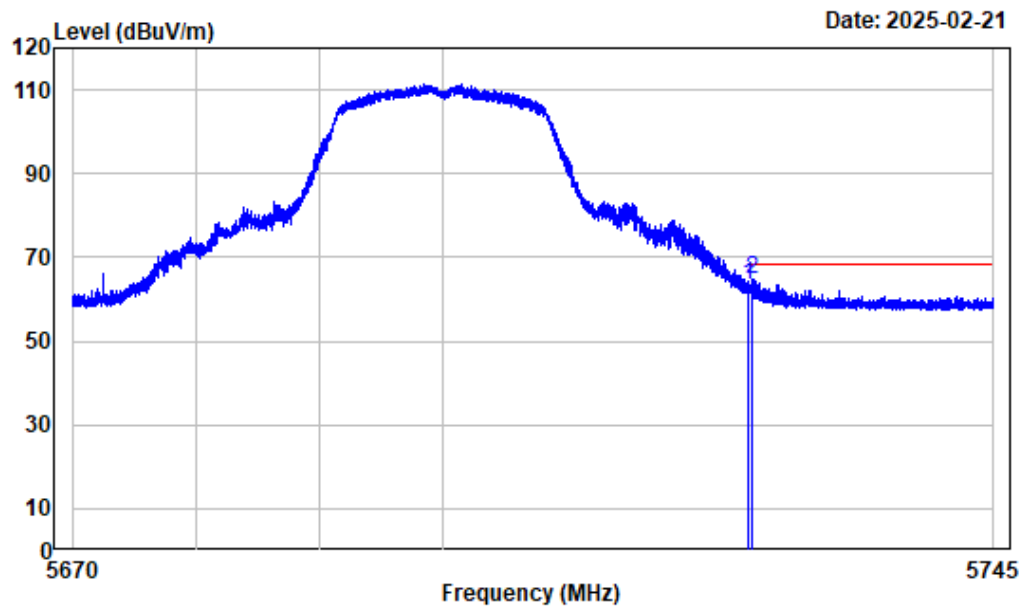

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N20-5700

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5725.000	-5.48	68.76	63.28	68.20	-4.92	Peak
2 5725.207	-5.48	70.35	64.87	68.20	-3.33	Peak


Left Band edge_Horizontal_Peak_802.11n-HT40

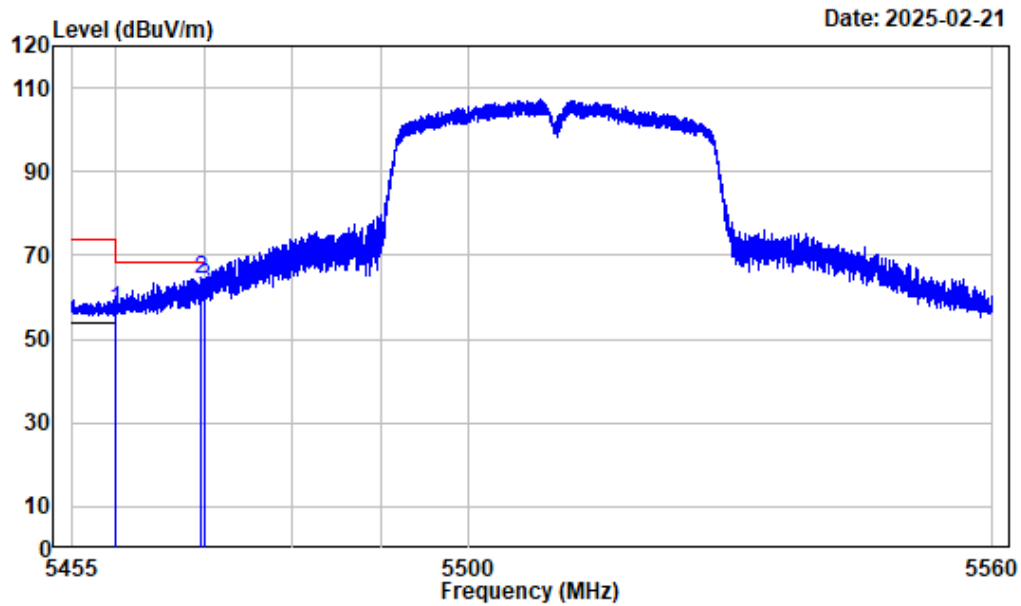

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N40-5510

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	63.48	57.19	74.00	-16.81	Peak
2	5469.597	-6.26	70.52	64.26	68.20	-3.94	Peak
3	5470.000	-6.26	68.59	62.33	68.20	-5.87	Peak


Left Band edge_Horizontal_Average_802.11n-HT40

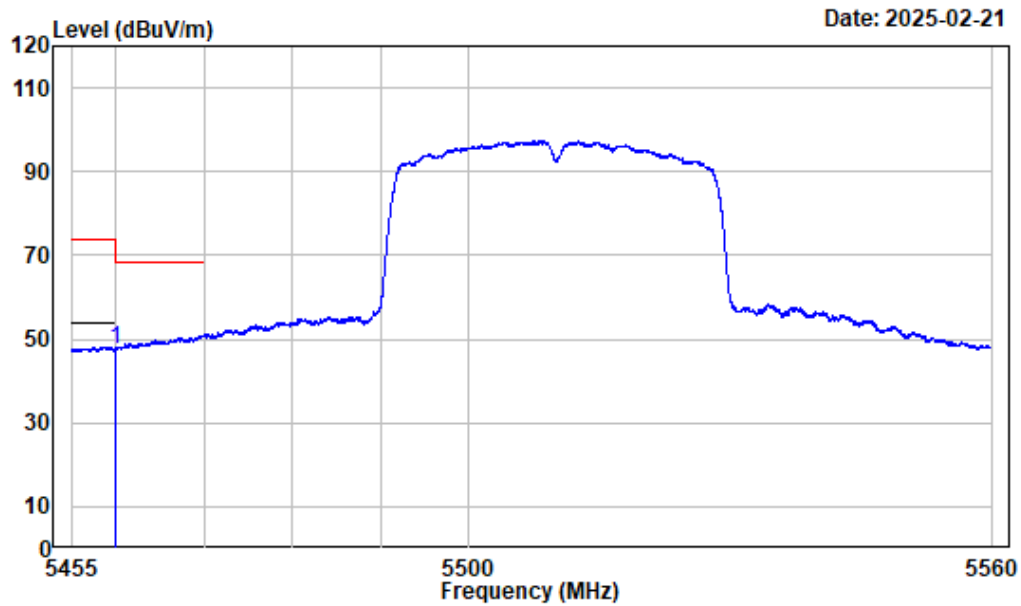

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band3-N40-5510

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5460.000	-6.29	53.97	47.68	54.00	-6.32 Average


Left Band edge_Vertical_Peak_802.11n-HT40

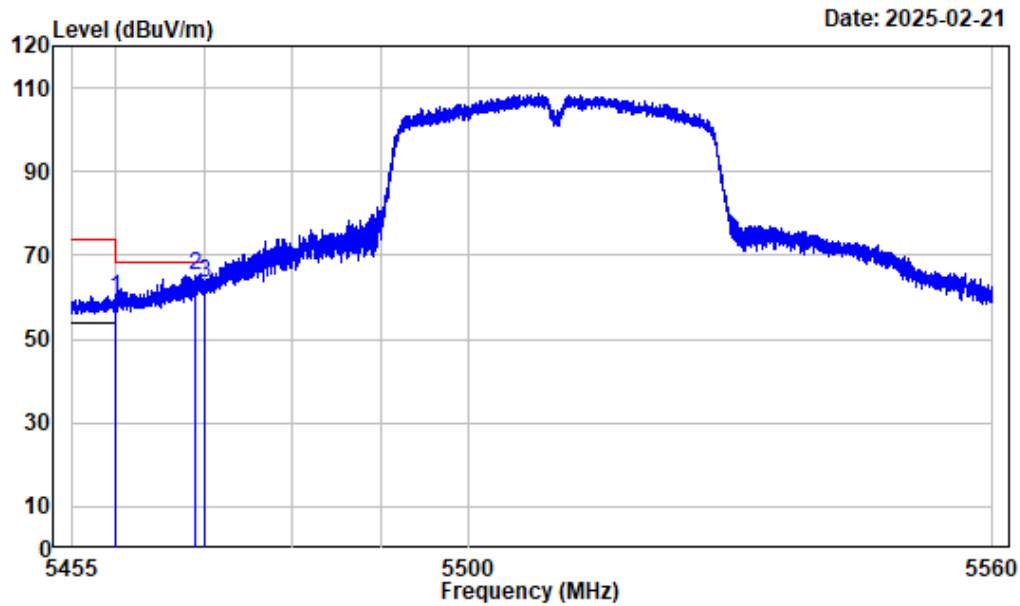

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N40-5510

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-6.29	66.09	59.80	74.00	-14.20	Peak
2	5468.940	-6.26	71.36	65.10	68.20	-3.10	Peak
3	5470.000	-6.26	69.84	63.58	68.20	-4.62	Peak


Left Band edge_Vertical_Average_802.11n-HT40

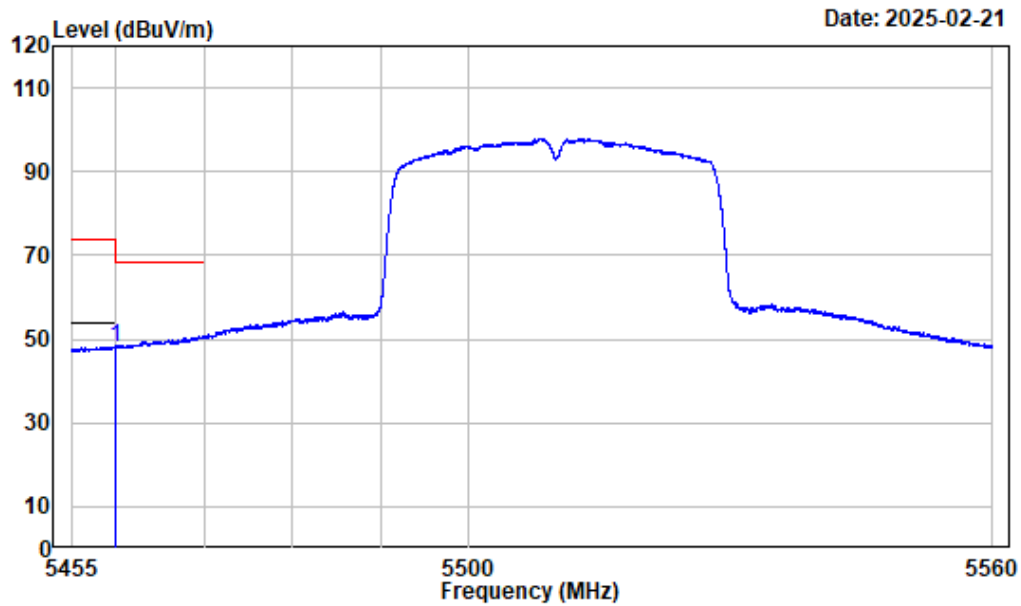

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band3-N40-5510

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5460.000	-6.29	54.42	48.13	54.00	-5.87	Average


Right Band edge_Horizontal_802.11n-HT40

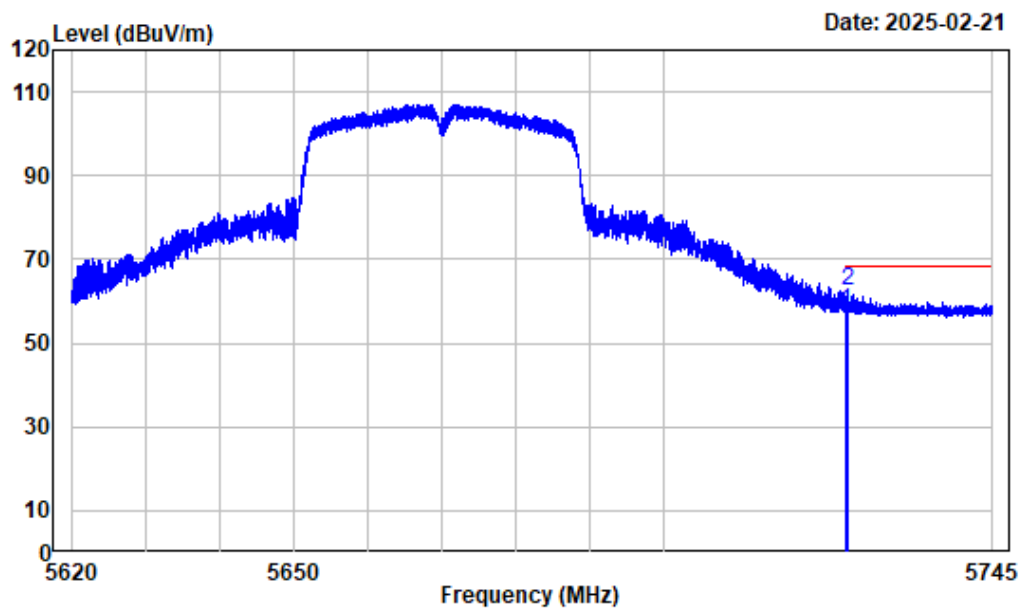

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N40-5670

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5725.000	-5.48	63.08	57.60	68.20	-10.60 Peak
2	5725.279	-5.48	67.93	62.45	68.20	-5.75 Peak

Right Band edge_Vertical_802.11n-HT40

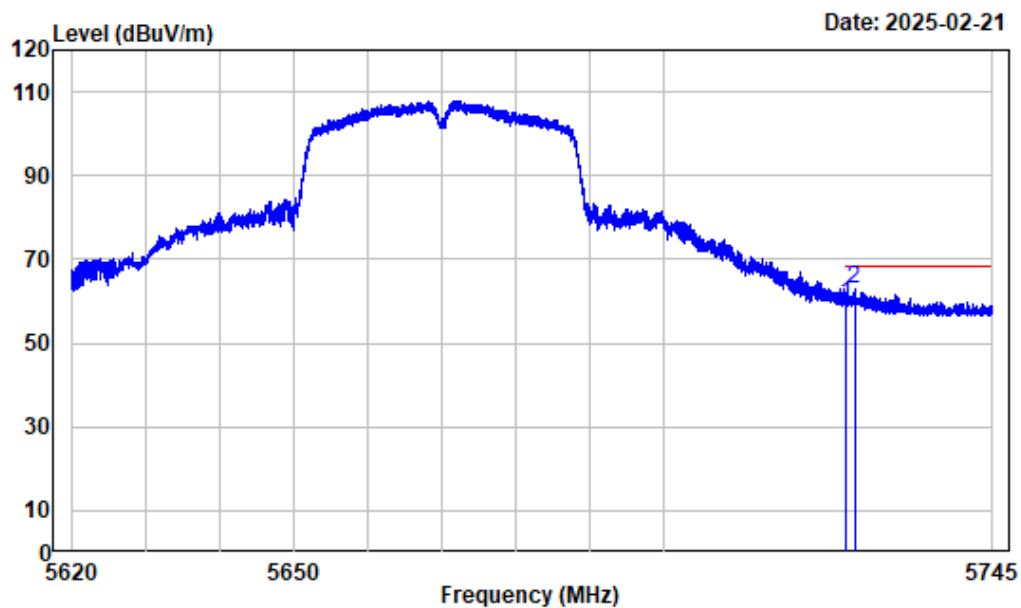


Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N40-5670

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5725.000	-5.48	64.78	59.30	68.20	-8.90	Peak
2 5726.091	-5.48	68.40	62.92	68.20	-5.28	Peak

5725-5850MHz:


Left Band edge_Horizontal_802.11a

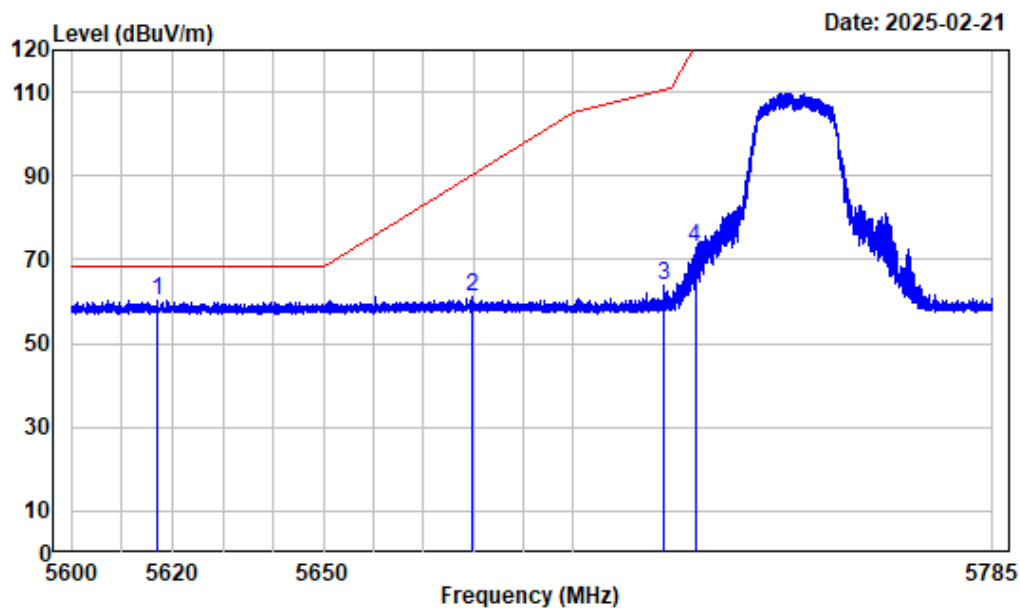

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5617.091	-6.09	66.42	60.33	68.20	-7.87	Peak
2	5679.814	-5.77	66.82	61.05	90.30	-29.25	Peak
3	5718.461	-5.54	69.44	63.90	110.37	-46.47	Peak
4	5724.613	-5.49	78.33	72.84	121.32	-48.48	Peak


Left Band edge_Vertical_802.11a

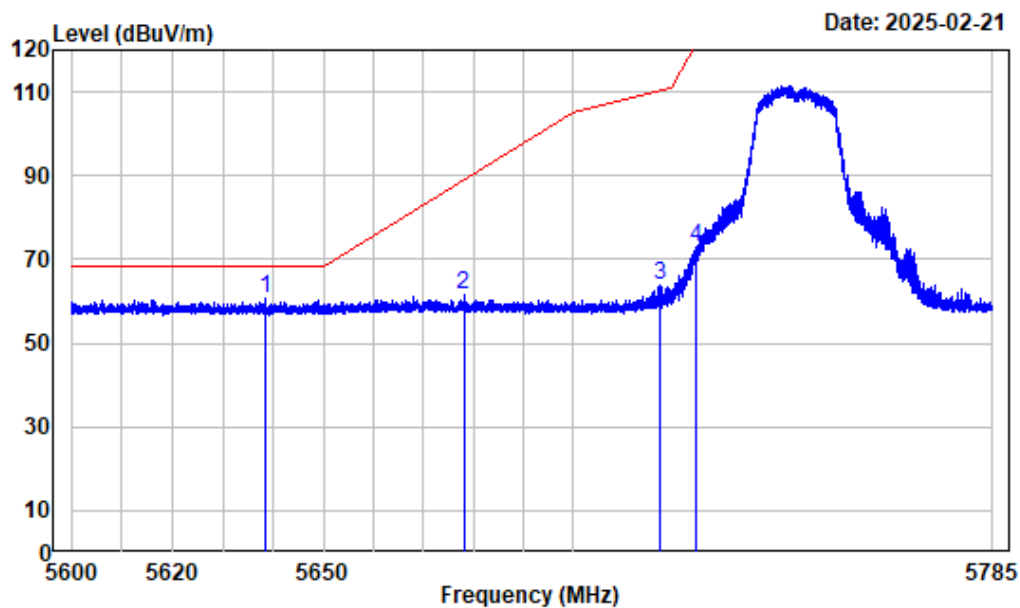

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5745

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5638.323	-5.94	66.41	60.47	68.20	-7.73	Peak
2	5678.057	-5.78	67.35	61.57	89.00	-27.43	Peak
3	5717.490	-5.56	69.38	63.82	110.10	-46.28	Peak
4	5724.891	-5.49	78.50	73.01	121.95	-48.94	Peak


Right Band edge_Horizontal_802.11a

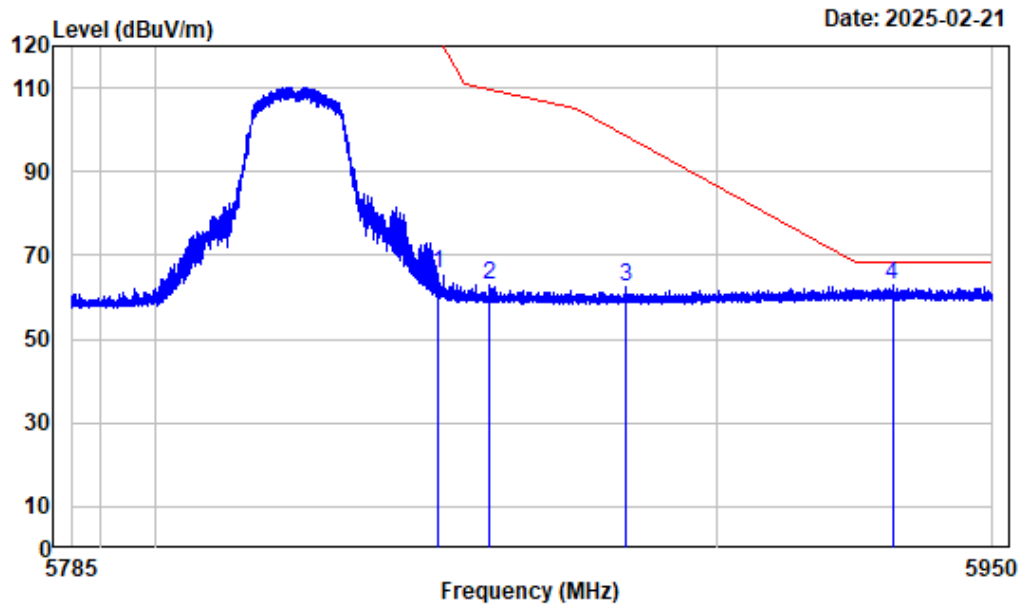

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5850.187	-4.68	70.35	65.67	155.20	-89.53	Peak
2 5859.156	-4.63	67.66	63.03	109.63	-46.60	Peak
3 5883.847	-4.52	67.17	62.65	98.63	-35.98	Peak
4 5931.848	-4.44	67.51	63.07	68.20	-5.13	Peak


Right Band edge_Vertical_802.11a

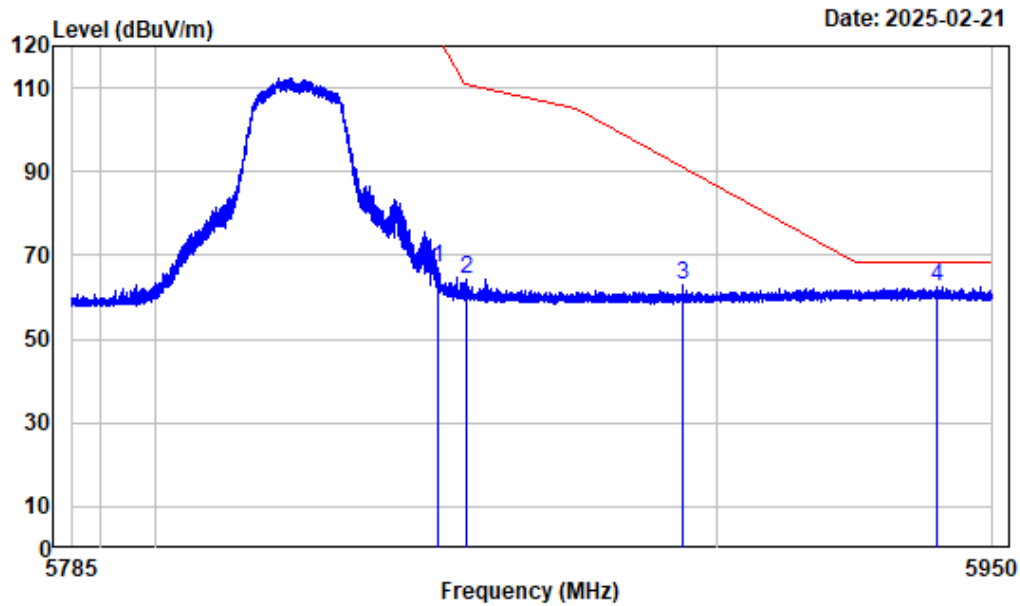

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.255	-4.68	71.77	67.09	121.62	-54.53	Peak
2	5855.113	-4.66	68.84	64.18	110.77	-46.59	Peak
3	5893.934	-4.48	67.43	62.95	91.15	-28.20	Peak
4	5939.996	-4.44	67.14	62.70	68.20	-5.50	Peak


Left Band edge_Horizontal_802.11n-HT20

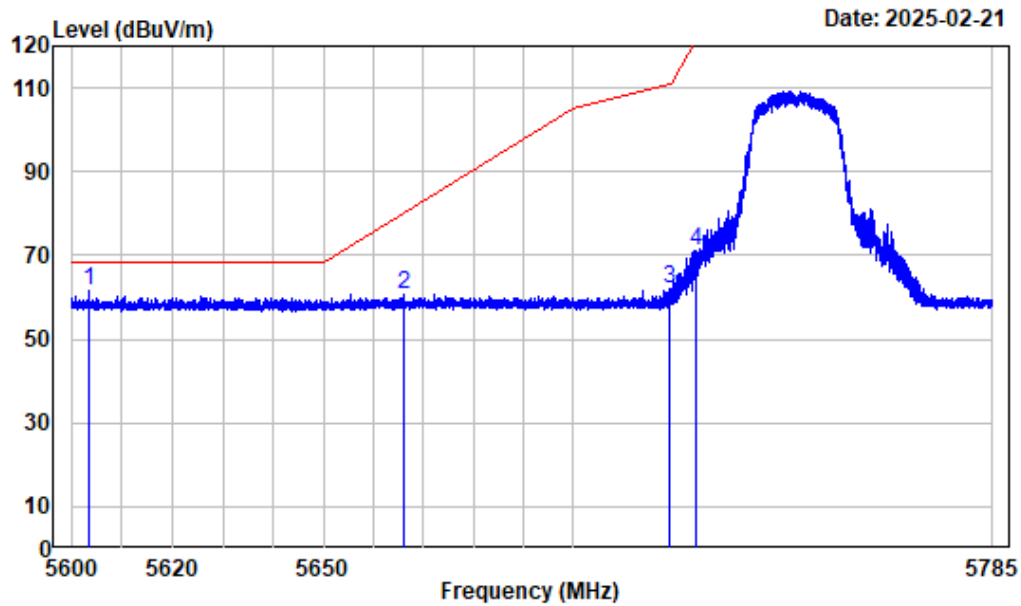

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N20-5745

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5603.331	-6.19	67.65	61.46	68.20	-6.74 Peak
2 5666.215	-5.82	66.57	60.75	80.24	-19.49 Peak
3 5719.502	-5.54	67.68	62.14	110.66	-48.52 Peak
4 5724.752	-5.49	76.44	70.95	121.63	-50.68 Peak


Left Band edge_Vertical_802.11n-HT20

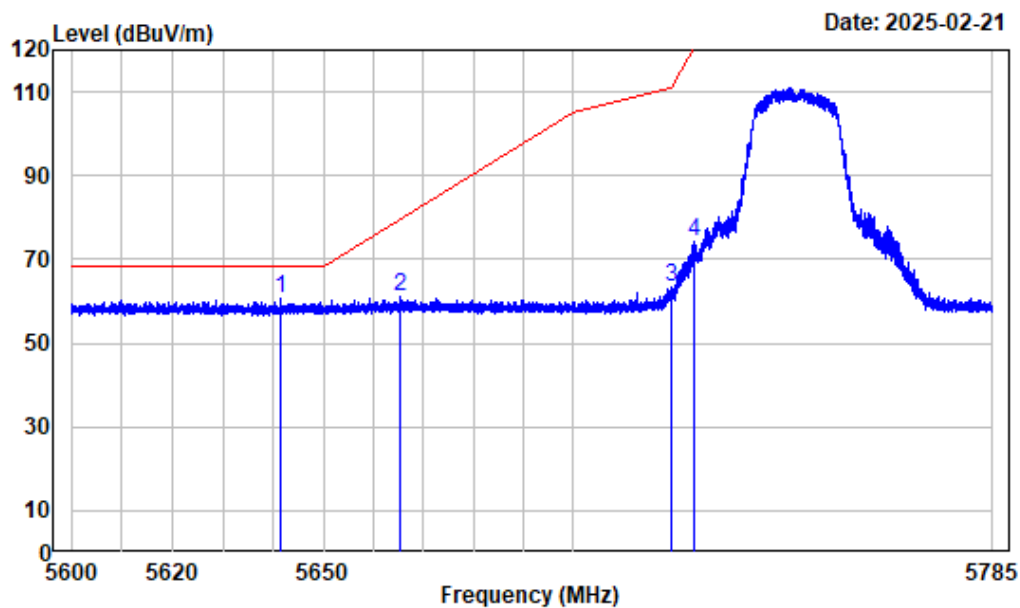

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N20-5745

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5641.630	-5.92	66.42	60.50	68.20	-7.70 Peak
2 5665.267	-5.82	66.78	60.96	79.53	-18.57 Peak
3 5719.895	-5.53	69.09	63.56	110.77	-47.21 Peak
4 5724.405	-5.49	79.58	74.09	120.84	-46.75 Peak


Right Band edge_Horizontal_802.11n-HT20

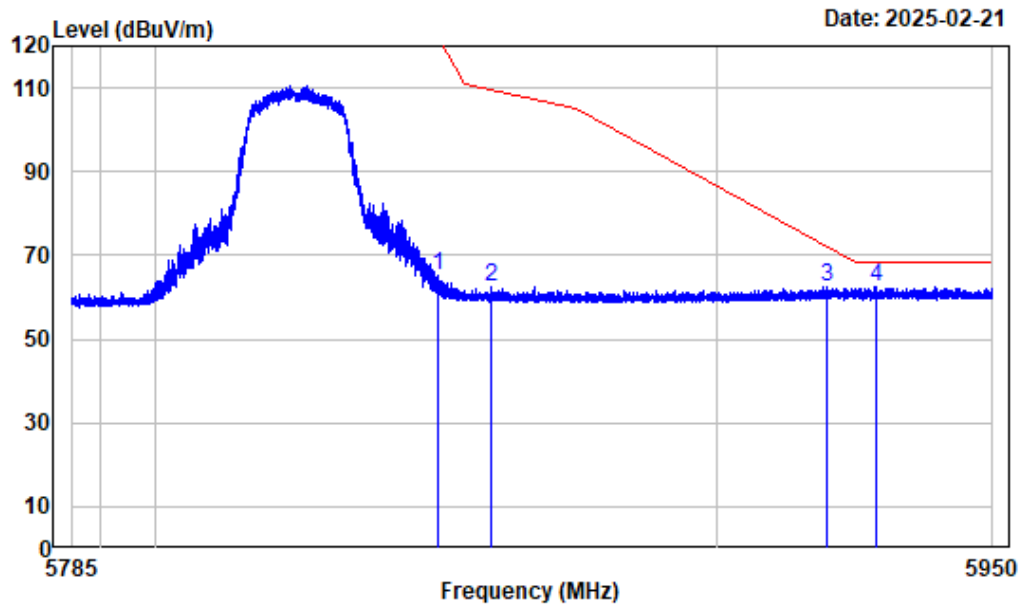

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N20-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.225	-4.68	70.00	65.32	121.69	-56.37	Peak
2	5859.754	-4.63	67.21	62.58	109.47	-46.89	Peak
3	5919.987	-4.45	66.87	62.42	71.90	-9.48	Peak
4	5928.815	-4.45	67.14	62.69	68.20	-5.51	Peak


Right Band edge_Vertical_802.11n-HT20

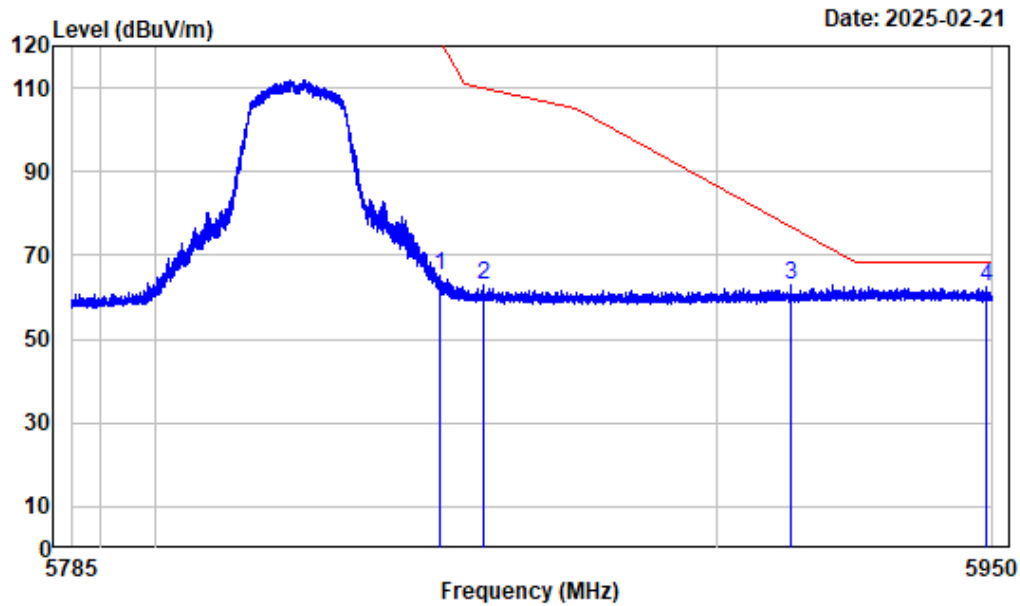

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N20-5825

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5850.390	-4.68	69.85	65.17	121.31	-56.14 Peak
2 5858.208	-4.65	67.65	63.00	109.90	-46.90 Peak
3 5913.365	-4.46	67.36	62.90	76.78	-13.88 Peak
4 5948.907	-4.45	67.14	62.69	68.20	-5.51 Peak


Left Band edge_Horizontal_802.11n-HT40

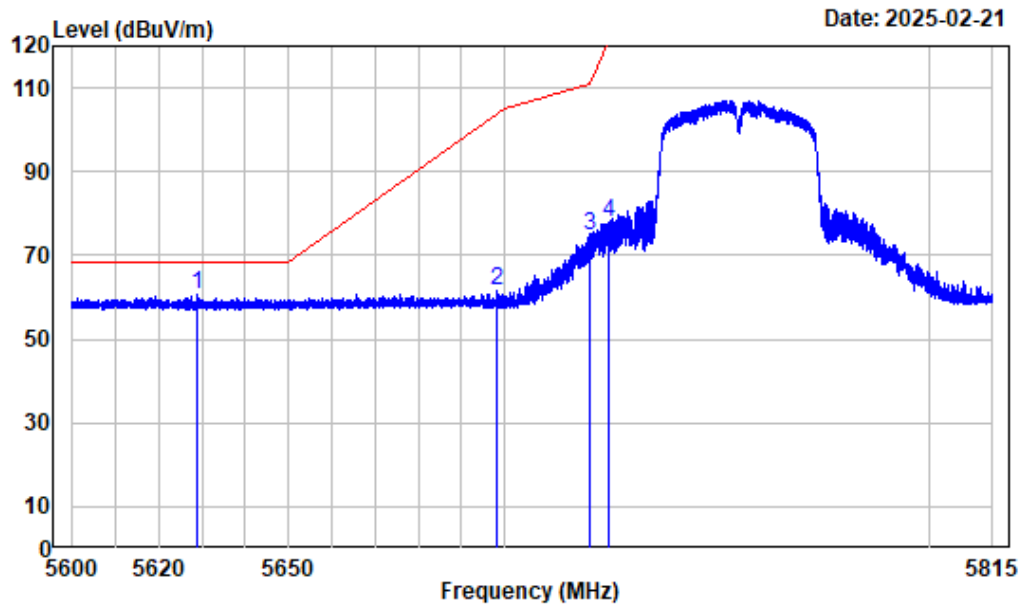

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5628.760	-6.01	66.48	60.47	68.20	-7.73	Peak
2	5698.456	-5.73	67.21	61.48	104.06	-42.58	Peak
3	5719.904	-5.53	80.35	74.82	110.77	-35.95	Peak
4	5724.259	-5.49	83.48	77.99	120.51	-42.52	Peak


Left Band edge_Vertical_802.11n-HT40

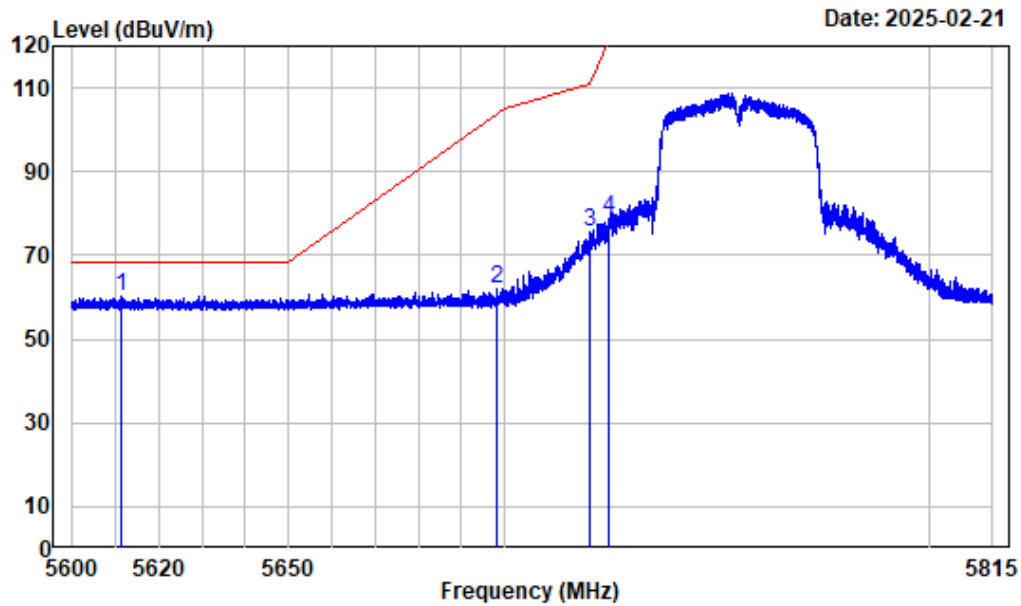

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N40-5755

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5611.235	-6.14	66.42	60.28	68.20	-7.92	Peak
2	5698.348	-5.73	67.71	61.98	103.98	-42.00	Peak
3	5719.931	-5.53	81.05	75.52	110.78	-35.26	Peak
4	5724.662	-5.49	84.30	78.81	121.43	-42.62	Peak


Right Band edge_Horizontal_802.11n-HT40

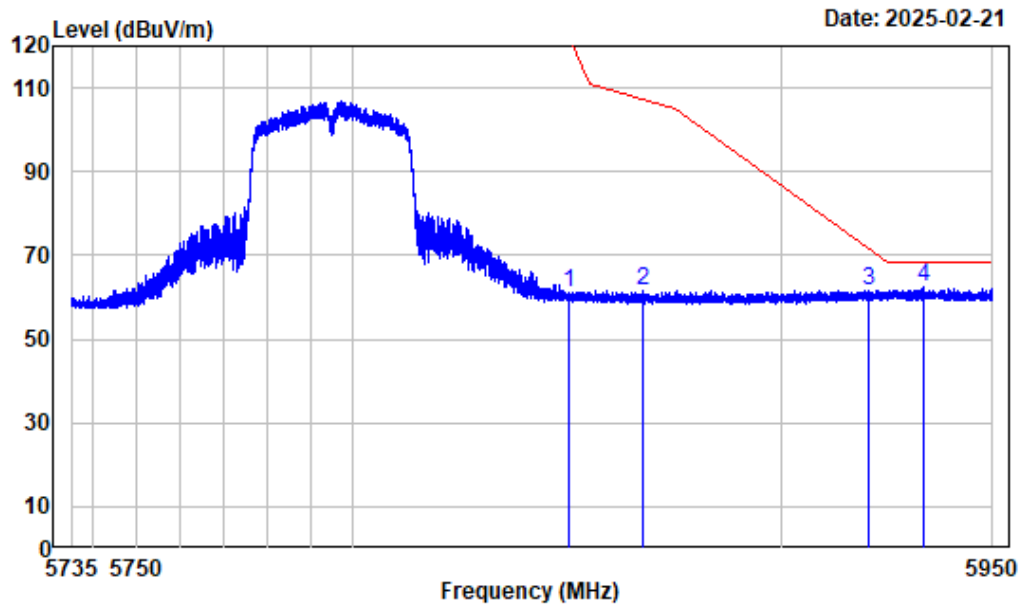

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N40-5795

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.362	-4.68	66.02	61.34	121.37	-60.03	Peak
2	5867.376	-4.60	66.29	61.69	107.33	-45.64	Peak
3	5920.649	-4.45	66.09	61.64	71.41	-9.77	Peak
4	5933.846	-4.45	66.85	62.40	68.20	-5.80	Peak

Right Band edge_Vertical_802.11n-HT40

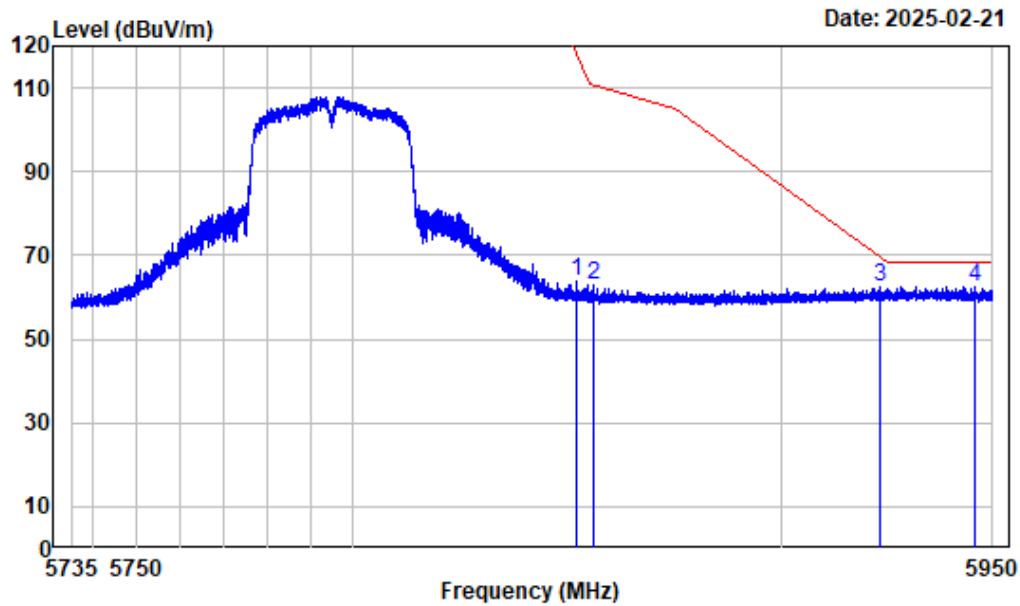


Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N40-5795

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5851.787	-4.66	68.69	64.03	118.13	-54.10 Peak
2 5855.738	-4.66	67.38	62.72	110.59	-47.87 Peak
3 5923.148	-4.46	66.77	62.31	69.56	-7.25 Peak
4 5945.968	-4.44	67.03	62.59	68.20	-5.61 Peak

1-18GHz (Listed with the worst harmonic margin test plot)

5150-5250MHz:


1-7GHz_Horizontal_802.11a

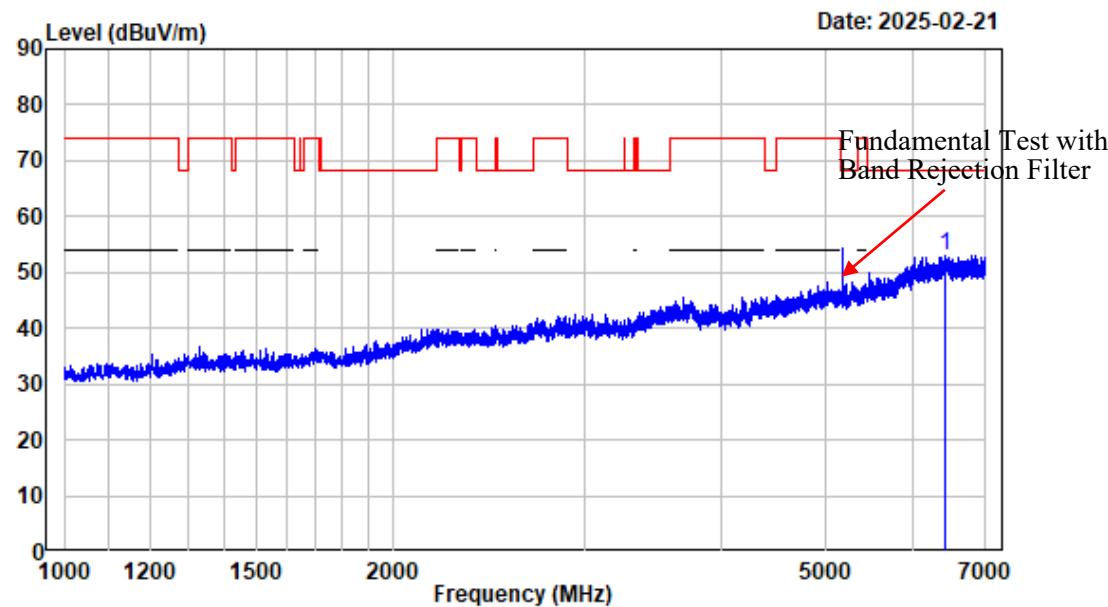

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6436.680	-2.87	55.94	53.07	68.20	-15.13	Peak


1-7GHz_Vertical_802.11a

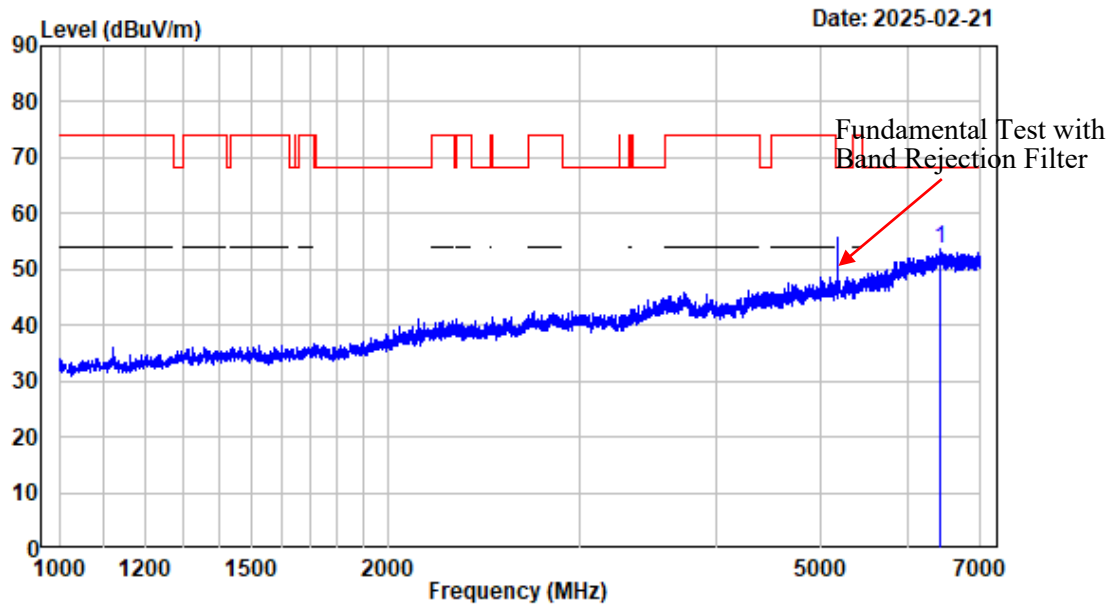

Condition : Vertical
 Project No. : 2401A25033E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band1-A-5180

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6438.180	-2.88	56.70	53.82	68.20	-14.38	Peak


7-18GHz_Horizontal_Peak_802.11a

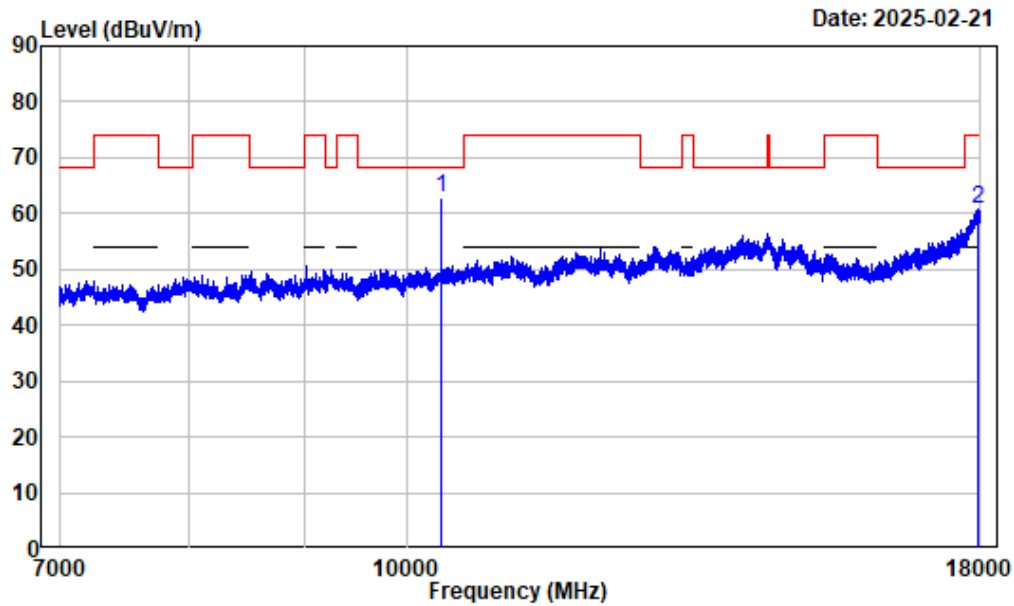

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10360.000	2.53	60.45	62.98	68.20	-5.22	Peak
2	17967.000	13.03	47.68	60.71	74.00	-13.29	Peak


7-18GHz_Horizontal_Average_802.11a

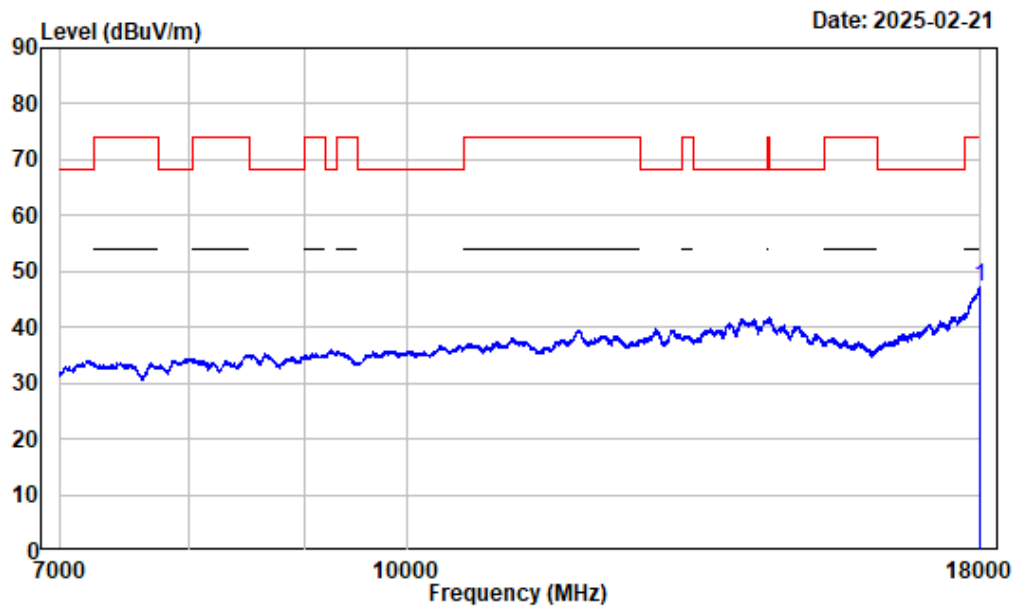

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17989.000	13.14	34.00	47.14	54.00	-6.86	Average


7-18GHz_Vertical_Peak_802.11a

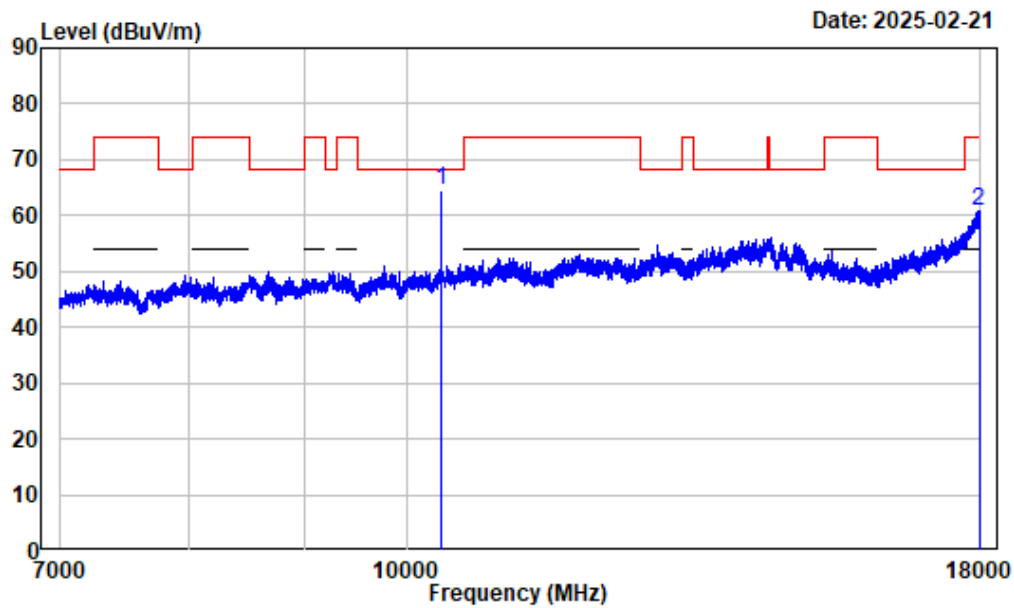

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 10360.000	2.53	61.97	64.50	68.20	-3.70 Peak
2 17972.500	13.07	47.79	60.86	74.00	-13.14 Peak


7-18GHz_Vertical_Average_802.11a

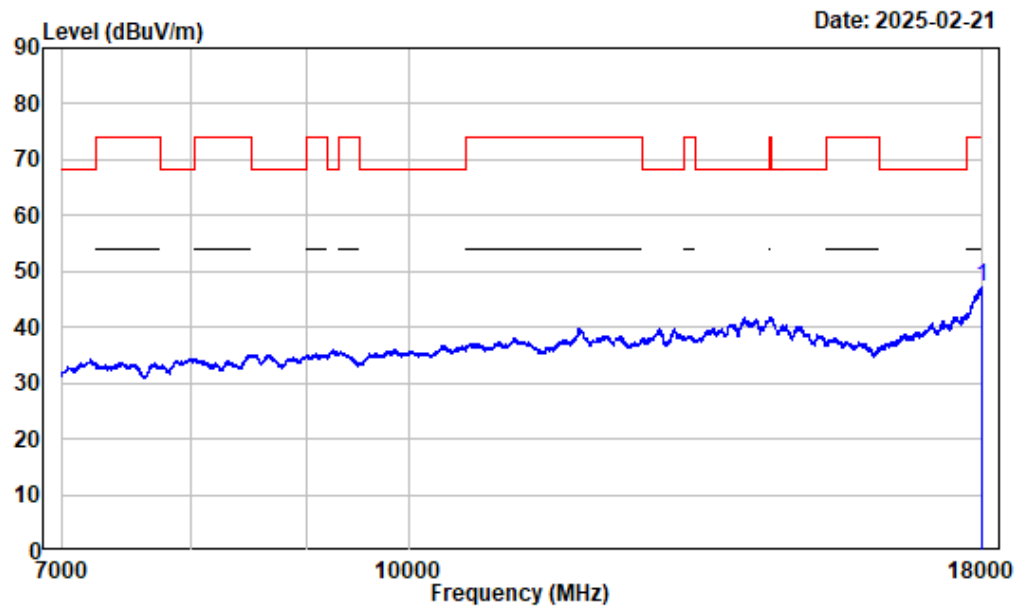

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17997.250	13.19	34.08	47.27	54.00	-6.73	Average


1-7GHz_Horizontal_802.11n-HT20

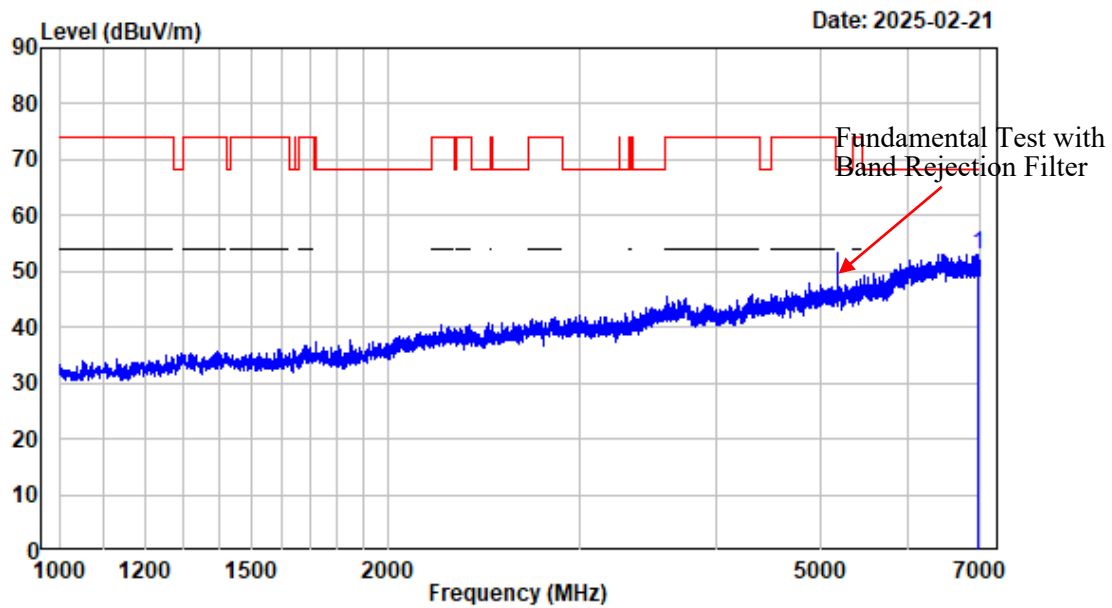

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N20-5180

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6972.247	-2.80	55.91	53.11	68.20	-15.09	Peak


1-7GHz_Vertical_802.11n-HT20

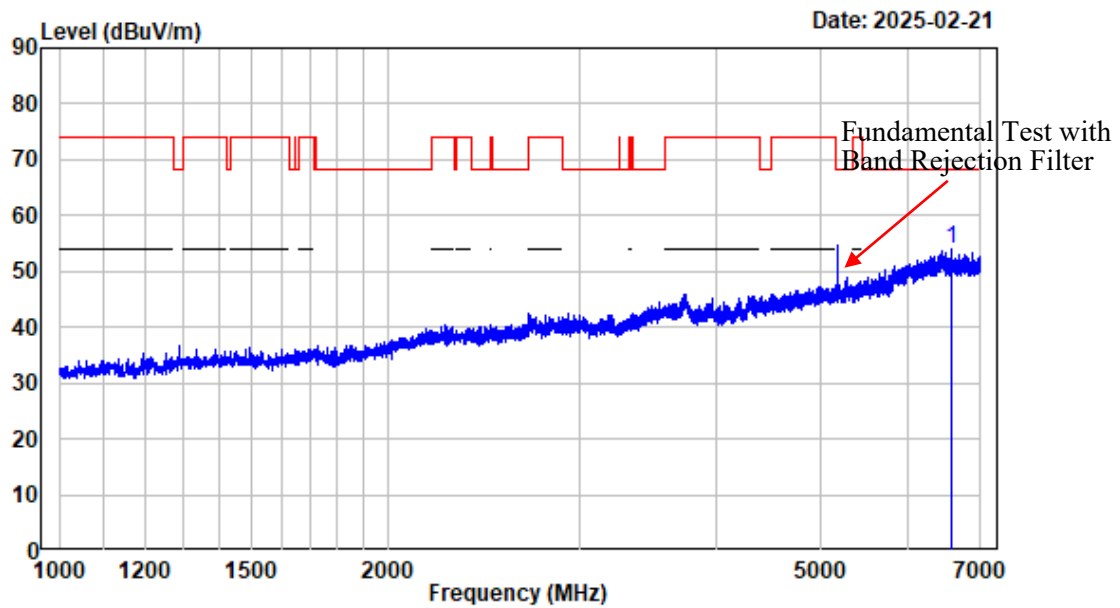

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N20-5180

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	6573.197	-3.08	57.01	53.93	68.20 -14.27 Peak


7-18GHz_Horizontal_Peak_802.11n-HT20

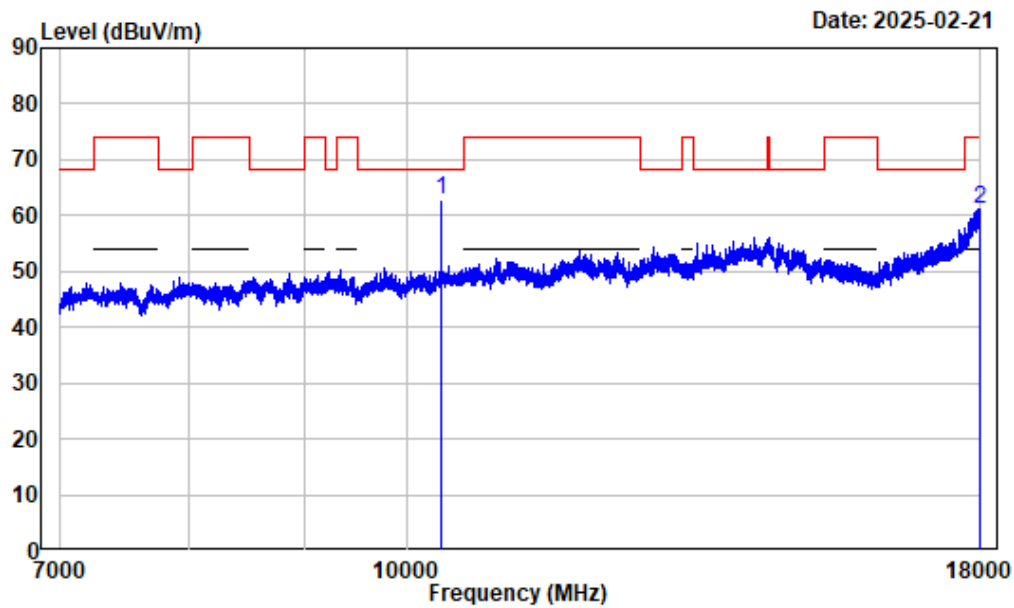

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N20-5180

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 10360.000	2.53	60.17	62.70	68.20	-5.50 Peak
2 17975.250	13.08	48.21	61.29	74.00	-12.71 Peak


7-18GHz_Horizontal_Average_802.11n-HT20

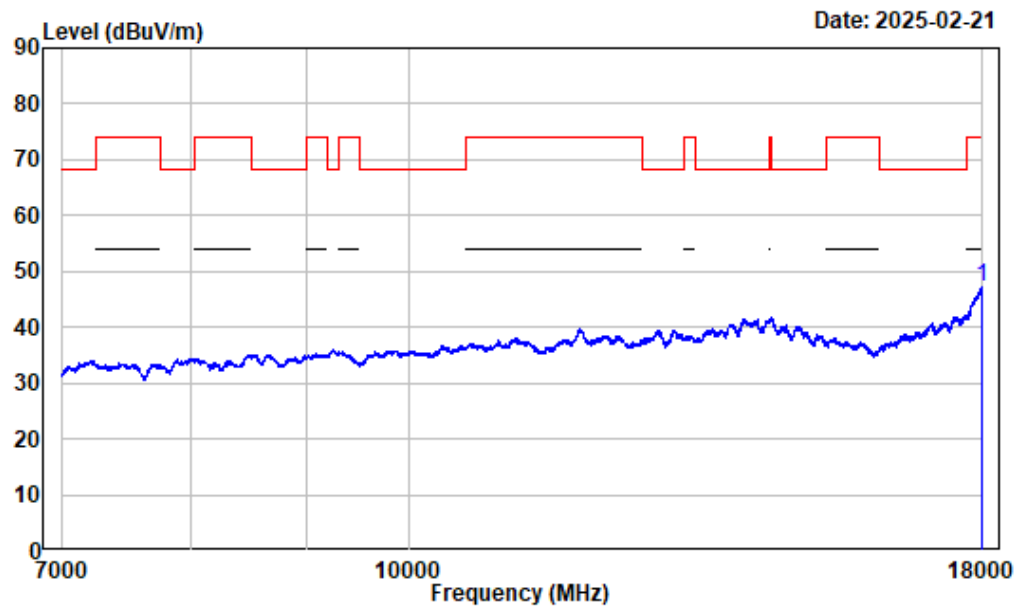

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band1-N20-5180

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17995.880	13.18	33.90	47.08	54.00	-6.92	Average


7-18GHz_Vertical_Peak_802.11n-HT20

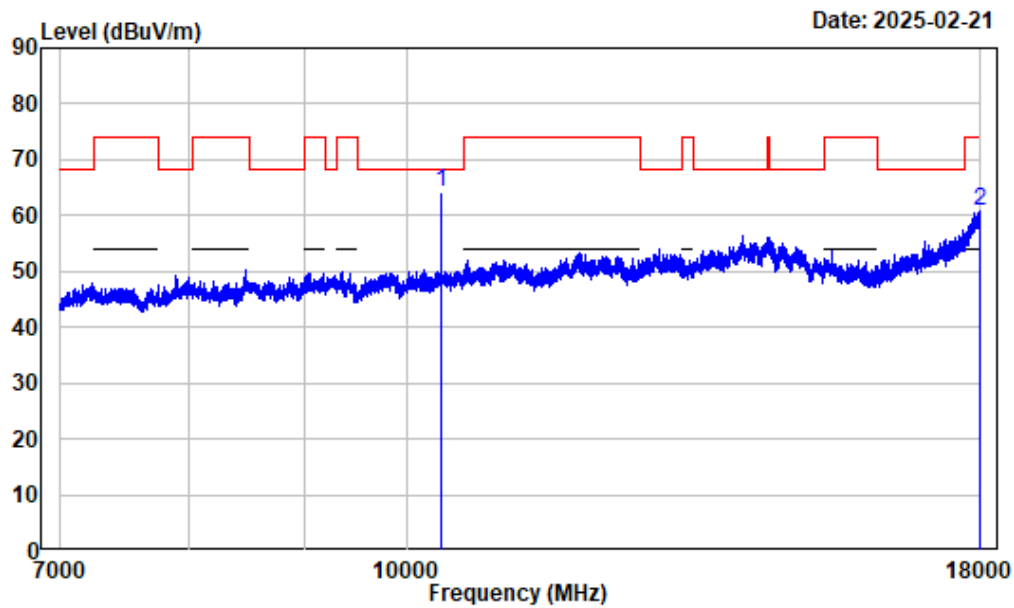

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N20-5180

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 10360.000	2.53	61.70	64.23	68.20	-3.97 Peak
2 17994.500	13.17	47.69	60.86	74.00	-13.14 Peak


7-18GHz_Vertical_Average_802.11n-HT20

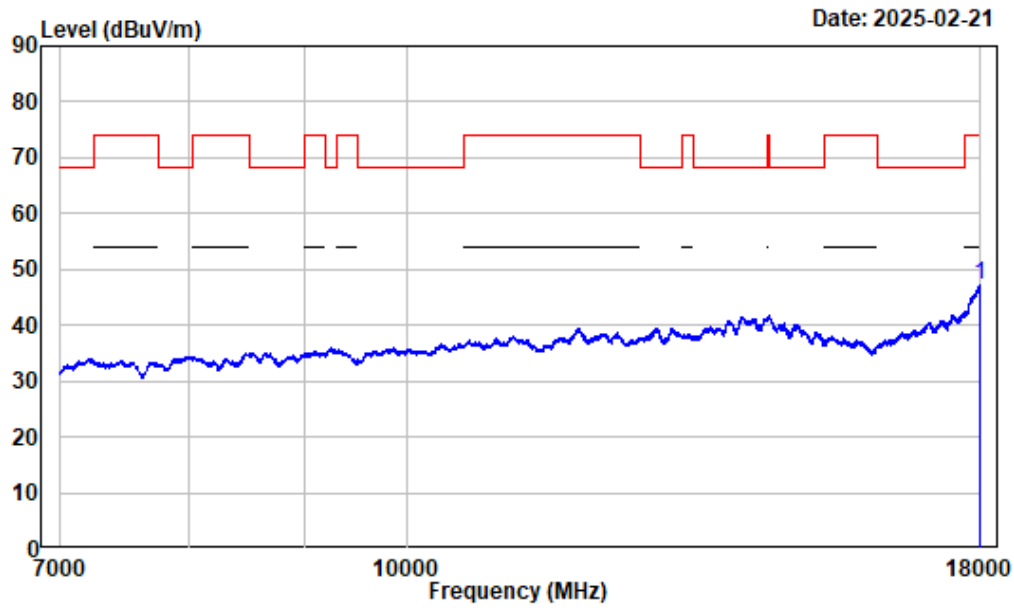

Condition : Vertical
 Project No. : 2401A25033E-RF
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
 Note : 5GWiFi-Band1-N20-5180

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17993.130	13.17	33.88	47.05	54.00	-6.95	Average


1-7GHz_Horizontal_802.11n-HT40

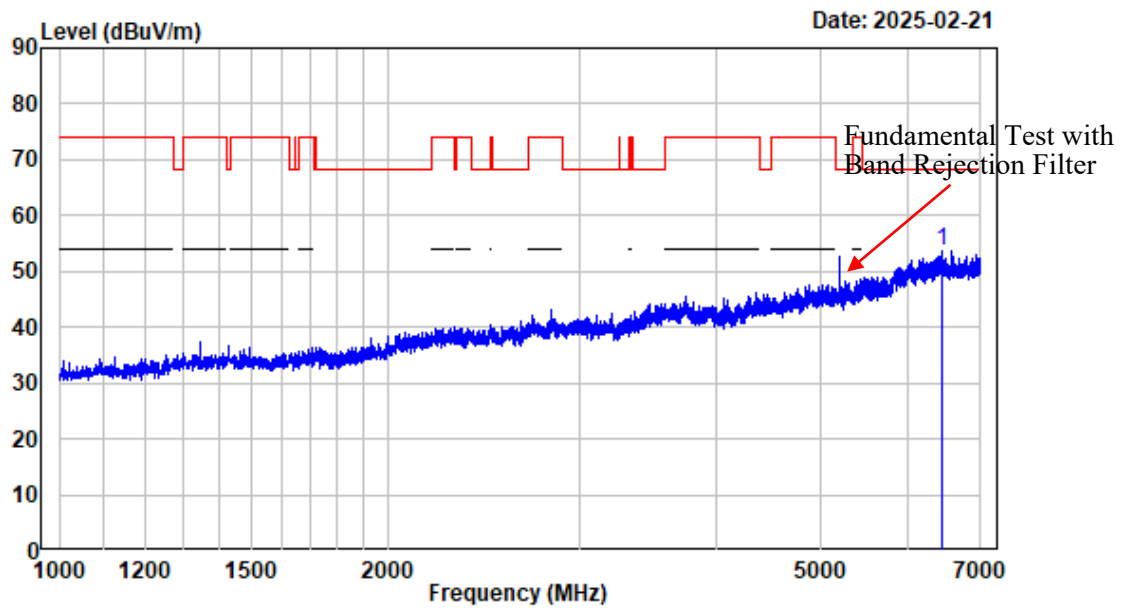

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N40-5190

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6453.932	-2.88	56.70	53.82	68.20	-14.38	Peak


1-7GHz_Vertical_802.11n-HT40

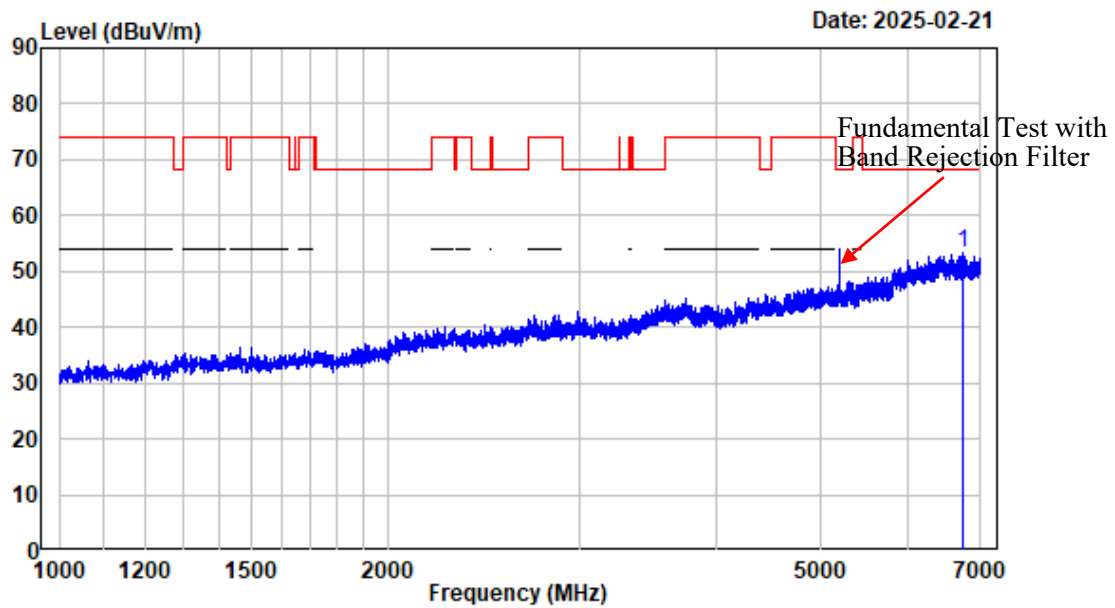

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N40-5190

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6755.469	-3.22	56.44	53.22	68.20	-14.98	Peak


7-18GHz_Horizontal_Peak_802.11n-HT40

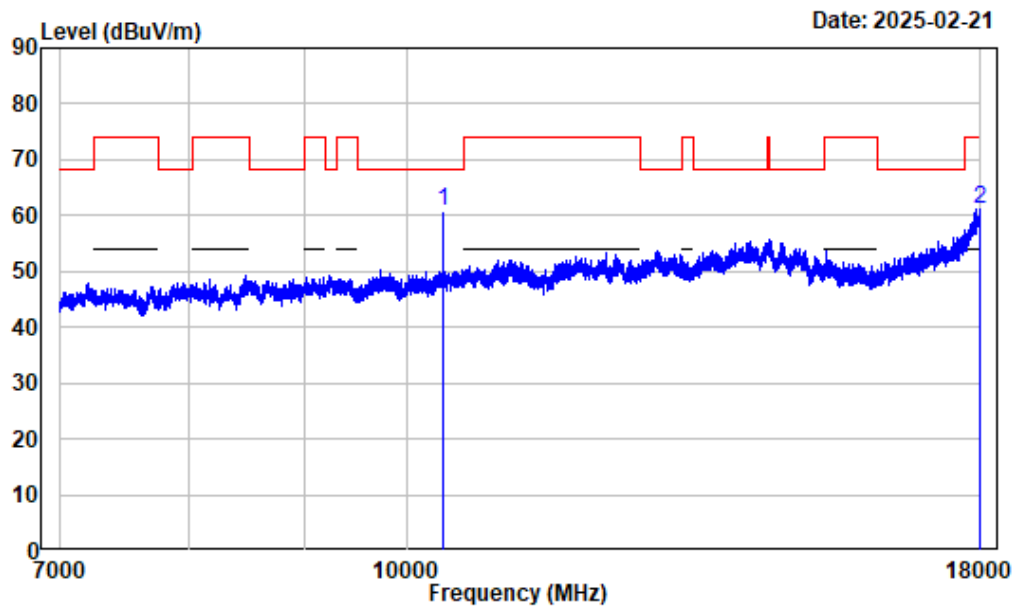

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N40-5190

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 10380.000	2.54	58.21	60.75	68.20	-7.45 Peak
2 17991.750	13.16	48.08	61.24	74.00	-12.76 Peak


7-18GHz_Horizontal_Average_802.11n-HT40

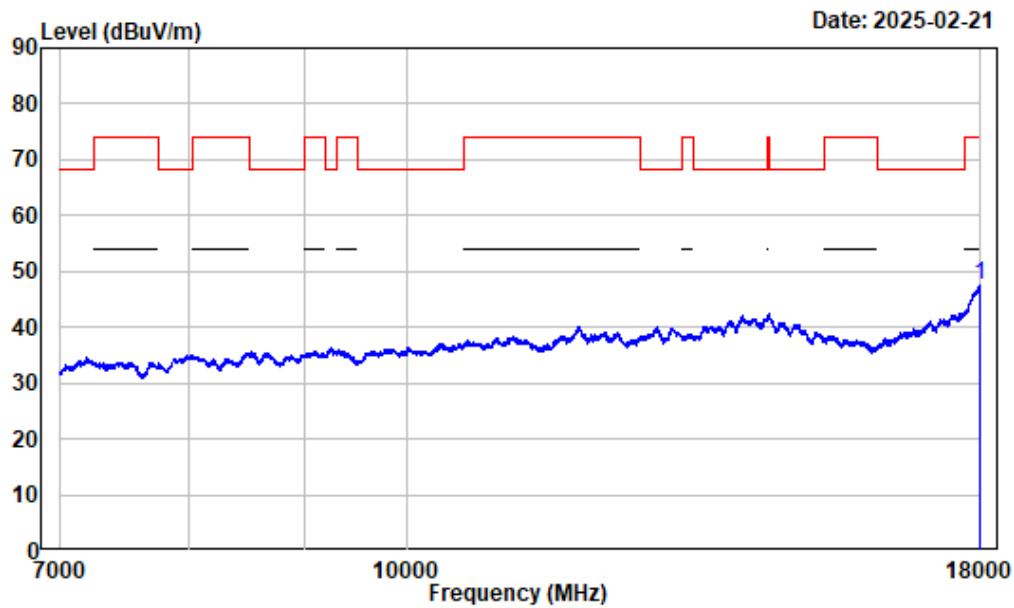

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-N40-5190

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17994.500	13.17	34.49	47.66	54.00	-6.34	Average


7-18GHz_Vertical_Peak_802.11n-HT40

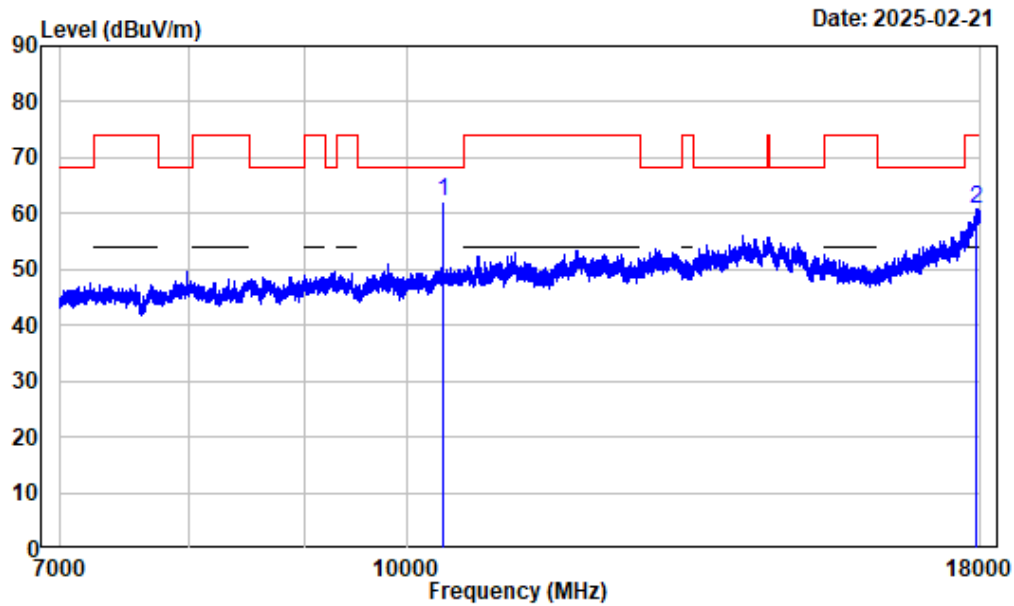

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-N40-5190

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 10380.000	2.54	59.68	62.22	68.20	-5.98 Peak
2 17936.740	12.89	47.85	60.74	74.00	-13.26 Peak

7-18GHz_Vertical_Average_802.11n-HT40

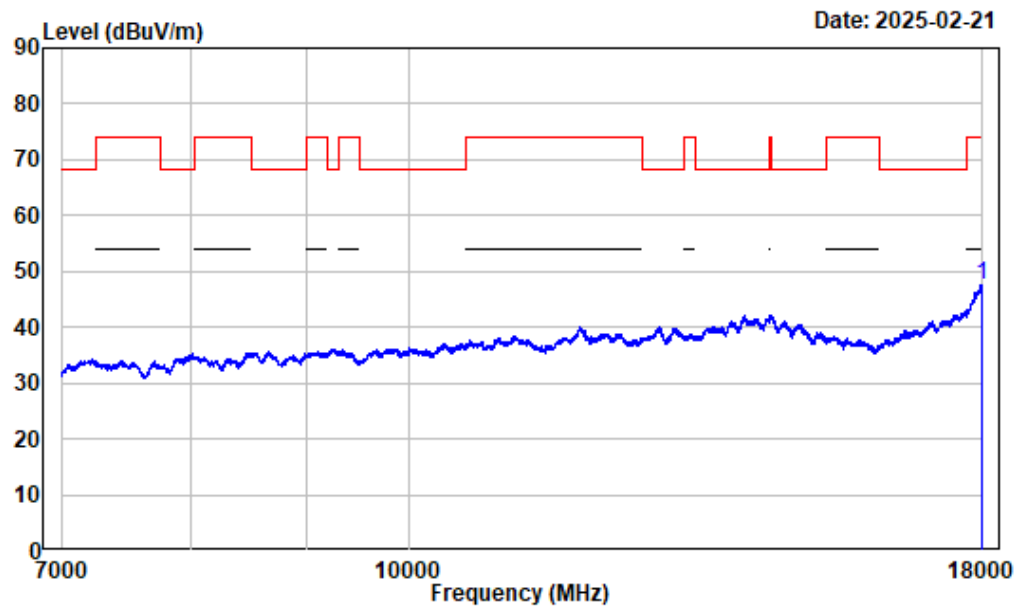


Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band1-N40-5190

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17994.500	13.17	34.39	47.56	54.00	-6.44	Average

5250-5350MHz:


1-7GHz_Horizontal_802.11a

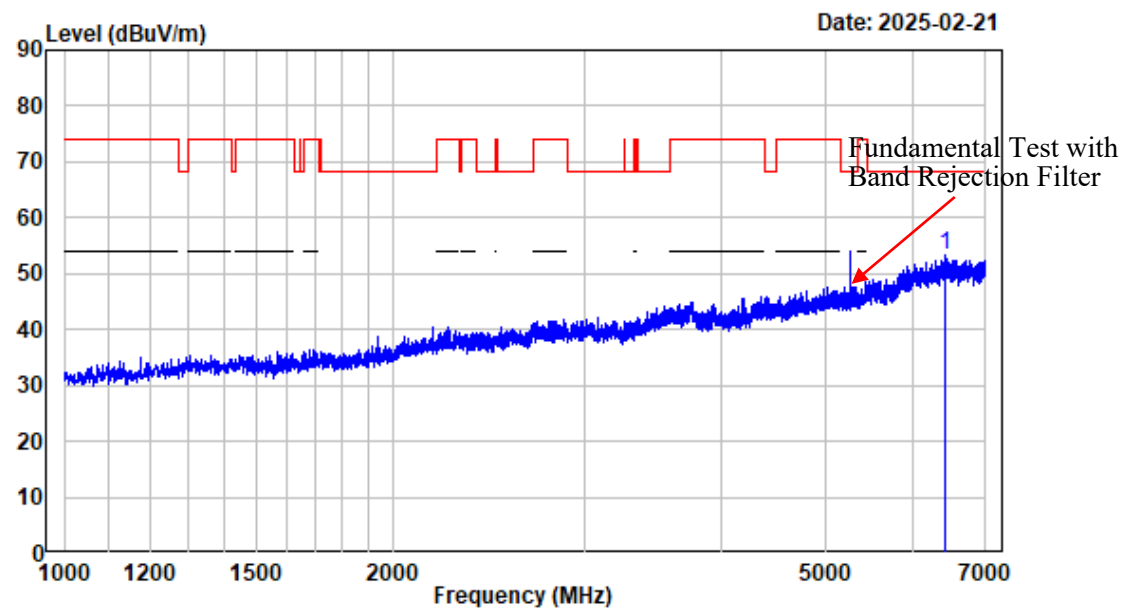

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5260

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6420.178	-2.88	56.07	53.19	68.20	-15.01	Peak


1-7GHz_Vertical_802.11a

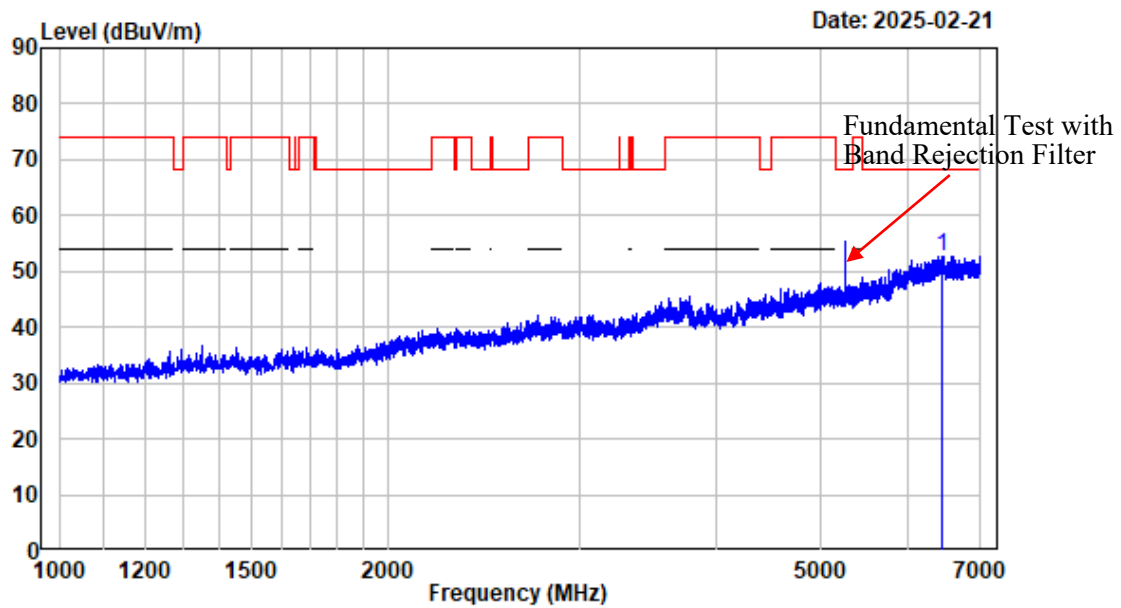

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5260

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	6453.932	-2.88	55.59	52.71	68.20 -15.49 Peak


7-18GHz_Horizontal_Peak_802.11a

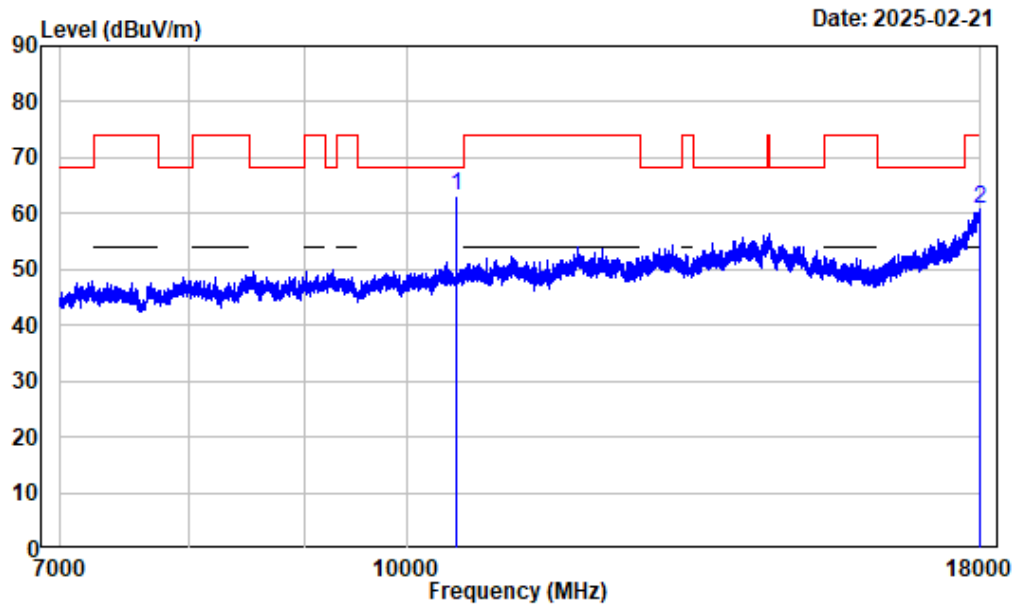

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5260

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 10520.000	2.18	60.88	63.06	68.20	-5.14 Peak
2 17994.500	13.17	47.72	60.89	74.00	-13.11 Peak


7-18GHz_Horizontal_Average_802.11a

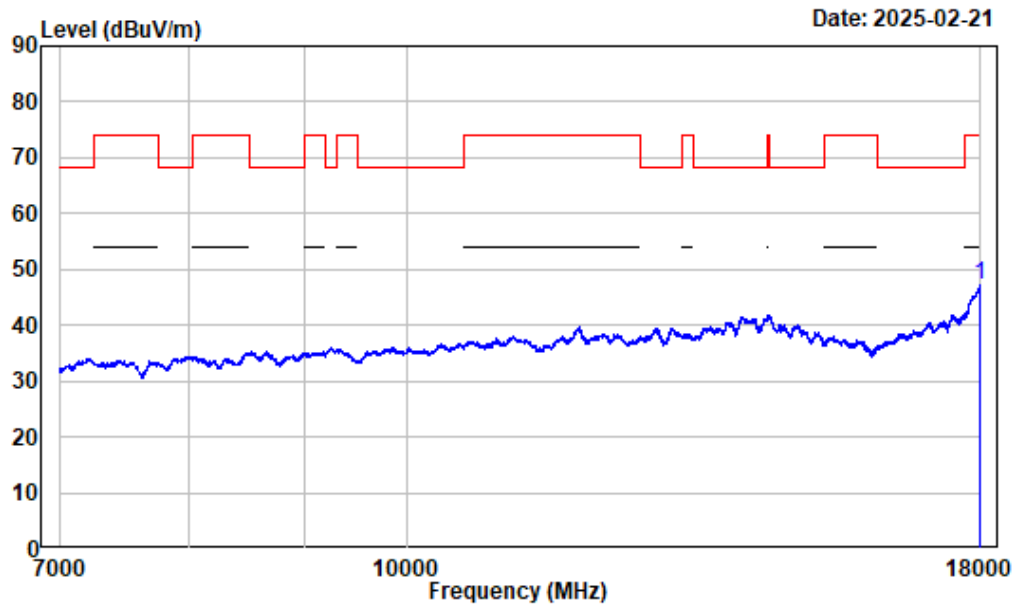

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-A-5260

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17994.500	13.17	33.91	47.08	54.00	-6.92	Average


7-18GHz_Vertical_Peak_802.11a

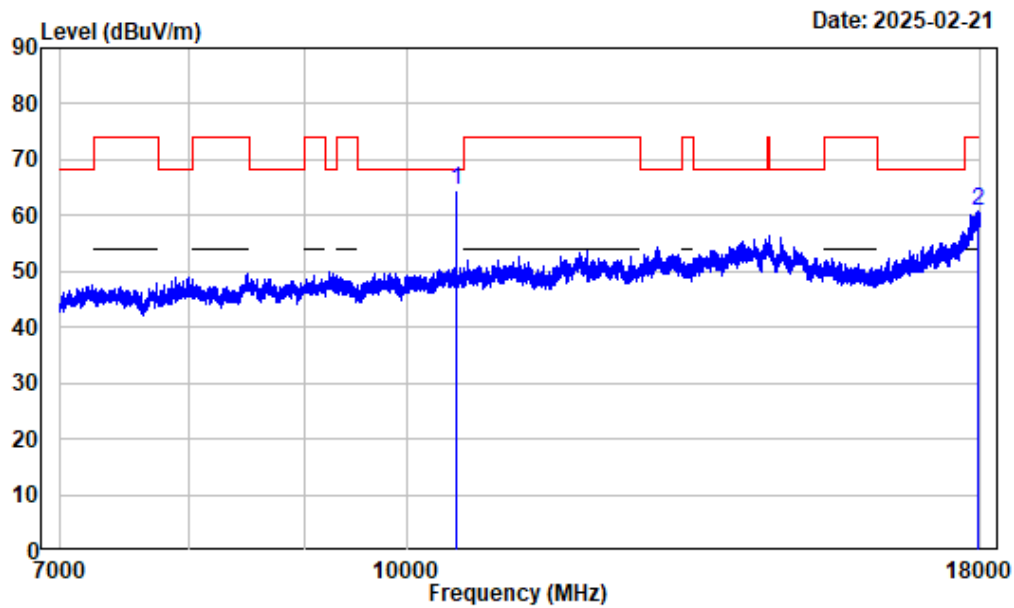

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5260

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 10520.000	2.18	62.35	64.53	68.20	-3.67 Peak
2 17962.870	13.01	47.87	60.88	74.00	-13.12 Peak


7-18GHz_Vertical_Average_802.11a

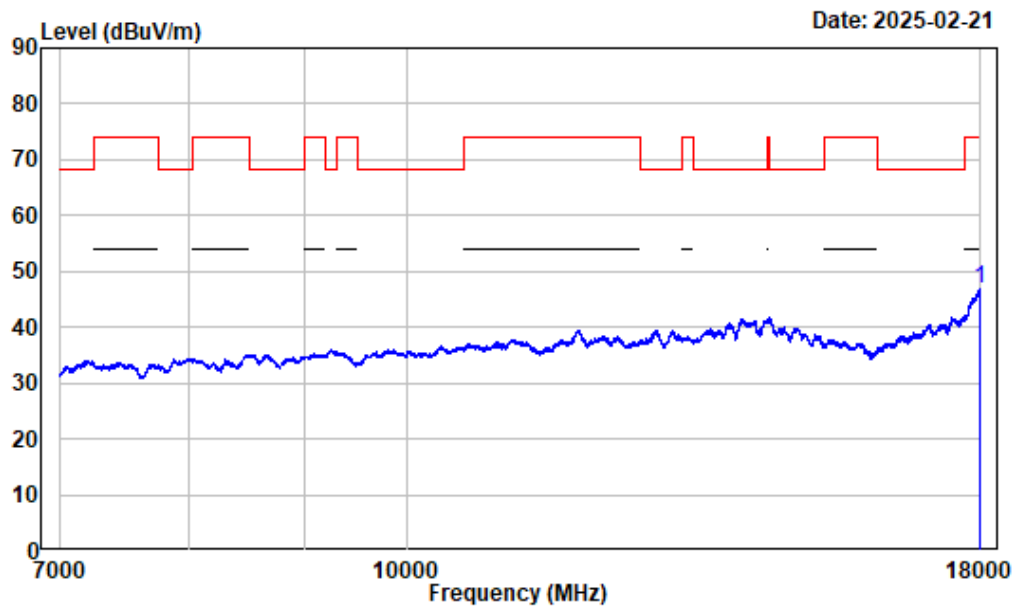

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-A-5260

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 17998.630	13.19	33.83	47.02	54.00	-6.98 Average


1-7GHz_Horizontal_802.11n-HT20

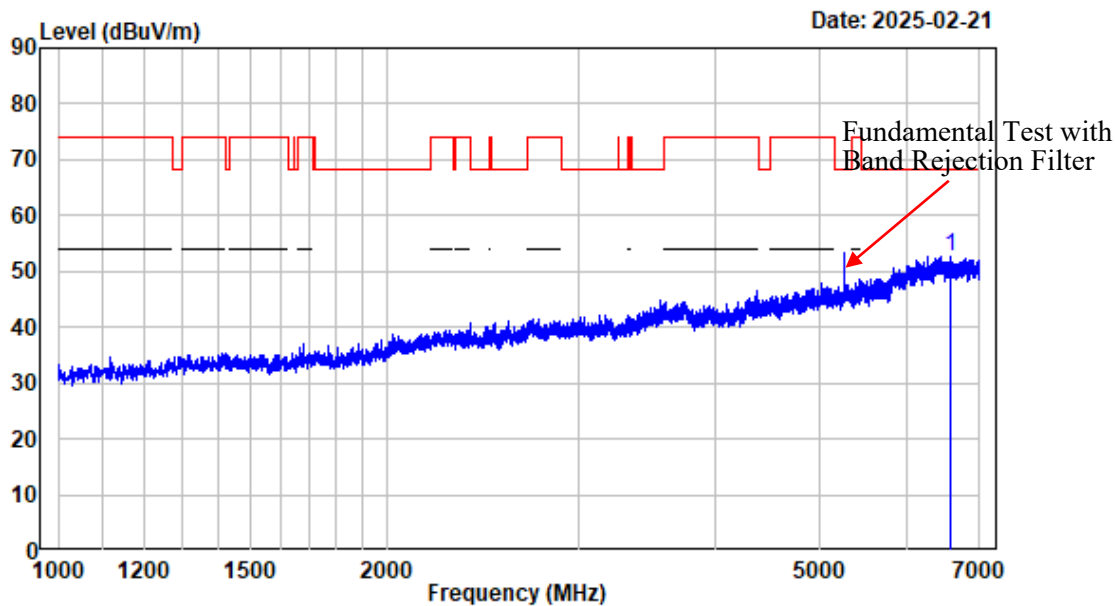

Condition : Horizontal
 Project No. : 2401A25033E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band2-N20-5260

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6589.699	-3.11	55.80	52.69	68.20	-15.51	Peak


1-7GHz_Vertical_802.11n-HT20

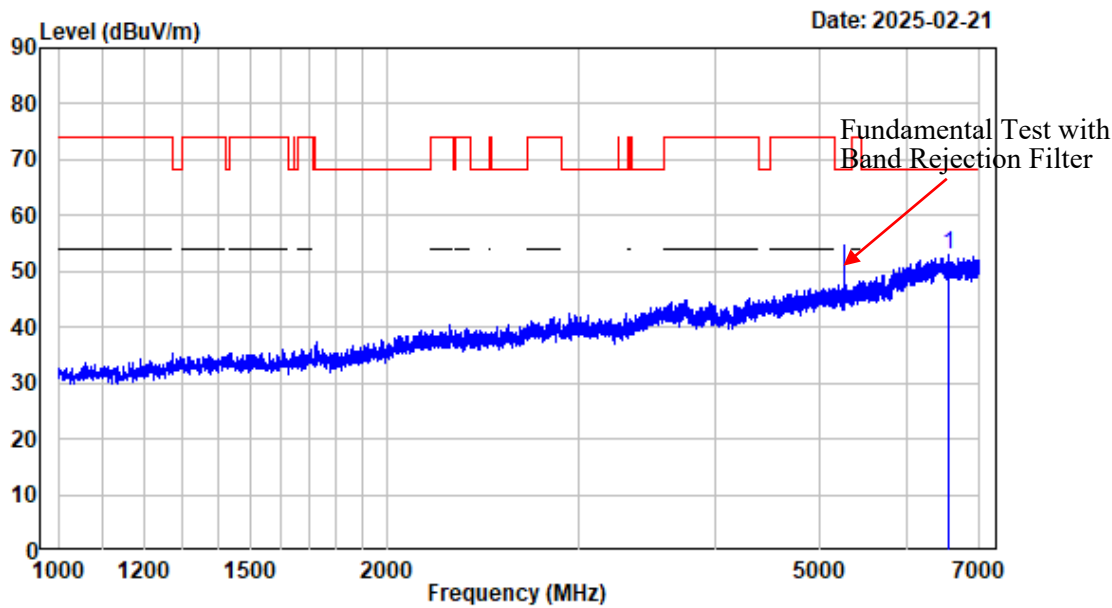

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N20-5260

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6562.695	-3.05	56.10	53.05	68.20	-15.15	Peak


7-18GHz_Horizontal_Peak_802.11n-HT20

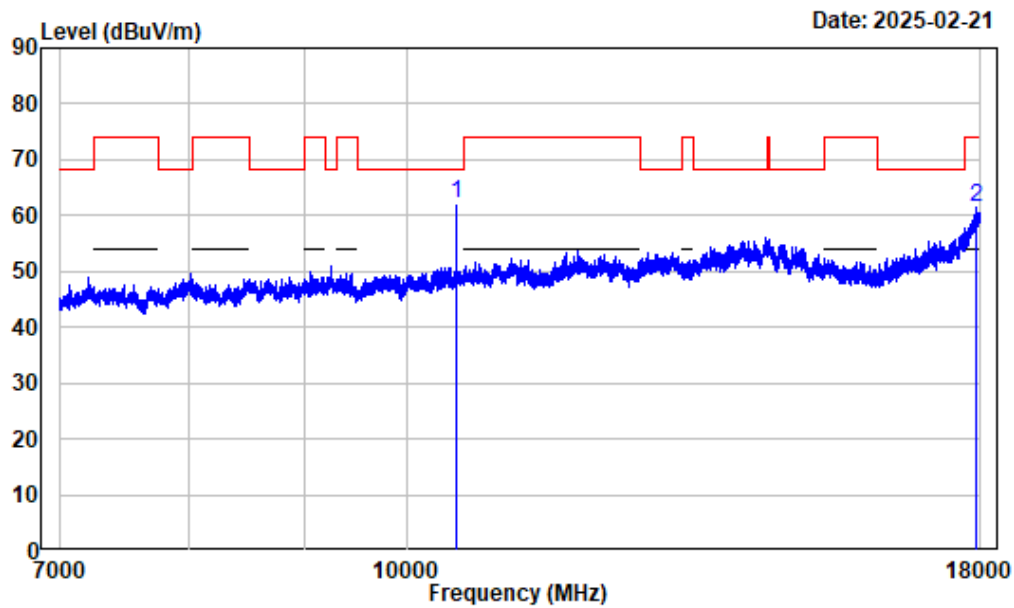

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N20-5260

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 10520.000	2.18	60.05	62.23	68.20	-5.97 Peak
2 17928.490	12.85	48.53	61.38	74.00	-12.62 Peak


7-18GHz_Horizontal_Average_802.11n-HT20

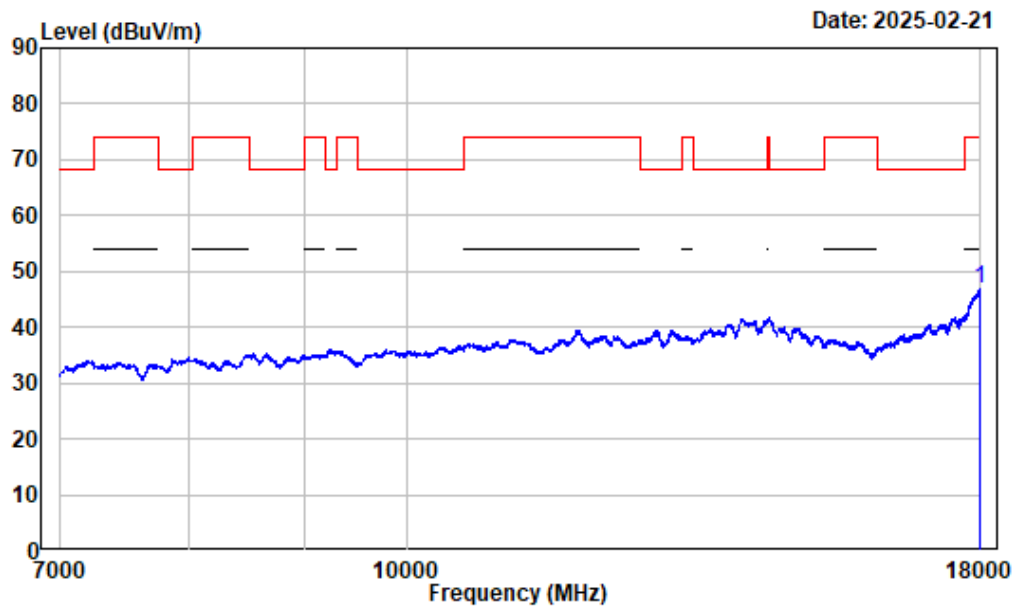

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-N20-5260

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	17994.500	13.17	33.80	46.97	54.00	-7.03 Average


7-18GHz_Vertical_Peak_802.11n-HT20

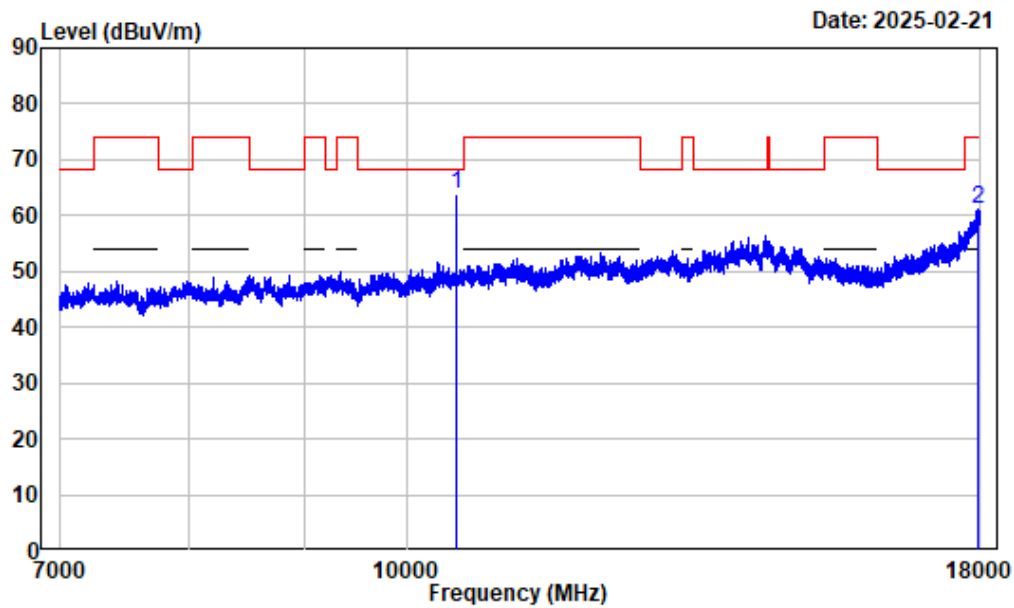

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N20-5260

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1 10520.000	2.18	61.59	63.77	68.20	-4.43	Peak
2 17940.870	12.91	48.16	61.07	74.00	-12.93	Peak


7-18GHz_Vertical_Average_802.11n-HT20

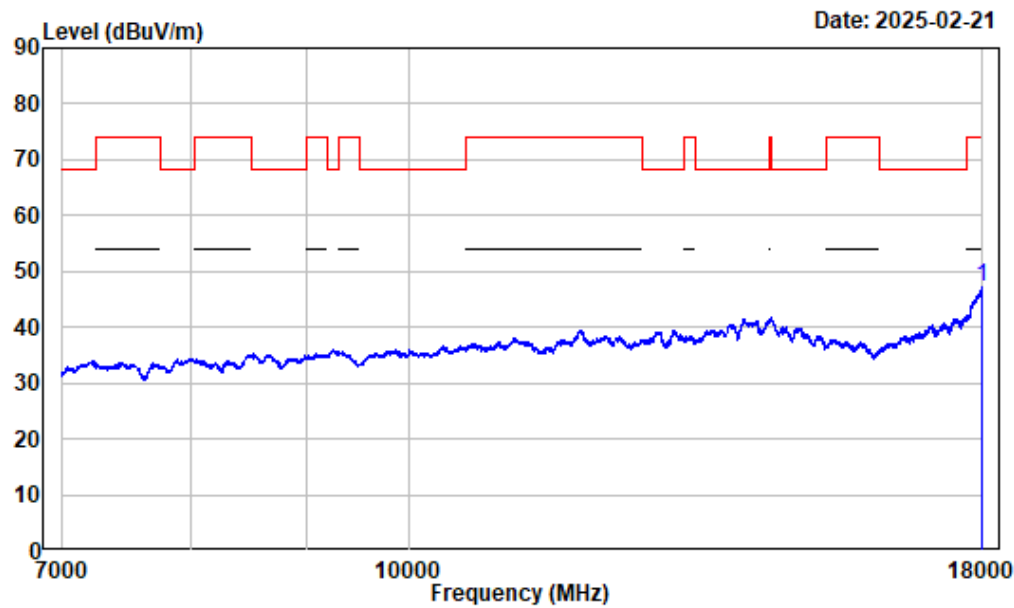

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band2-N20-5260

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17986.250	13.12	33.99	47.11	54.00	-6.89	Average


1-7GHz_Horizontal_802.11n-HT40

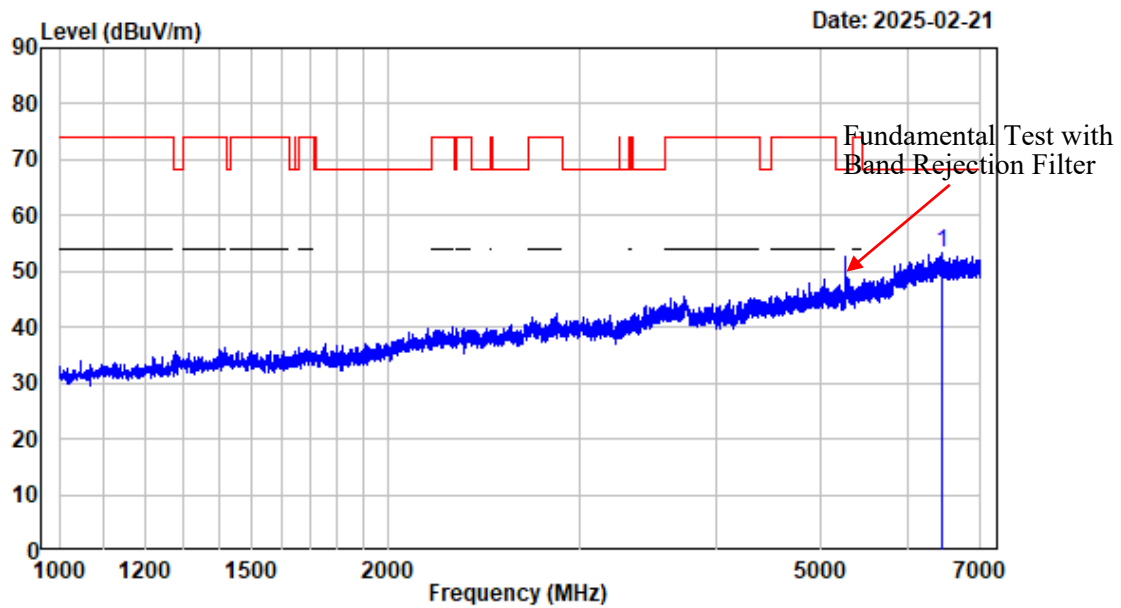

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N40-5270

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1	6453.182	-2.88	56.08	53.20	68.20 -15.00 Peak


1-7GHz_Vertical_802.11n-HT40

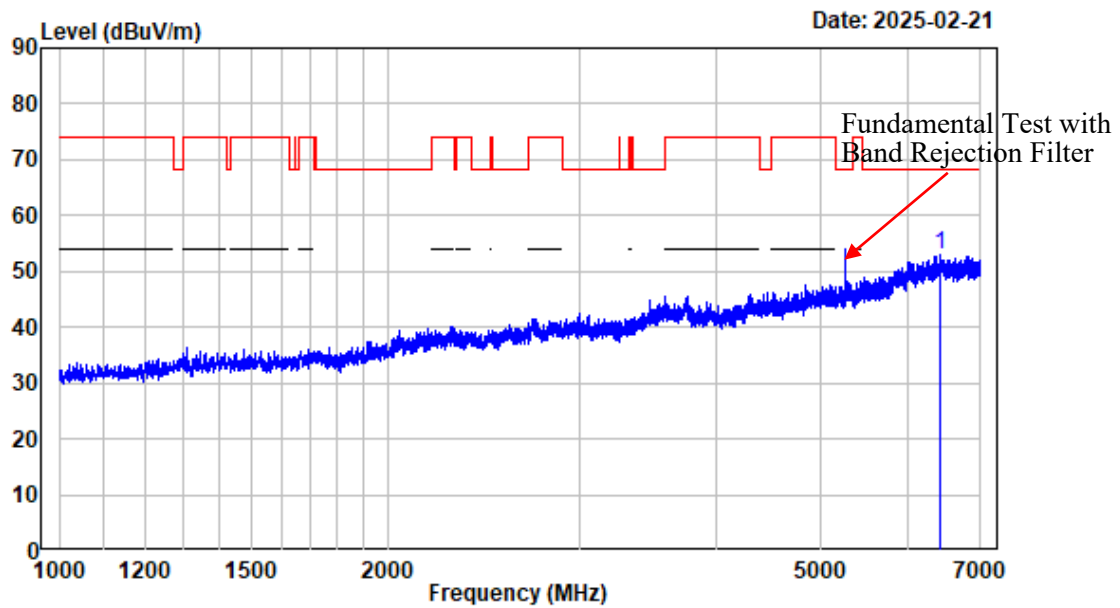

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N40-5270

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	6429.179	-2.89	55.90	53.01	68.20	-15.19 Peak


7-18GHz_Horizontal_Peak_802.11n-HT40

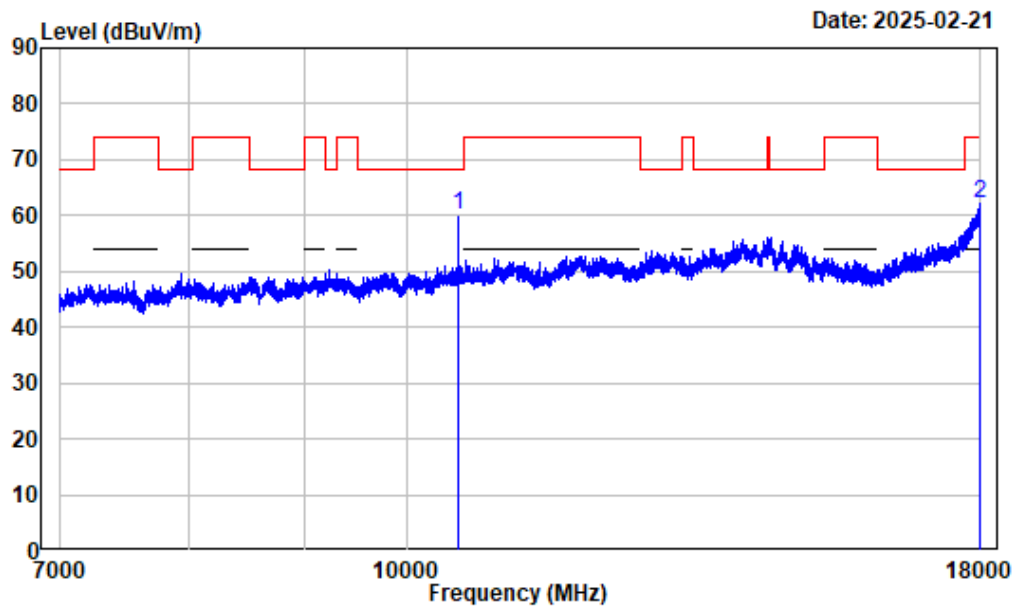

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N40-5270

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 10540.000	2.18	57.93	60.11	68.20	-8.09 Peak
2 17979.370	13.10	49.22	62.32	74.00	-11.68 Peak


7-18GHz_Horizontal_Average_802.11n-HT40

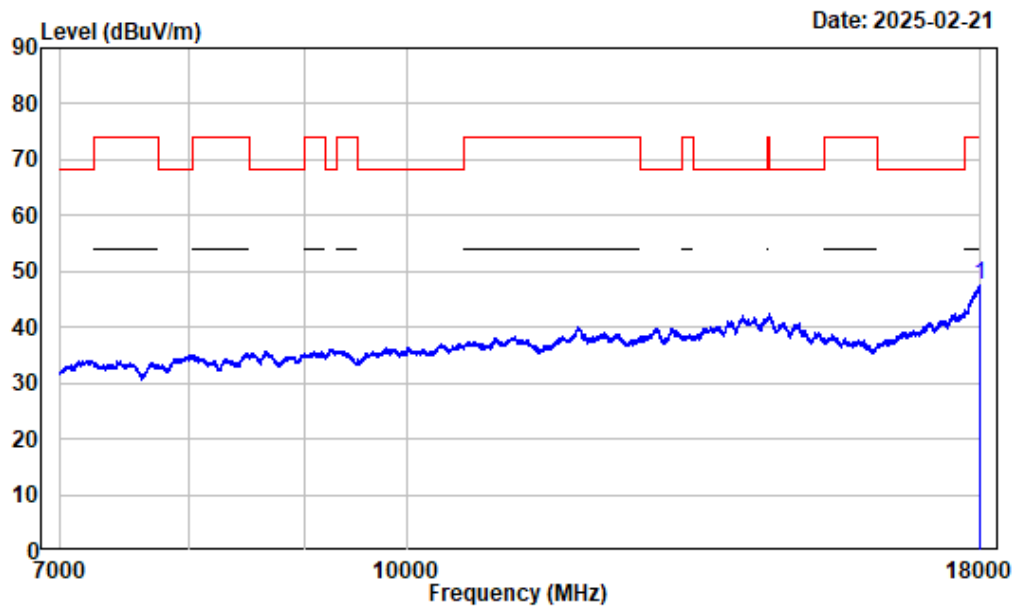

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band2-N40-5270

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17994.500	13.17	34.36	47.53	54.00	-6.47	Average


7-18GHz_Vertical_Peak_802.11n-HT30

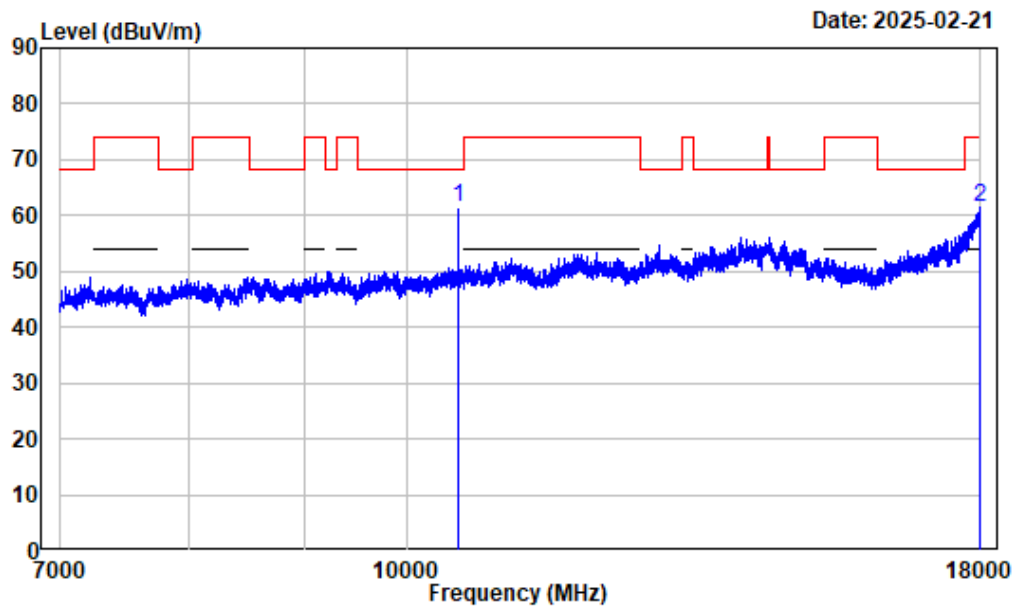

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-N40-5270

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1 10540.000	2.18	59.44	61.62	68.20	-6.58	Peak
2 17976.620	13.09	48.45	61.54	74.00	-12.46	Peak

7-18GHz_Vertical_Average_802.11n-HT40

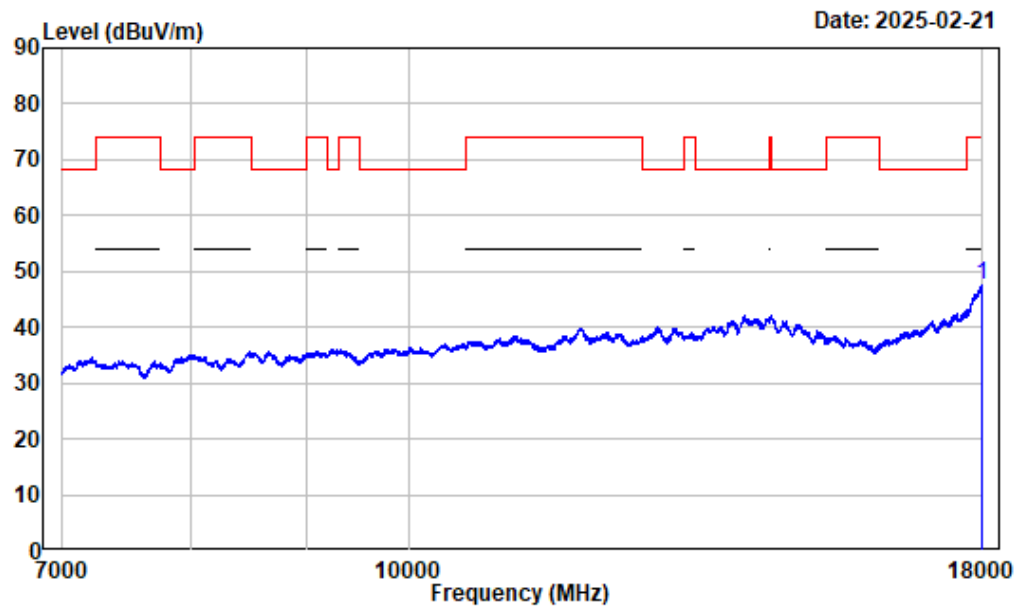


Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band2-N40-5270

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17979.370	13.10	34.54	47.64	54.00	-6.36	Average

5470-5725MHz:


1-7GHz_Horizontal_802.11a

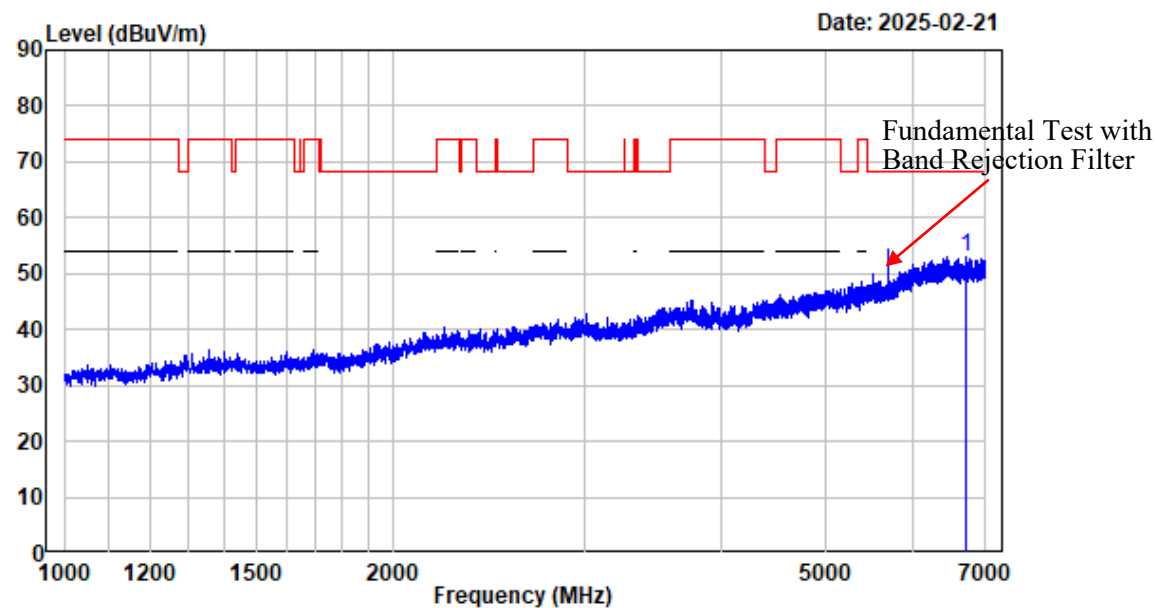

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6715.714	-3.32	56.43	53.11	68.20	-15.09	Peak


1-7GHz_Vertical_802.11a

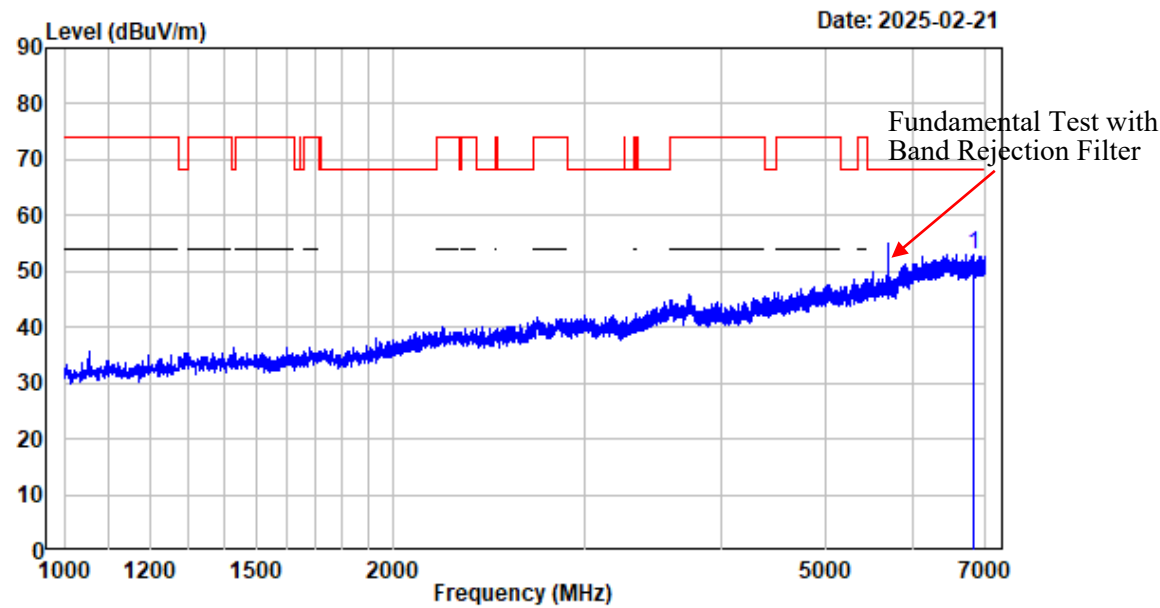

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6814.727	-3.28	56.42	53.14	68.20	-15.06	Peak


7-18GHz_Horizontal_Peak_802.11a

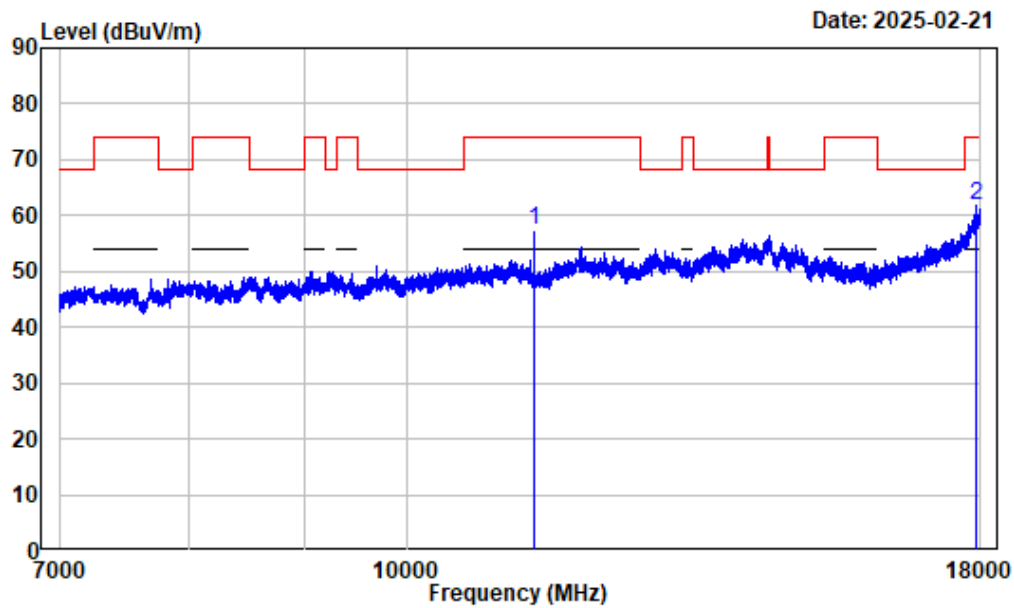

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11400.000	3.32	54.17	57.49	74.00	-16.51	Peak
2 17907.860	12.75	49.00	61.75	74.00	-12.25	Peak


7-18GHz_Horizontal_Average_802.11a

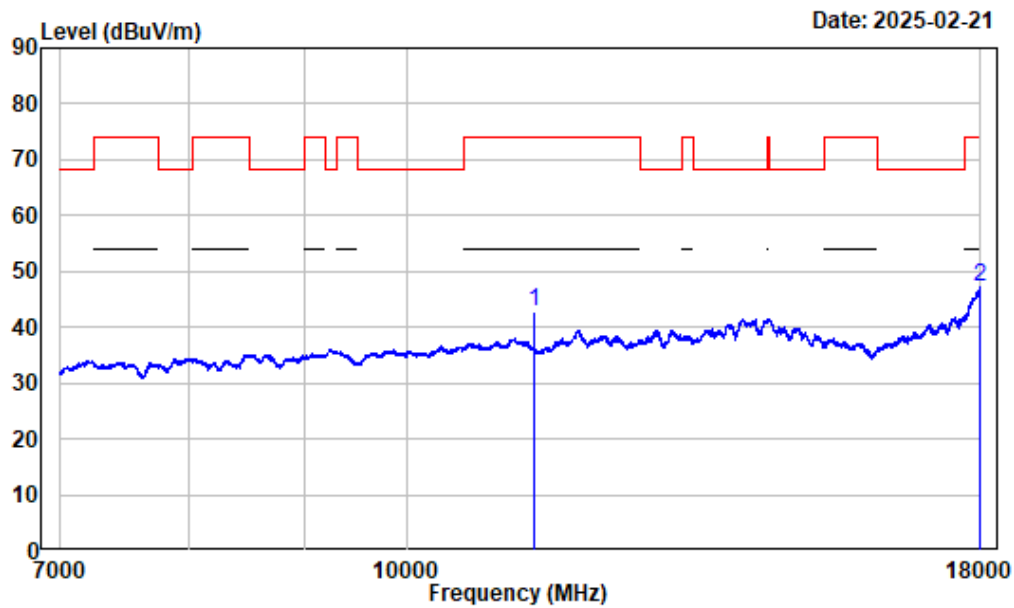

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11400.000	3.32	39.42	42.74	54.00	-11.26	Average
2 17991.750	13.16	33.98	47.14	54.00	-6.86	Average


7-18GHz_Vertical_Peak_802.11a

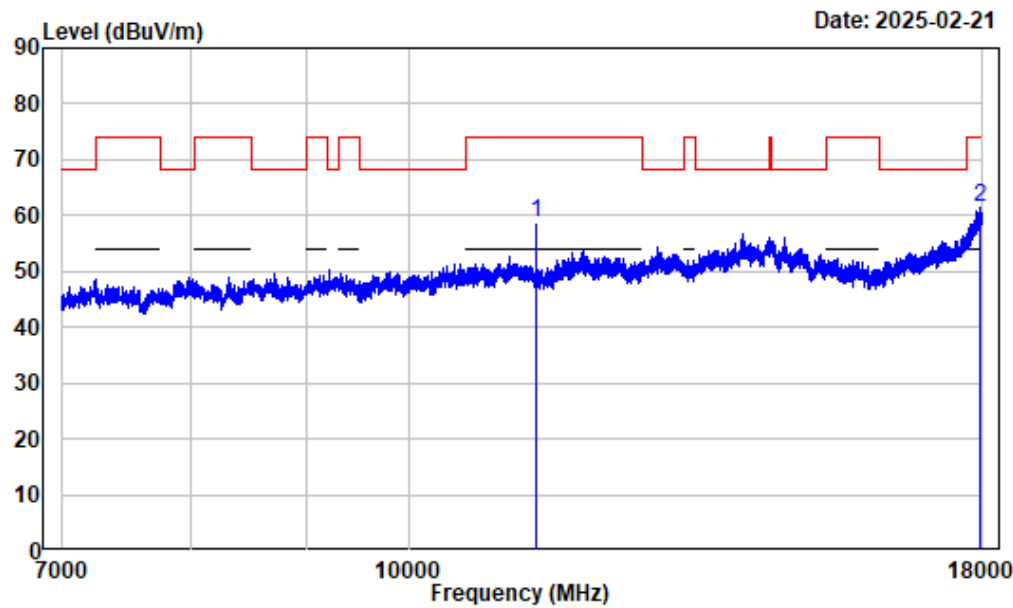

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 11400.000	3.32	55.39	58.71	74.00	-15.29 Peak
2 17951.870	12.96	48.41	61.37	74.00	-12.63 Peak


7-18GHz_Vertical_Average_802.11a

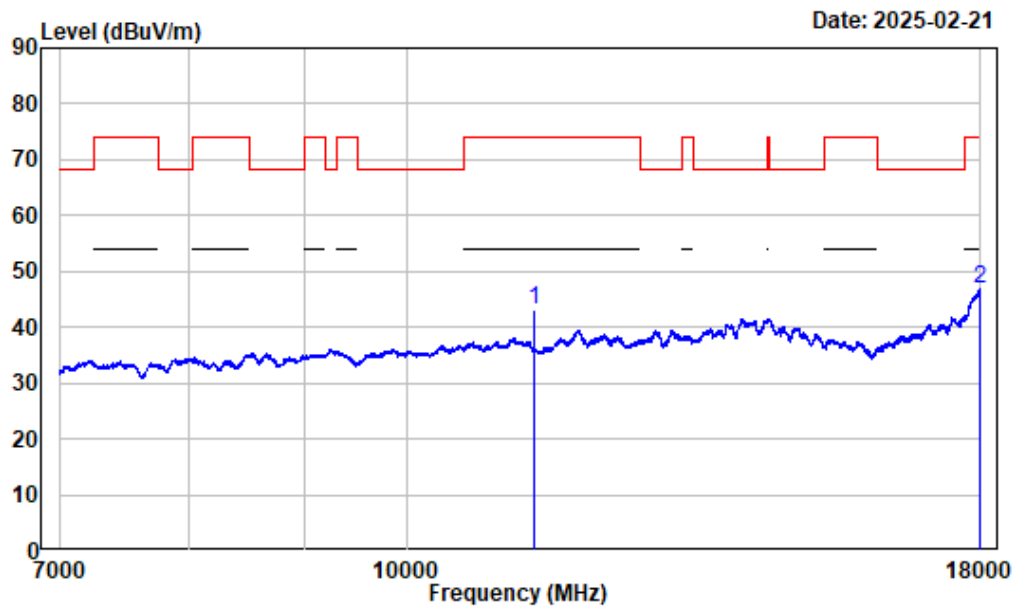

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-A-5700

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11400.000	3.32	39.98	43.30	54.00	-10.70	Average
2 17995.880	13.18	33.83	47.01	54.00	-6.99	Average


1-7GHz_Horizontal_802.11n-HT20

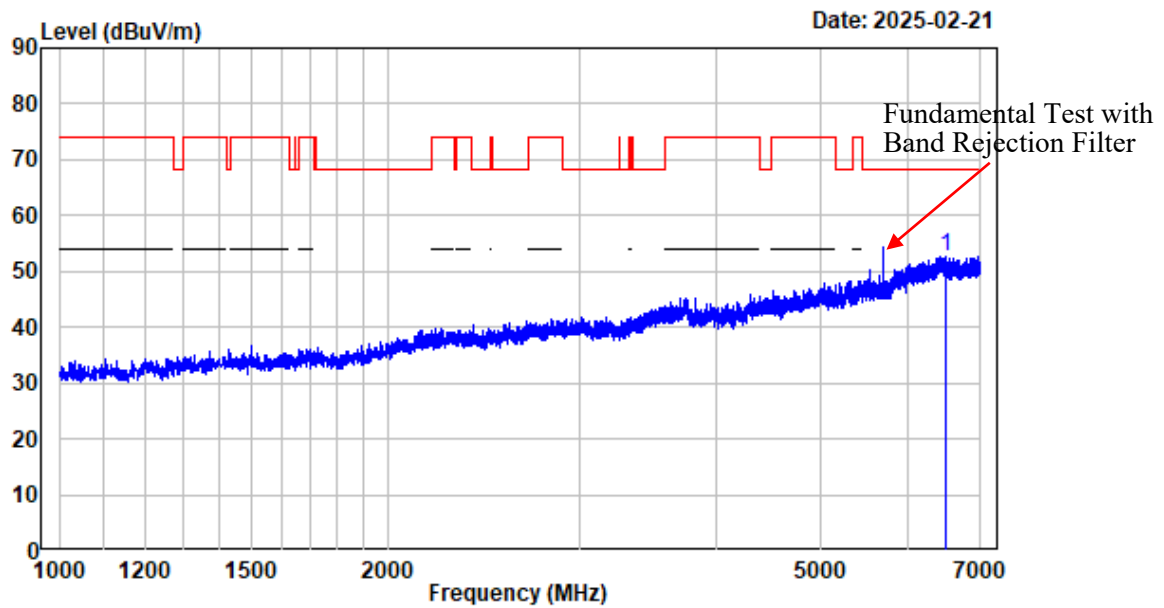

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N20-5700

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1	6493.687	-2.94	55.69	52.75	68.20 -15.45 Peak


1-7GHz_Vertical_802.11n-HT20

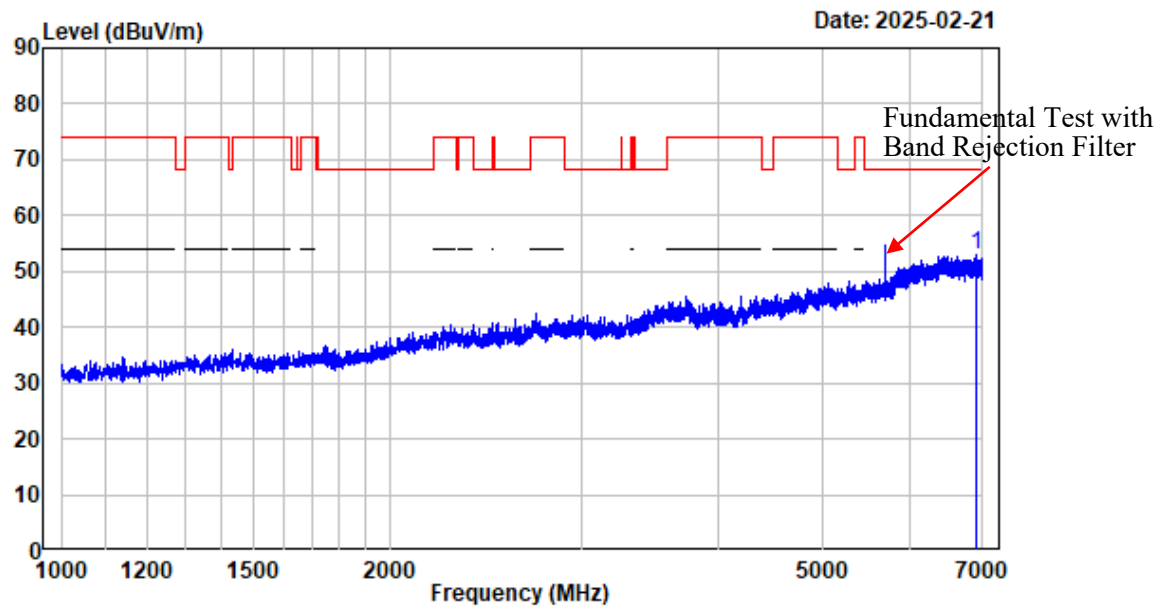

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N20-5700

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 6913.739	-3.00	55.97	52.97	68.20	-15.23 Peak


7-18GHz_Horizontal_Peak_802.11n-HT20

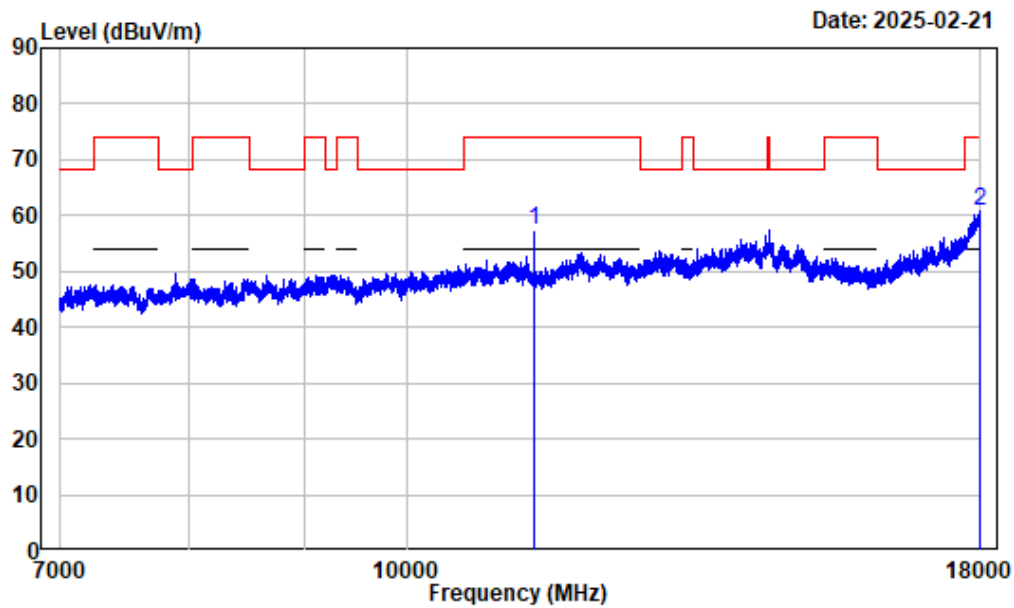

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N20-5700

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1 11400.000	3.32	53.96	57.28	74.00	-16.72	Peak
2 17979.370	13.10	47.58	60.68	74.00	-13.32	Peak


7-18GHz_Horizontal_Average_802.11n-HT20

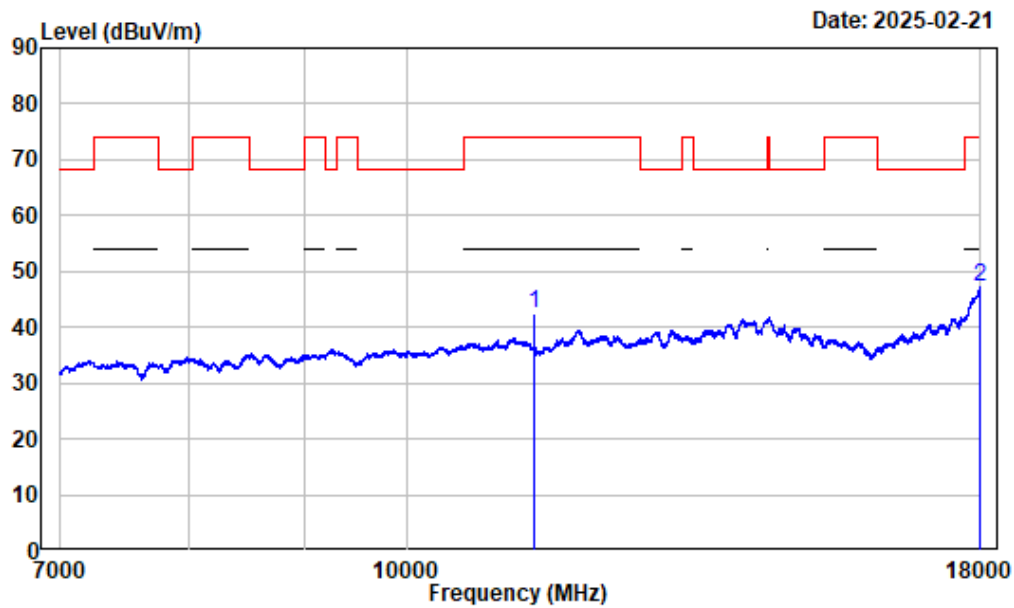

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-N20-5700

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11400.000	3.32	39.29	42.61	54.00	-11.39	Average
2 17997.250	13.19	33.87	47.06	54.00	-6.94	Average


7-18GHz_Vertical_Peak_802.11n-HT20

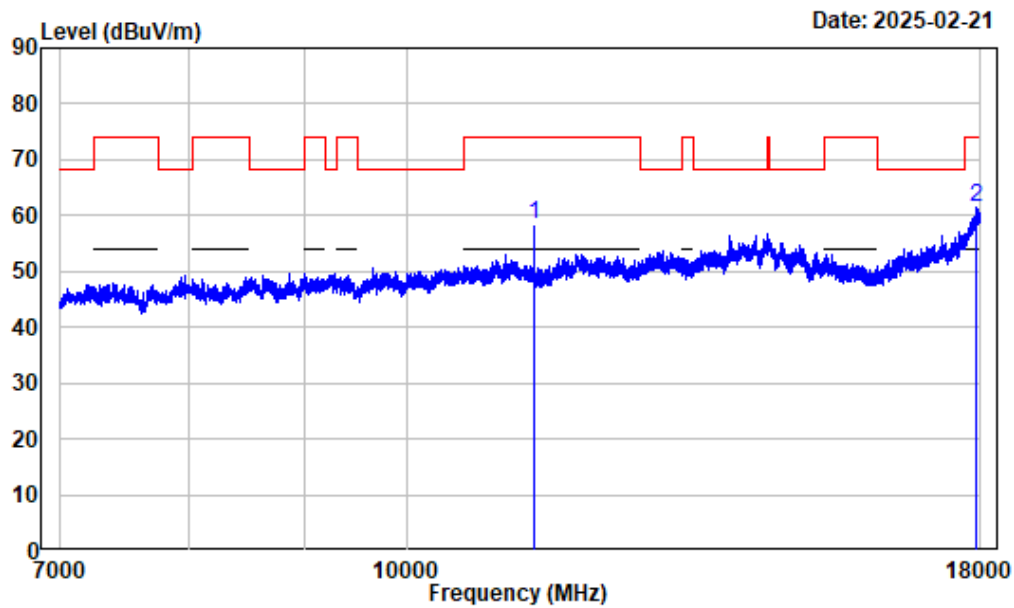

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N20-5700

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 11400.000	3.32	55.18	58.50	74.00	-15.50 Peak
2 17931.240	12.86	48.46	61.32	74.00	-12.68 Peak


7-18GHz_Vertical_Average_802.11n-HT20

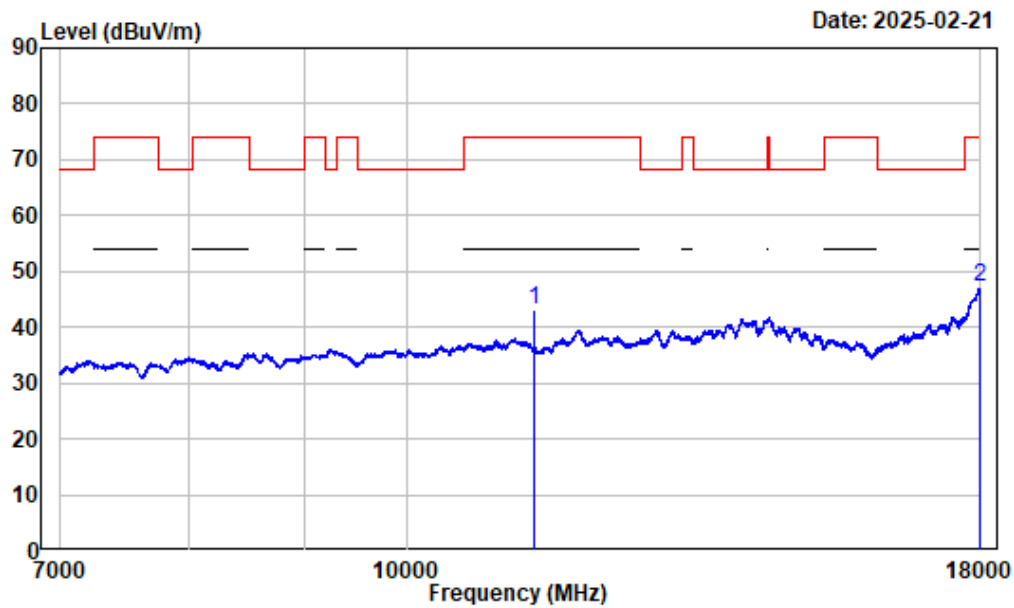

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band3-N20-5700

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11400.000	3.32	39.82	43.14	54.00	-10.86	Average
2 17998.630	13.19	33.86	47.05	54.00	-6.95	Average


1-7GHz_Horizontal_802.11n-HT40

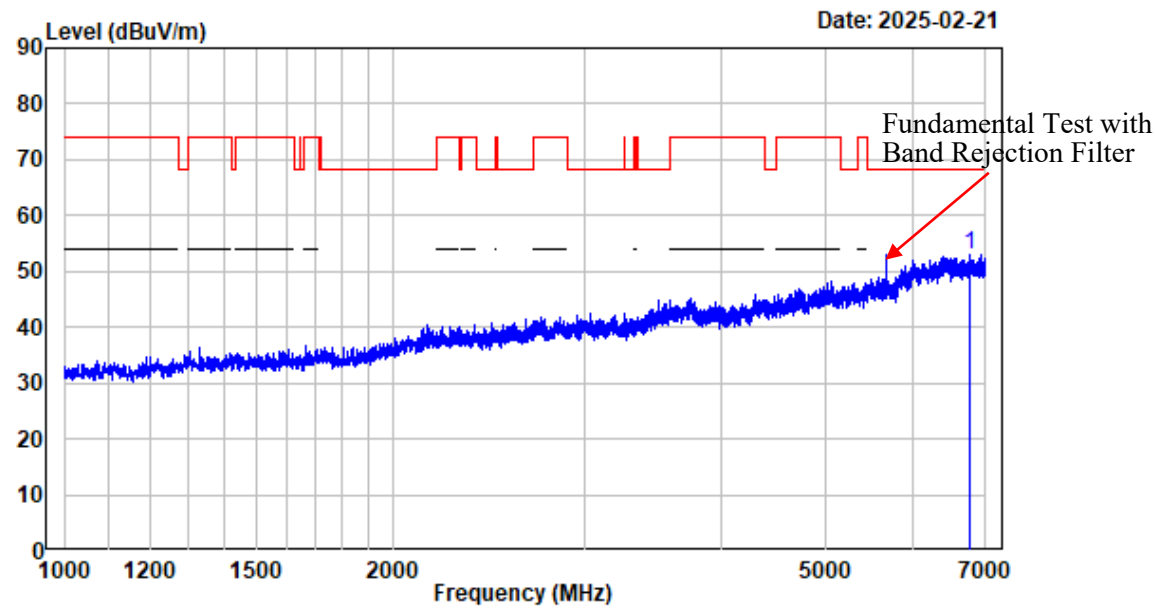

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N40-5670

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6780.223	-3.30	56.22	52.92	68.20	-15.28	Peak


1-7GHz_Vertical_802.11n-HT40

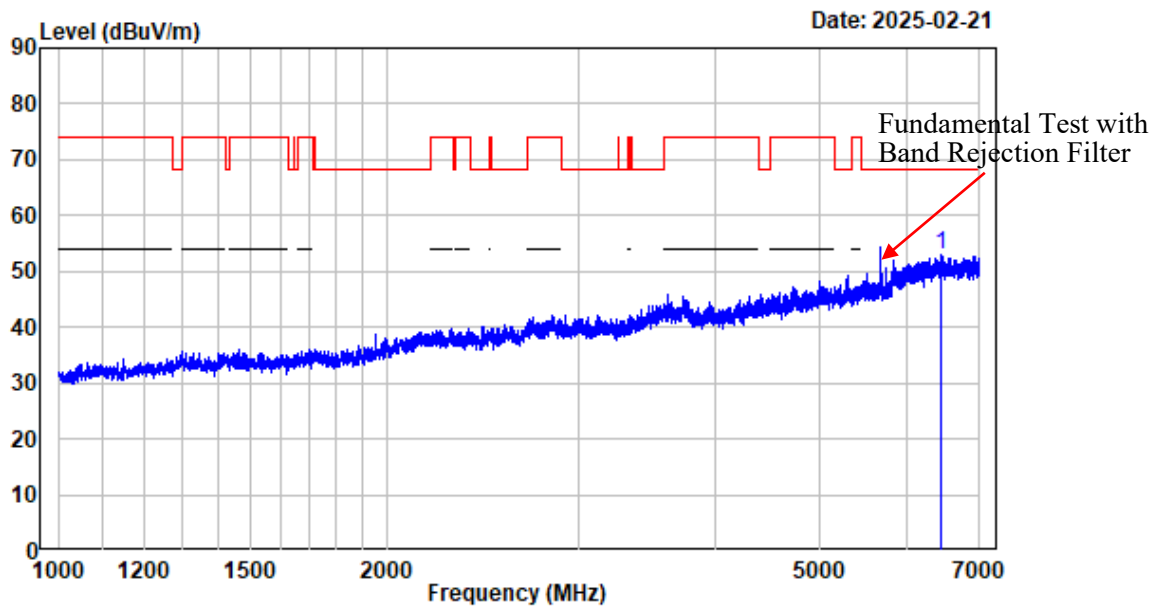

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N40-5670

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6454.682	-2.88	55.77	52.89	68.20	-15.31 Peak


7-18GHz_Horizontal_Peak_802.11n-HT40

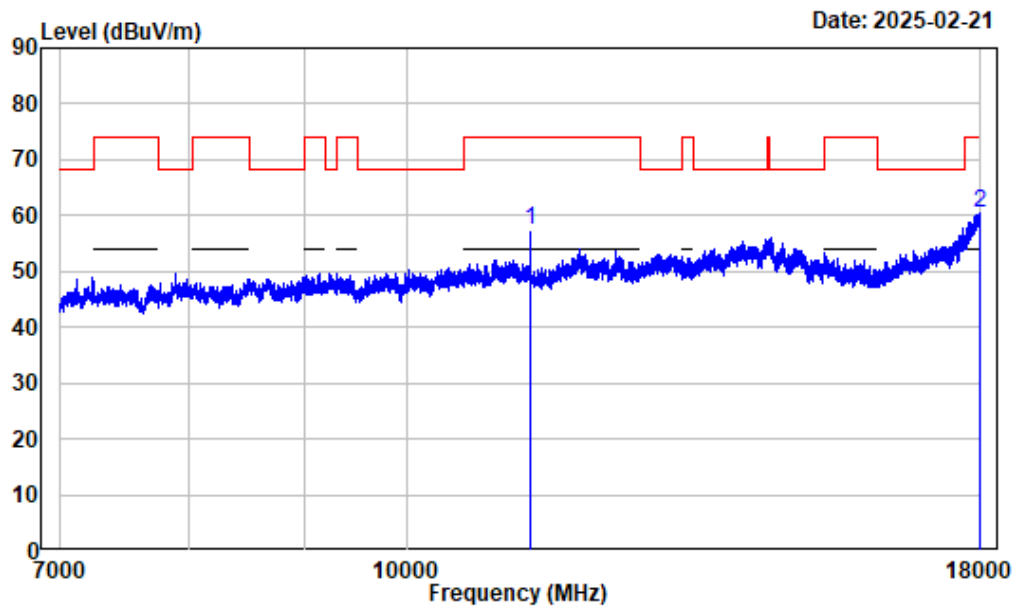

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N40-5670

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 11340.000	3.46	53.86	57.32	74.00	-16.68 Peak
2 17994.500	13.17	47.31	60.48	74.00	-13.52 Peak


7-18GHz_Horizontal_Average_802.11n-HT40

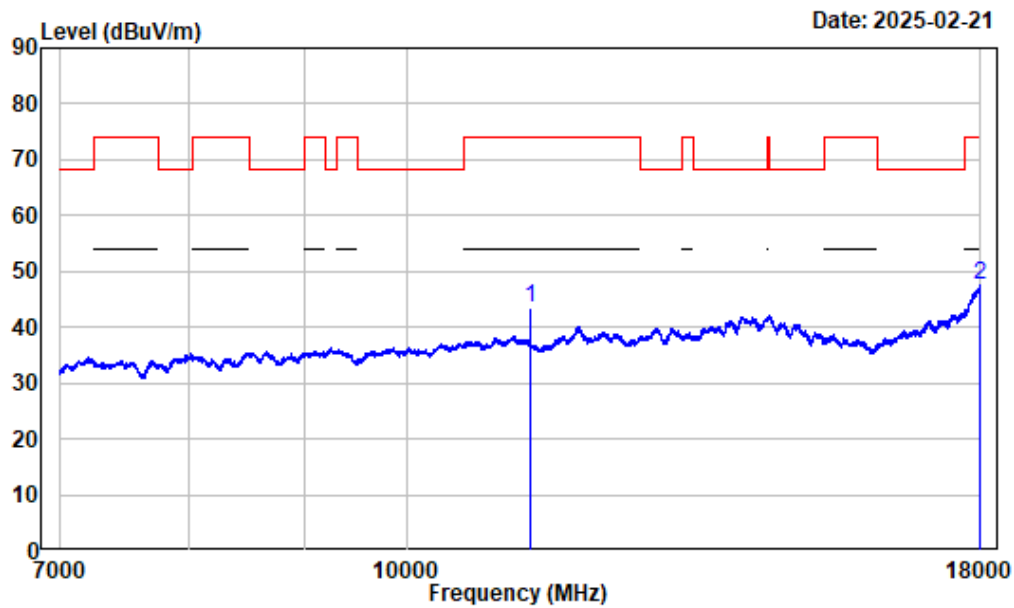

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band3-N40-5670

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11340.000	3.46	40.12	43.58	54.00	-10.42	Average
2 17978.000	13.10	34.47	47.57	54.00	-6.43	Average


7-18GHz_Vertical_Peak_802.11n-HT40

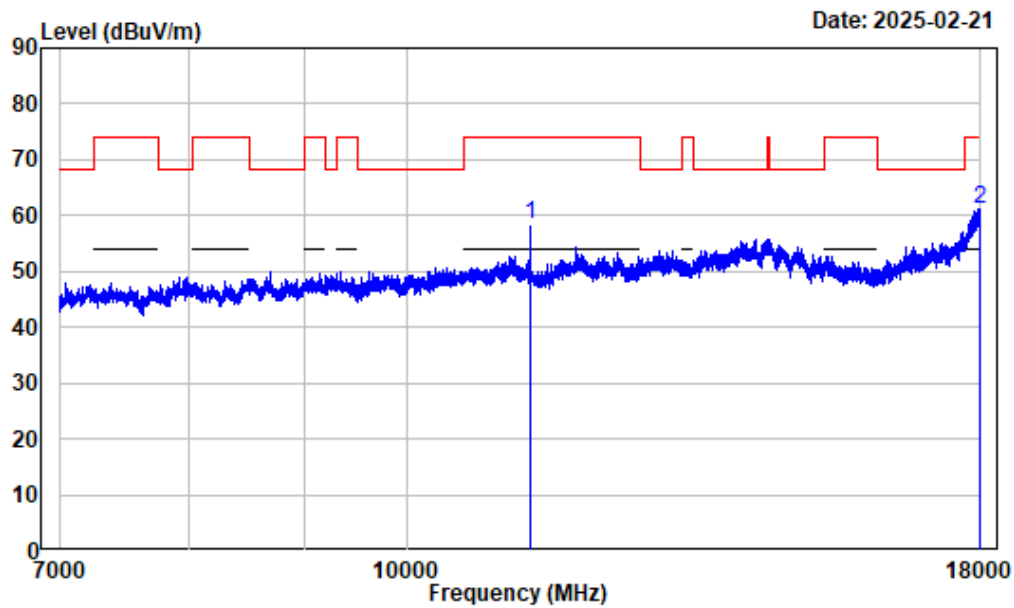

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band3-N40-5670

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1 11340.000	3.46	55.09	58.55	74.00	-15.45	Peak
2 17991.750	13.16	47.89	61.05	74.00	-12.95	Peak

7-18GHz_Vertical_Average_802.11n-HT40

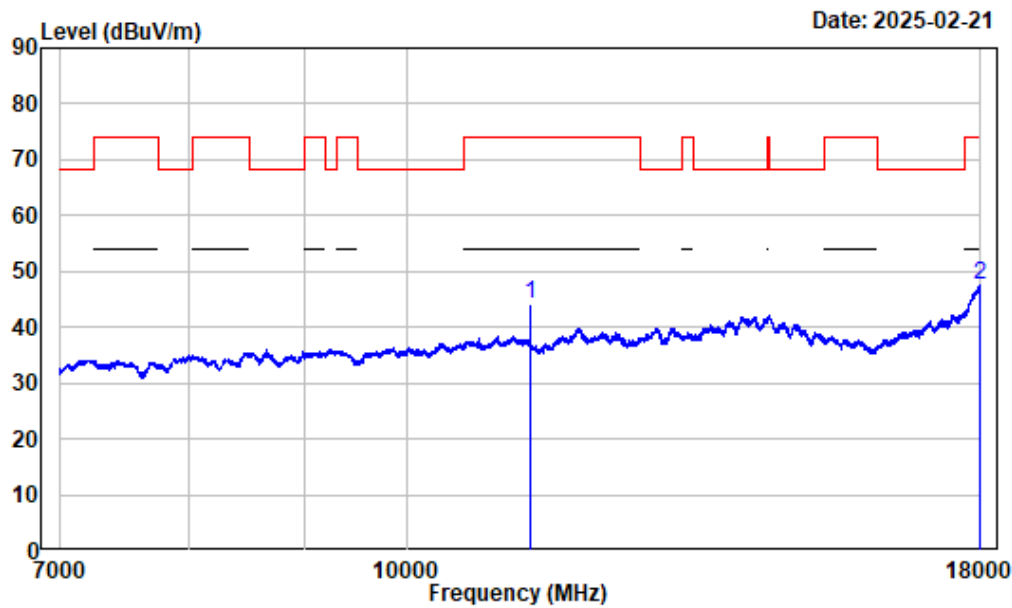


Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band3-N40-5670

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11340.000	3.46	40.64	44.10	54.00	-9.90	Average
2 17980.750	13.11	34.49	47.60	54.00	-6.40	Average

5725-5850MHz:


1-7GHz_Horizontal_802.11a

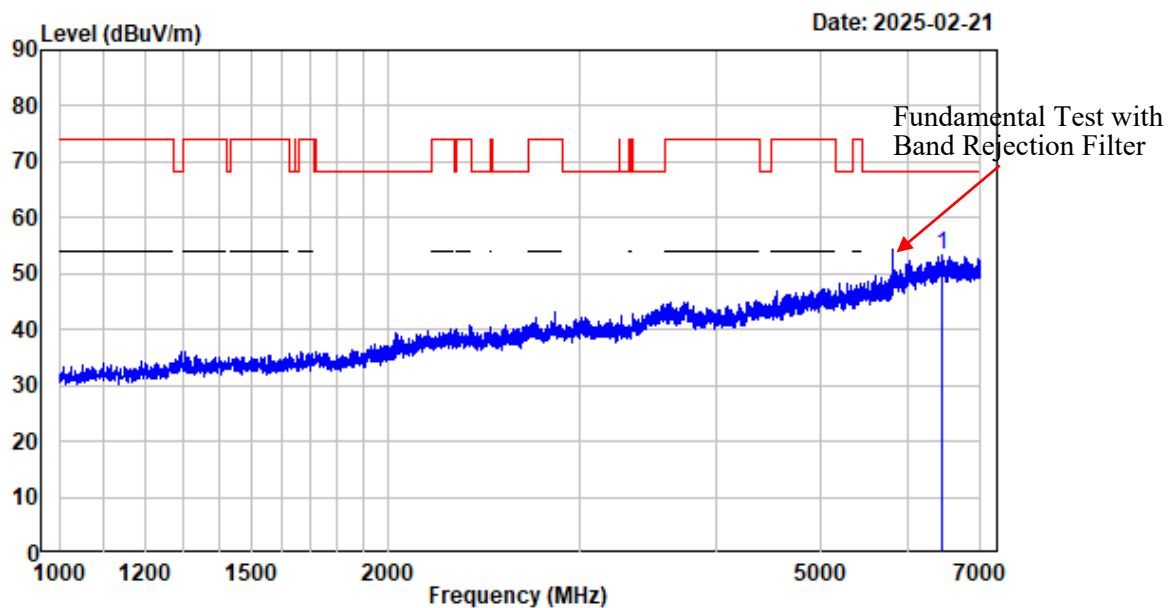

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

Freq	Factor	Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6460.683	-2.88	56.14	53.26	68.20	-14.94	Peak


1-7GHz_Vertical_802.11a

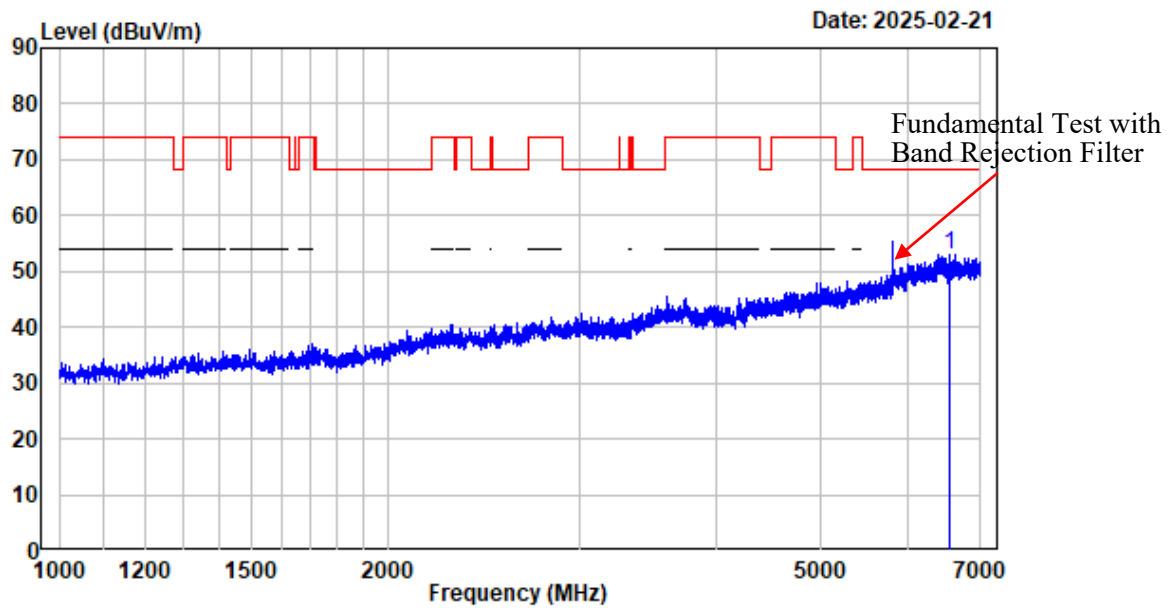

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6555.194	-3.05	55.97	52.92	68.20	-15.28	Peak


7-18GHz_Horizontal_Peak_802.11a

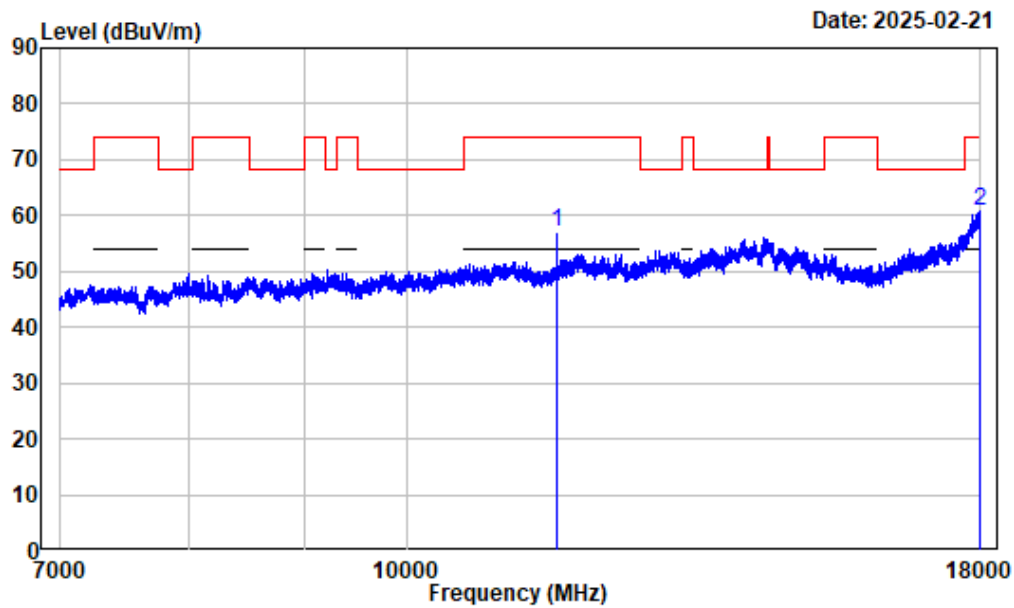

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	3.42	53.69	57.11	74.00	-16.89	Peak
2	17995.880	13.18	47.69	60.87	74.00	-13.13	Peak


7-18GHz_Horizontal_Average_802.11a

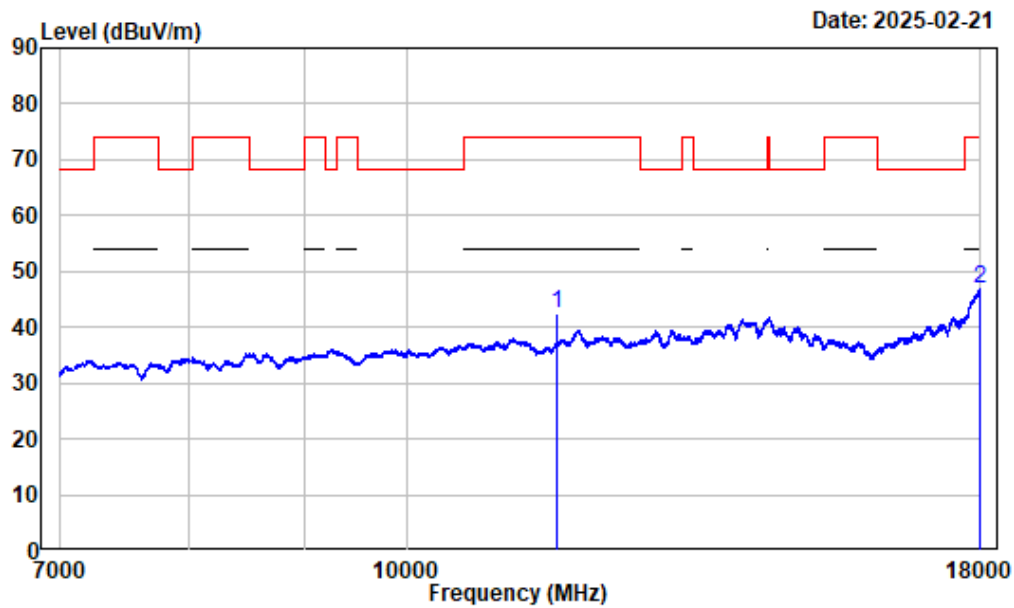

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	3.42	39.07	42.49	54.00	-11.51	Average
2 17997.250	13.19	33.59	46.78	54.00	-7.22	Average


7-18GHz_Vertical_Peak_802.11a

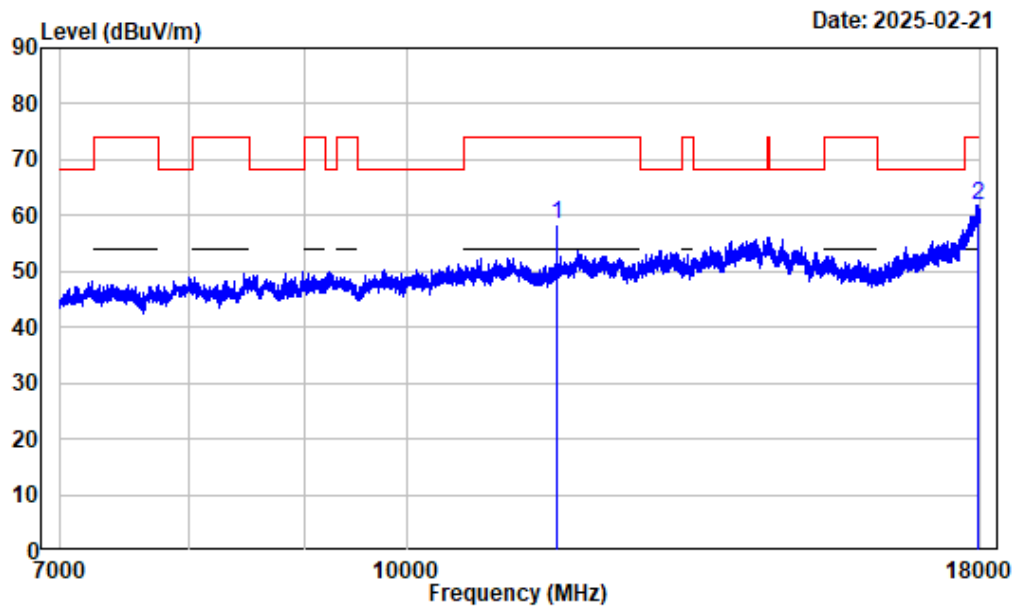

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	3.42	54.85	58.27	74.00	-15.73	Peak
2	17968.370	13.05	48.71	61.76	74.00	-12.24	Peak


7-18GHz_Vertical_Average_802.11a

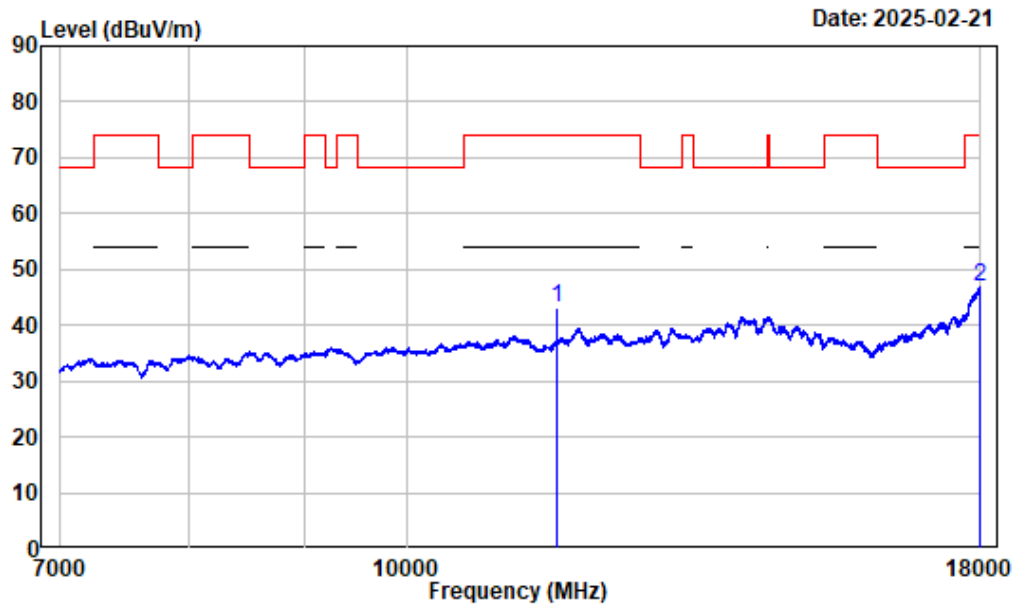

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-A-5825

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	3.42	39.62	43.04	54.00	-10.96	Average
2 17991.750	13.16	33.74	46.90	54.00	-7.10	Average


1-7GHz_Horizontal_802.11n-HT20

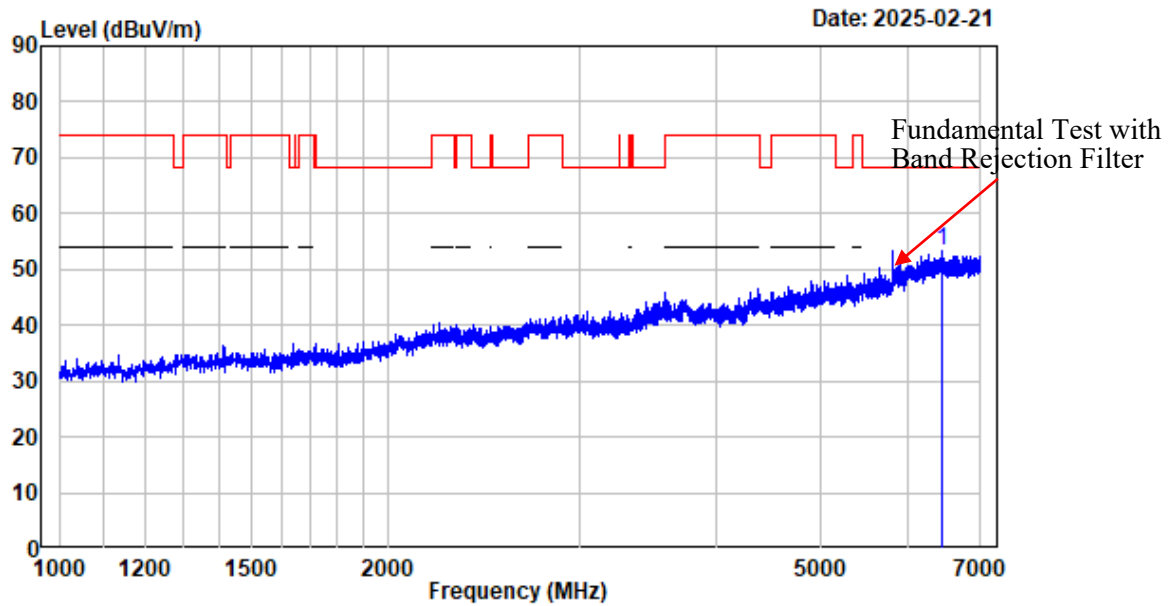

Condition : Horizontal
 Project No. : 2401A25033E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band4-N20-5825

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 6445.681	-2.88	56.37	53.49	68.20	-14.71 Peak


1-7GHz_Vertical_802.11n-HT20

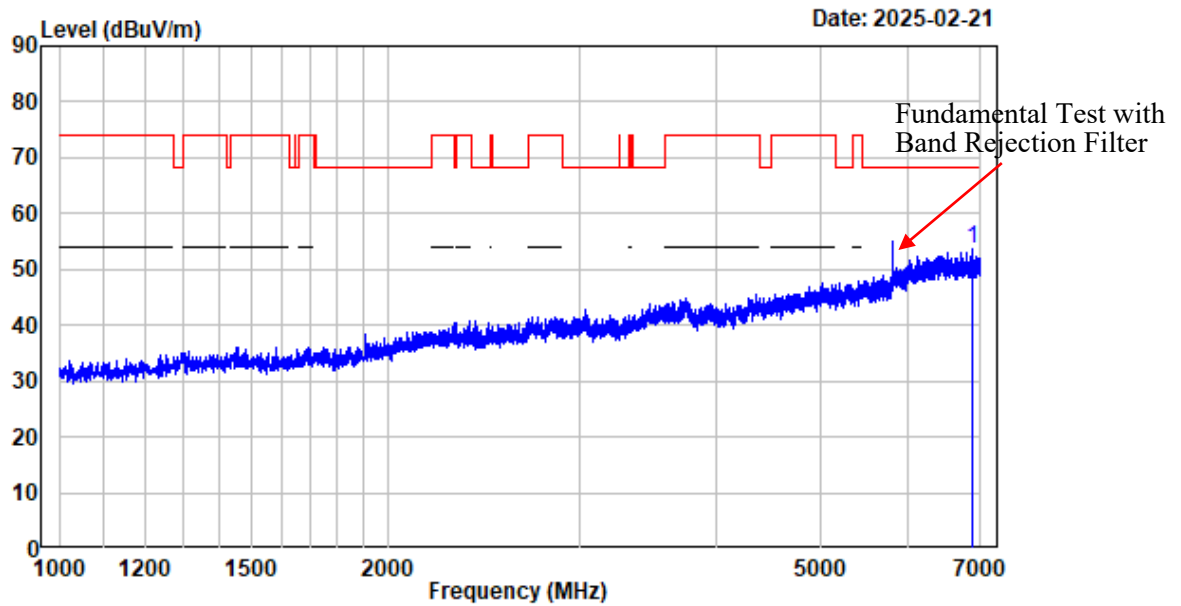

Condition : Vertical
 Project No. : 2401A25033E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band4-N20-5825

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6882.235	-3.12	56.68	53.56	68.20	-14.64	Peak


7-18GHz_Horizontal_Peak_802.11n-HT20

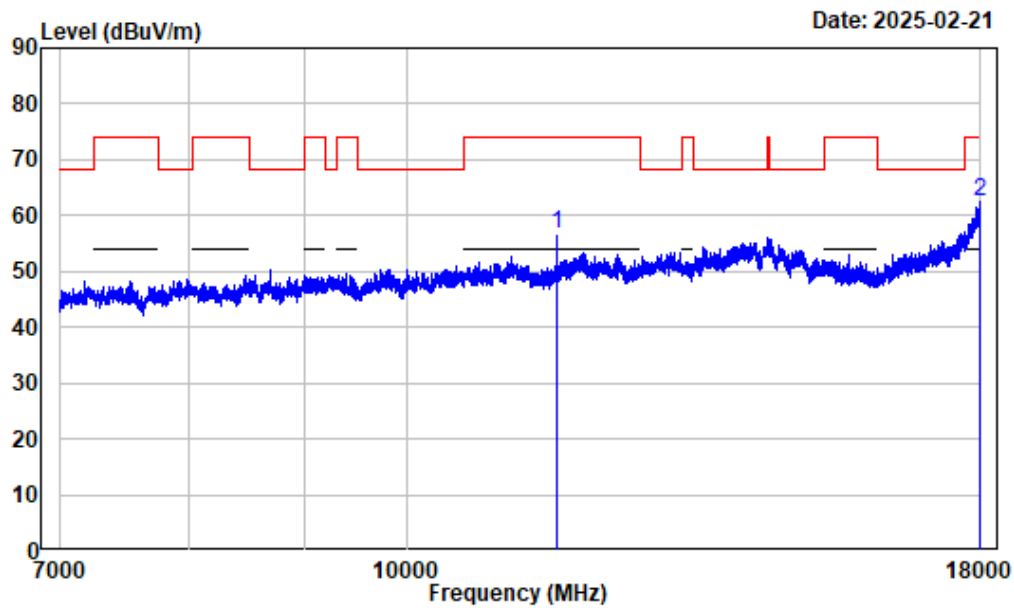

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N20-5825

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	3.42	53.46	56.88	74.00	-17.12	Peak
2 17984.870	13.12	49.47	62.59	74.00	-11.41	Peak


7-18GHz_Horizontal_Average_802.11n-HT20

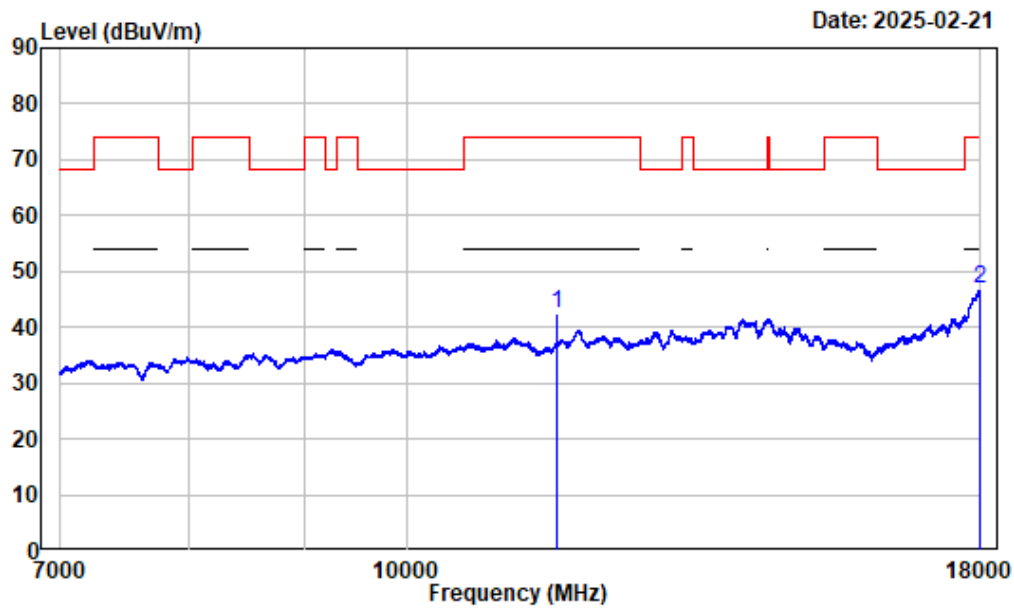

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-N20-5825

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	3.42	39.04	42.46	54.00	-11.54	Average
2 17994.500	13.17	33.76	46.93	54.00	-7.07	Average


7-18GHz_Vertical_Peak_802.11n-HT20

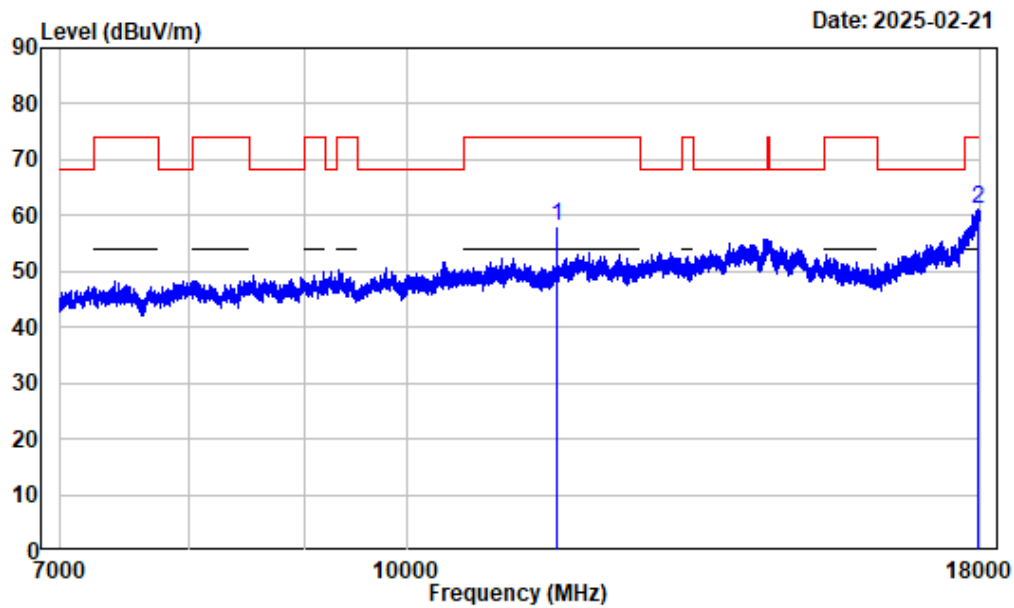

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N20-5825

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	3.42	54.68	58.10	74.00	-15.90	Peak
2 17961.500	13.01	48.14	61.15	74.00	-12.85	Peak


7-18GHz_Vertical_Average_802.11n-HT20

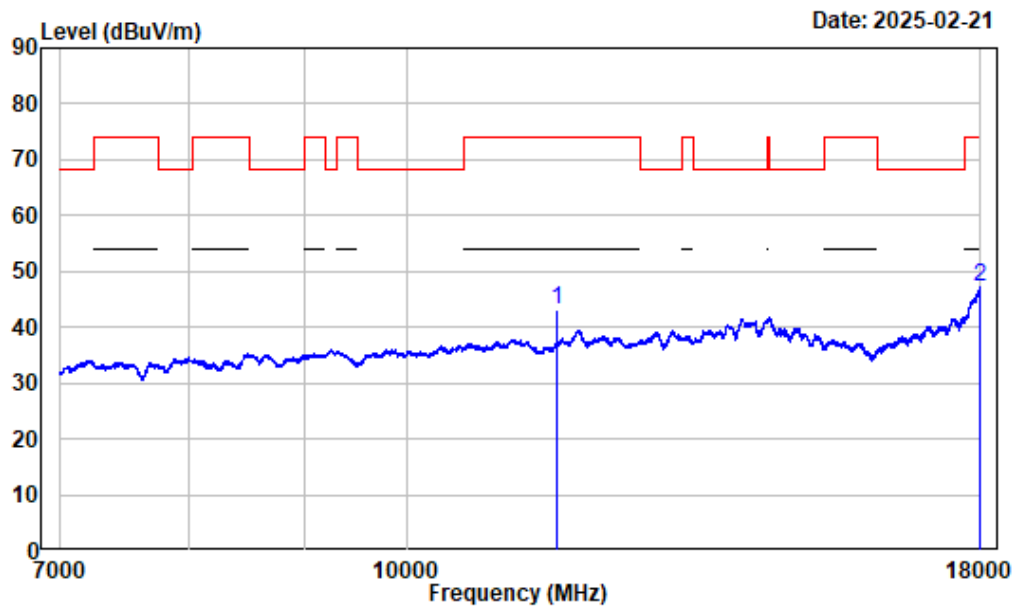

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:1kHz Detector:Peak
Note : 5GWiFi-Band4-N20-5825

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1 11650.000	3.42	39.55	42.97	54.00	-11.03	Average
2 17998.630	13.19	33.87	47.06	54.00	-6.94	Average


1-7GHz_Horizontal_802.11n-HT40

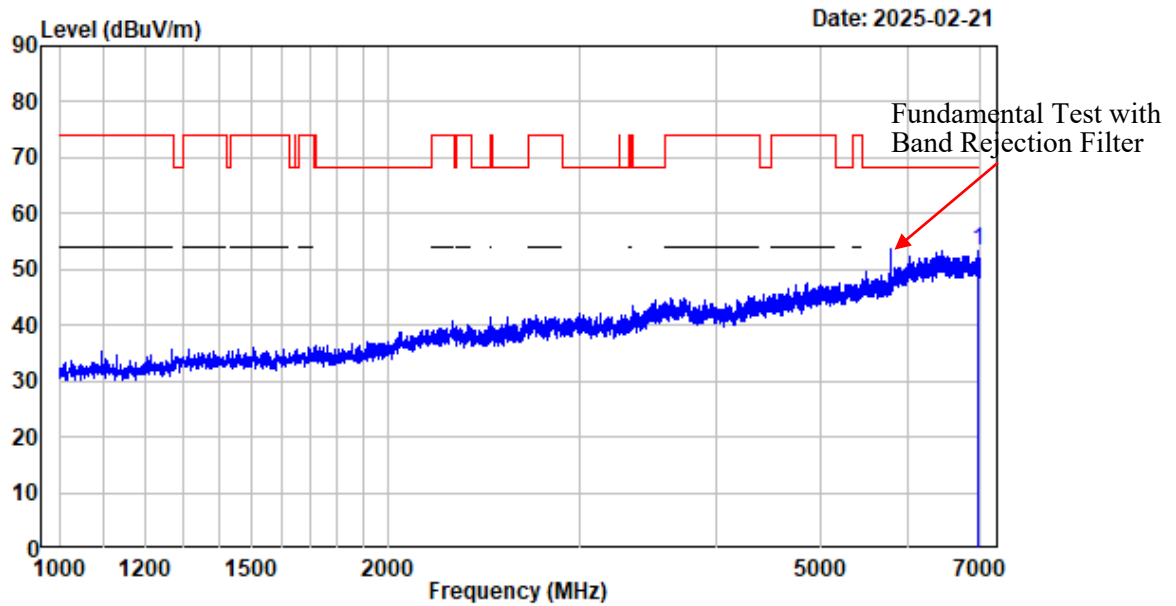

Condition : Horizontal
 Project No. : 2401A25033E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band4-N40-5795

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 6976.747	-2.83	56.21	53.38	68.20	-14.82 Peak


1-7GHz_Vertical_802.11n-HT40

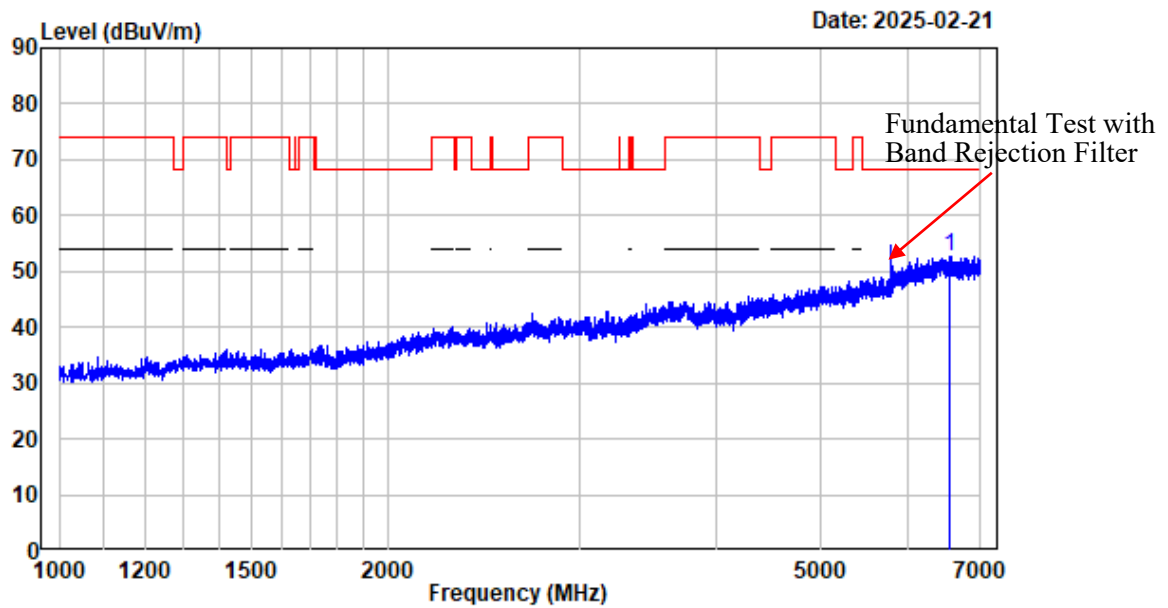

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N40-5795

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	6546.193	-3.03	55.81	52.78	68.20 -15.42 Peak


7-18GHz_Horizontal_Peak_802.11n-HT40

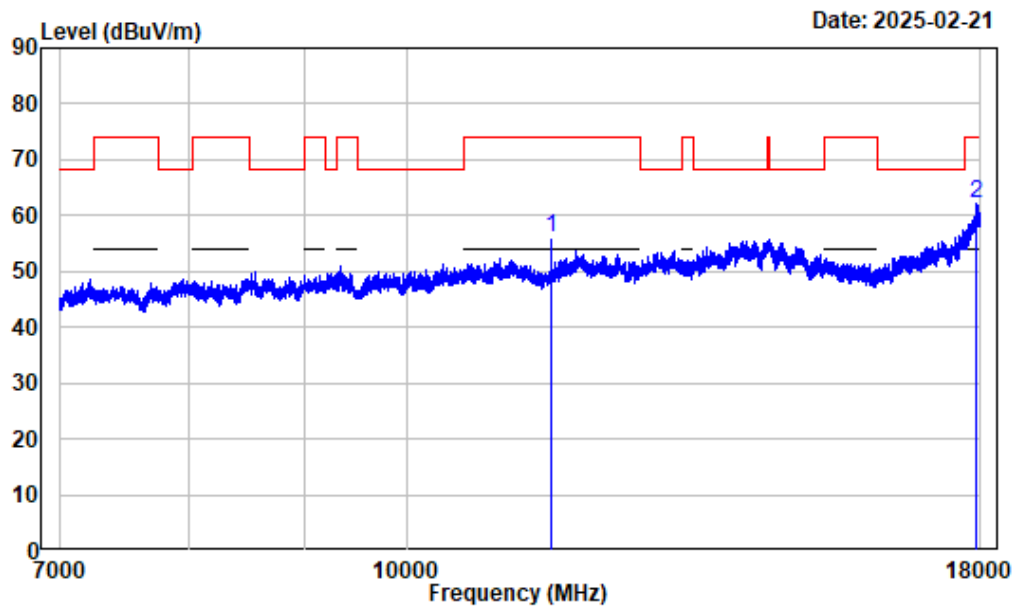

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N40-5795

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 11590.000	3.21	52.86	56.07	74.00	-17.93 Peak
2 17935.370	12.88	49.15	62.03	74.00	-11.97 Peak


7-18GHz_Horizontal_Average_802.11n-HT40

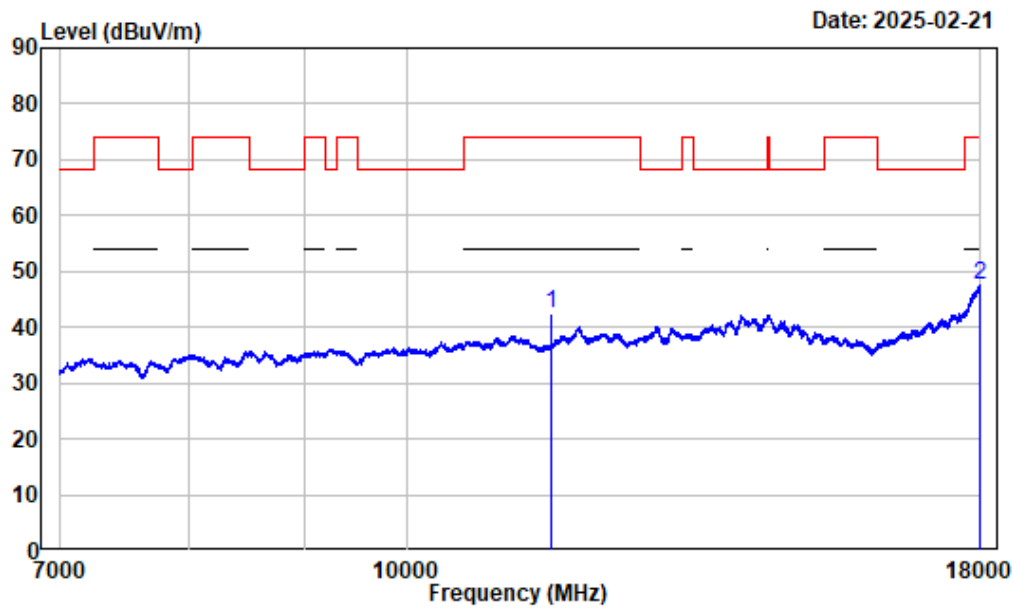

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band4-N40-5795

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 11590.000	3.21	39.13	42.34	54.00	-11.66	Average
2 17994.500	13.17	34.31	47.48	54.00	-6.52	Average


7-18GHz_Vertical_Peak_802.11n-HT40

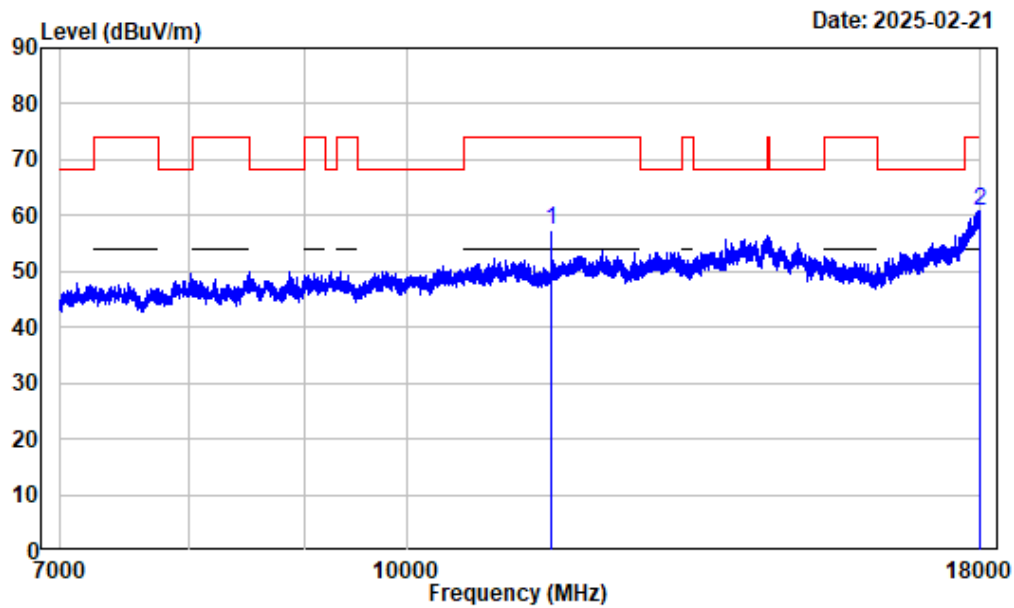

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band4-N40-5795

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1 11590.000	3.21	54.04	57.25	74.00	-16.75	Peak
2 17989.000	13.14	47.78	60.92	74.00	-13.08	Peak

7-18GHz_Vertical_Average_802.11n-HT40

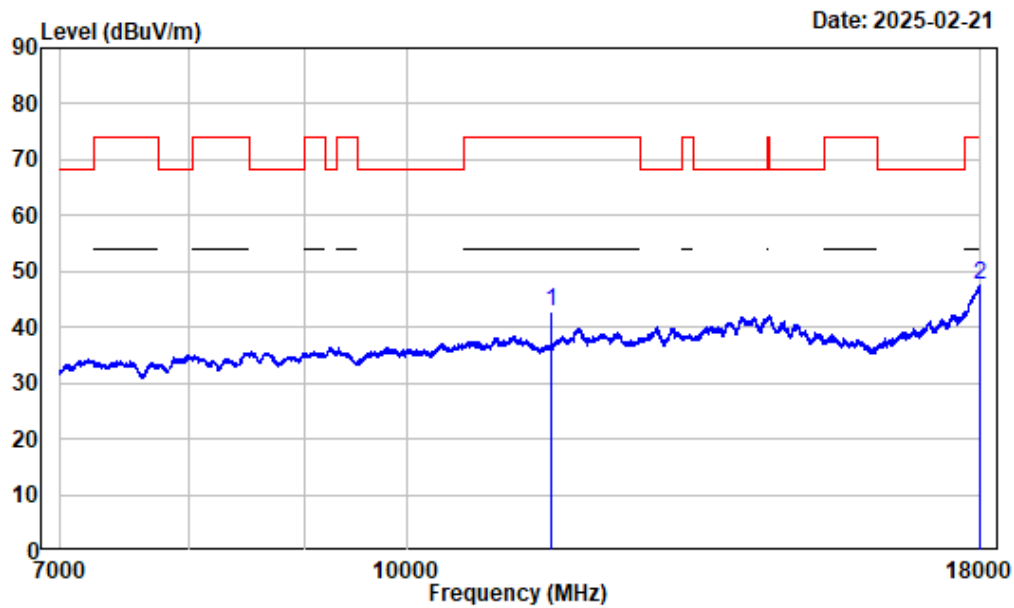


Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:2kHz Detector:Peak
Note : 5GWiFi-Band4-N40-5795

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1 11590.000	3.21	39.65	42.86	54.00	-11.14	Average
2 17979.370	13.10	34.49	47.59	54.00	-6.41	Average

18-40GHz (Only with worst case margin mode plot)


18-40GHz_Horizontal_802.11a

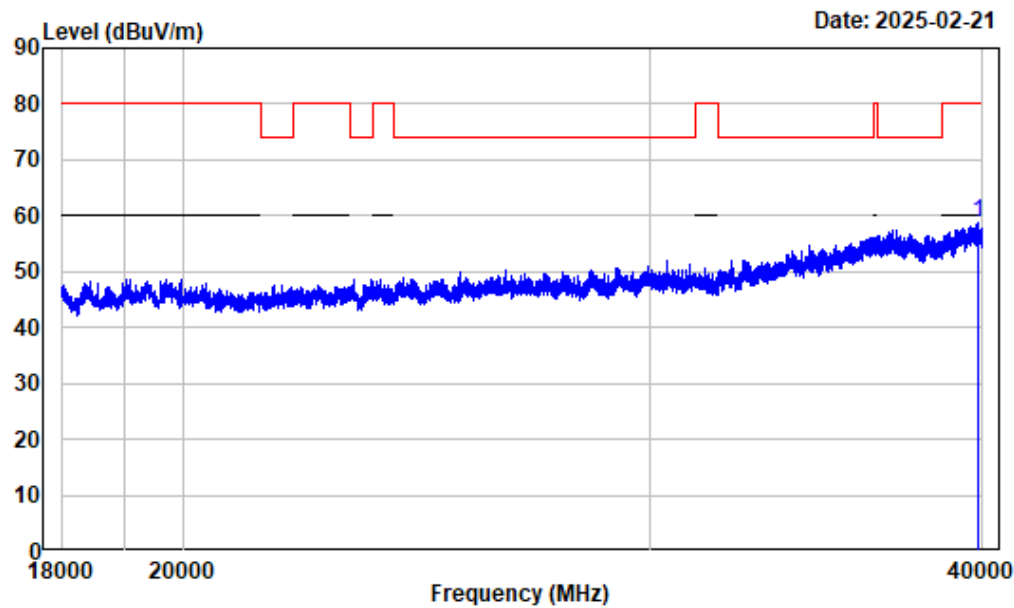

Condition : Horizontal
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5260

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 39834.980	22.52	36.13	58.65	80.00	-21.35	Peak

18-40GHz_Vertical_802.11a

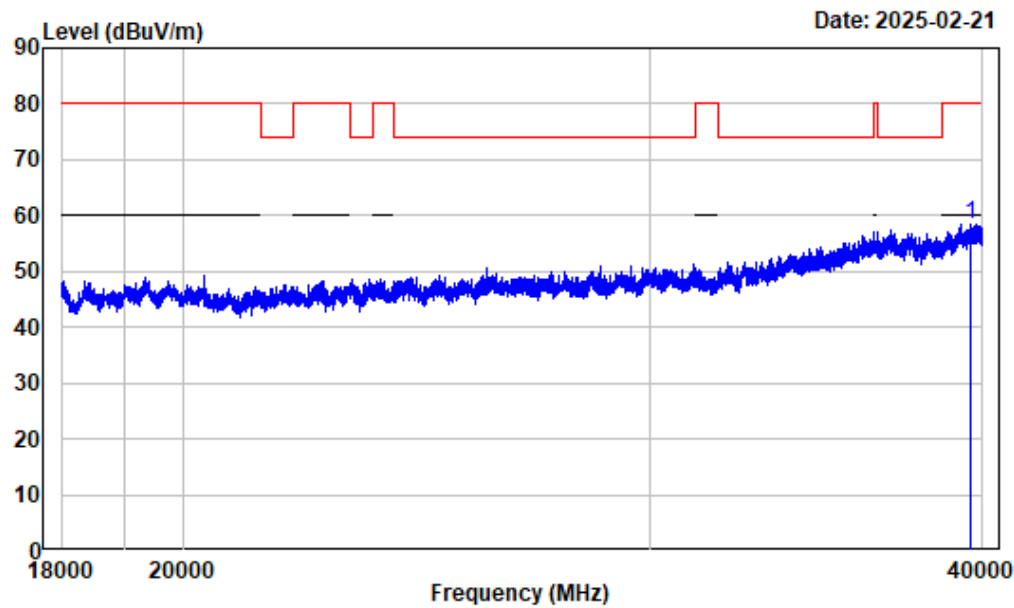

Condition : Vertical
Project No. : 2401A25033E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band2-A-5260

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 39603.950	22.79	35.72	58.51	80.00	-21.49	Peak

RF Conducted data**Emission Bandwidth****Test Information:**

Sample No.:	2WQQ-9	Test Date:	2025/02/16~2025/02/24
Test Site:	RF	Test Mode:	Transmitting
Tester:	Kungfumaster Liang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.8	Relative Humidity: (%)	47	ATM Pressure: (kPa)	101
-----------------------------	------	----------------------------------	----	-------------------------------	-----

Test Data:**26dB Emission Bandwidth
5150-5250MHz**

Mode	Test Frequency (MHz)	Result (MHz)
802.11a	5180	19.469
	5200	19.570
	5240	19.520
802.11n20	5180	20.792
	5200	20.794
	5240	20.746
802.11n40	5190	38.639
	5230	38.639

5250-5350MHz

Mode	Test Frequency (MHz)	Result (MHz)
802.11a	5260	19.469
	5280	19.520
	5320	19.319
802.11n20	5260	20.795
	5280	20.900
	5320	20.842
802.11n40	5270	38.739
	5310	38.539

5470-5725MHz


Mode	Test Frequency (MHz)	Result (MHz)
802.11a	5500	25.671
	5580	20.840
	5700	19.570
	5720	19.520
802.11n20	5500	21.245
	5580	20.946
	5700	20.850
	5720	20.901
802.11n40	5510	38.639
	5550	38.639
	5670	38.639
	5710	38.438

**6dB Emission Bandwidth
5725-5850MHz**

Mode	Test Frequency (MHz)	Result (MHz)	Limit (MHz)	Verdict
802.11a	5745	16.416	0.5	Pass
	5785	16.416	0.5	Pass
	5825	16.416	0.5	Pass
802.11n20	5745	16.917	0.5	Pass
	5785	16.917	0.5	Pass
	5825	17.017	0.5	Pass
802.11n40	5755	34.134	0.5	Pass
	5795	34.034	0.5	Pass


5150-5250MHz

802.11a_5180MHz

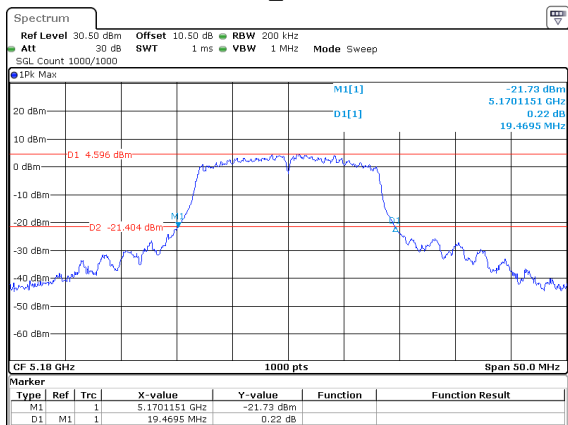


ProjectNo.:2401A25033E-RF Tester:Kungfumaster Liang
Date: 16.FEB.2025 20:57:22

802.11a_5200MHz

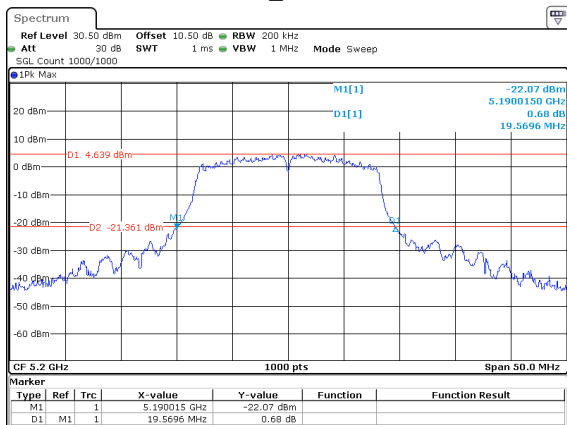


ProjectNo.:2401A25033E-RF Tester:Kungfumaster Liang
Date: 16.FEB.2025 21:00:30

802.11a_5240MHz

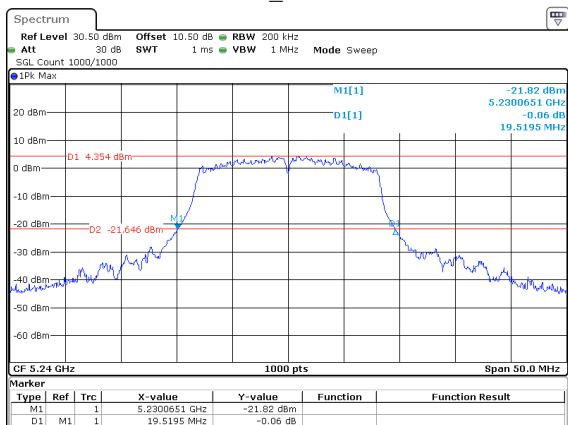


ProjectNo.:2401A25033E-RF Tester:Kungfumaster Liang
Date: 16.FEB.2025 21:02:36

802.11n20_5180MHz

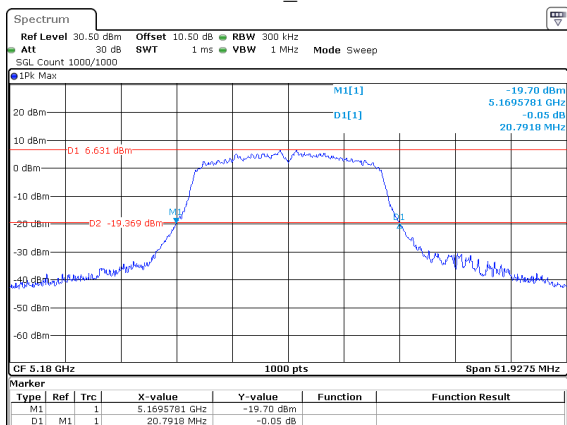


ProjectNo.:2401A25033E-RF Tester:Kungfumaster Liang
Date: 16.FEB.2025 21:05:45

802.11n20_5200MHz

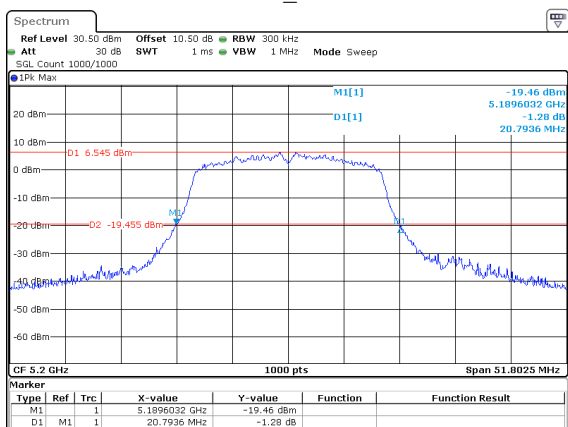


ProjectNo.:2401A25033E-RF Tester:Kungfumaster Liang
Date: 16.FEB.2025 21:08:19

802.11n20_5240MHz

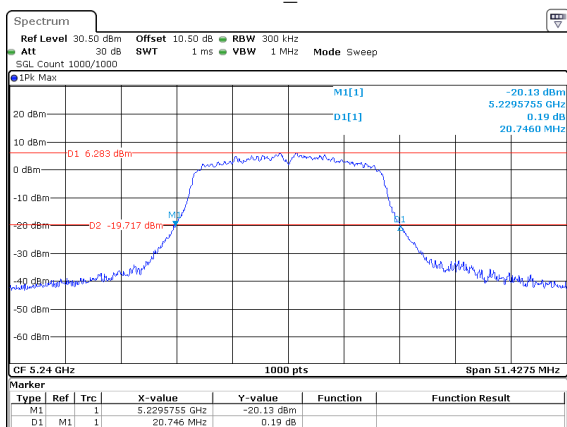


ProjectNo.:2401A25033E-RF Tester:Kungfumaster Liang
Date: 16.FEB.2025 21:10:34

802.11n40_5190MHz

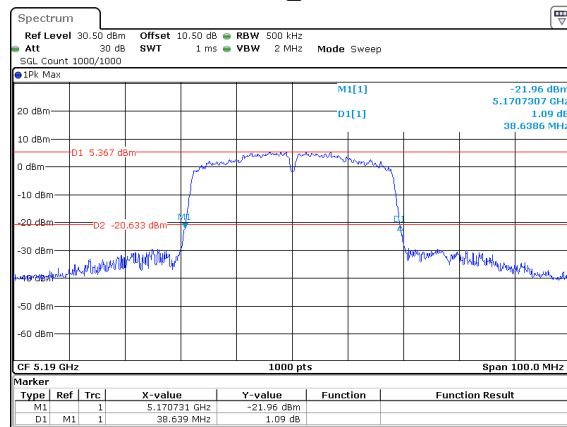

ProjectNo.:2401A25033E-RF Tester:Kungfumaster Liang
Date: 16.FEB.2025 21:12:44


802.11n40_5230MHz

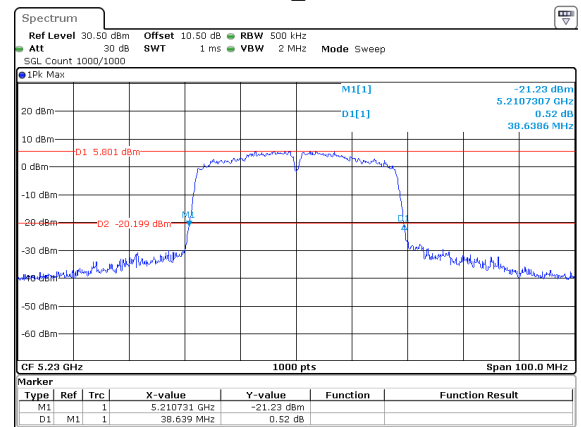

ProjectNo.:2401A25033E-RF Tester:Kungfumaster Liang
Date: 16.FEB.2025 21:19:52


5250-5350MHz

802.11a_5260MHz

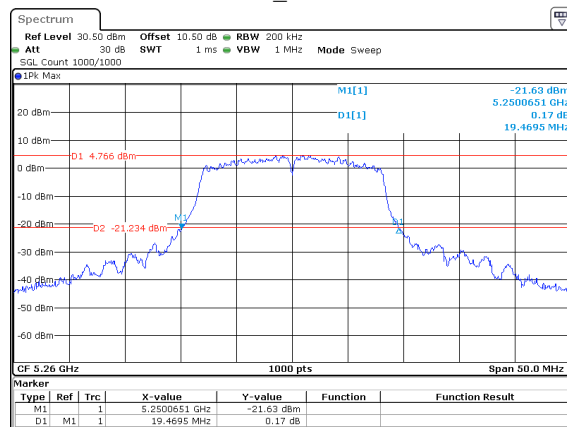


ProjectNo.:2401A25033E-RF Tester:Kungfumaster Liang
Date: 16.FEB.2025 21:58:28

802.11a_5280MHz

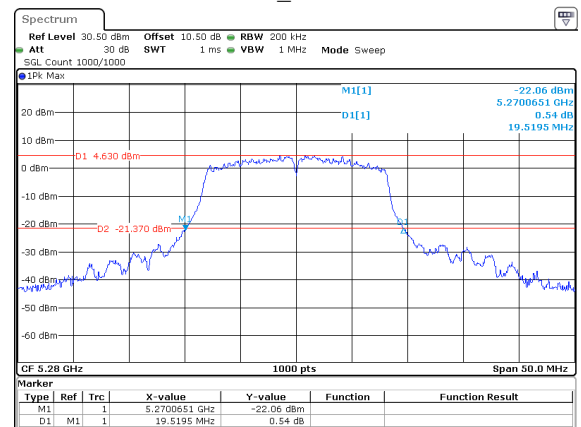


ProjectNo.:2401A25033E-RF Tester:Kungfumaster Liang
Date: 16.FEB.2025 22:00:53

802.11a_5320MHz

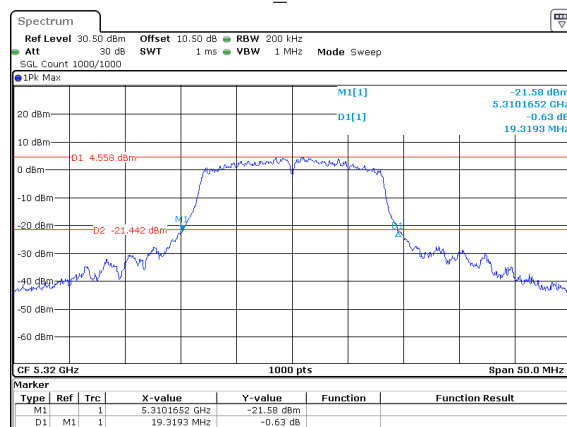


ProjectNo.:2401A25033E-RF Tester:Kungfumaster Liang
Date: 16.FEB.2025 22:03:40

802.11n20_5260MHz

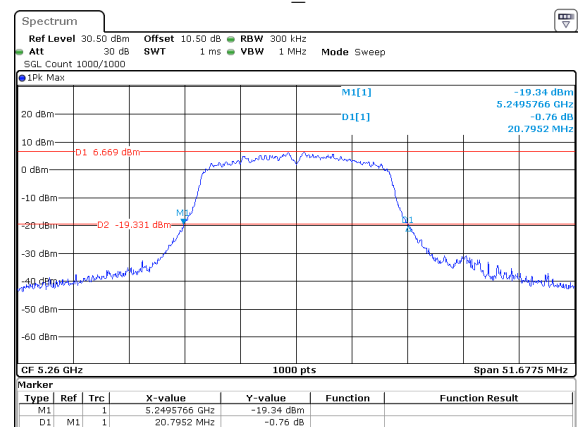


ProjectNo.:2401A25033E-RF Tester:Kungfumaster Liang
Date: 16.FEB.2025 22:06:16

802.11n20_5280MHz

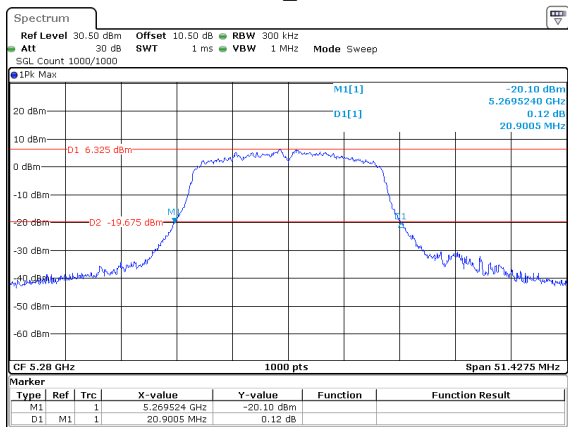


ProjectNo.:2401A25033E-RF Tester:Kungfumaster Liang
Date: 16.FEB.2025 22:08:49

802.11n20_5320MHz

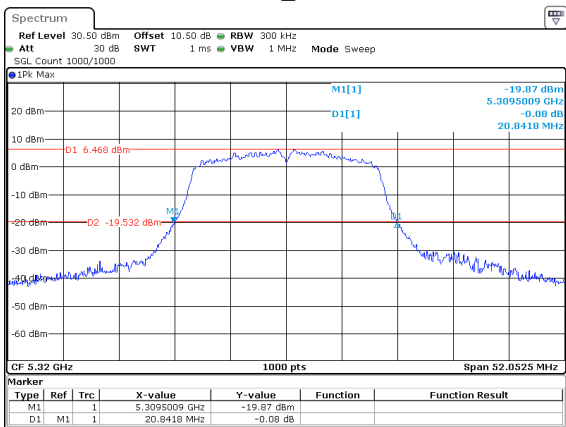


ProjectNo.:2401A25033E-RF Tester:Kungfumaster Liang
Date: 16.FEB.2025 22:11:14

802.11n40_5270MHz

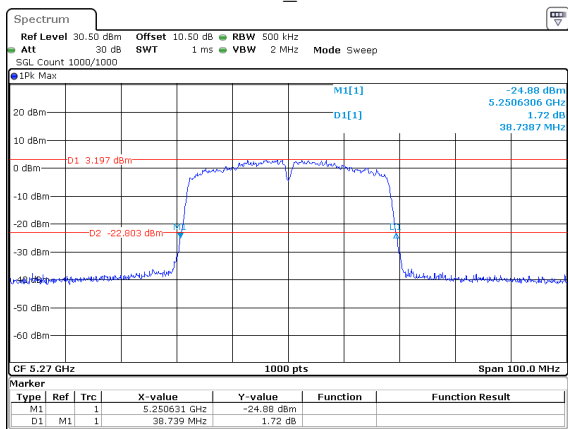

ProjectNo.:2401A25033E-RF Tester:Kungfumaster Liang
Date: 24.FEB.2025 21:17:37


802.11n40_5310MHz

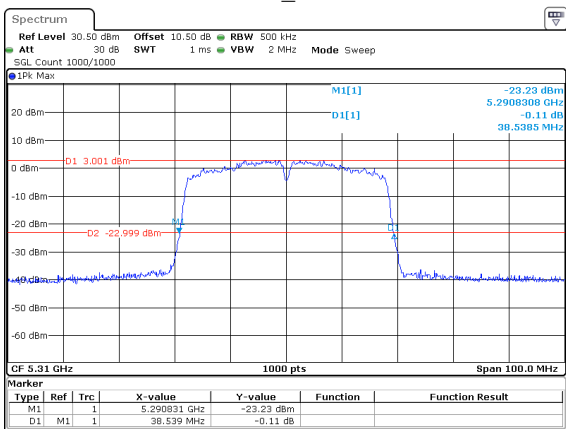

ProjectNo.:2401A25033E-RF Tester:Kungfumaster Liang
Date: 24.FEB.2025 21:20:29


5470-5725MHz

802.11a_5500MHz

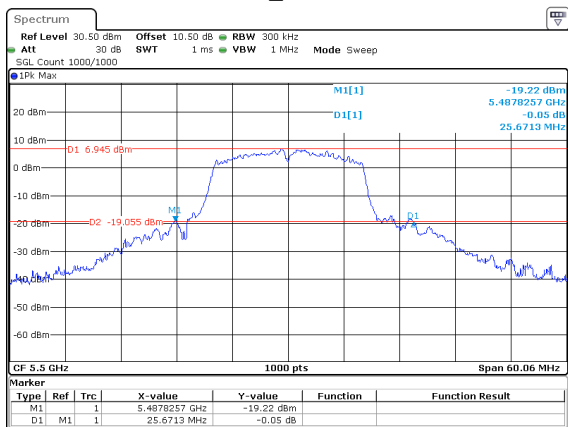


ProjectNo.:2401A25033E-RF Tester:Kungfumaster Liang
Date: 24.FEB.2025 22:12:13

802.11a_5580MHz

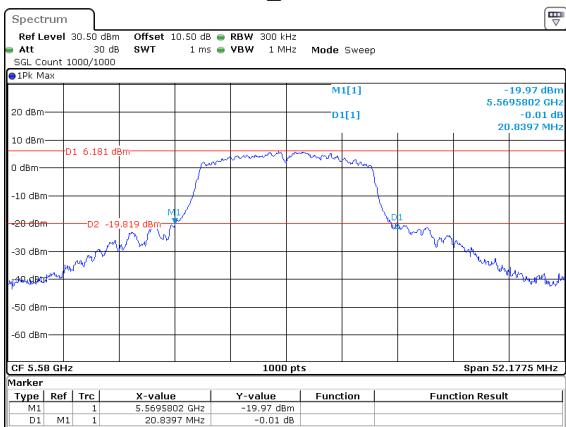


ProjectNo.:2401A25033E-RF Tester:Kungfumaster Liang
Date: 24.FEB.2025 22:13:31

802.11a_5700MHz

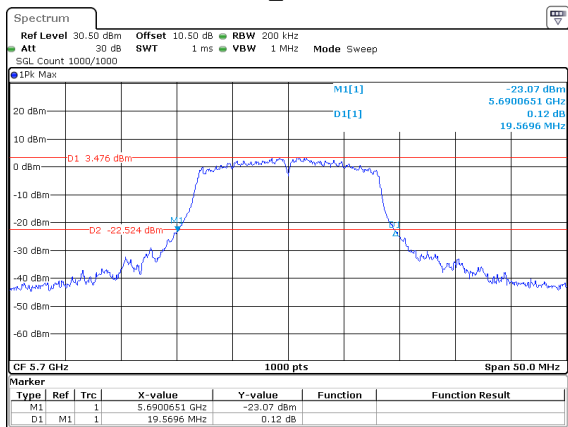


ProjectNo.:2401A25033E-RF Tester:Kungfumanter Liang
Date: 24.FEB.2025 22:14:45

802.11a_5720MHz

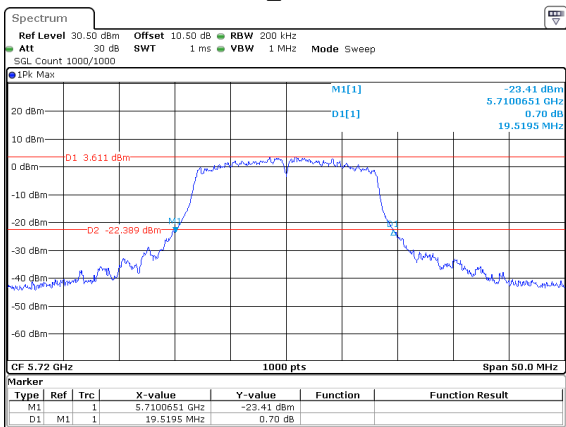


ProjectNo.:2401A25033E-RF Tester:Kungfumanter Liang
Date: 24.FEB.2025 22:15:43

802.11n20_5500MHz

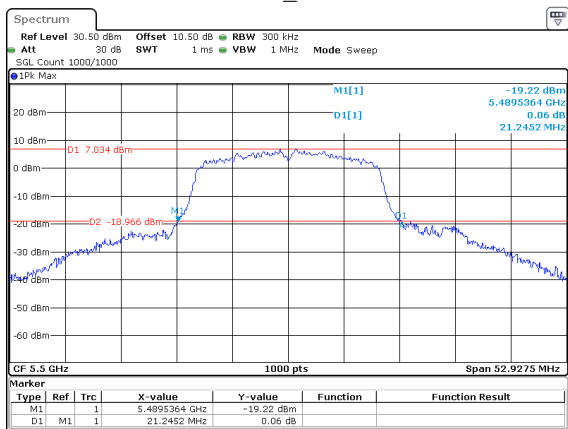


ProjectNo.:2401A25033E-RF Tester:Kungfumanter Liang
Date: 24.FEB.2025 22:17:21

802.11n20_5580MHz

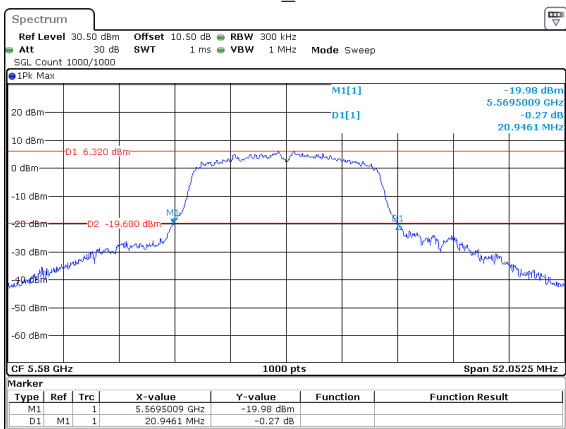


ProjectNo.:2401A25033E-RF Tester:Kungfumanter Liang
Date: 24.FEB.2025 22:18:36

802.11n20_5700MHz

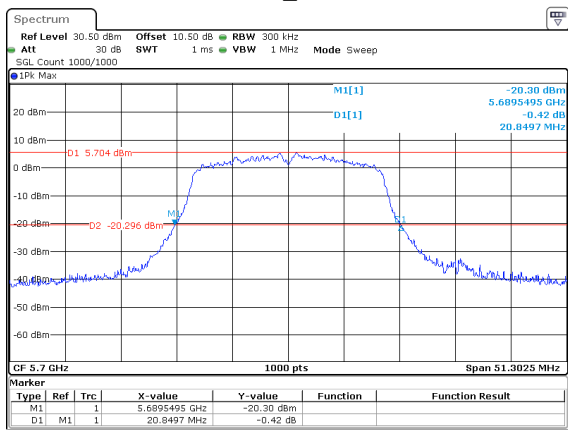


ProjectNo.:2401A25033E-RF Tester:Kungfumanter Liang
Date: 24.FEB.2025 22:20:02

802.11n20_5720MHz

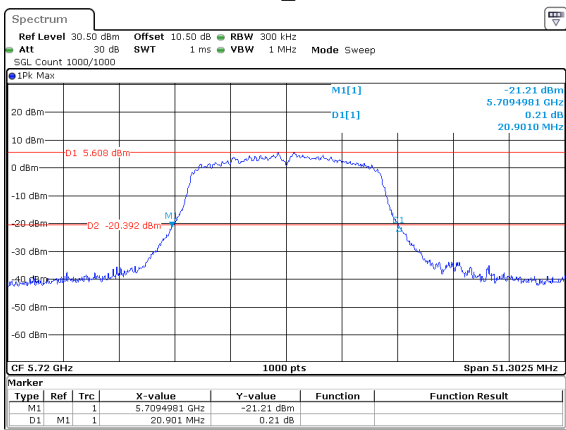


ProjectNo.:2401A25033E-RF Tester:Kungfumanter Liang
Date: 24.FEB.2025 22:21:09

802.11n40_5510MHz

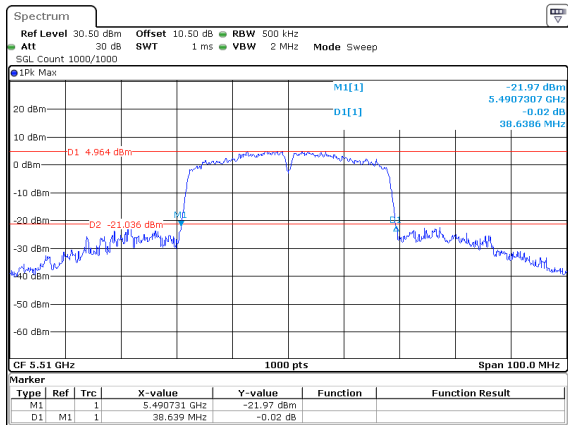


ProjectNo.:2401A25033E-RF Tester:Kungfumaster Liang
Date: 24.FEB.2025 22:22:59

802.11n40_5550MHz

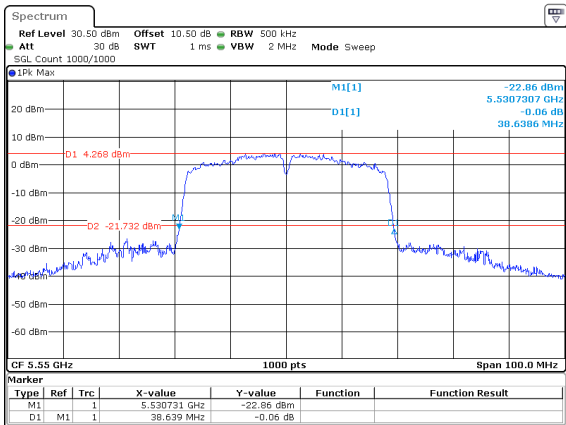


ProjectNo.:2401A25033E-RF Tester:Kungfumaster Liang
Date: 24.FEB.2025 22:25:08

802.11n40_5670MHz

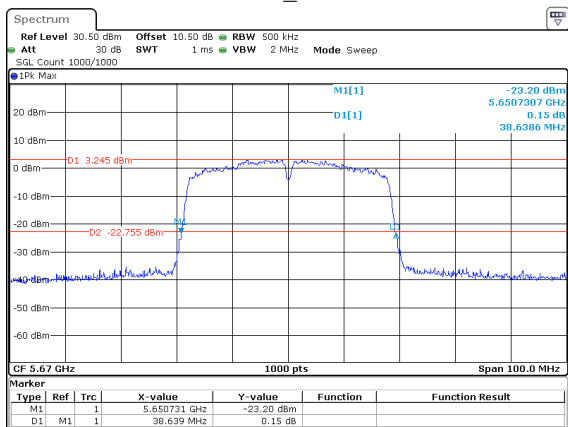

ProjectNo.:2401A25033E-RF Tester:Kungfumaster Liang
Date: 24.FEB.2025 22:27:03


802.11n40_5710MHz

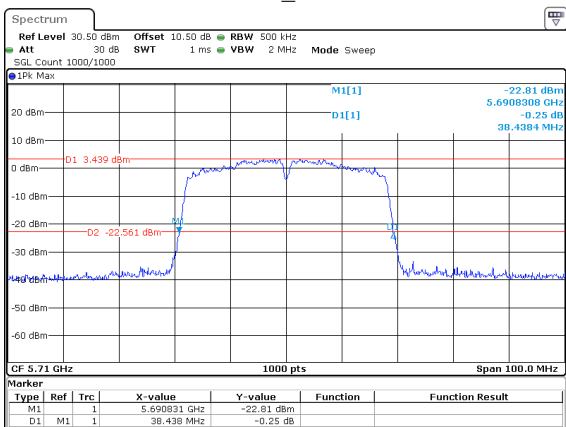

ProjectNo.:2401A25033E-RF Tester:Kungfumaster Liang
Date: 24.FEB.2025 22:28:16


5725-5850MHz

802.11a_5745MHz

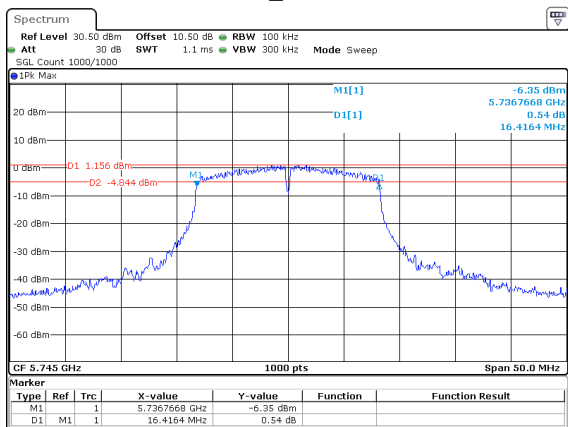


ProjectNo.:2401A25033E-RF Tester:Kungfumaster Liang
Date: 16.FEB.2025 23:05:20

802.11a_5785MHz

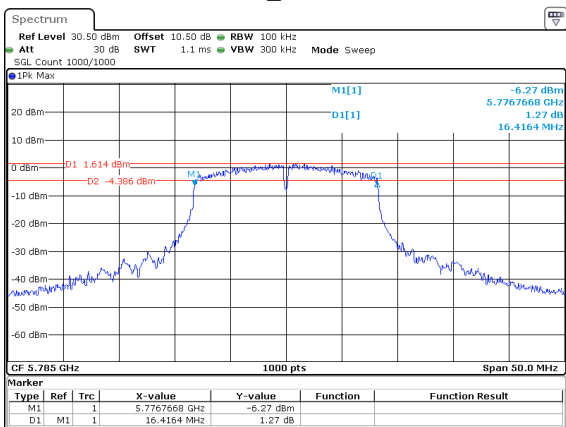


ProjectNo.:2401A25033E-RF Tester:Kungfumaster Liang
Date: 16.FEB.2025 23:08:07

802.11a_5825MHz

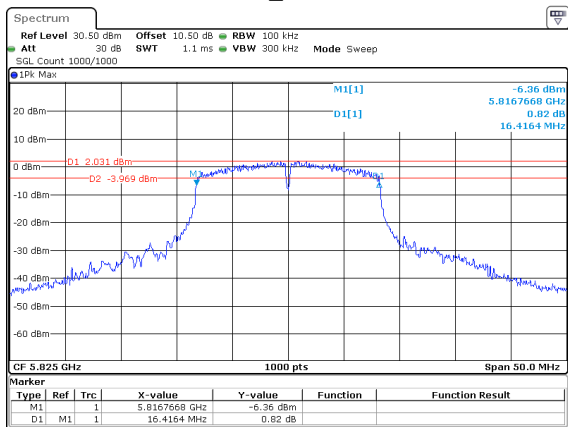


ProjectNo.:2401A25033E-RF Tester:Kungfumanter Liang
Date: 16.FEB.2025 23:10:36

802.11n20_5745MHz

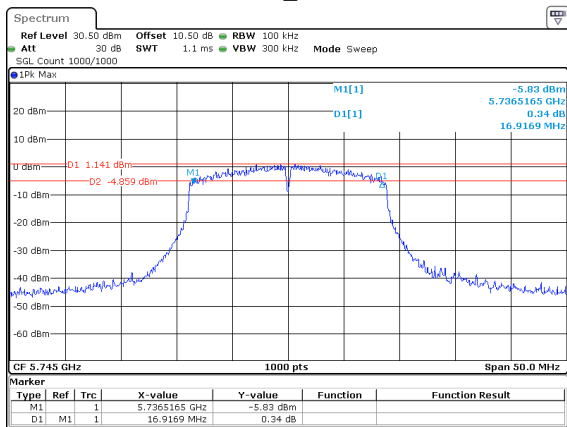


ProjectNo.:2401A25033E-RF Tester:Kungfumanter Liang
Date: 16.FEB.2025 23:13:33

802.11n20_5785MHz

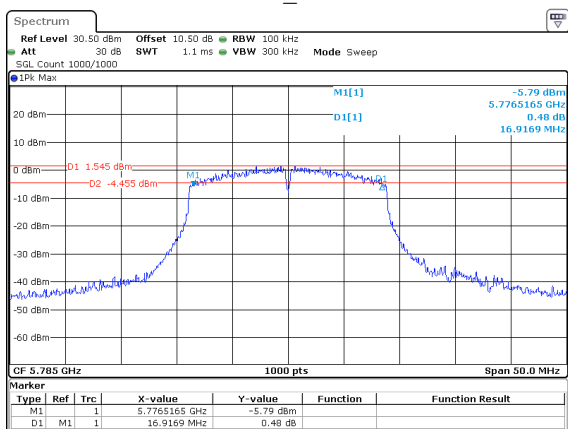


ProjectNo.:2401A25033E-RF Tester:Kungfumanter Liang
Date: 16.FEB.2025 23:16:11

802.11n20_5825MHz

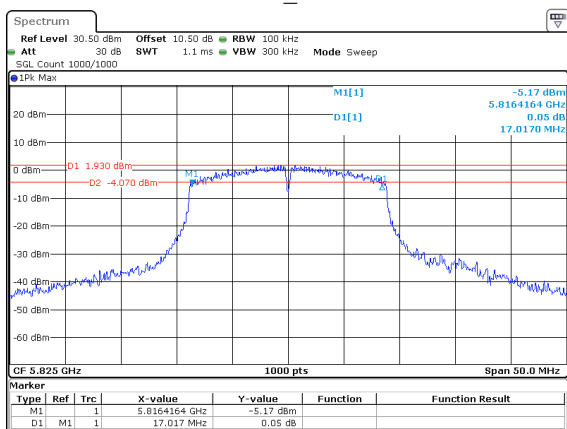


ProjectNo.:2401A25033E-RF Tester:Kungfumanter Liang
Date: 16.FEB.2025 23:18:36

802.11n40_5755MHz

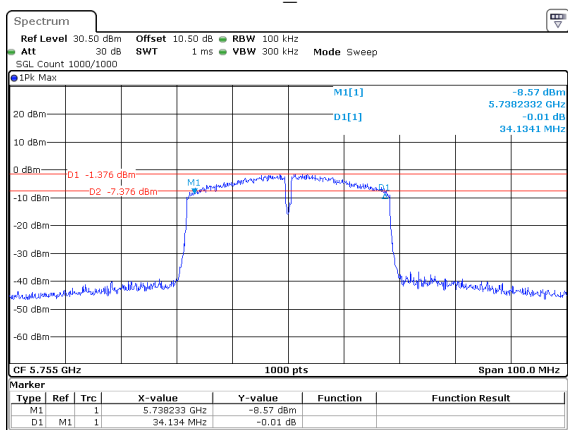

ProjectNo.:2401A25033E-RF Tester:Kungfumanter Liang
Date: 16.FEB.2025 23:20:29

802.11n40_5795MHz

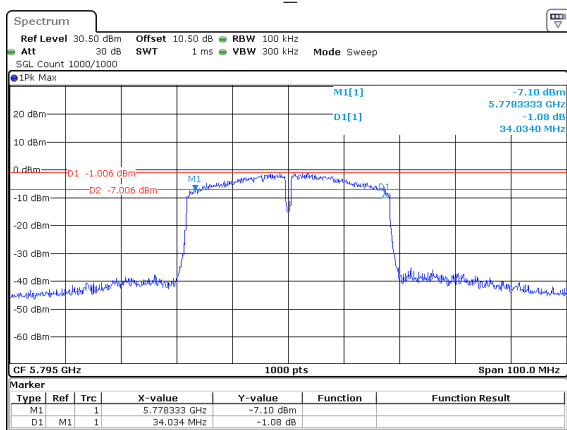

ProjectNo.:2401A25033E-RF Tester:Kungfumanter Liang
Date: 16.FEB.2025 23:22:10

99% Occupied Bandwidth

Test Information:

Sample No.:	2WQQ-9	Test Date:	2025/02/16~2025/02/24
Test Site:	RF	Test Mode:	Transmitting
Tester:	Kungfumaster Liang	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	23.8	Relative Humidity: (%)	47	ATM Pressure: (kPa)	101
----------------------	------	------------------------------	----	------------------------	-----

Test Data:**5150-5250MHz**

Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11a	5180	16.300
	5200	16.300
	5240	16.300
802.11n20	5180	17.450
	5200	17.450
	5240	17.450
802.11n40	5190	35.400
	5230	35.400

Note:

The 99% Occupied Bandwidth have not fall into the band 5250-5350MHz, please refer to the test plots of 99% Occupied Bandwidth.

5250-5350MHz

Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11a	5260	16.300
	5280	16.300
	5320	16.300
802.11n20	5260	17.450
	5280	17.450
	5320	17.450
802.11n40	5270	35.400
	5310	35.400

5470-5725MHz

Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11a	5500	16.400
	5580	16.350
	5700	16.300
	5720	16.300
802.11n20	5500	17.550
	5580	17.500
	5700	17.450
	5720	17.450
802.11n40	5510	35.400
	5550	35.400
	5670	35.400
	5710	35.400

5725-5850MHz

Mode	Test Frequency (MHz)	99% OBW (MHz)
802.11a	5745	16.300
	5785	16.300
	5825	16.350
802.11n20	5745	17.450
	5785	17.450
	5825	17.450
802.11n40	5755	35.400
	5795	35.400

Note:

The 99% Occupied Bandwidth have not fall into the band 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.