

Dongguan Chuangjie Electronics Co., Ltd

APPROVAL SHEET
For
WP-4908-IPEX project
Antenna componentst

Frequency range	WIFI:(2.4/5.8GHz))
VSWR	< =2.0
Input Impedance	50 (Ω)
Polarization	Vertical Polarization
(3dB) HPW	180° H-plane 120° E-plane

RF by		Checked by	
ME by		Date	
Customer Confirm			

Project:		Author:Wang	File Name: WP -4908 - IPEX
Date: 2024-11-05			
TEST:	Language:	Check: Zhong	
A	English		

Revision History

Date	Revision	Description of Changes
2024-11-05	RA	Measured with SUS301 sample.

Dongguan Chuangjie Electronics Co., Ltd.....

WP-4908-IPEX_PROJECT 1

ANTENNA COMPONENTST 1

2.1 Components/Part revisions 3

3 MECHANICAL DESCRIPTION 3

4 ELECTRICAL PERFORMANCE 3

4.1 Set-up 3

4.1.1 VSWR 3

4.1.2 Gain & Radiation Patterns 3

4.1.3 Matching Circuit Description 3

4.2 Measurement Data 4

4.2.1 Active result (GSM) 4

6 Mechanical drawing 5

7 RELIABILITY TESTS 10

7.1 Test content 10

7.2 Test results 10

8 CONCLUSION 9

1 Technical Summary

This report summarizes the electrical results of the proposed antenna to support the WP-4908-IPEX program. We test the antenna with the latest version handset. And it

Project:		Author:Wang	File Name: WP-4908- IPEX
Date: 2024-11-05			
TEST:	Language:	Check: Zhong	
A	English		

seems to be acceptable.

2 General Description

2.1 Components/Part revisions

VSWR: Voltage Standing Wave Rate.

3 Mechanical Description

4 Electrical Performance

4.1 Set-up

4.1.1 VSWR

VSWR measurements (S11) were performed using an Agilent 8753D Network Analyzer and the previously described test fixture. Coaxial chokes were used to mitigate surface currents on the outside of the cabling. The testing was performed in free space.

4.1.2 Gain & Radiation Patterns



The gain of the antenna was measured in the Lxc’s anechoic chamber. Coaxial chokes on the feed cable were used to mitigate surface currents. The chamber provides less than –30 dB reflectivity from 800 MHz through 3 GHz and an 18” diameter spherical quiet zone. The measurement results are calibrated using both dipole and leaky wave horn standards.

4.1.3 Matching Circuit Description

Project:		Author:Wang	File Name: WP-4908- IPEX
Date: 2024-11-05			
TEST:	Language:	Check: Zhong	
A	English		

4.2 Measurement Data

4.2.1 Active result (2.4G/5.8WIFI)

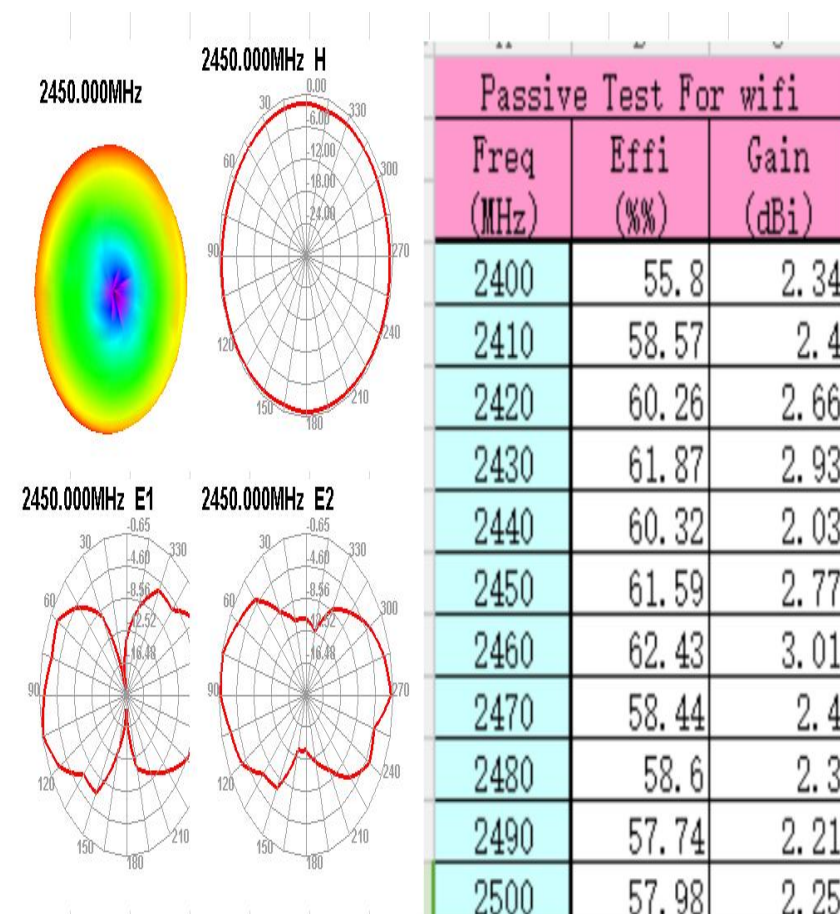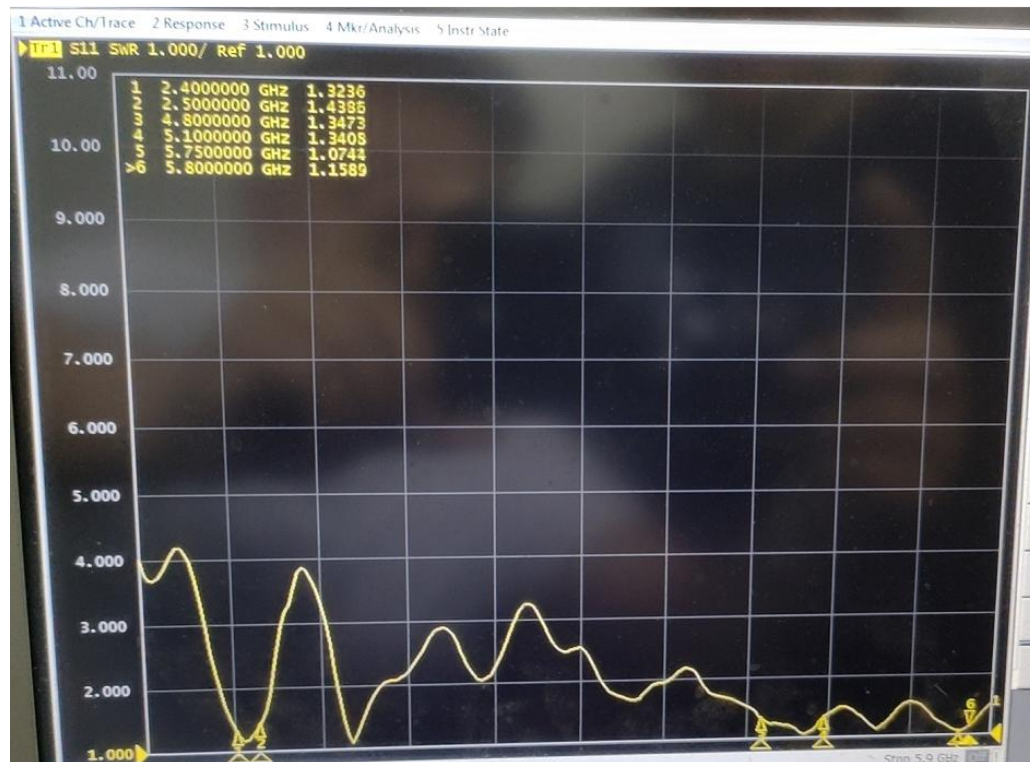

Project:		Author:Wang	File Name:
----------	--	-------------	--


Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
5150	50.84	-3.2	2.55
5160	50.91	-2.95	2.44
5170	53.82	-2.69	2.46
5180	52.88	-2.77	2.64
5190	50.48	-2.97	2.66
5200	49.24	-3.26	2.32
5210	49.42	-3.06	2.33
5220	51.52	-2.88	2.56
5230	55.3	-2.57	2.93
5240	57.23	-2.42	2.28
5250	50.33	-2.98	2.09
5260	50.22	-2.99	2.17
5270	48.98	-3.1	2.03
5280	51.73	-2.86	2.11
5290	53.3	-2.73	2.46
5300	51.79	-2.86	2.49
5310	51.68	-2.87	2.94
5320	52.18	-2.83	3.01
5330	51.18	-2.91	2.68
5340	52.01	-2.84	2.68
5350	54.68	-2.62	3.09
5360	52.86	-2.77	3.01
5370	53.3	-2.73	3.09
5380	53.78	-2.69	3.11
5390	50.33	-2.98	2.71
5400	60.27	-2.2	3.47
5410	57.92	-2.37	3.4
5420	56.91	-2.45	3.31
5430	56.42	-2.49	3.23
5440	55.8	-2.53	3.46
5450	59.59	-2.25	3.69
5460	56.29	-2.5	3.43
5470	57.54	-2.4	3.5
5480	56.43	-2.48	3.49
5490	57.37	-2.41	3.47
5500	58.29	-2.34	3.63

Project:		Author:Wang	File Name: WP-4908- IPEX
Date: 2024-11-05			
TEST:	Language:	Check: Zhong	
A	English		



5510	58.34	-2.34	3.42
5520	59.76	-2.24	3.51
5530	56.02	-2.52	3.7
5540	58.12	-2.36	3.37
5550	61.06	-2.14	3.13
5560	60.62	-2.17	3.87
5570	58.55	-2.32	3.98
5580	57.27	-2.42	3.82
5590	58.2	-2.35	3.56
5600	60.17	-2.21	3.55
5610	59.79	-2.23	3.79
5620	56.76	-2.46	3.68
5630	56.56	-2.47	3.7
5640	57.45	-2.41	3.6
5650	58.91	-2.3	3.62
5660	59.94	-2.22	3.88
5670	56.49	-2.48	3.92
5680	58.98	-2.29	3.72
5690	59.39	-2.26	3.15
5700	58.88	-2.3	3.96
5710	59.26	-2.27	3.85
5720	60.22	-2.2	3.91
5730	61.8	-2.09	3.46
5740	58.63	-2.32	3.45
5750	60.52	-2.18	3.48
5760	57.48	-2.4	3.64
5770	59.96	-2.22	3.69
5780	61.97	-2.08	3.71
5790	58.48	-2.33	3.24
5800	61.07	-2.14	3.27
5810	59.34	-2.27	3.2
5820	59.25	-2.27	3.53
5830	60.59	-2.18	3.98
5840	57.94	-2.37	3.53
5850	61.11	-2.14	3.79

Project:		Author:Wang	File Name: WP-4908- IPEX
Date: 2024-11-05			
TEST:	Language:	Check: Zhong	
A	English		

5150.00MHz - 5850.00MHz Gain

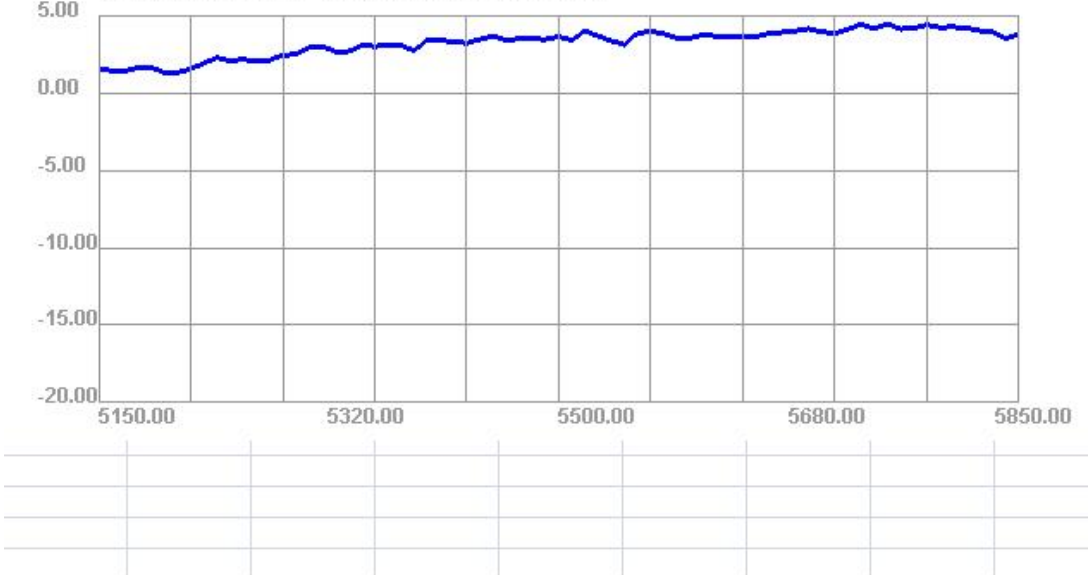


5150.00MHz - 5850.00MHz Efficiency

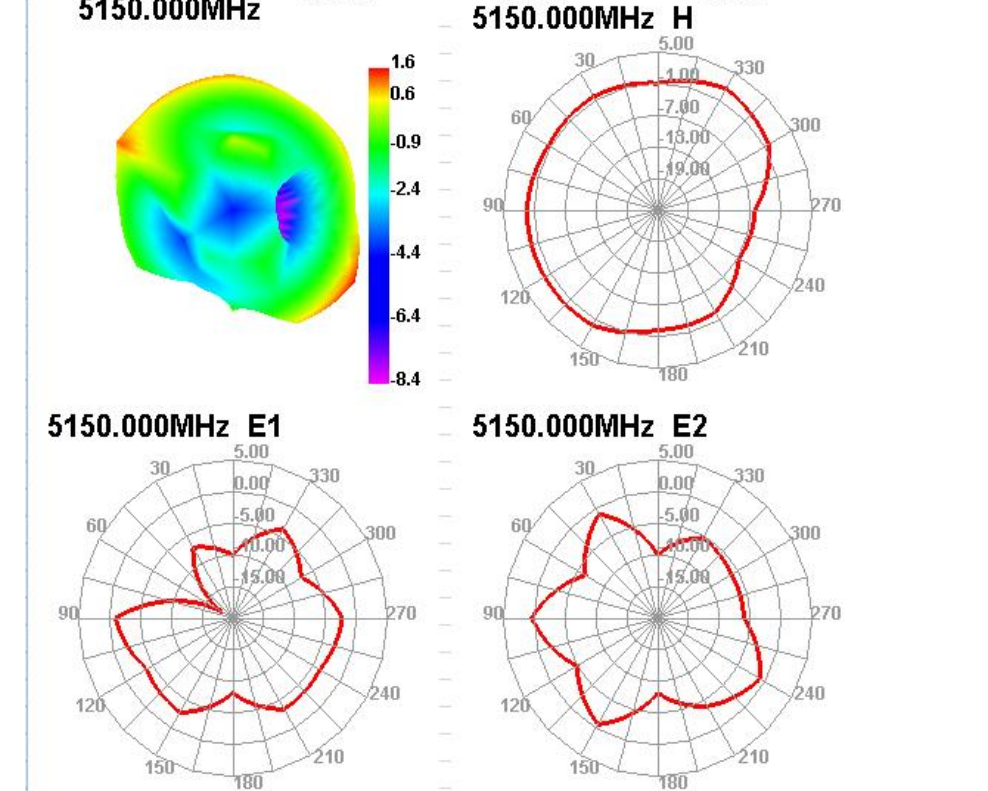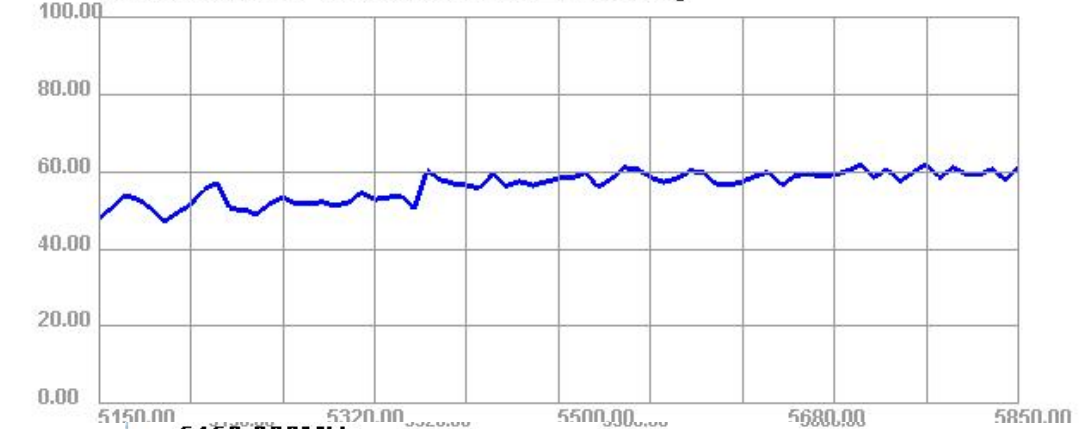


Project:		Author:Wang	File Name: WP-4908- IPEX
Date: 2024-11-05			
TEST:	Language:	Check: Zhong	
A	English		


5160.000MHz

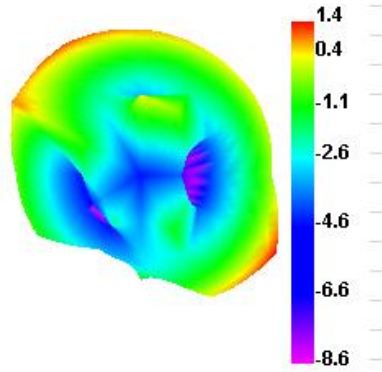


5160.000MHz H

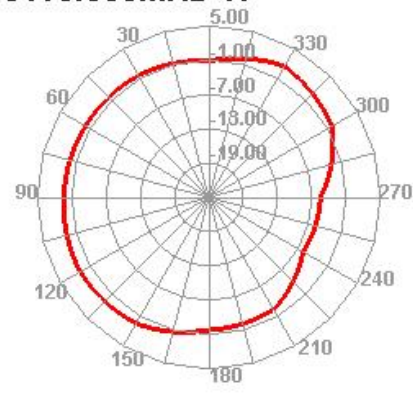

5160.000MHz E1

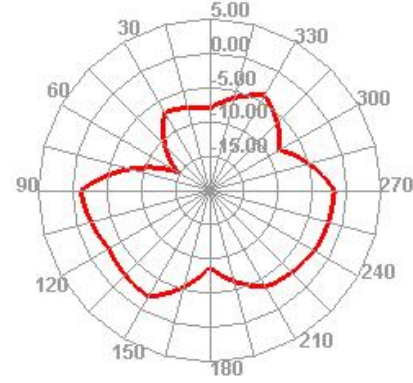


5160.000MHz E2

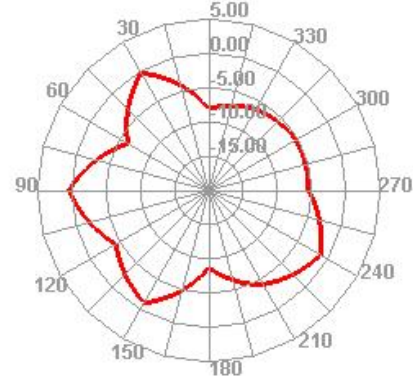

Project:		Author:Wang	File Name: WP-4908- IPEX
Date: 2024-11-05			
TEST:	Language:	Check: Zhong	
A	English		

6, * 1	' \$ 7 (	DESCRIPTION	\$ 3 3 5 2 9 (5
△			
△			
△			

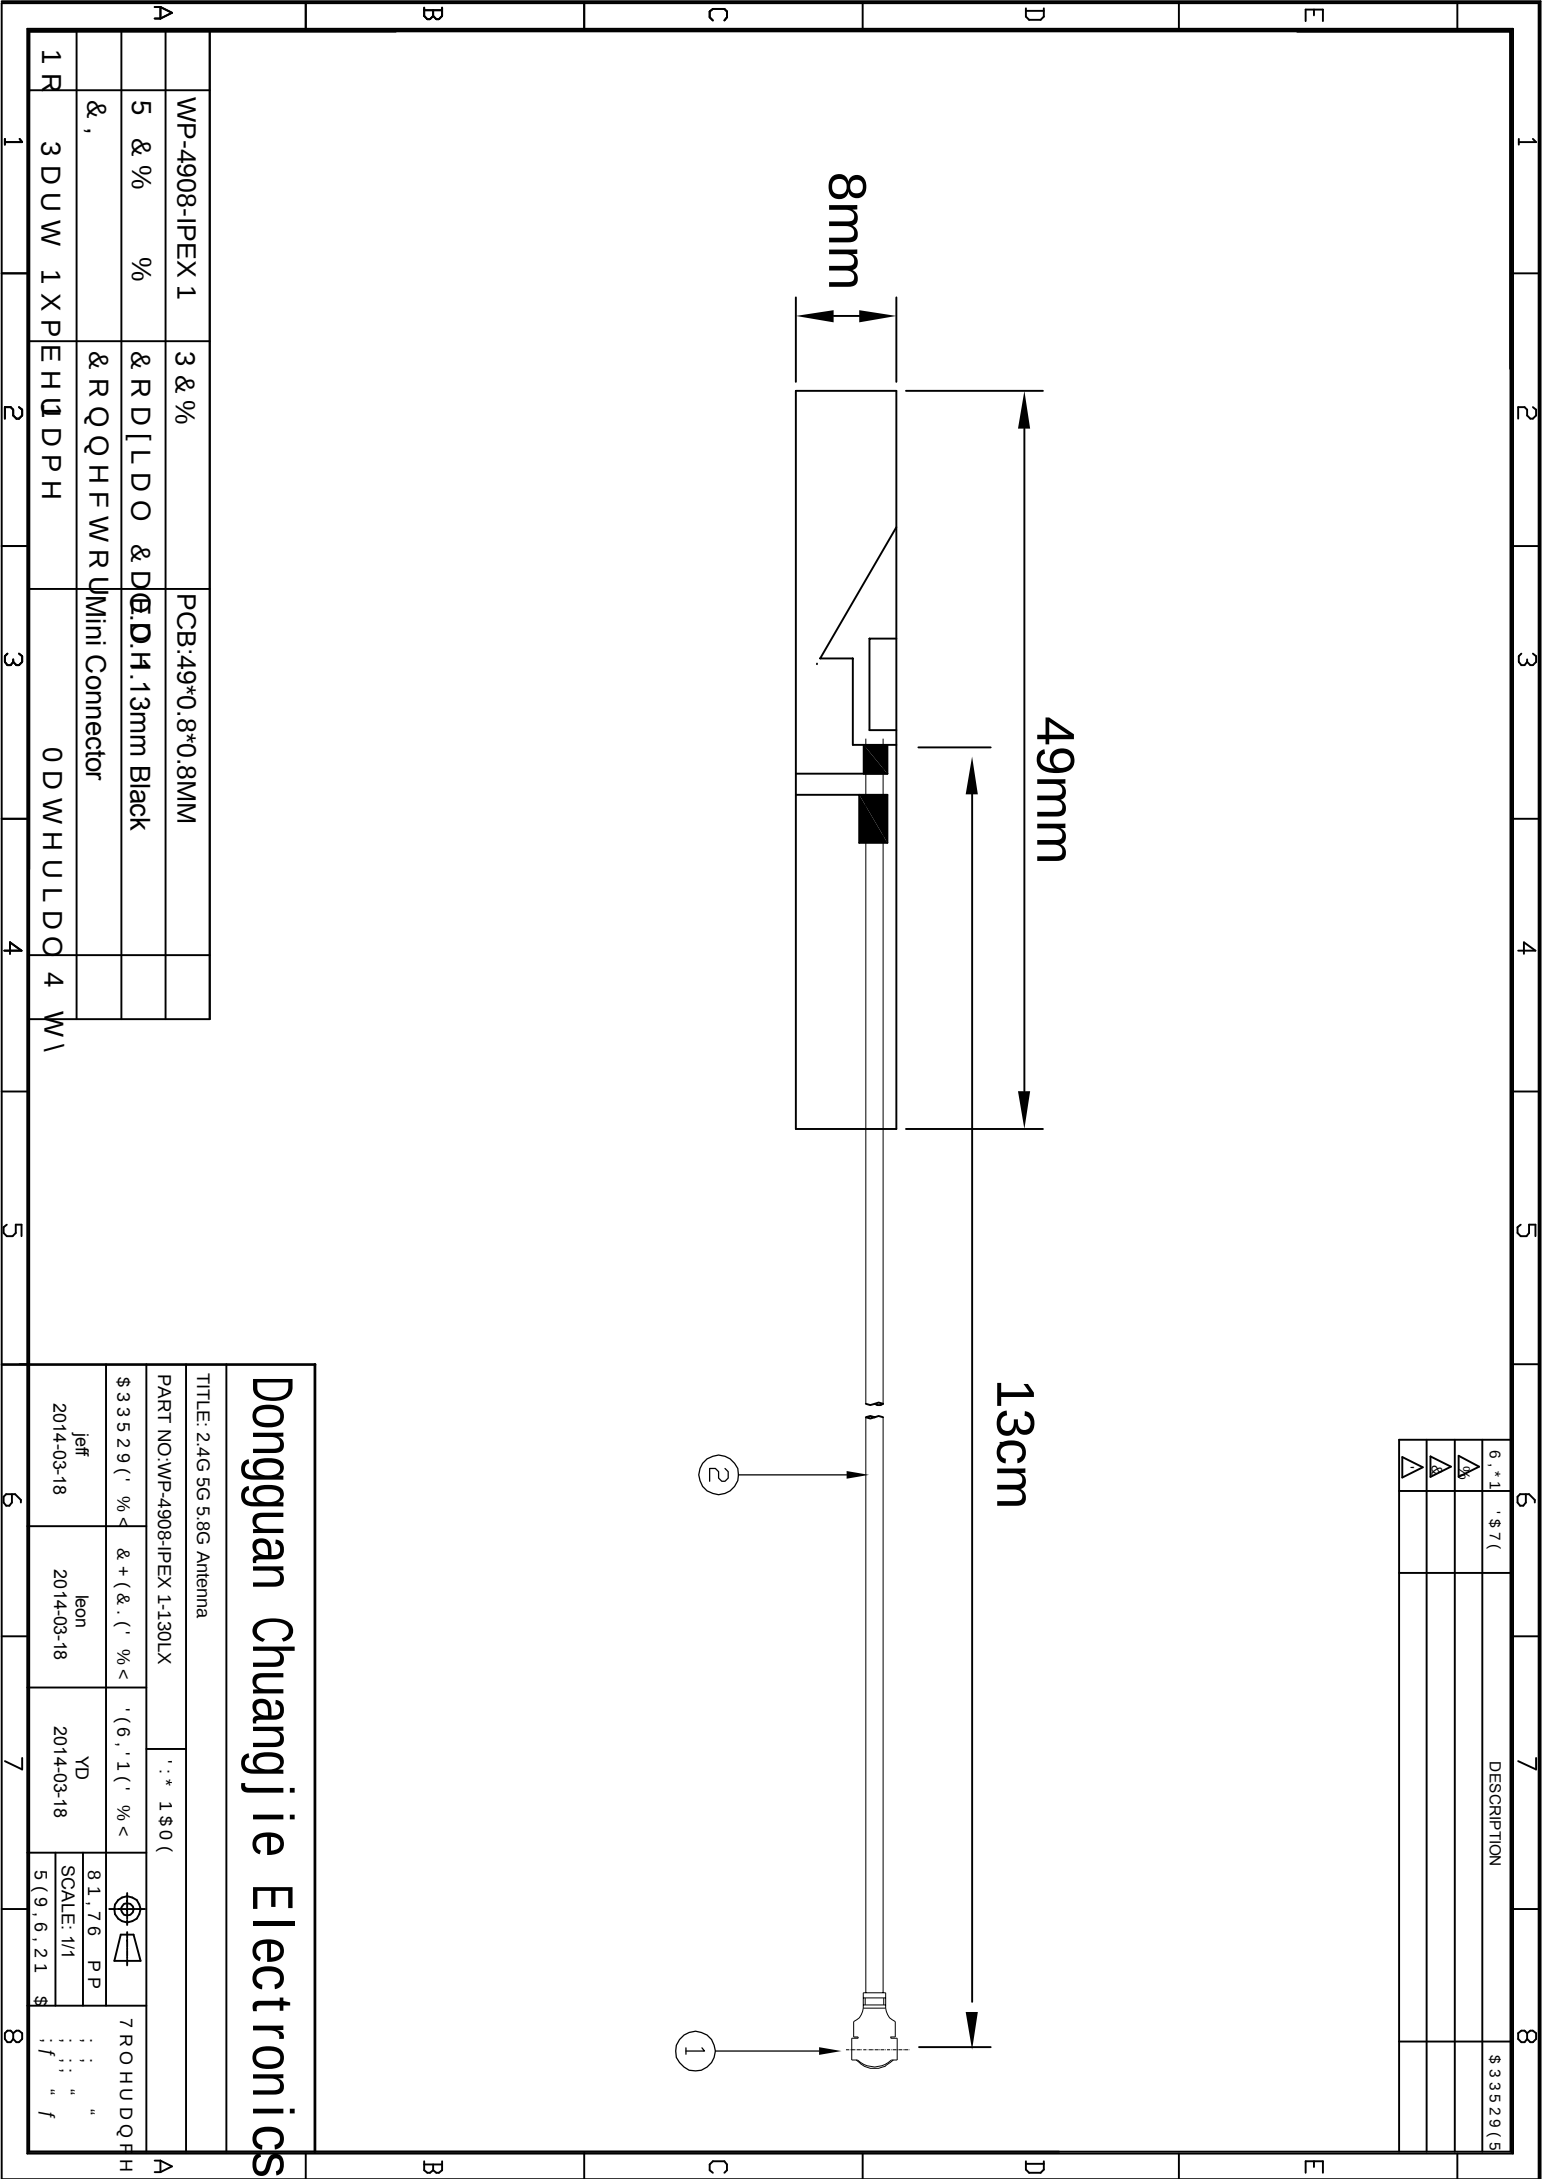

Dongguan Chuangjie Electronics

WP-4908-IPEX 1	3 & %	PCB:49*0.8*0.8MM	
5 & %	%	& RD[LDO & D	
& ,	& R Q Q H F W R U	Mini Connector	
1 R	3 D U W 1 X P E H U D P H		0 D W H U L D Q 4 W \

TITLE: 2.4G 5G 5.8G Antenna			
PART NO:WP-4908-IPEX 1-130LX	' : * 1 \$ 0 (		
\$ 3 3 5 2 9 (' % <	& + (& , (' % <	' (6 , ' 1 (' % <	7 R O H U D Q F H
jeff 2014-03-18	leon 2014-03-18	YD 2014-03-18	SCALE: 1/1
			5 (9 , 6 , 2 1 \$