

MPE REPORT

Car wireless charger

MODEL No.: TY001, AB-1001-70-80X-WX-BK, AB-1001B-90x-WX-BK,
AB-1003-DX-WX-BK, AB-1003A-DX-WX-BK, AB-1012-WXC-BK,
AB-1026-WX-BK, AB-1058-WX-BK, AB-1065-WX-BK, AB-1201-WX-BK,
AB-1202-WX-BK, AB-1203-WX-BK, AB-1204-WX-BK, AB-1205-WX-BK,
AB-1206-WX-BK, AB-1207-WX-BK, AB-1208-WX-BK, AB-1209-WX-BK,
AB-1210-WX-BK

FCC ID: 2BEGL-TY001

REPORT NO.: NCT23051214E-2

ISSUE DATE: Jan. 17, 2024

Prepared for

Wenzhou Tuyi Automotive Products Co., Ltd

Building 1, Standard Factory Building, Shangsheng Village, Tangxia
Town, Rui'an, Wenzhou City, Zhejiang Province, China

Prepared by

Shenzhen NCT Testing Technology Co., Ltd.

Building 1, Standard Factory Building, Shangsheng Village, Tangxia
Town, Rui'an, Wenzhou City, Zhejiang Province, China

TEL: 400-8868-419

FAX: 86-755-27790922

TABLE OF CONTENT

Test Report Description	Page
1. SUMMARY OF TEST RESULT	4
2. GENERAL INFORMATION	5
2.1. DESCRIPTION OF DEVICE (EUT)	5
2.2. TEST SETUP	5
2.3. DESCRIPTION OF TEST FACILITY	6
2.4. MEASUREMENT UNCERTAINTY	6
3. MEASURING DEVICE AND TEST EQUIPMENT	7
3.1. FOR MPE MEASUREMENT	7
4. RF EXPOSURE	8
4.1. MEASURING STANDARD	8
4.2. REQUIREMENTS	8
4.3. TEST CONFIGURATION	9
4.4. EQUIPMENT APPROVAL CONSIDERATIONS	10
4.5. LIMITS	11
4.6. MEASURING RESULTS	12
5. PHOTOGRAPHS OF TEST SETUP	14

TEST REPORT DESCRIPTION

Applicant : Wenzhou Tuyi Automotive Products Co., Ltd
Address : Building 1, Standard Factory Building, Shangsheng Village, Tangxia Town, Rui'an, Wenzhou City, Zhejiang Province, China
Manufacturer : Wenzhou Tuyi Automotive Products Co., Ltd
Address : Building 1, Standard Factory Building, Shangsheng Village, Tangxia Town, Rui'an, Wenzhou City, Zhejiang Province, China
EUT : Car wireless charger
TY001, AB-1001-70-80X-WX-BK, AB-1001B-90x-WX-BK, AB-1003-DX-WX-BK, AB-1003A-DX-WX-BK, AB-1012-WXC-BK, AB-1026-WX-BK, AB-1058-WX-BK, AB-1065-WX-BK, AB-1201-WX-BK, AB-1202-WX-BK, AB-1203-WX-BK, AB-1204-WX-BK, AB-1205-WX-BK, AB-1206-WX-BK, AB-1207-WX-BK, AB-1208-WX-BK, AB-1209-WX-BK, AB-1210-WX-BK
Model Name :
Trademark : N/A


Measurement Procedure Used:

FCC Part 1(1.1310) and Part 2(2.1091)
680106 D01 RF Exposure Wireless Charging App v03r01

The device described above is tested by Shenzhen NCT Testing Technology Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen NCT Testing Technology Co., Ltd. is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC requirements.


This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen NCT Testing Technology Co., Ltd.

Test Engineer:



Keven Wu / Engineer

Technical Manager:



Henry Wang / Manager



1. SUMMARY OF TEST RESULT

EMISSION		
Description of Test Item	Standard & Limits	Results
MPE	FCC Part 1(1.1310) and Part 2(2.1091) 680106 D01 RF Exposure Wireless Charging App v03r01	Pass
Note: N/A is an abbreviation for Not Applicable.		

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT : Car wireless charger

Model Number : TY001, AB-1001-70-80X-WX-BK, AB-1001B-90x-WX-BK, AB-1003-DX-WX-BK, AB-1003A-DX-WX-BK, AB-1012-WXC-BK, AB-1026-WX-BK, AB-1058-WX-BK, AB-1065-WX-BK, AB-1201-WX-BK, AB-1202-WX-BK, AB-1203-WX-BK, AB-1204-WX-BK, AB-1205-WX-BK, AB-1206-WX-BK, AB-1207-WX-BK, AB-1208-WX-BK, AB-1209-WX-BK, AB-1210-WX-BK

Power Rating : Input: 9-16Vdc/3A
Type-C Output: 5Vdc/4A 20W
USB Output: 5Vdc/4.5A 22.5W
Wireless Charging Output : 15W Max

Operation Frequency for WPT : 110-205KHz

Modulation : MSK


Antenna Type: : Coil Antenna

Date of Received : Jan. 17, 2024

Date of Test : Jan. 08, 2024 to Jan. 16, 2024

Test Setup

For Mobile exposure conditions

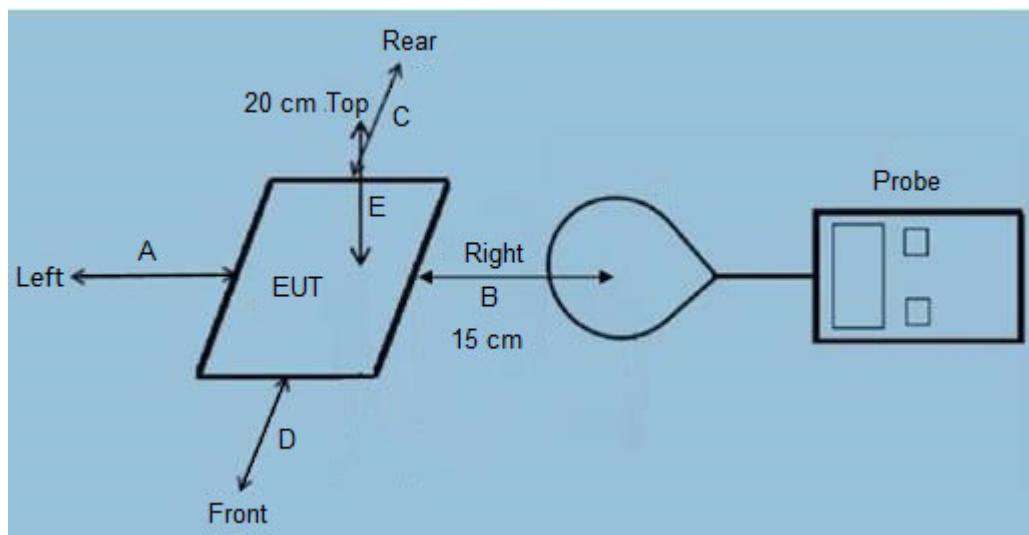

2.3. Description of Test Facility

Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27
The certificate is valid until 2028.01.07
The Laboratory has been assessed and proved to be in compliance with
CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)
The Certificate Registration Number is L8251

Designation Number: CN1347
Test Firm Registration Number: 894804
Accredited by A2LA, June 14, 2023
The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018
The Conformity Assessment Body Identifier is CN0150
Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.
Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan
District, Shenzhen, People's Republic of China

2.4. Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB

3. MEASURING DEVICE AND TEST EQUIPMENT

3.1. For MPE Measurement

Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
<input type="checkbox"/>	Exposure Level Tester(1Hz-400KHz)	Narda	EHP-200A	180ZX00634	2023.06.21	2024.06.20

4. RF EXPOSURE

4.1. Measuring Standard

FCC Part 1(1.1310) and Part 2(2.1091)

4.2. Requirements

Three different categories of transmitters are defined by the FCC in OET Bulletin 65. These categories are fixed installation, mobile, and portable and are defined as follows:

- o Fixed Installations: fixed location means that the device, including its antenna, is physically secured at a permanent location and is not able to be easily moved to another location. Additionally, distance to humans from the antenna is maintained to at least 2 meters.
- o Mobile Devices: a mobile device is defined as a transmitting device designed to be used in other than fixed locations and to be generally used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structures and the body of the user or nearby persons. Transmitters designed to be used by consumers or workers that can be easily re-located, such as a wireless modem operating in a laptop computer, are considered mobile devices if they meet the 20 centimeter separation requirement. The FCC rules for evaluating mobile devices for RF compliance are found in 47 CFR §2.1091.
- o Portable Devices: a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user. Portable device requirements are found in Section 2.1093 of the FCC's Rules (47 CFR§2.1093). The FCC also categorizes the use of the device as based upon the user's awareness and ability to exercise control over his or her exposure. The two categories defined are Occupational/ Controlled Exposure and General Population/Uncontrolled Exposure. These two categories are defined as follows:
Occupational/Controlled Exposure: In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means. Awareness of the potential for RF exposure in a workplace or similar environment can be provided through specific training as part of a RF safety program. If appropriate, warning signs and labels can also be used to establish such awareness by providing prominent information on the risk of potential exposure and instructions on methods to minimize such exposure risks.
General Population/Uncontrolled Exposure: The general population / uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity. Warning labels placed on low-power consumer devices such as cellular telephones are not considered sufficient to allow the device to be considered under the occupational/controlled category, and the general population/uncontrolled exposure limits apply to these devices.

4.3. Test configuration

For Mobile exposure conditions

- 1) The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- 2) The measurement probe was placed at test distance (15cm for A,B,C,D four sides and 20cm for E Top) which is between the edge of the charger and the geometric center of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- 4) The EUT were measured according to the dictates of 680106 D01 RF Exposure Wireless Charging Apps v03r01

4.4. Equipment Approval Considerations

Requirement for KDB Publication 680106 D01 RF Exposure Wireless Charging App v03r01

Condition Requirement	Yes / No	Answers
Power transfer frequency is less than 1 MHz.	Yes	The power transfer frequency is 110-205KHz.
Output power from each primary coil is less than or equal to 15 watts.	Yes	Output power is 15W Max.
The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.	Yes	It has three coils and they are can Simultaneous emission at the same time.
Client device is placed directly in contact with the transmitter.	Yes	Client device is placed directly in contact with the transmitter.
Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	Yes	Mobile exposure conditions only
The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	Yes	Please refer to the result of Electric Field Emissions and Magnetic Field Emissions.

4.5. Limits

Limits for Maximum Permissible Exposure (MPE)/Controlled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500	/	/	f/300	6
1,500-100,000	/	/	5	6

Limits for Maximum Permissible Exposure (MPE)/Uncontrolled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500	/	/	f/1500	30
1,500-100,000	/	/	1.0	30

F=frequency in MHz

*=Plane-wave equivalent power density

According to FCC 680106 D01 RF Exposure Wireless Charging Apps v03r01 Section 3. RF Exposure Requirements clause 3 the Emission-Limits in the frequency range from 100 KHz to 300 KHz should be assessed versus the limits at 300 KHz in Table 1 of CFR 47 – Section1.310 as following (measured distance shall be 15cm from the center of the probe to the edge of the device):

Frequency	E-Field	*/*	B-Field
	V/m	A/m	uT
0.3 MHz – 3.0 MHz	614	1.613	2.0
3.0 MHz – 30 MHz	824/f (=27.5 _{30MHz})	2.19/f (=0.073 _{30MHz})	--

A KDB inquire was required to determine/confirm the applicable limits below 100 KHz.

Test Mode	Description	Remark
Discharging	Full Load	With Phone
	Half Load	With Phone
	No Load	With Phone

4.6. Measuring Results

For Mobile exposure conditions

Test Mode: Mode 1(Full Load)

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	Distance(cm)
Top	3.15	614	20
Left	2.35	614	15
Right	3.23	614	15
Rear	3.29	614	15
Front	2.78	614	15

Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	Distance(cm)
Top	0.0156	1.63	20
Left	0.0366	1.63	15
Right	0.0178	1.63	15
Rear	0.0093	1.63	15
Front	0.0078	1.63	15

Test Mode: Mode 1(Half Load)

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	Distance(cm)
Top	2.96	614	20
Left	2.18	614	15
Right	2.26	614	15
Rear	2.25	614	15
Front	2.78	614	15

Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	Distance(cm)
Top	0.0123	1.63	20
Left	0.0229	1.63	15
Right	0.0133	1.63	15
Rear	0.0088	1.63	15
Front	0.0066	1.63	15

Test Mode: Mode 1(No Load)

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	Distance(cm)
Top	1.09	614	20
Left	1.23	614	15
Right	1.11	614	15
Rear	1.19	614	15
Front	1.27	614	15

Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	Distance(cm)
Top	0.0103	1.63	20
Left	0.0115	1.63	15
Right	0.0049	1.63	15
Rear	0.0068	1.63	15
Front	0.0077	1.63	15

5. PHOTOGRAPHS OF TEST SETUP

For Mobile exposure conditions

