

Testing Report




Customer Name: SHENZHEN SHIXIN ZHONGXIN TECHNOLOGY CO., LTD

Product Name: BT Antenna

Sample Model: F-6168

Reference Standard: GB/T9410-2008; ANSI/IEEE Std 149-1979

Issue Date: 2024.04. 28

Engineer:		Date: 2024.04. 28
Auditor:		Date: 2024.04. 28
Approver:		Date: 2024.04. 28

1. General Information

1.1 General Information of testing institutions

Name	Shenzhen Hetuo Technology Co., Ltd.
Address	Room 1202 B, Building C6, Hengfeng Industrial City, Xixiang, Baoan District, Shenzhen
Tel	18665849001
E-mail	18665849001@163.com
Equipment	Agilent 5071C


1.2 Testing principle

2. Test System


Multi-probe OTA Measurement System



Antenna Photo & Lenght(mm)_ANT1:PCB antenna

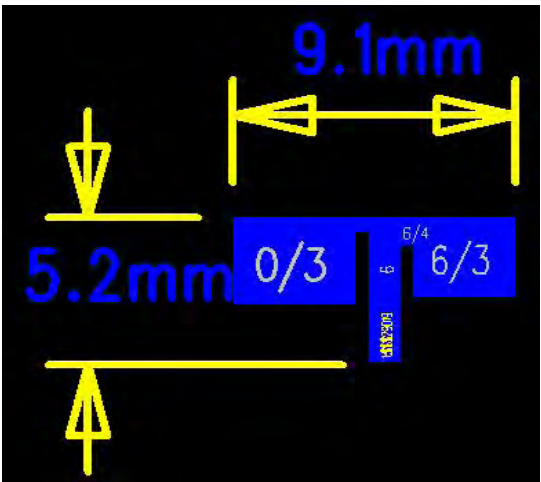

Antenna Photo & Lenght(mm)_ANT2:PCB antenna

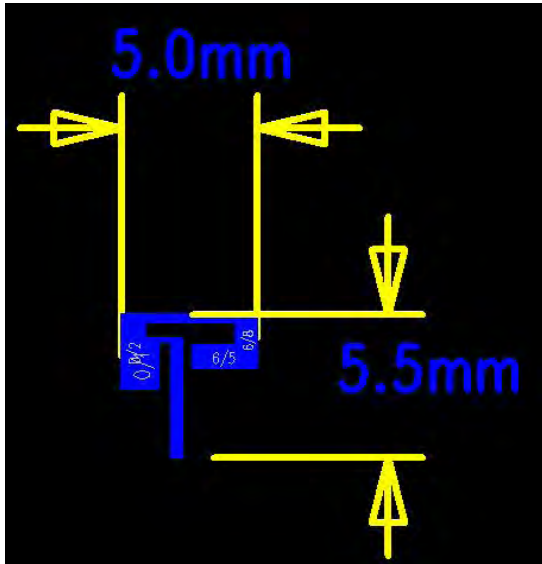


1.3 Test equipment

Equipment	Model No.	Serial No.	Manufacturer	Calibration date	Next calibration date
24 probe microwave chamber	4*3*3	NA	SATIMO	2024.03.29	2024.04.29
Network Analyzer	5071C	NA	Agilent	2024.03.29	2024.04.29

1.4 Test environment

Temperature	24 C± 1.5 C
Humidity	45%RH
Pressure	101kPa

1.5 Brief summary of Procedure

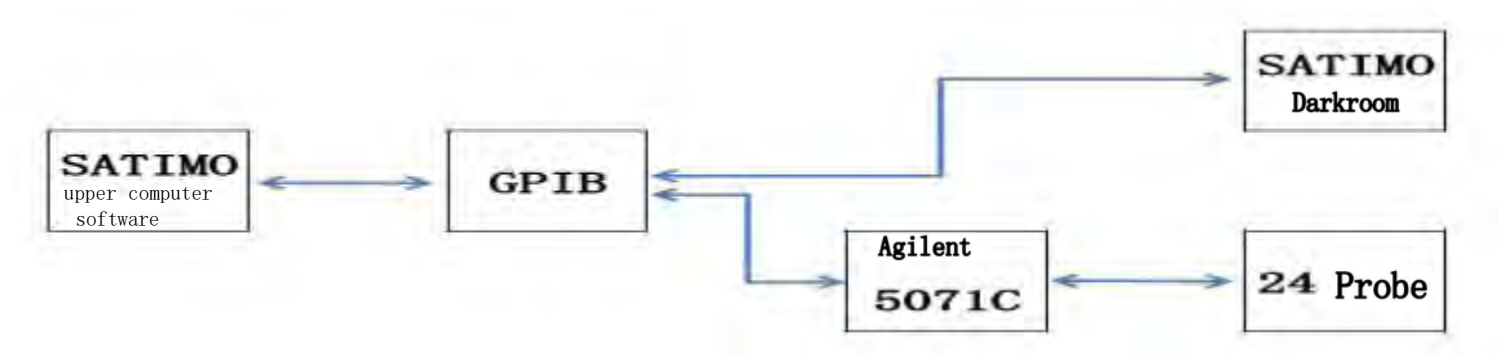

1. SATIMO turn on the Upper Computer Software, Name: VeryView99.exe, Version No.: V1.10;
2. VeryView99 via GPIB (General Purpose Interface Bus) to control the shielding room (darkroom)'s SATIMO;
3. Meanwhiel, GPIB control the Agilent 5071C to read the Antenna data by 24 Probe;
4. Agilent 5071C will analyse the data and generate the result;
5. Agilent 5071C will feedback to VeryView99 software to generate the test report.

2. Sample Information

2.1 Client information

Name	SHENZHEN SHIXINZHONGXIN TECHNOLOGY CO.,LTD
Address	A1 , Shajing Donghuan Industrial Zone , Bao 'an District , Shenzhen
Contacts	Ma Chao
Tel	18218809918
E-mail	machao@c- chip. com. cn

2.2 Description of EUT(S)

Product Name	5.2G/5.8G Antenna
Sample Model	F-6168
Antenna Size	ANT1:9.1*5.2mm
	ANT2:5.0*5.5mm
Antenna Type	PCB antenna
Serial No.	/
Test Item	Antenna Gain, Radiation pattern
Frequency Range	5155-5245MHz 5730-5848MHz
Received Date	2024.04.28
Test Date	2024.04. 28
Remark	The length of the RF cable is 50mm

The test photos

