

## RF Exposure Evaluation

FCC ID:2BEHV-W2312

|                    |                                                                                                 |
|--------------------|-------------------------------------------------------------------------------------------------|
| Product Name:      | BISCUIT MAGNETIC CHARGER 3-IN-1 MAGENTIC WIRELESS FAST CHAGER                                   |
| Product Model No.: | 4231013-608-B(IDWCBISC-01), 4231013-608-W(IDWCBISC-10)                                          |
| Model Difference:  | Only color of shell is different.                                                               |
| Test Auxiliary:    | Load and Power adapter                                                                          |
| Transmitting mode: | Keep the EUT in continuously wireless charging mode                                             |
| Ratings.....       | Input:5V/9V<br>Wireless charging output:<br>Phone: 5W/7.5W/10W/15W<br>Earphone:5W<br>Watch:2.5W |

| Test Modes: |                                         |
|-------------|-----------------------------------------|
| Mode 1      | Wireless charging for Phone mode(15W)   |
| Mode 2      | Wireless charging for Phone mode(10W)   |
| Mode 3      | Wireless charging for Phone mode(7.5W)  |
| Mode 4      | Wireless charging for Phone mode(5W)    |
| Mode 5      | Wireless charging for earphone mode(5W) |
| Mode 6      | Wireless charging for Watch mode(2.5W)  |

## 1 Measuring Standard

KDB 680106 D01 Wireless Power Transfer v04

## 2 Requirements

According to the item 5 of KDB 680106 v04:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation.

(1) The power transfer frequency is below 1 MHz.

The EUT frequency range is: 110kHz- 350kHz.

(2) The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.

The output power is equal to 15W, Only one coil.

(3) A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact)

EUT can be directly charged.

(4) Only § 2.1091-Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093-Portable exposure conditions).

Yes, EUT is a mobile exposure conditions only.

(5) The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes. The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures (e.g., coils or antennas) that by design can simultaneously transmit are energized at their nominal maximum power.

Yes, The EUT H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit

(6) For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well. For instance, a device may use three RF coils powered at 5 W, or one coil powered at 15 W: in this case, both scenarios shall be tested.

No, EUT has only one coil.

### Limits

The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)


Limits for Maximum Permissible Exposure (MPE)

| Frequency range (MHz)                                          | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm <sup>2</sup> ) | Averaging time (minutes) |
|----------------------------------------------------------------|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| <b>(A) Limits for Occupational/Controlled Exposures</b>        |                               |                               |                                     |                          |
| 0.3-3.0                                                        | 614                           | 1.63                          | *(100)                              | 6                        |
| 3.0-30                                                         | 1842/f                        | 4.89/f                        | *(900/f <sup>2</sup> )              | 6                        |
| 30-300                                                         | 61.4                          | 0.163                         | 1.0                                 | 6                        |
| 300-1500                                                       | /                             | /                             | f/300                               | 6                        |
| 1500-100,000                                                   | /                             | /                             | 5                                   | 6                        |
| <b>(B) Limits for General Population/Uncontrolled Exposure</b> |                               |                               |                                     |                          |
| 0.3-1.34                                                       | 614                           | 1.63                          | *(100)                              | 30                       |
| 1.34-30                                                        | 824/f                         | 2.19/f                        | *(180/f <sup>2</sup> )              | 30                       |
| 30-300                                                         | 27.5                          | 0.073                         | 0.2                                 | 30                       |
| 300-1500                                                       | /                             | /                             | f/1500                              | 30                       |
| 1500-100,000                                                   | /                             | /                             | 1.0                                 | 30                       |

F=frequency in MHz  
 \*Plane-wave equivalent power density  
 RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

Limits for Maximum Permissible Exposure (MPE)

### 3 Test Setup

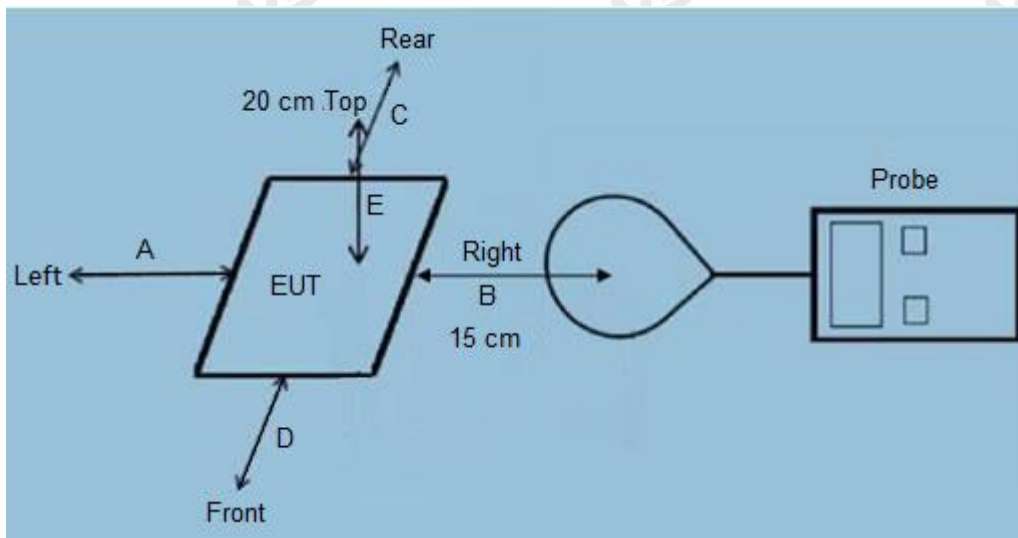

### 4 Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at test distance (15 cm from all sides and 20 cm from the top) which is between the edge of the charger and the geometric center of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- 4) The EUT was measured according to the dictates of KDB 680106 v04.

Remark: The EUT's test position A, B, C, D and E is valid for the E and H field measurements.

## 5 Test Instruments list

| Test Equipment                             | Manufacturer | Model No.                    | SN.        | Cal.Date<br>(mm-dd-yy) | Cal.Due date<br>(mm-dd-yy) |
|--------------------------------------------|--------------|------------------------------|------------|------------------------|----------------------------|
| Exposure Level Tester                      | Narda        | ELT-400                      | N-0231     | May 12, 2023           | May 11, 2024               |
| Magnetic field probe<br>100cm <sup>2</sup> | Narda        | ELT probe 100cm <sup>2</sup> | M0675      | May 12, 2023           | May 11, 2024               |
| Isotropic Electric field<br>probe          | Narda        | EP-601                       | 611WX70332 | May 12, 2023           | May 11, 2024               |

## 6 Test Result

We have evaluated 1%, 50% and 100% of mode1/2/3/4/5/6 , and the worst mode (mode1-100% load) is showed in this report.

### E-Filed Strength at 15 cm from the edges surrounding the EUT (V/m)

| Frequency Range (MHz) | Test<br>Position A | Test<br>Position B | Test<br>Position C | Test<br>Position D | 50%Limits<br>(V/m) | Limits<br>(V/m) | test result |
|-----------------------|--------------------|--------------------|--------------------|--------------------|--------------------|-----------------|-------------|
| 0.110-0.350           | 0.205              | 0.412              | 0.418              | 0.406              | 307                | 614             | PASS        |

### E-Filed Strength at 20 cm from the top of the EUT (V/m)

| Frequency Range<br>(MHz) | Test<br>Position E | 50%Limits<br>(V/m) | Limits<br>(V/m) | test result |
|--------------------------|--------------------|--------------------|-----------------|-------------|
| 0.110-0.350              | 0.362              | 307                | 614             | PASS        |

### H-Filed Strength at 15 cm from the edges surrounding the EUT (A/m)

| Frequency Range (MHz) | Test<br>Position A | Test<br>Position B | Test<br>Position C | Test<br>Position D | 50%Limits<br>(V/m) | Limits<br>(A/m) | test<br>result |
|-----------------------|--------------------|--------------------|--------------------|--------------------|--------------------|-----------------|----------------|
| 0.110-0.350           | 0.19               | 0.20               | 0.18               | 0.19               | 0.815              | 1.63            | PASS           |

### H-Filed Strength at 20 cm from the top of the EUT (A/m)

| Frequency Range<br>(MHz) | Test<br>Position E | 50%Limits<br>(V/m) | Limits<br>(A/m) | test result |
|--------------------------|--------------------|--------------------|-----------------|-------------|
| 0.110-0.350              | 0.28               | 0.815              | 1.63            | PASS        |

## 7 Test Photo

