

# TEST REPORT



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (1) / (32) Pages

## 1. Applicant

- Name : ENPLUG CO.,LTD
- Address : A-704. 705, 46, Dallaenae-ro, Sujeong-gu, Seongnam-si, Gyeonggi-do  
Republic of Korea
- Date of Receipt : 2025-04-18

## 2. Manufacturer

- Name : ENPLUG CO.,LTD
- Address : A-704. 705, 46, Dallaenae-ro, Sujeong-gu, Seongnam-si, Gyeonggi-do  
Republic of Korea

**3. Use of Report :** For FCC Certification

**4. Test Sample / Model :** Health Hub / EUM-200

**5. Date of Test :** 2025-05-08 to 2025-05-22

**6. Test Standard(method) used :** FCC 47 CFR part 15 subpart C 15.247

**7. Testing Environment :** refer to 6 page

**8. Test Results :** Compliance

**9. Location of Test :**  Permanent Testing Lab  On Site Testing  
(Address : 5, Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This report cannot be reproduced or copied without the written consent of CTK.

Approval	Tested by Nam-hyoung Kwon: (Signature)	Technical Manager Gwan-yong Kim: (Signature)
----------	---	---

2025-06-04

**CTK Co., Ltd.**



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (2) / (32) Pages

## REPORT REVISION HISTORY

Date	Revision	Page No
2025-06-04	Issued (CTK-2025-01440)	all

***This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.***



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (3) / (32) Pages

## **CONTENTS**

1. General Product Description .....	4
1.1 Applicant Information .....	4
1.2 Product Information.....	4
1.3 Peripheral Devices .....	4
2. Accreditations .....	5
2.1 Laboratory Accreditations and Listings .....	5
2.2 Calibration Details of Equipment used for Measurement .....	5
3. Test Specifications .....	6
3.1 Standards.....	6
3.2 Testing Environment .....	6
3.3 Mode of Operation during the Test .....	7
3.4 Device Modifications .....	7
3.5 Measurement Uncertainty.....	8
3.6 Test Software.....	8
4. Technical Characteristic Test.....	9
4.1 6 dB Bandwidth.....	9
4.2 Maximum Peak Conducted Output Power .....	12
4.3 Transmitter Power Spectral Density.....	14
4.4 Conducted Spurious Emission .....	16
4.5 Radiated Emission .....	18
4.6 AC Conducted Emissions .....	29
APPENDIX A – Test Equipment Used For Tests .....	32

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (4) / (32) Pages

## 1. General Product Description

### 1.1 Applicant Information

<b>Company</b>	ENPLUG CO.,LTD
<b>Contact Point</b>	A-704. 705, 46, Dallaenae-ro, Sujeong-gu, Seongnam-si Gyeonggi-do, Republic of Korea
<b>Contact Person</b>	Name : Jongsung Lee E-mail : js.lee@enplug.co.kr

### 1.2 Product Information

<b>FCC ID</b>	2BEJA-EUM-200
<b>Product Description</b>	Health Hub
<b>Basic Model</b>	EUM-200
<b>Variant Model Name</b>	-
<b>Operating Frequency</b>	2 402 MHz - 2 480 MHz
<b>RF Output Power</b>	1 Mbps : 7.282 dBm (5.348 mW)
<b>Antenna Specification</b>	Antenna type : Chip IFA Antenna Peak Gain : 1.5 dBi
<b>Number of channels</b>	40
<b>Channel Spacing</b>	2 MHz
<b>Type of modulation</b>	GFSK (Bluetooth 5.1 – LE)
<b>Power Source</b>	DC 5 V
<b>Hardware Rev</b>	REV 1.0
<b>Software Rev</b>	1.40
<b>RF Power Setting in test SW</b>	Tera Term Version 4.106

### 1.3 Peripheral Devices

<b>Device</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>
Note Computer	DELL	P97G	5YZZ763
AC Adapter	DELL	HA65NM130	CN-OPFC2Y-CH200 -076-41QG-A05



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (5) / (32) Pages

## 2. Accreditations

### 2.1 Laboratory Accreditations and Listings

Country	Agency	Registration Number
USA	FCC	805871
CANADA	ISED	CN : 8737A CAB ID : KR0025
KOREA	NRRA	KR0025

### 2.2 Calibration Details of Equipment used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (6) / (32) Pages

### 3. Test Specifications

#### 3.1 Standards

FCC Part Section(s)	Requirement(s)	Status (Note 1)	Test Condition
15.247(a)	6 dB Bandwidth	C	Conducted
15.247(b)	Maximum Output Power	C	
15.247(d)	Conducted Spurious Emission	C	
15.247(d)	Unwanted Emission (Conducted)	C	
15.247(e)	Transmitter Power Spectral Density	C	
15.209	Radiated Emissions	C	Radiated
15.207(a)	AC Conducted Emissions	C	Line Conducted
<u>Note 1:</u> C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable			
<u>Note 2:</u> The data in this test report are traceable to the national or international standards.			
<u>Note 3:</u> The sample was tested according to the following specification: FCC Part 15.247			
<u>Note 4:</u> The tests were performed according to the method of measurements prescribed in KDB No.558074, ANSI C63.10-2013			

#### 3.2 Testing Environment

Test Item	Test Date	Temperature (°C)	Relative Humidity (%)
6 dB Bandwidth	2025-05-08	21 - 22	34 - 36
Maximum Output Power			
Conducted Spurious Emission			
Unwanted Emission (Conducted)			
Transmitter Power Spectral Density			
Transmitter Emission (Radiated)	1) 9 kHz to 30 MHz	2025-05-13	34 - 36
	2) 30 MHz to 1 GHz		
	3) 1 GHz to 18 GHz	2025-05-13	35 - 40
	4) 18 GHz to 26.5 GHz		
	5) Restricted Frequency Bands		
AC Conducted Emission	2025-05-22	20 - 21	33 - 36

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (7) / (32) Pages

### 3.3 Mode of Operation during the Test

The EUT is operated in a manner representative of the typical of the equipments.  
During at testing, system components were manipulated within the confines of typical usage to  
maximize each emission.

#### Test Frequency

Lowest Channel	Middle Channel	Highest Channel
2 402 MHz	2 440 MHz	2 480 MHz

#### Test Mode Duty

Mode	Duty Cycle	Duty Cycle Factor
1 Mbps	100.0 %	0.00 dB

### 3.4 Device Modifications

The following modifications were necessary for compliance:

Not applicable

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (8) / (32) Pages

### 3.5 Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter.  
Coverage factor  $k = 2$ , Confidence levels of 95 %

Description	Uncertainty
Conducted RF Output Power	1.5 dB (C.L.: Approx. 95 %, $k = 2$ )
Power Spectral Density	1.5 dB (C.L.: Approx. 95 %, $k = 2$ )
Occupied Bandwidth	0.1 MHz (C.L.: Approx. 95 %, $k = 2$ )
Unwanted Emission (Conducted)	3.0 dB (C.L.: Approx. 95 %, $k = 2$ )
Radiated Emissions ( $f \leq 1$ GHz)	3.82 dB (C.L.: Approx. 95 %, $k = 2$ )
Radiated Emissions ( $f > 1$ GHz)	4.48 dB (C.L.: Approx. 95 %, $k = 2$ )
Line Conducted Emission	2.00 dB (C.L.: Approx. 95 %, $k = 2$ )

### 3.6 Test Software

#### Automation Program

Conducted Test	-
Radiated Test	EP5RE Ver. 6.0.1.0, ES10 Ver. 10.001
Line Conducted Test	EMC32 Ver. 10.50.00



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (9) / (32) Pages

## 4. Technical Characteristic Test

### 4.1 6 dB Bandwidth

#### Test Procedures

KDB 558074 - Section 8.2

ANSI C63.10-2013 - Section 11.8.2

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

ANSI C63.10-2013 - Section 6.9

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission.

Use the 99 % power bandwidth function of the instrument and report the measured bandwidth.

#### Test Settings:

Center frequency = the highest, middle and the lowest channels

- a) RBW = 100 kHz
- b) VBW  $\geq 3 \times$  RBW
- c) Detector = peak
- d) Trace mode = max hold
- e) Sweep = auto couple
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### **Minimum Standard :**

---

6 dB Bandwidth > 500 kHz

---



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (10) / (32) Pages

## Test Results :

Test Mode	Frequency [MHz]	6 dB Bandwidth [MHz]	99 % Bandwidth [MHz]	Result
1 Mbps	2 402	0.762	1.106	Complies
	2 440	0.770	1.100	Complies
	2 480	0.758	1.105	Complies


See next pages for actual measured spectrum plots.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (11) / (32) Pages


### Lowest Frequency (2 402 MHz)

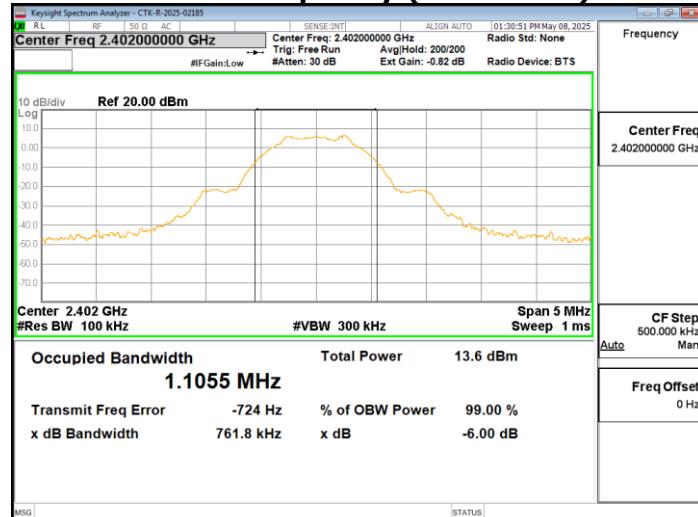

### Middle Frequency (2 440 MHz)



### Highest Frequency (2 480 MHz)

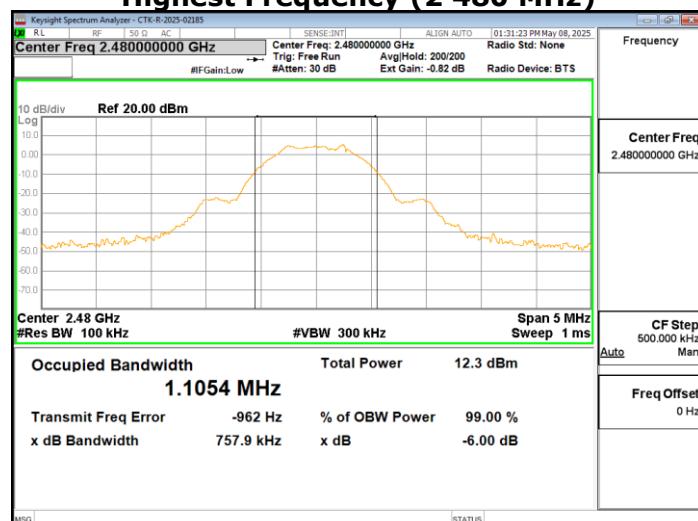

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (12) / (32) Pages

## 4.2 Maximum Peak Conducted Output Power

### Test Procedures

KDB 558074 - Section 8.3.1.1  
ANSI C63.10-2013 - Section 11.9.1.1

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

#### Test Settings:

Center frequency = the highest, middle and the lowest channels

a) RBW $\geq$ DTS bandwidth	b) VBW $\geq 3 \times$ RBW
c) Span $\geq 3 \times$ RBW	d) Sweep time = auto couple
e) Detector = peak	f) Trace mode = max hold
g) Allow trace to fully stabilize	
h) Use peak marker function to determine the peak amplitude level.	

#### Limit :

Maximum Output Power < 1 W (30 dBm)

### Test Results :

<b>Test Mode</b>	<b>Frequency [MHz]</b>	<b>Maximum Peak Conducted Output Power</b>		<b>Result</b>
		<b>[dBm]</b>	<b>[mW]</b>	
1 Mbps	2 402	7.282	5.348	Complies
	2 440	6.697	4.674	Complies
	2 480	6.010	3.990	Complies

See next pages for actual measured spectrum plots.



**CTK Co., Ltd.**


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (13) / (32) Pages


### Lowest Frequency (2 402 MHz)



### Middle Frequency (2 440 MHz)

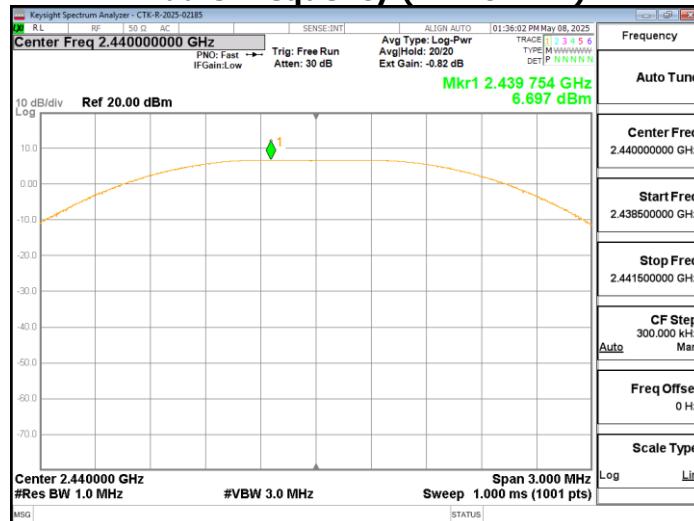

### Highest Frequency (2 480 MHz)

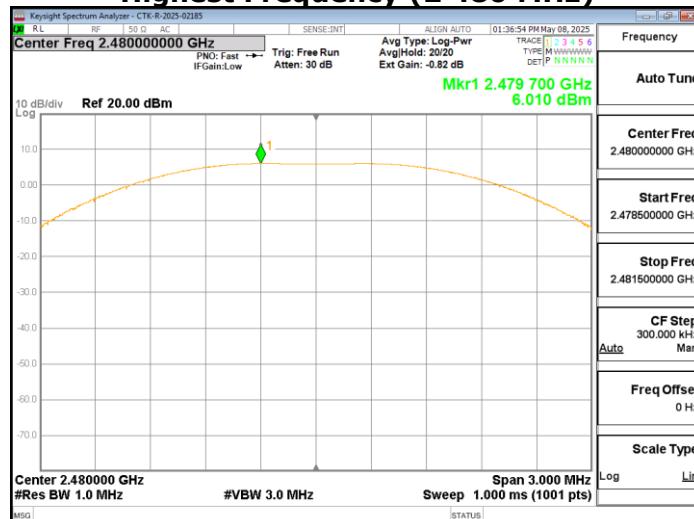

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (14) / (32) Pages

## 4.3 Transmitter Power Spectral Density

### Test Procedures

KDB 558074 - Section 8.4  
ANSI C63.10-2013 - Section 11.10.2

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance.

#### Test Settings:

Center frequency = the highest, middle and the lowest channels

a) RBW : $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$	b) VBW $\geq 3 \times \text{RBW}$
c) Span $\geq 1.5 \times \text{DTS bandwidth}$	d) Sweep time = auto couple
e) Detector = peak	f) Trace mode = max hold
g) Allow trace to fully stabilize	
h) Use the peak marker function to determine the maximum amplitude level within the RBW.	

#### Limit :

Power Spectral Density < 8 dBm @ 3 kHz BW

### Test Results :

Test Mode	Frequency [MHz]	Power Spectral Density [dBm]	Result
1 Mbps	2 402	-10.111	Complies
	2 440	-10.618	Complies
	2 480	-11.378	Complies


See next pages for actual measured spectrum plots.

**CTK Co., Ltd.**


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (15) / (32) Pages


### Lowest Frequency (2 402 MHz)

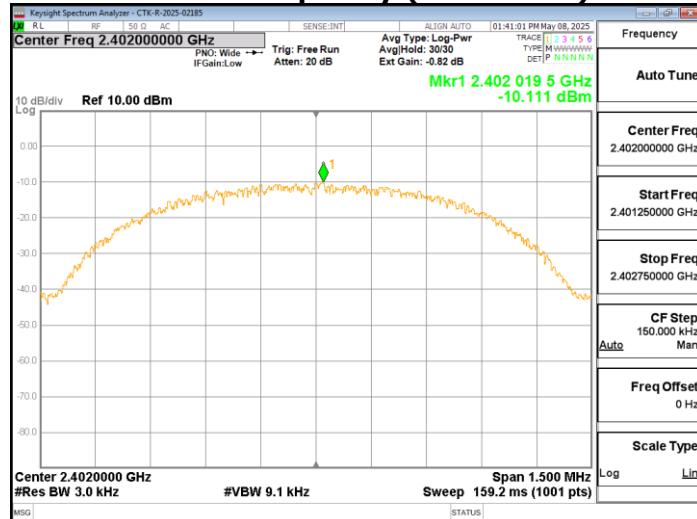

### Middle Frequency (2 440 MHz)

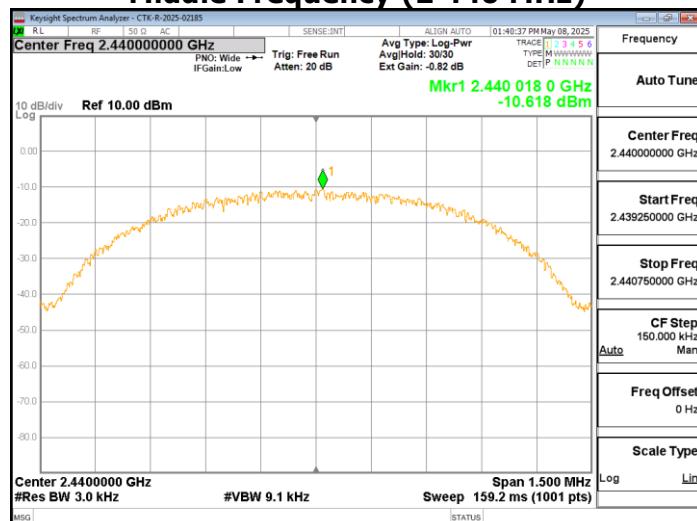

### Highest Frequency (2 480 MHz)

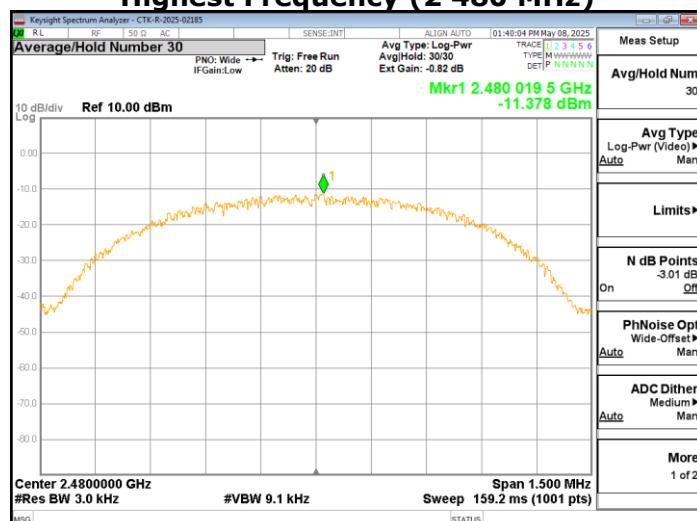



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (16) / (32) Pages

## 4.4 Conducted Spurious Emission

### Test Procedures

KDB 558074 - Section 8.5

ANSI C63.10-2013 - Section 11.11.3

The Unwanted emission from the EUT were measured according to the dictates PKPSD measurement procedure in section 11.11 of ANSI C63.10-2013.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB.

#### Test Settings:

Center frequency = the highest, middle and the lowest channels

a) RBW = 100 kHz	b) VBW $\geq$ 3 x RBW
c) Detector = peak	d) Sweep time = auto couple
e) Trace mode = max hold	
f) Allow trace to fully stabilize	
g) Use the peak marker function to determine the maximum amplitude level.	

#### Limit :

---

Emission Level < 20 dBc

---

#### **Test Results : Complies**

- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest in-band spectral density. Therefore the applying equipment meets the requirement.

See next pages for actual measured spectrum plots.






**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (17) / (32) Pages

## Spurious Emission

Test Mode : 1 Mbps

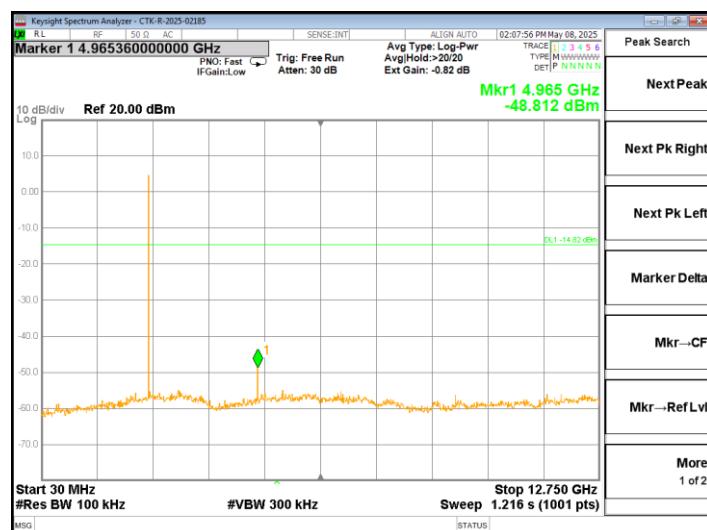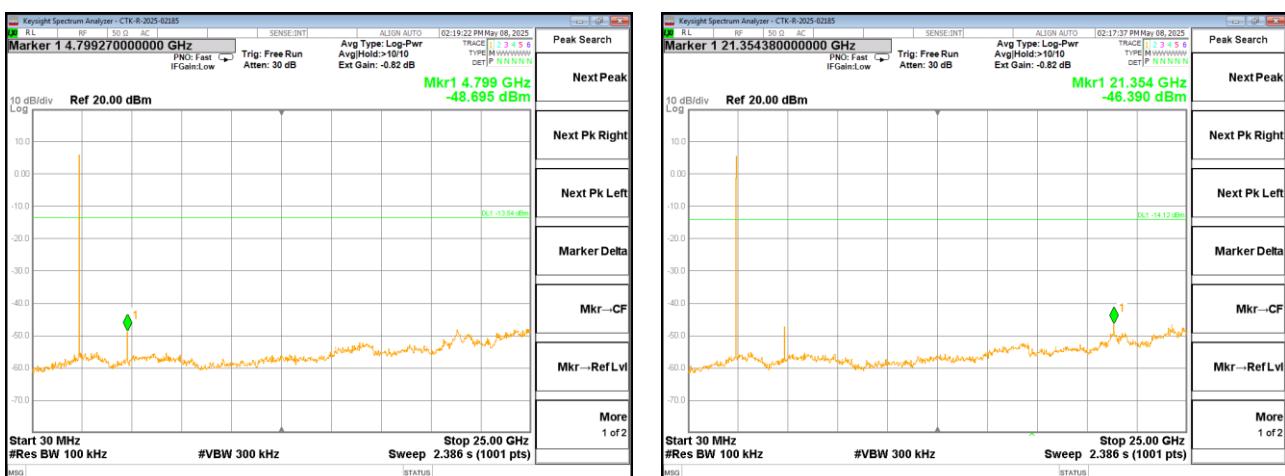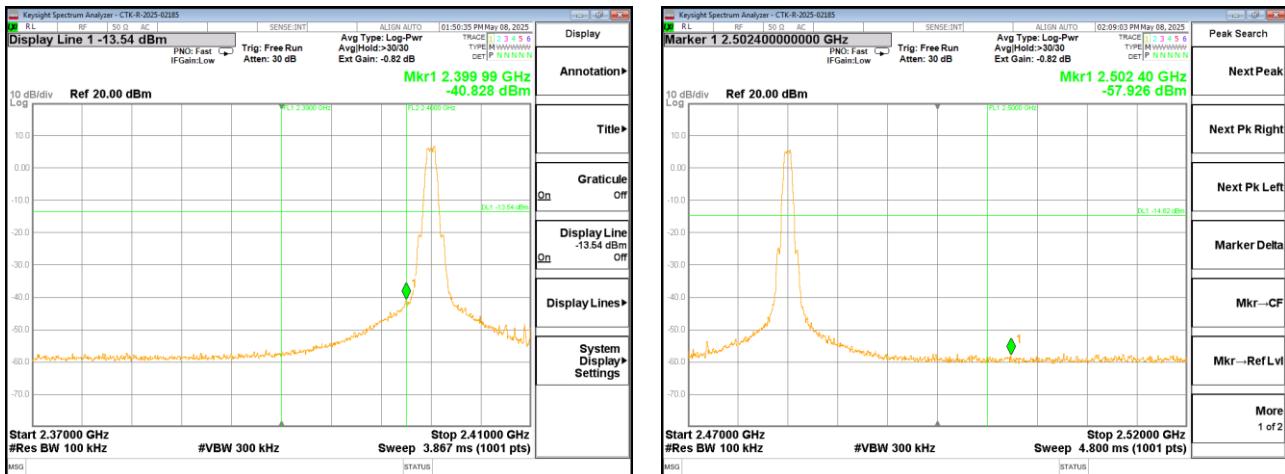



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (18) / (32) Pages

## 4.5 Radiated Emission

### Test Location

- 10 m SAC (test distance :  10 m,  3 m)
- 3 m SAC (test distance : 3 m)

### Test Procedures

KDB 558074 - Section 8.5, 8.6  
ANSI C63.10-2013 - Section 11.11, 11.12

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The center of the Loop Test Antenna is 1 m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna (30 MHz to 1 GHz) and Horn Test Antenna (above 1 GHz) are used. Test Antenna is 3 m away from the EUT. Test Antenna height is carried from 1 m to 4 m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

#### Test Settings:

Frequency Range = 9 kHz ~ 1 GHz

- a) RBW = 100 kHz for  $f < 1$  GHz, 9 kHz for  $f < 30$  MHz
- b) VBW  $\geq$  RBW
- c) Detector = CISPR Quasi-peak
- d) Sweep time = auto couple

#### - Peak

Frequency Range = 1 GHz ~ 26.5 GHz (2.4 GHz 10<sup>th</sup> harmonic)

- a) RBW = 1 MHz
- b) VBW  $\geq$  3 x RBW
- c) Detector = peak
- d) Sweep time = auto
- e) Trace mode = max hold

#### - Average (duty cycle $\geq$ 98 %)

Frequency Range = 1 GHz ~ 26.5 GHz (2.4 GHz 10<sup>th</sup> harmonic)

- a) RBW = 1 MHz
- b) VBW  $\geq$  3 x RBW
- c) Detector = RMS
- d) Sweep time = auto
- e) Averaging type = power (i.e., RMS)
- f) Trace mode = average (at least 100 traces)

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (19) / (32) Pages

- Average (duty cycle < 98 %, duty cycle variations are less than  $\pm 2 \%$ )

Frequency Range = 1 GHz ~ 26.5 GHz (2.4 GHz 10<sup>th</sup> harmonic)

a) RBW = 1 MHz

b) VBW  $\geq$  3 x RBW

c) Detector = RMS

d) Sweep time = auto

e) Averaging type = power (i.e., RMS)

f) Trace mode = average (at least 100 traces)

A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 % duty cycle.

If power averaging (RMS) mode, then the applicable correction factor is  $10 \log(1/x)$ , where x is the duty cycle.

Test Mode	Duty Cycle Factor
1 Mbps	0.00 dB

### Limit :

FCC Part 15 § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

**Table 1. Restricted Frequency Bands**

MHz	MHz	MHz	MHz	MHz	GHz
0.09-0.11	8.37626-8.38675	73-74.6	399.9-410	2690-2900	10.6-12.7
<sup>1</sup> 0.495-0.505	8.41425-8.41475	74.8-75.2	608-614	3260-3267	13.25-13.4
2.1735-2.1905	12.29-12.293	108-121.94	960-1240	3332-3339	14.47-14.5
4.125-4.128	12.51975-12.52025	123-138	1300-1427	3345.8-3358	15.35-16.2
4.17725-4.17775	12.57675-12.57725	149.9-150.05	1435-1626.5	3600-4400	17.7-21.4
4.20725-4.20775	13.36-13.41	156.52475- 156.52525	1645.5-1646.5	4500-5150	22.01-23.12
6.215-6.218	16.42-16.423	156.7-156.9	1660-1710	5350-5460	23.6-24
6.26775-6.26825	16.69475-16.69525	162.0125-167.17	1718.8-1722.2	7250-7750	31.2-31.8
6.31175-6.31225	16.80425-16.80475	167.72-173.2	2200-2300	8025-8500	36.43-36.5
8.291-8.294	25.5-25.67	240-285	2310-2390	9000-9200	<sup>2</sup> Above 38.6
8.362-8.366	37.5-38.25	322-335.4	2483.5-2500	9300-9500	

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (20) / (32) Pages

FCC Part 15 § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 2 :

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table 2. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

**Table 2. General Field Strength Limits for Licence-Exempt Transmitters**

Frequency [MHz]	Field Strength [uV/m]	Field Strength [dBuV/m]	Deasurement Distance [meters]
0.009-0.490	2400/F(kHz)	48.5 – 13.8	300
0.490-1.705	24000/F(kHz)	33.8 – 23	30
1.705-30	30	29.5	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3

\*\* Except as provided in 15.209(g). Fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz, 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note :

- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3 m (AV) and 74 dBuV/m@3 m (PK)
- 3) For measurement above 1 GHz, the resolution bandwidth is set to 1 MHz and video bandwidth is set to 3 MHz for peak measurement.




**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501


Report No.:  
CTK-2025-01440  
Page (21) / (32) Pages

### Test Setup :

- 1) For field strength of emissions from 9 kHz to 30 MHz

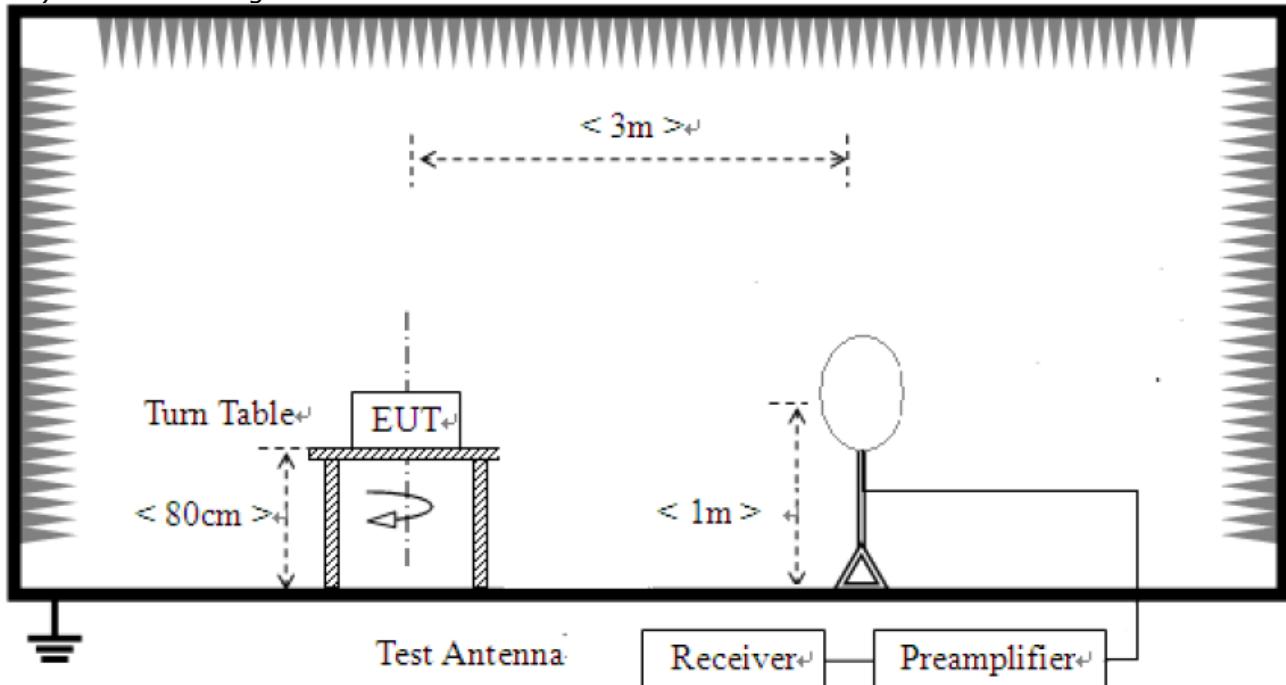

- 2) For field strength of emissions from 30 MHz to 1 GHz

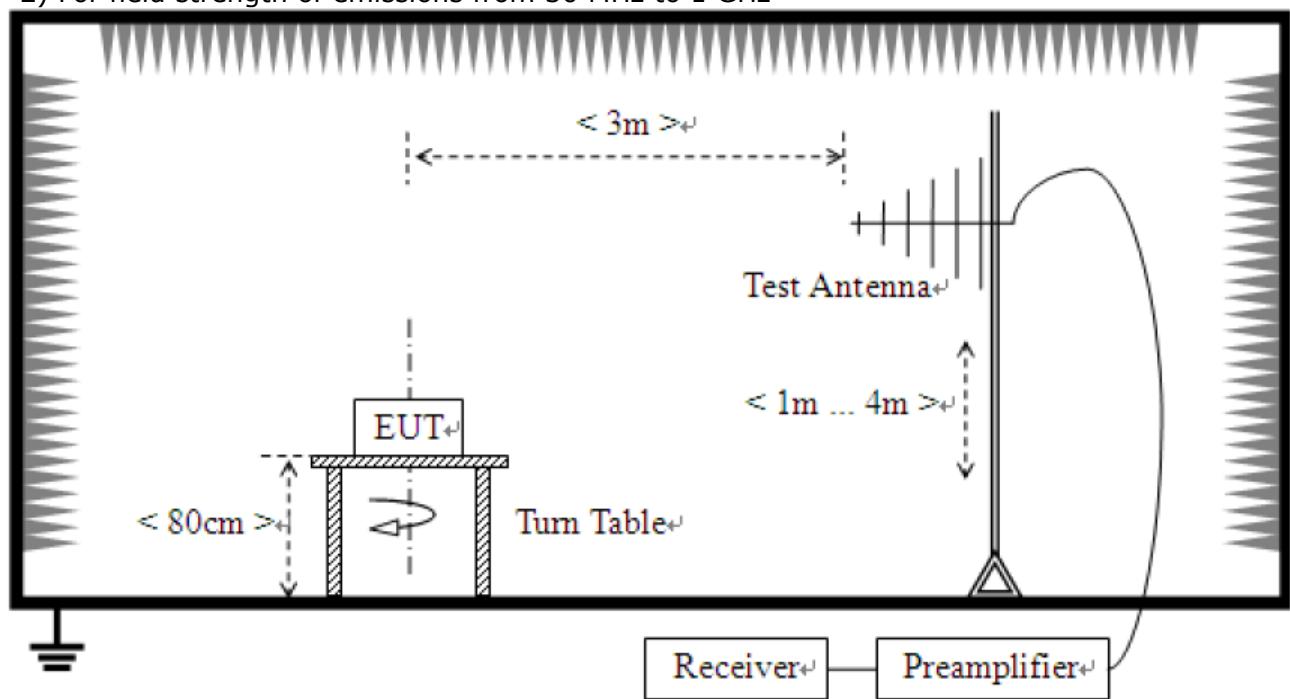




**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (22) / (32) Pages

3) For field strength of emissions above 1 GHz

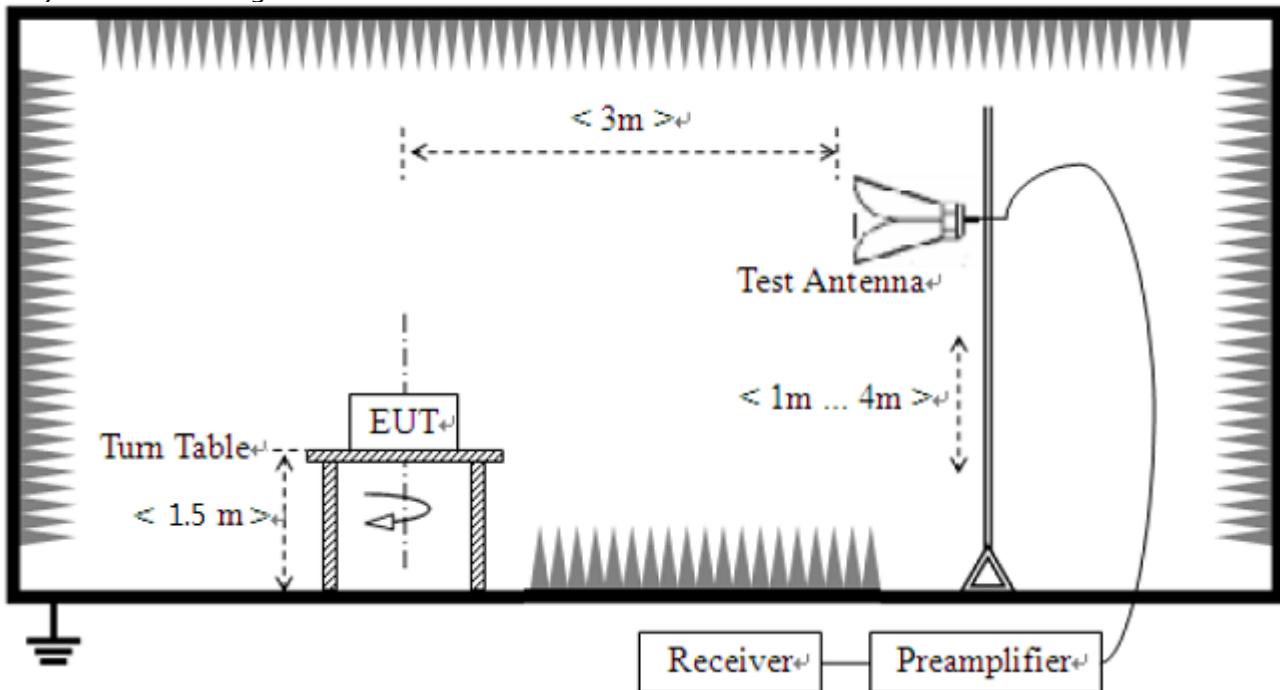


**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (23) / (32) Pages

**Test Results :****1) 9 kHz to 30 MHz****Test Mode : Middle Channel of the Transmitter (Worst Case)**

The requirements are:

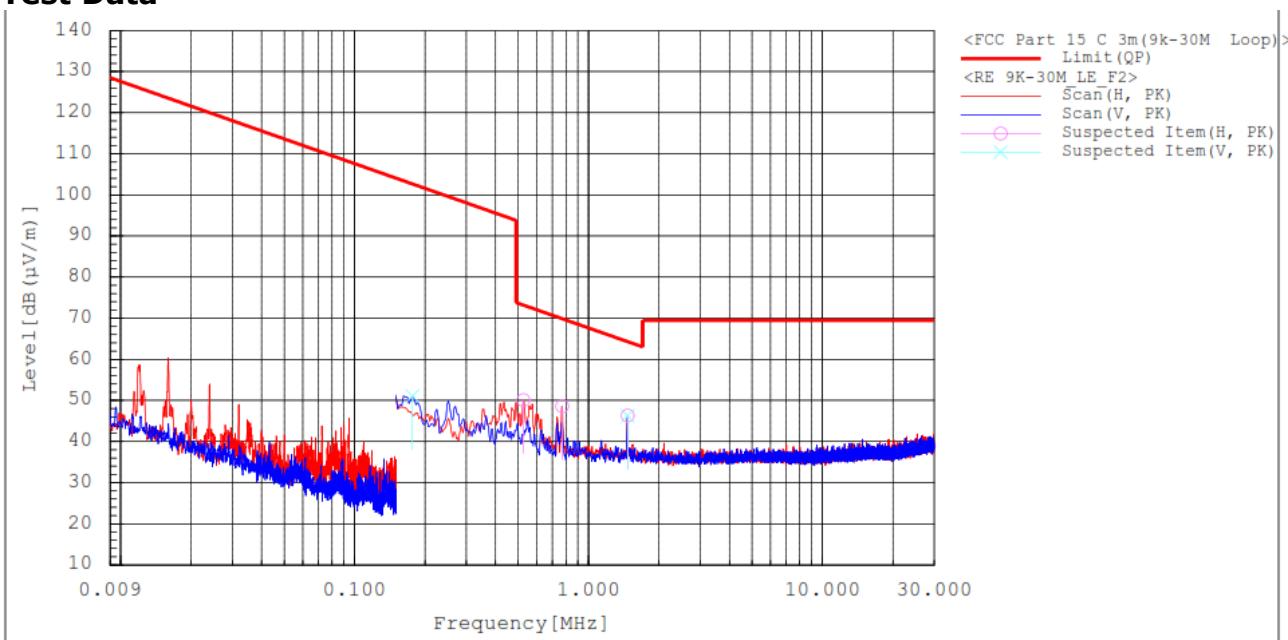 Complies**Test Data**

## Spectrum Selection

No.	Frequency	Pol	Reading	c.f	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		[dB ( $\mu$ V)]	[dB (1/m)]	[dB ( $\mu$ V/m)]	[dB ( $\mu$ V/m)]	[dB]	[cm]	[deg]	
1	0.177	V	26.3	24.8	51.1	102.6	51.5	100.0	0.8	
2	0.526	H	25.2	24.9	50.1	73.2	23.1	100.0	211.5	
3	0.771	H	23.7	24.9	48.6	69.9	21.3	100.0	207.8	
4	1.469	V	21.3	25.0	46.3	64.3	18.0	100.0	285.5	
5	1.469	H	21.3	25.0	46.3	64.3	18.0	100.0	41.9	

**Remark :**

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.
2. Result = Reading + c.f (Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB)
5. This data is the Peak (PK) value.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (24) / (32) Pages


## 2) 30 MHz to 1 GHz

### Test Mode : Middle Channel of the Transmitter (Worst Case)

The requirements are:

Complies

### Test Data

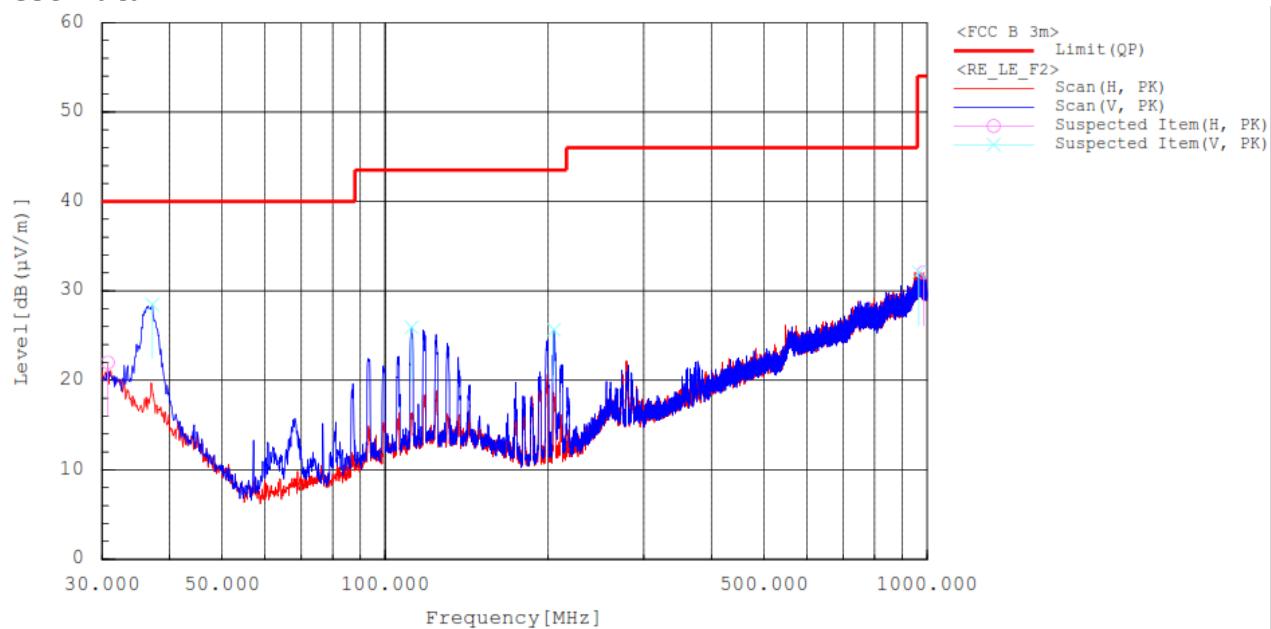

#### Spectrum Selection

No.	Frequency	Pol	Reading	c.f	Result	Limit	Margin	Height	Angle	Remark
	[MHz]		[dB (μV)]	[dB (1/m)]	[dB (μV/m)]	[dB (μV/m)]	[dB]	[cm]	[deg]	
1	30.776	H	28.6	-6.6	22.0	40.0	18.0	200.0	234.0	
2	37.178	V	38.5	-10.0	28.5	40.0	11.5	100.0	353.6	
3	111.868	V	39.1	-13.2	25.9	43.5	17.6	100.0	145.6	
4	204.891	V	40.2	-14.6	25.6	43.5	17.9	100.0	0.0	
5	966.050	V	25.8	6.3	32.1	54.0	21.9	199.9	0.8	
6	985.450	H	26.0	6.1	32.1	54.0	21.9	400.0	358.0	

#### Remark :

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.
2. Result = Reading + c.f (Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp gain
4. This data is the Peak (PK) value.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (25) / (32) Pages


### 3) Restricted Frequency Bands

**Test Mode : Lowest Channel of the Transmitter**  
**(Test frequency range : 2 310 MHz to 2 390 MHz)**

The requirements are:

Complies

### Test Data

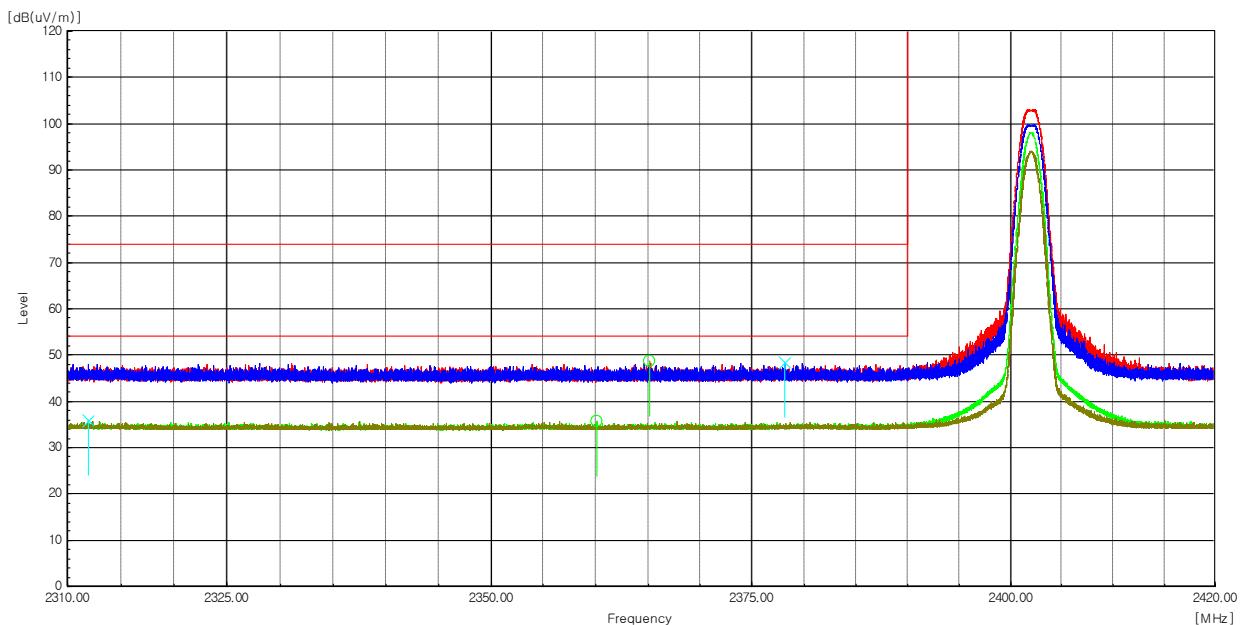

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 311.914	V	40.5	-4.7	0.0	-----	35.8	-----	54.0	-----	18.2	Average
2 360.149	H	40.3	-4.7	0.0	-----	35.6	-----	54.0	-----	18.4	Average
2 365.174	H	53.3	-4.7	0.0	48.6	-----	74.0	-----	25.4	-----	Peak
2 378.115	V	53.0	-4.6	0.0	48.4	-----	74.0	-----	25.6	-----	Peak

### Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.
2. Peak result = Reading + c.f (Correction factor)  
Average result = Reading + c.f (Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp gain

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
 Gyeonggi-do, 17142, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501


Report No.:  
 CTK-2025-01440  
 Page (26) / (32) Pages

**Test Mode : Highest Channel of the Transmitter**  
**(Test frequency range : 2 483.5 MHz to 2 500 MHz)**

The requirements are:

Complies

**Test Data**

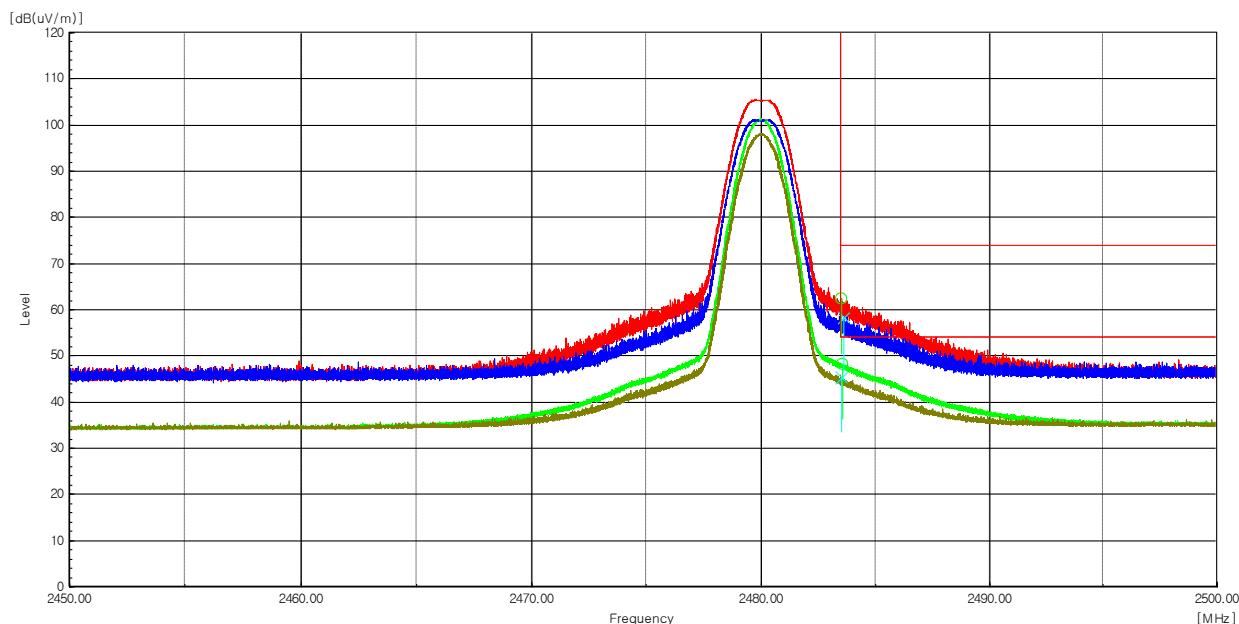

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
2 483.633	V	62.6	-4.2	0.0	58.4	-----	74.0	-----	15.6	-----	Peak
2 483.569	H	52.4	-4.2	0.0	-----	48.2	-----	54.0	-----	5.8	Average
2 483.537	H	66.5	-4.2	0.0	62.3	-----	74.0	-----	11.7	-----	Peak
2 483.503	V	49.6	-4.2	0.0	-----	45.4	-----	54.0	-----	8.6	Average

**Remarks**

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.
2. Peak result = Reading + c.f (Correction factor)  
 Average result = Reading + c.f (Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp gain

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
 Gyeonggi-do, 17142, Korea  
 Tel: +82-31-339-9970  
 Fax: +82-31-624-9501

Report No.:  
 CTK-2025-01440  
 Page (27) / (32) Pages


## 4) 1 GHz to 18 GHz

### Test Mode : Middle Channel of the Transmitter (Worst Case)

The requirements are:

Complies

### Test Data

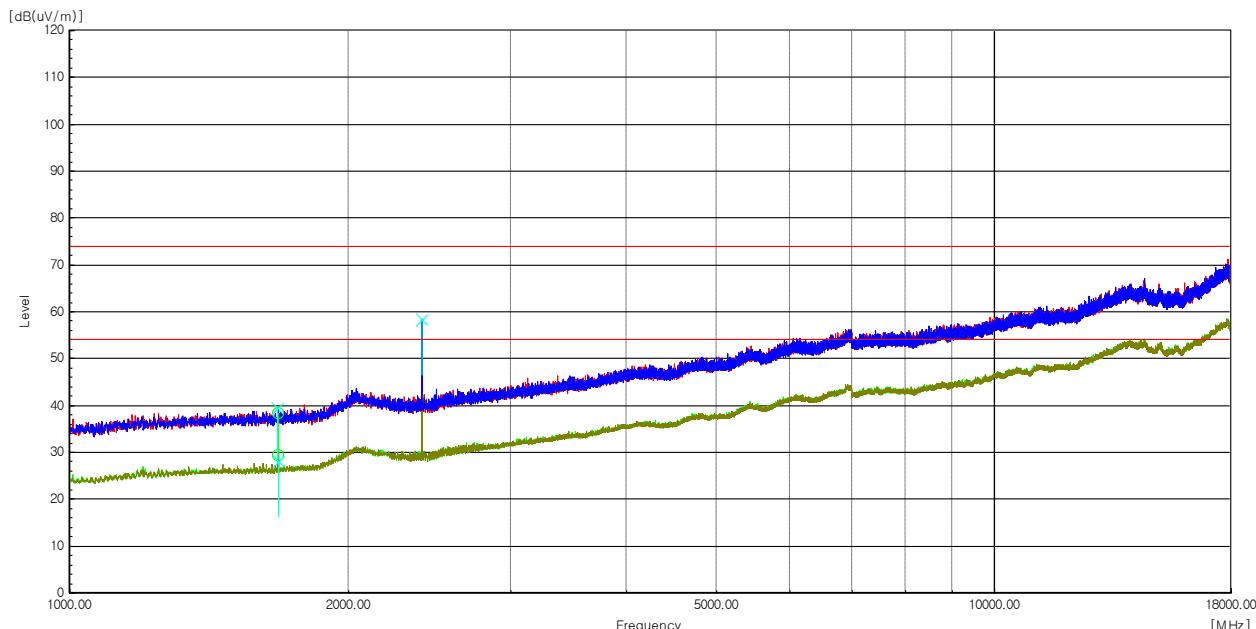

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dBuV/m]	Level AV [dBuV/m]	Limit PK [dBuV/m]	Limit AV [dBuV/m]	Margin PK [dB]	Margin AV [dB]	Note
1 680.027	H	46.6	-8.0	0.0	38.6	-----	74.0	-----	35.4	-----	Peak
1 680.027	H	37.3	-8.0	0.0	-----	29.3	-----	54.0	-----	24.7	Average
1 680.027	V	46.5	-8.0	0.0	38.5	-----	74.0	-----	35.5	-----	Peak
1 680.027	V	36.3	-8.0	0.0	-----	28.3	-----	54.0	-----	25.7	Average
2 440.298	V	63.0	-4.6	0.0	58.4	-----	-----	-----	-----	-----	Fundamental

### Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.
2. Peak result = Reading + c.f (Correction factor)  
     Average result = Reading + c.f (Correction factor) + Duty Cycle Factor
3. Correction factor = Antenna factor + Cable loss - Amp gain
4. Band reject filter was used from 1 GHz to 18 GHz
5. The 18 GHz end had no signal detected. As can be seen from the conducted spurious emission test, no signal was detected in the section.



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (28) / (32) Pages


## 5) 18 GHz to 26.5 GHz

### Test Mode : Lowest Channel of the Transmitter (Worst Case)

The requirements are:

Complies

### Test Data

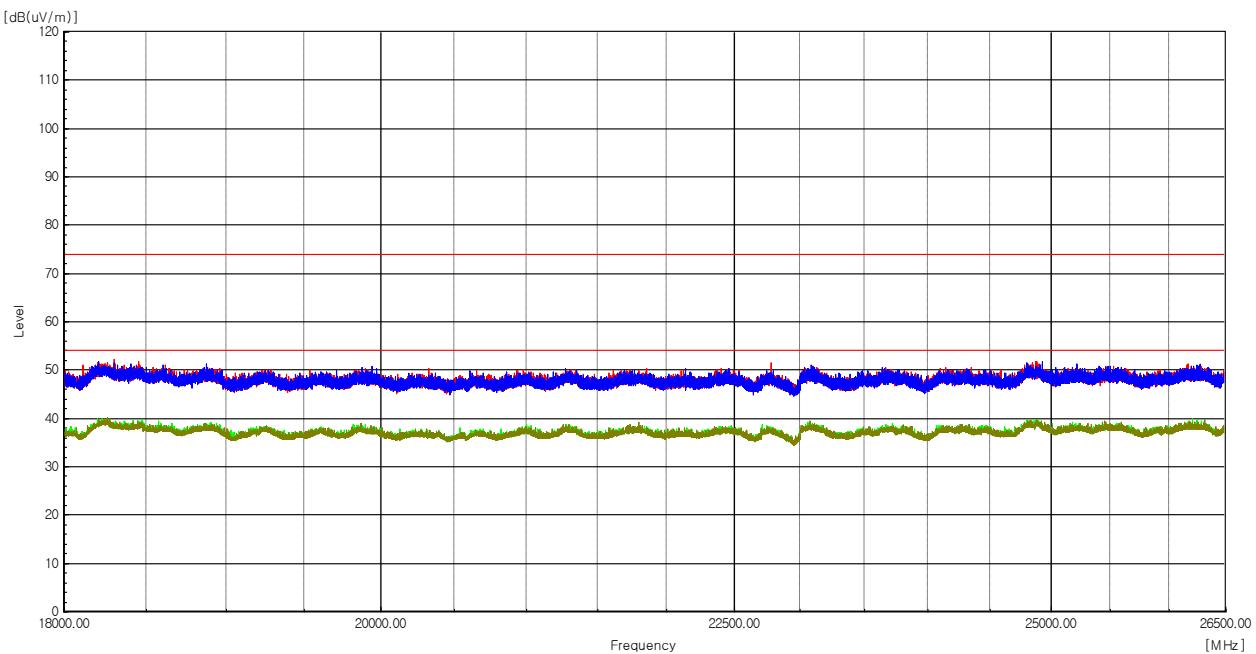

**Result :** No peak found

### Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X,Y axis). The worst emission was found in lie-down position (Z axis) and the worst case was recorded.
2. Result = Reading + c.f (Correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp gain

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (29) / (32) Pages

## 4.6 AC Conducted Emissions

### Frequency Range of measurement

150 kHz to 30 MHz

### Instrument Settings

IF Band Width: 9 kHz

### Test Procedures

ANSI C63.10-2013 - Section 6.2

The EUT was placed on a non-metallic table 0.8 m above the metallic, grounded floor and 0.4 m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8 m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

### Limit :

#### - 15.207(a)

Frequency [MHz]	Conducted Limit [dBuV]	
	Quasi-peak	Average**
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

\* The level decreases linearly with the logarithm of the frequency.

\*\* A linear average detector is required.

### Test Results

The requirements are:


Complies

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (30) / (32) Pages

## Test Data

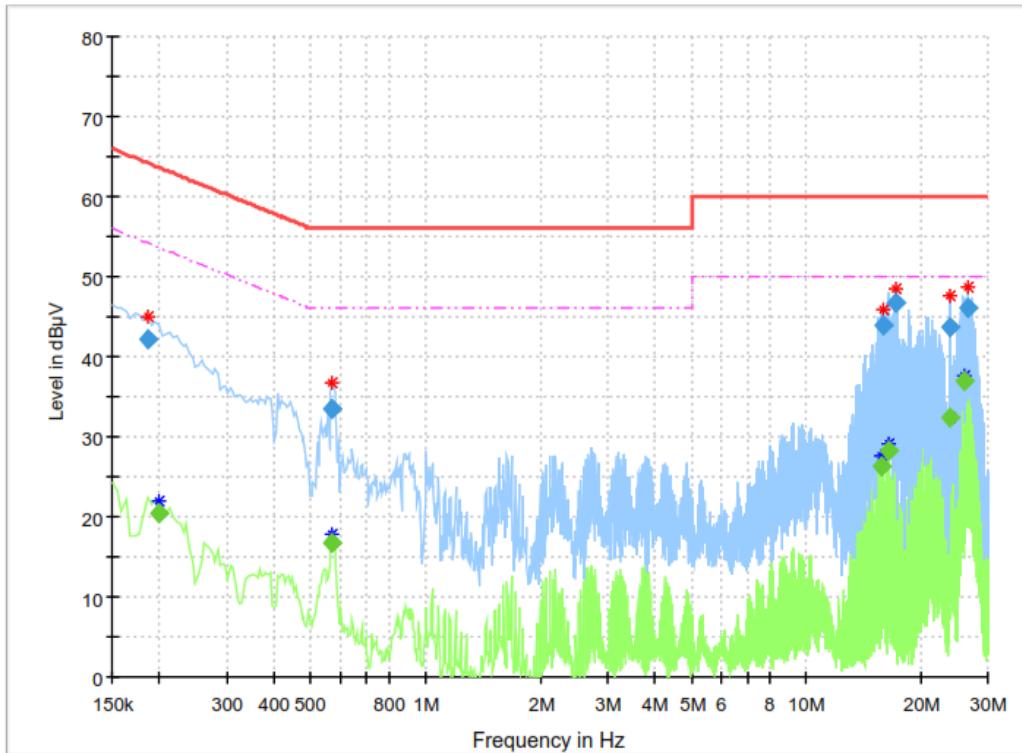**[LINE]**


## Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.186000	42.25	---	64.21	21.96	15000.0	9.000	L1	ON	10.0
0.199500	---	20.45	53.63	33.18	15000.0	9.000	L1	ON	10.0
0.568500	---	16.73	46.00	29.27	15000.0	9.000	L1	ON	10.2
0.568500	33.57	---	56.00	22.43	15000.0	9.000	L1	ON	10.2
15.801000	---	26.23	50.00	23.77	15000.0	9.000	L1	ON	10.6
15.882000	44.01	---	60.00	15.99	15000.0	9.000	L1	ON	10.6
16.440000	---	28.17	50.00	21.83	15000.0	9.000	L1	ON	10.6
17.119500	46.73	---	60.00	13.27	15000.0	9.000	L1	ON	10.6
23.919000	---	32.29	50.00	17.71	15000.0	9.000	L1	ON	10.6
23.932500	43.68	---	60.00	16.32	15000.0	9.000	L1	ON	10.6
26.119500	---	36.96	50.00	13.04	15000.0	9.000	L1	ON	10.7
26.520000	45.99	---	60.00	14.01	15000.0	9.000	L1	ON	10.7

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (31) / (32) Pages

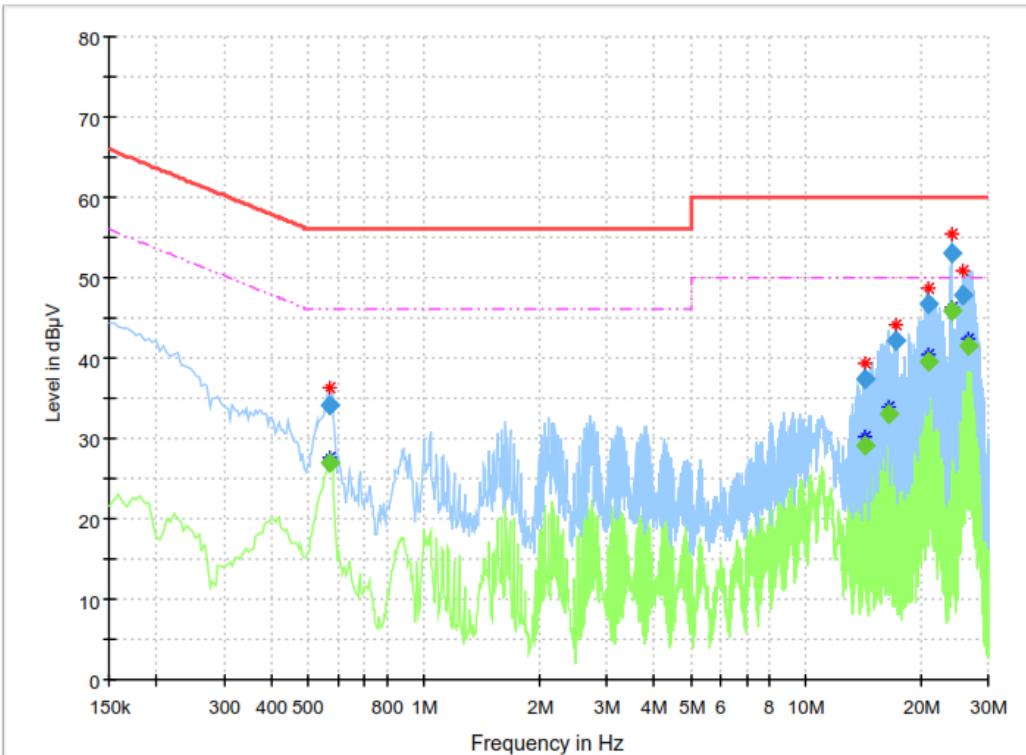**[NEUTRAL]****Final Result**

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	CAverage (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.568500	---	27.00	46.00	19.00	15000.0	9.000	N	ON	10.1
0.568500	34.10	---	56.00	21.90	15000.0	9.000	N	ON	10.1
14.361000	---	29.08	50.00	20.92	15000.0	9.000	N	ON	10.7
14.361000	37.37	---	60.00	22.63	15000.0	9.000	N	ON	10.7
16.440000	---	33.09	50.00	16.91	15000.0	9.000	N	ON	10.8
17.160000	42.25	---	60.00	17.75	15000.0	9.000	N	ON	10.9
20.841000	46.85	---	60.00	13.15	15000.0	9.000	N	ON	11.0
20.841000	---	39.66	50.00	10.34	15000.0	9.000	N	ON	11.0
24.000000	53.11	---	60.00	6.89	15000.0	9.000	N	ON	11.0
24.000000	---	45.78	50.00	4.22	15000.0	9.000	N	ON	11.0
25.638000	47.82	---	60.00	12.18	15000.0	9.000	N	ON	11.0
26.682000	---	41.46	50.00	8.54	15000.0	9.000	N	ON	11.0

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,  
Gyeonggi-do, 17142, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2025-01440  
Page (32) / (32) Pages

## APPENDIX A – Test Equipment Used For Tests

No.	Name of Equipment	Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date
1	Signal Analyzer	Agilent	N9020A	MY52090670	2024-09-19	2025-09-19
2	Signal Generator	Rohde & Schwarz	SMB100A	175528	2025-03-21	2026-03-21
3	EMI TEST RECEIVER	Rohde & Schwarz	ESW44	102039	2025-04-28	2026-04-28
4	BILOG ANTENNA	TESEQ	CBL6111D	60654	2023-08-21	2025-08-21
5	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2024-04-15	2026-04-15
6	6dB Attenuator	PASTERNACK	PE7AP006-06	L20210504000023	2024-07-31	2025-07-31
7	6dB Attenuator	NONE	6dB	190557	2024-09-19	2025-09-19
8	AMPLIFIER	SONOMA INSTRUMENT	310N	411011	2024-07-31	2025-07-31
9	Spectrum Analyzer	R&S	FSV40	101574	2025-01-10	2026-01-10
10	PRE AMPLIFIER	HP	8449B	3008A00620	2025-03-11	2026-03-11
11	Double Ridged Guide Antenna	ETS-Lindgren	3115	00078895	2025-03-13	2026-03-13
12	HORN ANTENNA	SCHWARZBECK	BBHA9170	1153	2024-10-18	2025-10-18
13	LOW NOISE AMPLIFIER	TESTEK	TK-PA1840H	210124-L	2024-10-18	2025-10-18
14	EMI TEST RECEIVER	Rohde & Schwarz	ESR3	102826	2025-04-28	2026-04-28
15	LISN	Rohde & Schwarz	ENV216	102698	2025-04-28	2026-04-28
16	Band Reject Filter	Micro Tronics	BRM50702	G444	2024-09-20	2025-09-20

-END-