

User manual of WHM210A

1. Introduction

The WHM210A uses the new Wi-Fi standard IEEE 802.11ah, which uses the Sub 1 GHz license-exempt band. It has long range, low power and high permeability and is optimized for IoT modules.

The WHM210A includes a RF switch and an internal PA in the SoC to increase transmit power up to 17dBm..

2. Hardware Architecture:

2.1 Main Chipset Information

Item	Vendor	Part Number
IEEE802.11ah WLAN	NEWRACOM	NRC7394

2.2 Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit
Temp	Operating	-40 to 85	°C
TSTG	Storage Temperature	-40 to 125	°C

3. Operational Description

The WHM210A is a long range, high-performance module for wireless communication. The module is solder-able like a SMD component and can easily be mounted on a simple carrier board with a minimum of required external connections.

- Features

- ▲ Compact module 14 x 17.5 x 2.8mm. (Typ.)
- ▲ Full IEEE 802.11ah compatibility with enhanced performance
- ▲ AP and STA, mesh network support
- ▲ UART and SPI support for host interface
- ▲ Low-Power Long Range Transceiver operating in the sub-1GHz ISM band
- ▲ RF interface optimized to 50 Ω
- ▲ -107 dBm minimum receive sensitivity (MCS10)

- CPU

- ▲ ARM® Cortex-M3 for IEEE 802.11ah WLAN and application
- ▲ Clock frequencies for processor(Max 32MHz)
- ▲ For IF and RF frequency, a crystal(32MHz) is a clock reference.

- Memory

Internal Memory	External Memory
▷ 32KB Boot ROM ▷ 1,088KB system SRAM ▷ 192KB Key Memory for security ▷ 16KB cache for XIP	▷ 32Mbit External Flash Memory

- WIFI Transmission

- ▲ Based on the industry proven direct conversion transceiver architecture
- ▲ Includes a complete radio front-end part, which consists of a Tx power amplifier and an LNA
- ▲ Integrated LDOs
- ▲ Radio calibration interfaces for digital baseband
- ▲ Internal temperature sensing and battery voltage monitoring
- ▲ Low supply current: RX 15mA @ 3.3V, TX 500mA @ 3.3V (+21 dBm Pout)
- ▲ Modulation bandwidth: 1/2/4 MHz
- ▲ RX noise figure < 6dB
- ▲ RX gain range: > 100dB
- ▲ RX IIP3: -17dBm (@ LNA max. gain)
- ▲ TX gain range: > 30 dB
- ▲ EVM < -30 dB @ +21 dBm (w/ 64 QAM, DPD)
- ▲ Integrated RF PLL phase error < 0.7 degree.

- Product Details

▲ Data Modulation

OFDM with BPSK, QPSK, 16QAM, 64QAM

▲ Frequency : 902 ~ 928 MHz

Country Code	BandWidth	CF	Remark
US	1 MHz	903.5 MHz	
	1 MHz	904.5 MHz	
	1 MHz	905.5 MHz	
	1 MHz	906.5 MHz	
	1 MHz	907.5 MHz	
	1 MHz	908.5 MHz	
	1 MHz	909.5 MHz	
	1 MHz	910.5 MHz	
	1 MHz	911.5 MHz	
	1 MHz	912.5 MHz	
	1 MHz	913.5 MHz	
	1 MHz	914.5 MHz	
	1 MHz	915.5 MHz	
	1 MHz	916.5 MHz	
	1 MHz	917.5 MHz	
	1 MHz	918.5 MHz	
	1 MHz	919.5 MHz	
	1 MHz	920.5 MHz	
	1 MHz	921.5 MHz	
	1 MHz	922.5 MHz	
	1 MHz	923.5 MHz	
	1 MHz	924.5 MHz	
	1 MHz	925.5 MHz	
	1 MHz	926.5 MHz	
	2 MHz	905.0 MHz	
	2 MHz	907.0 MHz	
	2 MHz	909.0 MHz	
	2 MHz	911.0 MHz	
	2 MHz	913.0 MHz	
	2 MHz	915.0 MHz	
	2 MHz	917.0 MHz	
	2 MHz	919.0 MHz	
	2 MHz	921.0 MHz	
	2 MHz	923.0 MHz	
	2 MHz	925.0 MHz	
	4 MHz	906.0 MHz	
	4 MHz	910.0 MHz	
	4 MHz	914.0 MHz	
	4 MHz	918.0 MHz	
	4 MHz	922.0 MHz	

This module ensures frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation

4. Antenna Trace Design for Host devices

4-1 Trace layout and dimensions including specific designs for each type:

1) Layout of trace design, parts, antenna, connectors, and isolation requirements;

All RF trace must be 50 ohm line. Connectors are required to use SMA Type connector. And Antenna is required to use **SJANT-PCB-900-01** antenna manufactured by SJIT CO.,LTD.

But, you must not give to access to antenna connector to user when you install this module into devices to be compliance with FCC section 15.203.

2) Boundary limits of size, thickness, length, width, shape(s), dielectric constant, and impedance must be clearly described for each type of antenna;

Antenna should be used only PCB pattern type antenna manufactured by SJIT CO.,LTD. Different antenna type is not acceptable.

3) Different antenna length and shapes affect radiated emissions, and each design shall be considered a different type; e.g., antenna length in multiple(s) of frequency wavelength and antenna shape (traces in phase) can affect antenna gain and must be considered;

Different antenna is unacceptable.

4-2 Appropriate parts by manufacturer and specifications.

1) For antenna, SJANT-PCB-900-01 or similar part manufactured.

4-3 Test procedures for design verification.

The manufacturer should verify that the antenna trace design on the PCB board is compliance with this Antenna Trace Design documents.

You connect the antenna connector of the device to the input of a measurement instrument. And you set the measurement instrument to the proper options for each frequency bands and conduct the test to get the output power from the antenna connector. The permissible output power range is in below table to verify the antenna trace design is appropriate for this documents.


BAND	Output power	Tolerance
WIFI-HaLow US	+15dBm	+2/-2dB

4-4 Production test procedures for ensuring compliance.


The host product itself is required to comply with all other applicable FCC equipment authorization regulations, requirements.

So, the host device should be tested for unintentional radiators under Part 15 subpart B for non-transmitter functions on the transmitter module as appropriate.

4-5 The above data is to be provided by a Gerber file (or equivalent) for PCB layout.

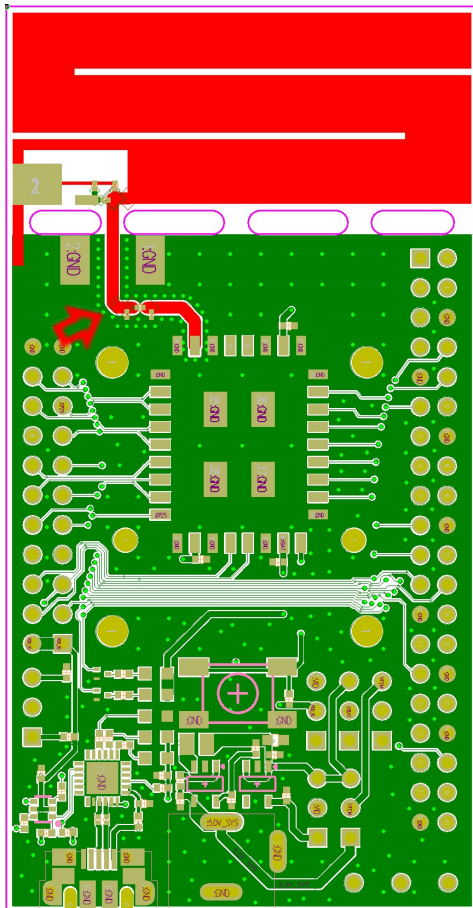

 : 50 ohm matching Transmission Line
[PCB Top]

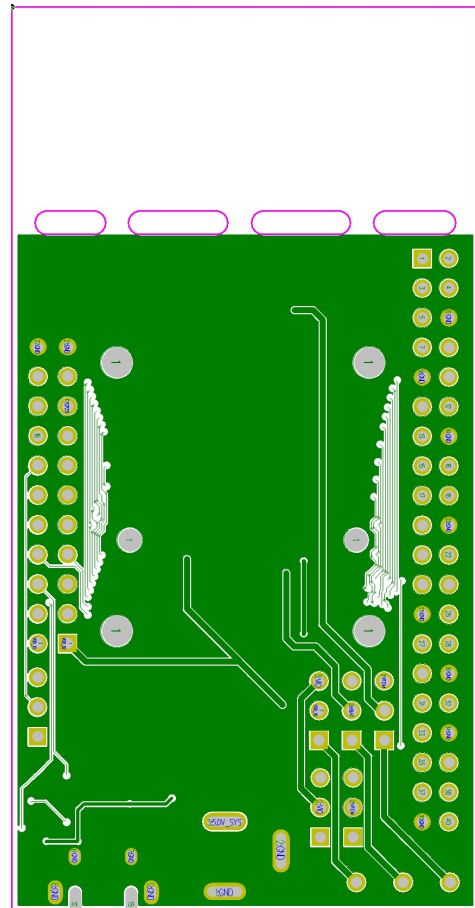


[PCB Bottom]

1) Application PCB information

- PCB : 2-layer 1.6T
- Size : 77.5 X 40
- RF Transmission line width : 1.0mm
- Clearance : 0.15mm
- FR4 PCB $\epsilon_r = 4.3$

2) Antenna Matching value]

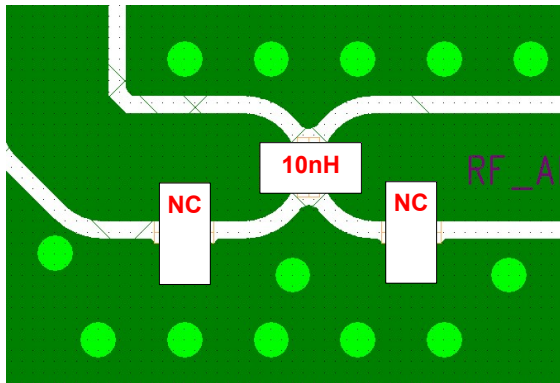


- SJIT provides support and management when using an antenna that is either the same as or different from the one in the EVK.

5. Installation Guide


- Contents

This module is used by mounting on the main board that included antenna.

- InstallationFigure

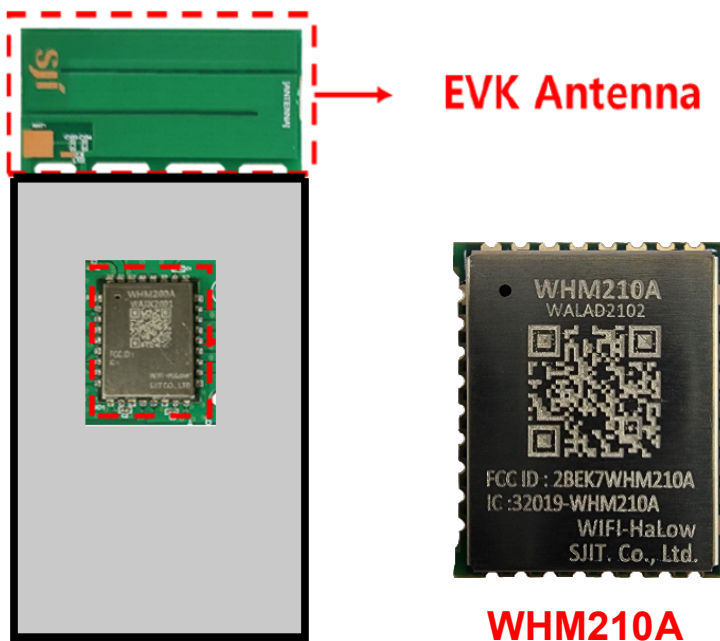

- Module Footprint

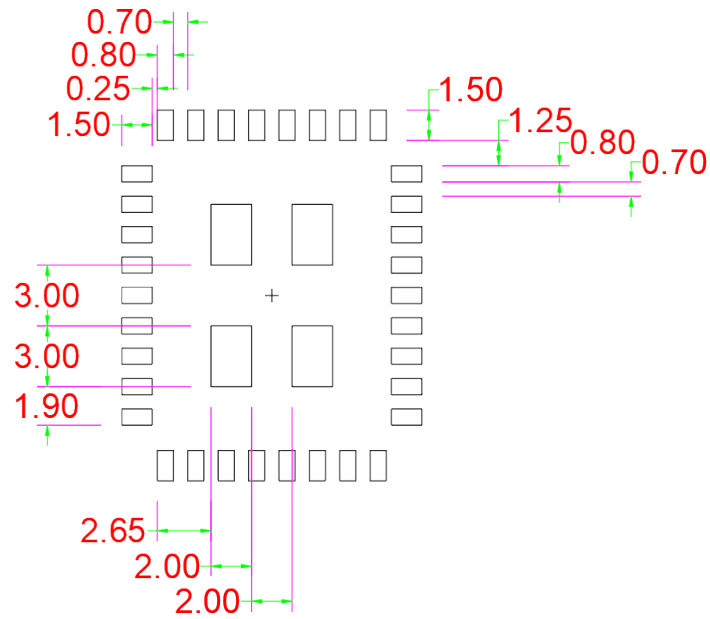

6.Contact Address

54-11, Dongtanhana 1-gil, Hwaseong-si, Gyeonggi-do, 18423, Republic of Korea.

7.Manufacturer

SJIT CO.,LTD

5. FCC Statement

FCC Statement	
1. FCC Part 15.19 Statements:	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
2. FCC Part 15.105 statement(Class B)	This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: - Reorient or relocate the receiving antenna. - Increase the separation between the equipment and receiver. - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. - Consult the dealer or an experienced radio/TV technician for help.
3. FCC Part 15.21 statement	Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. This device must not be co-located or operating in conjunction with any other antenna or transmitter.
4. Responsible Party 정보	Supplier's Declaration of Conformity 47 CFR § 2.1077 Compliance Information Unique Identifier: (e.g., Trade Name, Model Number) Responsible Party – U.S. Contact Information 1. Company Name: Sea Slug Labs LLC Street Address Sea Slug Labs 19806 Maverick Creek Ln Cypress City, State: Texas Zip Code: 77433 Telephone number or internet contact information: +6827778293 / jorge@seasluglabs.io 2. Company Name: Treetop Technical Products LLC Street Address 1776 Broadway, Unit 7 Raynham Massachusetts City, State: Massachusetts Zip Code: 02767 Telephone number or internet contact information: +15082383133/ sales@treetoptech.com
5. Modular Approval Statement	Regulatory notice to host manufacturer according to KDB 996369 D03 OEM Manual This module has been granted modular approval as below listed FCC rule parts. -FCC Rule parts 15C(15.247) Summarize the specific operational use conditions -The OEM integrator should use equivalent antennas which is the same type and equal or less gain than an antenna listed below this instruction manual. Trace antenna design (4~6Page) -This module is using Trace Antenna Design. Module integration guidelines must be closely followed. Compliance of host integrations of the module is limited to hosts adaptation designs which are identical to SJIT's reference design. Host integrations with adaption designs deviating from SJIT's reference design require either class 2 permissive change to this modular approval or a separate host approval with different FCC-ID.

5. Modular Approval Statement	Limited module procedures (N/A) - Single Module RF exposure considerations -The module has been certified for integration into products only by OEM integrators under the following condition: -The antenna(s) must be installed such that a minimum separation distance of at least 20 cm is maintained between the radiator (antenna) and all persons at all times. -The transmitter module must not be co-located or operating in conjunction with any other antenna or transmitter except in accordance with FCC multi-transmitter product procedures. -Mobile use As long as the three conditions above are met, further transmitter testing will not be required. OEM integrators should provide the minimum separation distance to end users in their end-product manuals. Antennas list This module is certified with the following integrated antenna. - Max. Antenna gain: 3.0 dBi / Ant. Type: EVK Antenna(P/N SJANT-PCB-900-01) Any new antenna type, higher gain than listed antenna should be met the requirements of FCC rule 15.203 and 2.1043 as permissive change procedure.
	End Product Labeling The module is labeled with its own FCC ID. If the FCC ID are not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module. In that case, the final end product must be labeled in a visible area with the following: - Contains FCC ID: 2BEK7WHM210A
	Information on test modes and additional testing requirements -OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed (for example, digital device emissions, PC peripheral requirements, additional transmitter in the host, etc.). Additional testing, Part 15 Subpart B disclaimer -The final host product also requires Part 15 subpart B compliance testing with the modular transmitter installed to be properly authorized for operation as a Part 15 digital device. Note EMI Considerations Note that a host manufacture is recommended to use D04 Module Integration Guide recommending as "best practice" RF design engineering testing and evaluation in case non-linear interactions generate additional non-compliant limits due to module placement to host components or properties. For standalone mode, reference the guidance in D04 Module Integration Guide and for simultaneous mode; see D02 Module Q&A Question 12, which permits the host manufacturer to confirm compliance. How to make changes Since only Grantees are permitted to make permissive changes, when the module will be used differently than granted, please contact the module manufacture on below contact information. - Contact information: wskim@seongji.co.kr / Tel: 82-31-222-8194

6. ISED Statement

FCC Statement	
Licensed-exempt Statement Statements:	This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: 1. This device may not cause interference. 2. This device must accept any interference, including interference that may cause undesired operation of the device. Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.
RF Exposure Statement	The antenna(s) must be installed such that a minimum separation distance of at least 20 cm is maintained between the radiator (antenna) and all persons at all times. l'exposition aux RF L'antenne (ou les antennes) doit être installée de façon à maintenir à tout instant une distance minimum de au moins 20 cm entre la source de radiation (l'antenne) et toute personne physique.
End Product Labeling	The module is labeled with its own IC Certification Number. If the IC Certification Number are not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module. In that case, the final end product must be labeled in a visible area with the following: Contains IC ID: 32019-WHM210A Étiquetage du produit final (IC) Le module est étiqueté avec sa propre identification FCC et son propre numéro de certification IC. Si l'identification FCC et le numéro de certification IC ne sont pas visibles lorsque le module est installé à l'intérieur d'un autre dispositif, la partie externe du dispositif dans lequel le module est installé devra également présenter une étiquette faisant référence au module inclus. Dans ce cas, le produit final devra être étiqueté sur une zone visible avec les informations suivantes : Contient module émetteur IC ID: 32019-WHM210A