

# FCC Test Report

## FCC ID: 2BEL7-CFP2

**Product:** MP4 player

**Trade Mark:** FOCUS, CAMPFIRE

**Model Number:** Campfire Player 2

**Family Model:** Campfire Player 3

**Report No.:** S24010305401004

**Issue Date:** Jan 17, 2024

### Prepared for

MCL Technologies Inc.

1900 S NORFOLK ST STE 350, SAN MATEO, California, 94403, USA

### Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community,

Xiang Street Bao'an District, Shenzhen P.R. China

Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090

Website: <http://www.ntek.org.cn>

## TEST RESULT CERTIFICATION

**Applicant's name**.....: MCL Technologies Inc.

Address .....: 1900 S NORFOLK ST STE 350, SAN MATEO, California, 94403, USA

**Manufacturer's Name**.....: ShenZhen Phonemax Technology Co., LTD

Address .....: 5F, East Block, Laobing Building, Xingye road, Xixiang, Bao'an District, Shenzhen, China

**Product description**

Product name .....: MP4 player

Trade Mark .....: FOCUS, CAMPFIRE

Model and/or type reference : Campfire Player 2

Family Model .....: Campfire Player 3

Test Sample Number .....: S240103054002

Date of Test .....: Jan 03, 2024 ~ Jan 17, 2024

FCC Part15B

**Standards**.....: ANSI C63.4:2014

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with Part 15 of FCC Rules. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Prepared  
By : Mukzi Lee  
Mukzi Lee  
(Project Engineer)

Reviewed  
By : Aaron Cheng  
Aaron Cheng  
(Supervisor)

Approved  
By : Alex Li  
Alex Li  
(Manager)

**Table of Contents****Page**

1 . TEST SUMMARY	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST SETUP	8
2.3 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	9
2.4 MEASUREMENT INSTRUMENTS LIST	10
3 . EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.1.1 POWER LINE CONDUCTED EMISSION	11
3.1.2 TEST PROCEDURE	12
3.1.3 TEST SETUP	12
3.1.4 EUT OPERATING CONDITIONS	12
3.1.5 TEST RESULTS	13
3.2 RADIATED EMISSION MEASUREMENT	15
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	15
3.2.2 TEST PROCEDURE	15
3.2.3 TEST SETUP	16
3.2.4 TEST RESULTS	17
3.2.5 TEST RESULTS(1000~18000MHz)	19

## 1. TEST SUMMARY

Test procedures according to the technical standards:

<b>EMC Emission</b>				
Standard	Test Item	Limit	Judgment	Remark
FCC Part15B ANSI C63.4: 2014	Conducted Emission	Class B	PASS	
	Radiated Emission	Class B	PASS	

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report
- (2) For client's request and manual description, the test will not be executed.



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	MP4 player
Trade Mark	FOCUS, CAMPFIRE
Model Name	Campfire Player 2
Family Model	Campfire Player 3
Model Difference	All the model are the same circuit and RF module, except the model names.
Product Description	Connecting I/O port: Micro USB, Earphone
	Operation Frequency: 5.8GHz
Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Adapter	N/A
Battery	DC 3.87V, 2000mAh, 7.74Wh
Power supply	DC 3.87V from battery or DC 5V from DC port
HW Version	Q9A_9230MB_D4X_V1.1
FW Version	V1.1
SW Version	q9a_d4x_t606_hd_480_1080_fengmai_Q9A_32GB_24_drv_user_T_2023_12_27_18_04

### 2.1.1 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Model 1	USB Data Transmission
Model 2	TF card Playing
Model 3	REC
Model 4	FM
Model 5	GPS


For Conducted Test	
Final Test Mode	Description
Model 1	USB Data Transmission
Model 2	TF card Playing
Model 3	REC
Model 4	FM

For Radiated Test	
Final Test Mode	Description
Model 1	USB Data Transmission
Model 2	TF card Playing
Model 3	REC
Model 4	FM


Note: Final Test Mode: Through Pre-scan, find the model 1 is the worst case.

Only the worst case mode is recorded in the report.

## 2.2 DESCRIPTION OF TEST SETUP

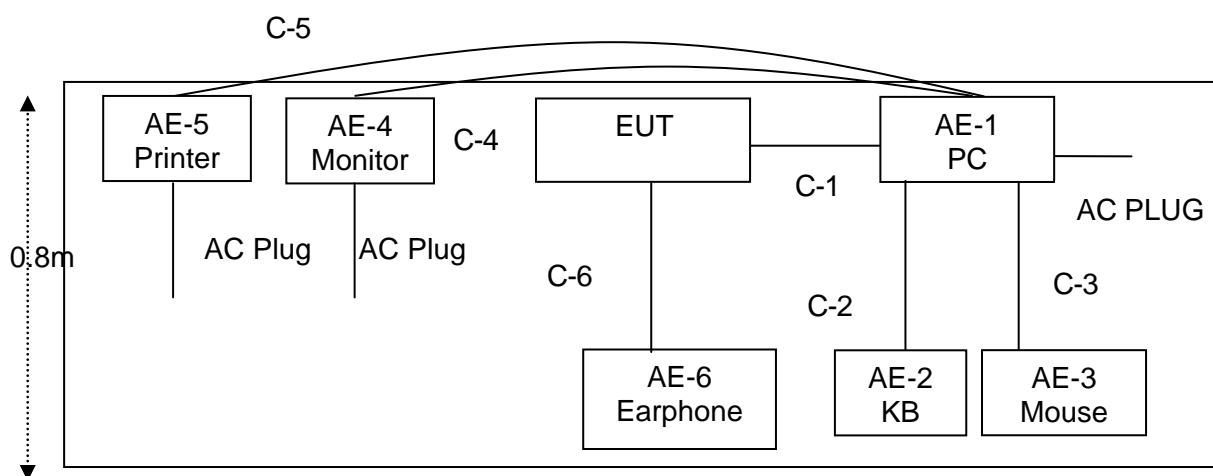

RE

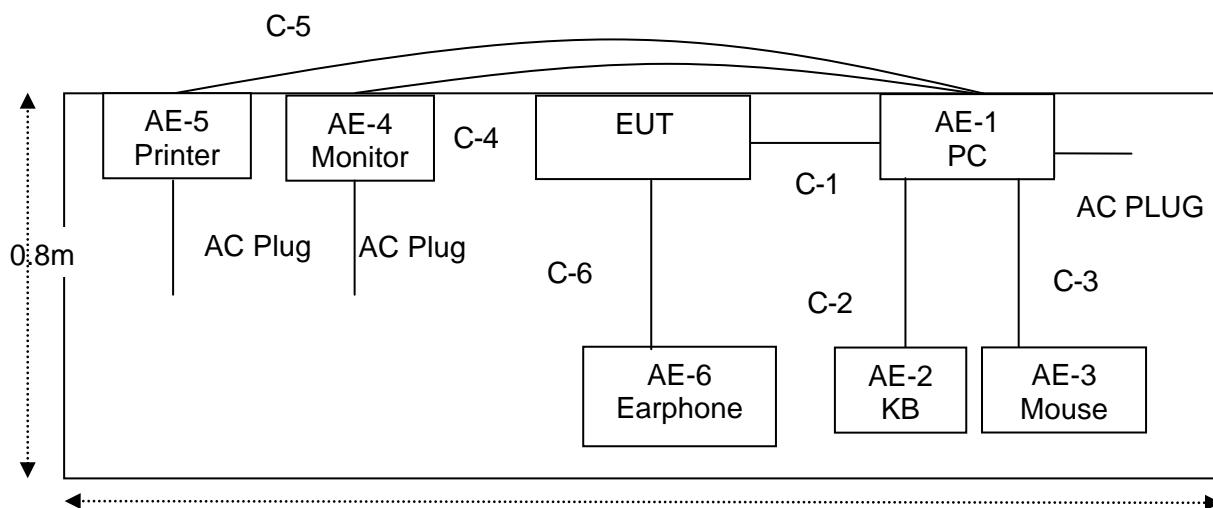

### 2.3 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
AE-1	PC	DELL	FT4Y23X	N/A	Peripherals
AE-2	KB	N/A	N/A	N/A	Peripherals
AE-3	Mouse	DELL	MS111-P	N/A	Peripherals
AE-4	Monitor	DELL	IN2020MB	N/A	Peripherals
AE-5	Printer	Canon	L11121E	N/A	Peripherals
AE-6	Earphone	N/A	N/A	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length	Note
C-1	USB Cable	YES	NO	1.0m	
C-2	USB Cable	NO	NO	1.2m	
C-3	USB Cable	NO	NO	1.2m	
C-4	HDMI Cable	YES	YES	1.0m	
C-5	USB Cable	NO	NO	1.2m	
C-6	Earphone Cable	NO	NO	1.2m	

**Note:**

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" means "shielded" "with core"; "NO" means "unshielded" "without core".

## 2.4 MEASUREMENT INSTRUMENTS LIST

## Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4440A	MY41000130	2023.03.27	2024.03.26	1 year
2	Test Receiver	R&S	ESPI	101318	2023.03.27	2024.03.26	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2023.03.16	2024.03.15	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2023.05.06	2026.05.05	3 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2023.03.27	2024.03.26	1 year
6	Horn Antenna	SCHWARZB ECK	BBHA 9120 D	2816	2023.01.12	2026.01.11	3 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2022.11.07	2025.11.06	3 year
8	Amplifier	EMC	EMC05183 5SE	980246	2023.05.29	2024.05.28	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2023.05.29	2024.05.28	1 year
10	Power Meter	DARE	RPR3006W	15I00041S NO84	2023.05.29	2024.05.28	1 year
11	Power Sensor	R&S	URV4-Z4	0395.1619.05	2023.05.29	2024.05.28	1 year
12	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2022.06.17	2025.06.16	3 year
13	High Test Cable(1G-40 GHz)	N/A	R-03	N/A	2022.06.17	2025.06.16	3 year
14	High Test Cable(1G-40 GHz)	N/A	R-04	N/A	2022.06.17	2025.06.16	3 year
15	Test Receiver	R&S	ESCI	101160	2023.03.27	2024.03.26	1 year

## AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2023.03.27	2024.03.26	1 year
2	LISN	R&S	ENV216	101313	2023.03.27	2024.03.26	1 year
3	LISN	SCHWAR ZBECK	NNLK 8129	8129245	2023.03.27	2024.03.26	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2023.05.06	2026.05.05	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2023.05.06	2026.05.05	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2023.05.06	2026.05.05	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2023.05.06	2026.05.05	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable which is scheduled for calibration every 3 years.

### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

### 3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 TEST SETUP



**Note: 1. Support units were connected to second LISN.**

**2. Both of LISNs (AMH) are 80 cm from EUT and at least 80 cm from other units and other metal planes**

### 3.1.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.


## 3.1.5 TEST RESULTS

EUT:	MP4 player	Model Name. :	Campfire Player 2
Temperature:	24.5 °C	Relative Humidity:	52%
Pressure:	1010hPa	Test Date:	2024/01/08
Test Mode:	Mode 1	Phase :	L
Test Voltage:	DC 5V from PC AC 120V/60Hz		

Frequency (MHz)	Reading Level (dB $\mu$ V)	Correct Factor (dB)	Measure-ment (dB $\mu$ V)	Limits (dB $\mu$ V)	Margin (dB)	Remark
0.1620	50.24	9.95	60.19	65.36	-5.17	QP
0.1620	36.24	9.95	46.19	55.36	-9.17	AVG
0.2460	38.32	10.14	48.46	61.89	-13.43	QP
0.2460	21.95	10.14	32.09	51.89	-19.80	AVG
0.7980	24.62	11.26	35.88	56.00	-20.12	QP
0.7980	22.11	11.26	33.37	46.00	-12.63	AVG
1.3619	22.22	12.38	34.60	56.00	-21.40	QP
1.3619	6.51	12.38	18.89	46.00	-27.11	AVG
6.3859	29.26	9.68	38.94	60.00	-21.06	QP
6.3859	15.95	9.68	25.63	50.00	-24.37	AVG
11.9819	27.86	9.70	37.56	60.00	-22.44	QP
11.9819	13.79	9.70	23.49	50.00	-26.51	AVG

## Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

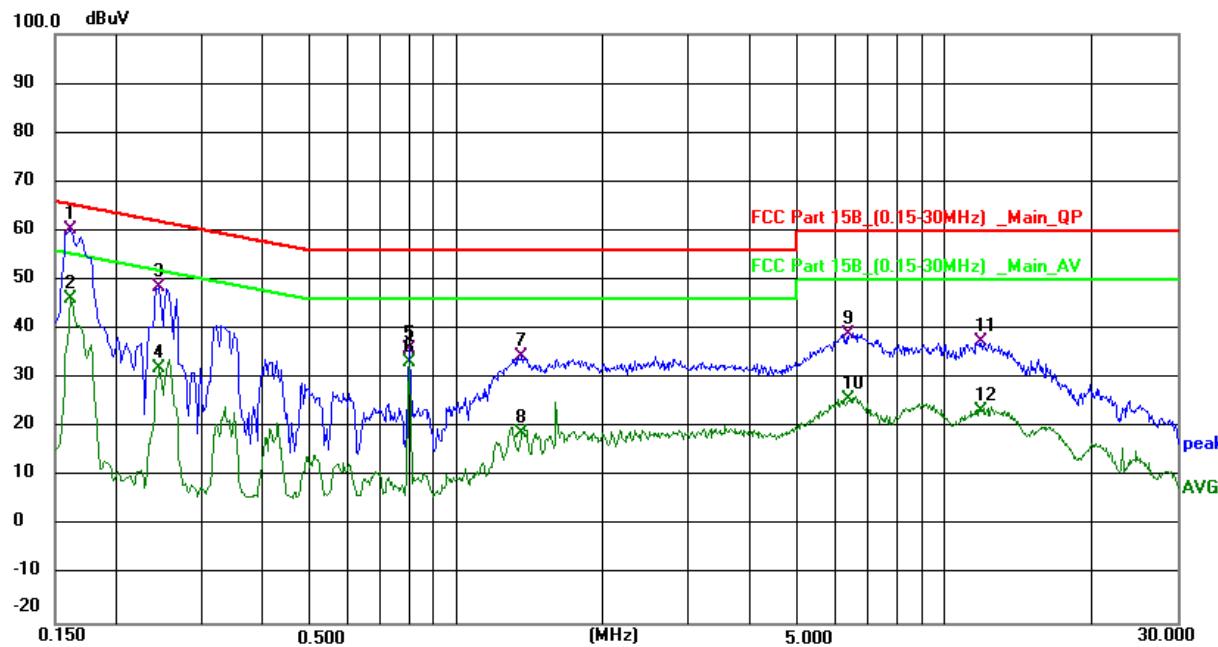


EUT:	MP4 player	Model Name.:	Campfire Player 2
Temperature:	24.5 °C	Relative Humidity:	52%
Pressure:	1010hPa	Test Date:	2024/01/08
Test Mode:	Mode 1	Phase :	N
Test Voltage:	DC 5V from PC AC 120V/60Hz		

Frequency (MHz)	Reading Level (dB $\mu$ V)	Correct Factor (dB)	Measure-ment (dB $\mu$ V)	Limits		Margin (dB)	Remark
				(dB $\mu$ V)	(dB)		
0.1660	51.13	9.97	61.10	65.16	-4.06	QP	
0.1660	29.75	9.97	39.72	55.16	-15.44	AVG	
0.2500	38.96	10.14	49.10	61.76	-12.66	QP	
0.2500	21.22	10.14	31.36	51.76	-20.40	AVG	
0.7980	25.43	11.26	36.69	56.00	-19.31	QP	
0.7980	22.94	11.26	34.20	46.00	-11.80	AVG	
1.3540	24.78	12.36	37.14	56.00	-18.86	QP	
1.3540	9.91	12.36	22.27	46.00	-23.73	AVG	
6.3220	27.83	9.68	37.51	60.00	-22.49	QP	
6.3220	12.81	9.68	22.49	50.00	-27.51	AVG	
9.5820	28.77	9.69	38.46	60.00	-21.54	QP	
9.5820	15.51	9.69	25.20	50.00	-24.80	AVG	

## Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

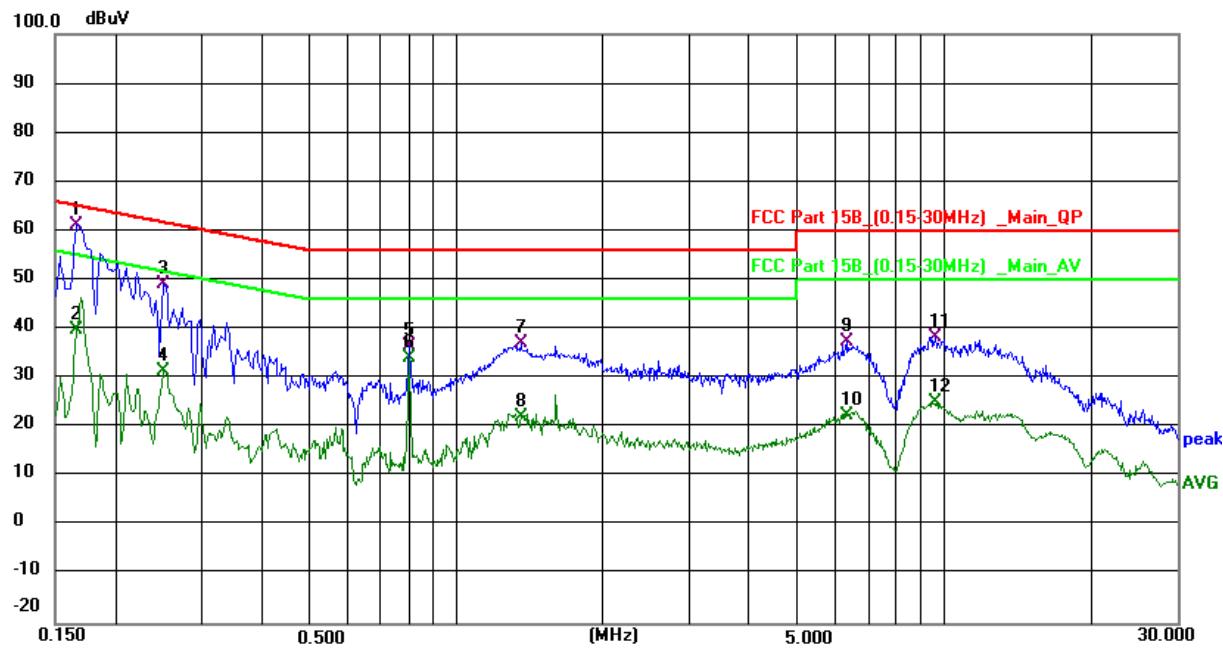

### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 3m)
	dB <sub>UV</sub> /m	dB <sub>UV</sub> /m
30 ~ 88	39.0	40.0
88 ~ 216	43.5	43.5
216 ~ 960	46.5	46.0
Above 960	49.5	54.0

Notes:

- (1) The limit for radiated test was performed according to as following:  
FCC PART 15B /ICES-003.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB<sub>UV</sub>/m)=20log Emission level (uV/m).

#### 3.2.2 TEST PROCEDURE

##### **Test Arrangement for Radiated Emissions up to 1 GHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited test facility. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for quasi-peak detection (QP) at frequency below 1GHz.

##### **Test Arrangement for Radiated Emissions above 1 GHz.**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna can be varied from one meter to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.


Note: For the hand-held device, the EUT should be measured for all 3 axes and only the worst case is recorded in the report

During the radiated emission test, according to ANSI C63.4-2014(4.2), the Spectrum Analyzer was set with the following configurations:


Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Avg	1 MHz	10 Hz

### 3.2.3 TEST SETUP

For Radiated Emission 30~1000MHz

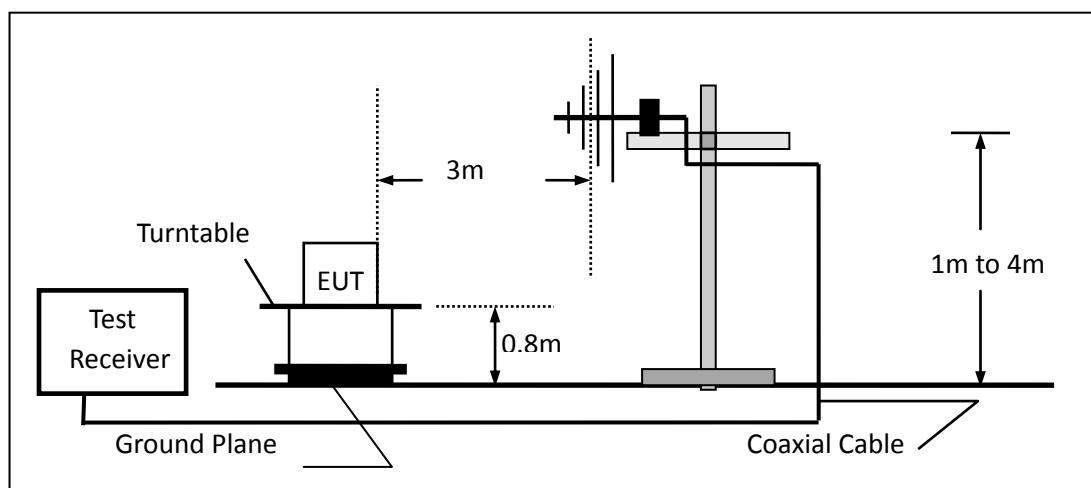

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

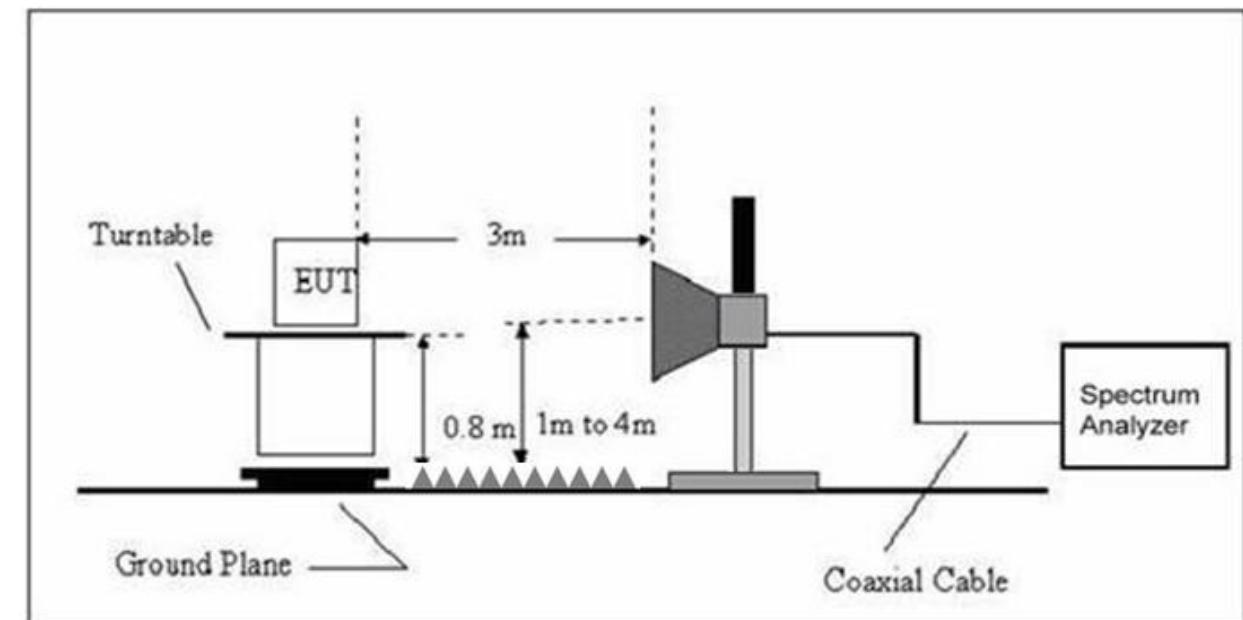

## 3.2.4 TEST RESULTS


## TEST RESULTS (30~1000 MHz)

EUT:	MP4 player	Model Name:	Campfire Player 2
Temperature:	24.5 °C	Relative Humidity:	55%
Pressure:	1010 hPa	Test Date :	2024/01/06
Test Mode :	Mode 1	Polarization :	Horizontal
Test Power :	DC 5V from PC AC 120V/60Hz		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	165.4866	19.10	17.60	36.70	43.50	-6.80	QP
H	187.7530	21.26	16.38	37.64	43.50	-5.86	QP
H	196.5098	23.06	16.21	39.27	43.50	-4.23	QP
H	269.4282	21.19	19.60	40.79	46.00	-5.21	QP
H	373.3110	15.09	22.55	37.64	46.00	-8.36	QP
H	480.5276	15.05	24.54	39.59	46.00	-6.41	QP

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

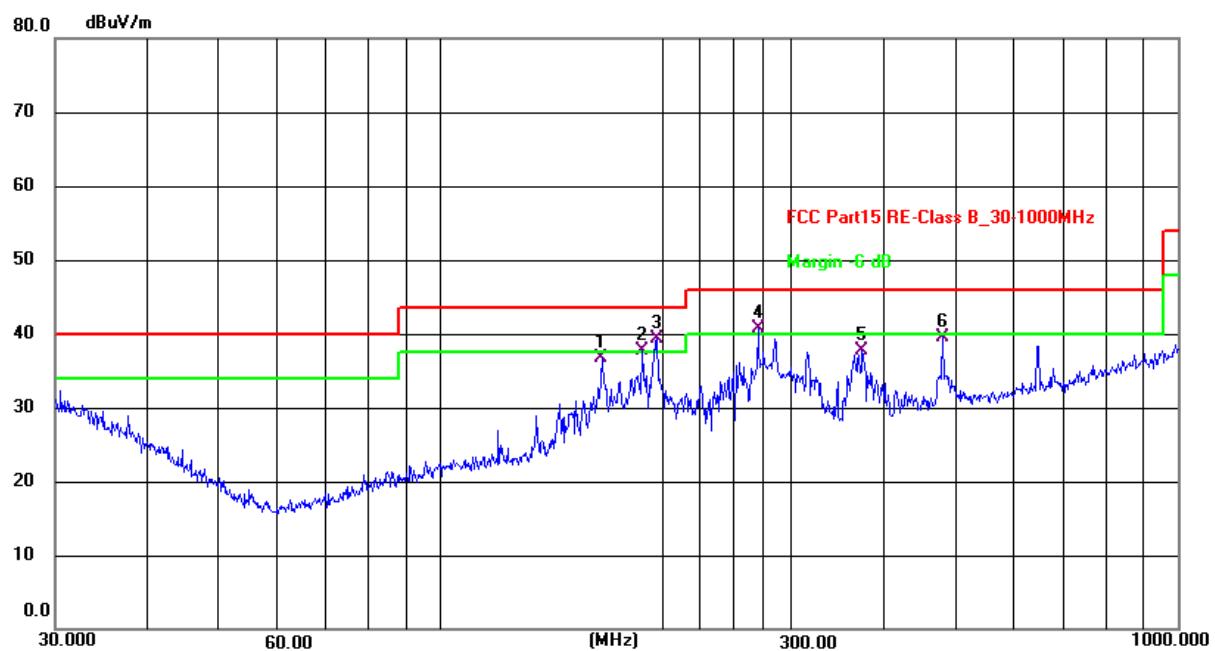


EUT:	MP4 player	Model Name :	Campfire Player 2
Temperature:	24.5 °C	Relative Humidity:	55%
Pressure:	1010 hPa	Test Date :	2024/01/06
Test Mode :	Mode 1	Polarization :	Vertical
Test Power :	DC 5V from PC AC 120V/60Hz		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	165.4866	18.90	17.60	36.50	43.50	-7.00	QP
V	187.7530	18.20	16.38	34.58	43.50	-8.92	QP
V	195.8220	20.93	16.21	37.14	43.50	-6.36	QP
V	480.5276	9.32	24.54	33.86	46.00	-12.14	QP
V	647.3855	10.15	27.02	37.17	46.00	-8.83	QP
V	903.3093	6.63	30.64	37.27	46.00	-8.73	QP

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

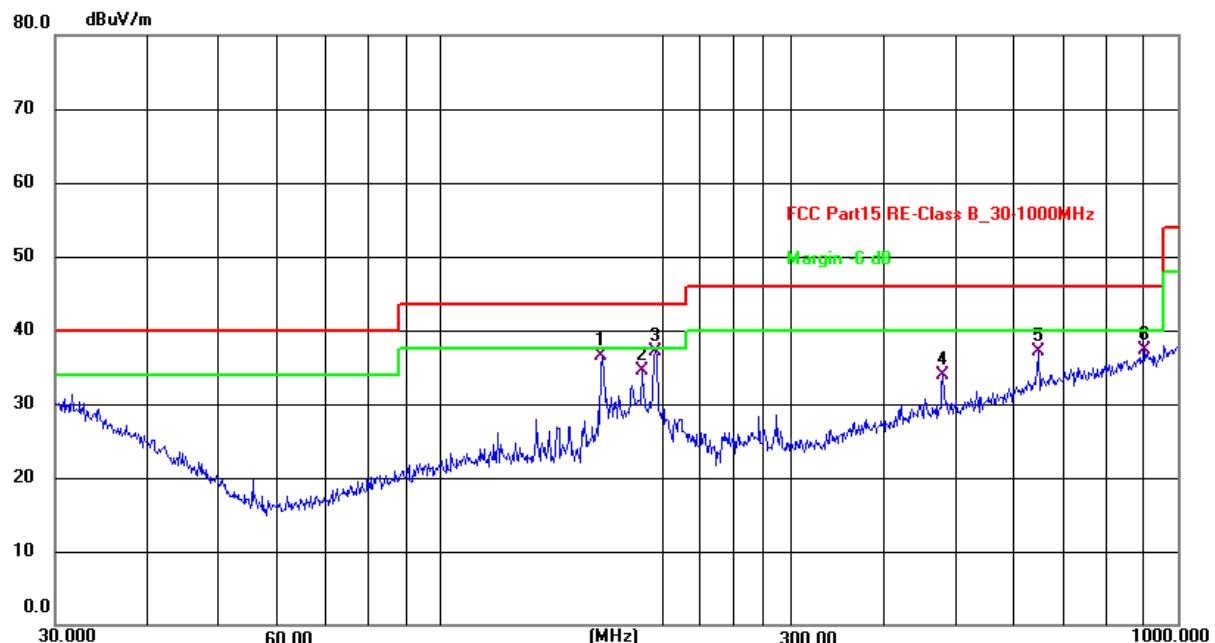

## 3.2.5 TEST RESULTS(1000~18000MHz)

EUT:	MP4 player	Model Name :	Campfire Player 2
Temperature:	24.5 °C	Relative Humidity:	55%
Pressure:	1010 hPa	Test Date :	2024/01/06
Test Mode :	Mode 1		
Test Power :	DC 5V from PC AC 120V/60Hz		

All the modulation modes have been tested, and the worst result was report as below:

Polar (H/V)	Frequency	Reading	Correct	Result	Limit	Over Limit	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
V	14549.000	51.91	3.99	55.90	74.00	-18.10	peak
V	14549.000	34.81	3.99	38.80	54.00	-15.20	AVG
V	16606.000	55.26	4.62	59.88	74.00	-14.12	peak
V	16606.000	36.94	4.62	41.56	54.00	-12.44	AVG
V	17473.000	55.17	6.07	61.24	74.00	-12.76	peak
V	17473.000	37.81	6.07	43.88	54.00	-10.12	AVG
H	14413.000	52.61	3.75	56.36	74.00	-17.64	peak
H	14413.000	35.45	3.75	39.20	54.00	-14.80	AVG
H	16538.000	53.71	4.93	58.64	74.00	-15.36	peak
H	16538.000	36.92	4.93	41.85	54.00	-12.15	AVG
H	17507.000	55.17	6.35	61.52	74.00	-12.48	peak
H	17507.000	37.49	6.35	43.84	54.00	-10.16	AVG

Remark:

Result = Reading + Correct, Over Limit= Result - Limit

Note: Only the worst results data points are reported in the report.

Other emissions are attenuated 20dB below the limit that does not recorded in the report.

END OF REPORT