

TEST REPORT

Product Name : L12DL5/6-CCT-RGB-WiFi-BLE
Brand Mark : SIMPLYCONSERVE
Model No. : L12DL5/6-CCT-RGB-WiFi-BLE
FCC ID : 2BEL8-L12DL5-6WIFI
Report Number : BLA-EMC-202401-A2903
Date of Sample Receipt : 2024/1/22
Date of Test : 2024/1/22 to 2024/1/30
Date of Issue : 2024/1/31
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

AM Conservation Group, Inc.
1701 Charleston Regional Parkway, Suite A, Charleston, SC 29492

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China
TEL: +86-755-23059481

Compiled by:

charlie

Review by:

Sueels

Approved by:

Blue Zheng

Date:

2024/1/31



REPORT REVISE RECORD

Version No.	Date	Description
00	2024/1/31	Original

TABLE OF CONTENTS

1 TEST SUMMARY	5
2 GENERAL INFORMATION	6
3 GENERAL DESCRIPTION OF E.U.T.....	6
4 OPERATION FREQUENCY EACH OF CHANNEL	7
5 TEST ENVIRONMENT	8
6 TEST MODE	8
7 MEASUREMENT UNCERTAINTY	8
8 DESCRIPTION OF SUPPORT UNIT	9
9 LABORATORY LOCATION	9
10 TEST INSTRUMENTS LIST	10
11 ANTENNA REQUIREMENT	14
11.1 CONCLUSION	14
12 RADIATED SPURIOUS EMISSIONS	15
12.1 LIMITS	15
12.2 BLOCK DIAGRAM OF TEST SETUP	16
12.3 PROCEDURE	16
12.4 TEST DATA	18
13 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	26
13.1 LIMITS	26
13.2 BLOCK DIAGRAM OF TEST SETUP	27
13.3 PROCEDURE	27
13.4 TEST DATA	29
14 CONDUCTED SPURIOUS EMISSIONS	45
14.1 LIMITS	45
14.2 BLOCK DIAGRAM OF TEST SETUP	46
14.3 TEST DATA	46
15 CONDUCTED BAND EDGES MEASUREMENT	47
15.1 LIMITS	47
15.2 BLOCK DIAGRAM OF TEST SETUP	48

15.3 TEST DATA	48
16 MINIMUM 6DB BANDWIDTH	49
16.1 LIMITS	49
16.2 BLOCK DIAGRAM OF TEST SETUP	49
16.3 TEST DATA	49
17 POWER SPECTRUM DENSITY	50
17.1 LIMITS	50
17.2 BLOCK DIAGRAM OF TEST SETUP	50
17.3 TEST DATA	50
18 CONDUCTED PEAK OUTPUT POWER	51
18.1 LIMITS	51
18.2 BLOCK DIAGRAM OF TEST SETUP	51
18.3 TEST DATA	52
19 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)	53
19.1 LIMITS	53
19.2 BLOCK DIAGRAM OF TEST SETUP	53
19.3 PROCEDURE	53
19.4 TEST DATA	55
20 APPENDIX	57
20.1 MAXIMUM CONDUCTED OUTPUT POWER	57
20.2 -6dB BANDWIDTH	64
20.3 OCCUPIED CHANNEL BANDWIDTH	71
20.4 MAXIMUM POWER SPECTRAL DENSITY LEVEL	78
20.5 BAND EDGE	85
20.6 CONDUCTED RF SPURIOUS EMISSION	94
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	107
APPENDIX B: PHOTOGRAPHS OF EUT	109

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5 & Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(1) & 15.247(b)(3)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass

2 GENERAL INFORMATION

Applicant	AM Conservation Group, Inc.
Address	1701 Charleston Regional Parkway, Suite A, Charleston, SC 29492
Manufacturer	AM Conservation Group, Inc.
Address	1701 Charleston Regional Parkway, Suite A, Charleston, SC 29492
Factory	N/A
Address	N/A
Product Name	L12DL5/6-CCT-RGB-WiFi-BLE
Test Model No.	L12DL5/6-CCT-RGB-WiFi-BLE

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	N/A
Software Version	N/A
Engineer sample no:	BLA-EMC-202401-A29
Operation Frequency:	802.11b/g/n(HT20): 2412MHz to 2462MHz 802.11n(HT40): 2422MHz to 2452MHz
Modulation Type:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Channel Spacing:	5MHz
Number of Channels:	802.11b/g/n(HT20):11 802.11n(HT40):7
Antenna Type:	internal antenna
Antenna Gain:	2.53dBi(Provided by the customer)
Remark:The Antenna Gain is supplied by the customer.BlueAsia is not responsible for this data	

4 OPERATION FREQUENCY EACH OF CHANNEL

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	6	2437MHz	11	2462MHz	--	--

Operation Frequency each of channel(802.11n HT40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
3	2422MHz	6	2437MHz	9	2452MHz	--	--

(802.11b/g/n HT20)	
Channel	Frequency
The lowest channel	2412MHz
The middle channel	2437MHz
The Highest channel	2462MHz

(802.11n HT40)	
Channel	Frequency
The lowest channel	2422MHz
The middle channel	2437MHz
The Highest channel	2452MHz

5 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	DC3.3V

6 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
Transmitting mode	Keep the EUT in continuously transmitting mode with modulation. (Duty cycle>98%)
Remark: Only the data of the worst mode would be recorded in this report.	

7 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5 %
Radiated Emission(9kHz-30MHz)	±4.34dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB
Unwanted Radiated Emission (30MHz ~ 1000MHz)	±4.35 dB
Unwanted Radiated Emission (1GHz ~ 18GHz)	±4.44 dB

8 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	lenovo	E460C	N/A	From lab (No.BLA-ZC-BS-2022005)

9 LABORATORY LOCATION

All tests were performed at:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District, Shenzhen, Guangdong Province, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

No tests were sub-contracted.

10 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber 1	SKET	966	N/A	2023/11/16	2026/11/15
Chamber 2	SKET	966	N/A	2021/07/20	2024/7/19
Spectrum	R&S	FSP40	100817	2023/08/30	2024/08/29
Receiver	R&S	ESR7	101199	2023/08/30	2024/08/29
Receiver	R&S	ESPI7	101477	2023/07/07	2024/07/06
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2022/10/12	2025/10/11
Horn Antenna	Schwarzbeck	BBHA9120D	01892 P:00331	2022/09/13	2025/09/12
Horn Antenna	Schwarzbeck	BBHA 9170	1106	2022/04/24	2024/04/23
Amplifier	SKET	LNPA_30M01G-30	SK2021060801	2023/07/07	2024/07/06
Amplifier	SKET	PA-000318G-45	N/A	2023/08/30	2024/08/29
Amplifier	SKET	LNPA_18G40G-50	SK2022071301	2023/07/14	2024/07/13
Filter group	SKET	2.4G/5G Filter group r	N/A	2023/07/07	2024/07/06
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2022/09/14	2025/09/13
1kHz calibration audio source	SKET	MCS-ABT-C35	N/A	2023/09/04	2024/09/03
Free Field Microphone	SKET	MGS MP 663	0414	2023/09/04	2024/09/03
Audio shielding box	SKET	SB-ABT-C35	N/A	2023/03/30	2024/03/29
Controller	SKET	N/A	N/A	N/A	N/A

Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A
Signal Generator DTV	ECREDIX	DSG-1000	N/A	N/A	N/A

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	2023/11/16	2025/11/15
Receiver	R&S	ESPI3	101082	2023/08/30	2024/08/29
LISN	R&S	ENV216	3560.6550.15	2023/08/30	2024/08/29
LISN	AT	AT166-2	AKK1806000003	2023/08/30	2024/08/29
ISN	TESEQ	ISNT8-cat6	53580	2023/08/30	2024/08/29
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01045	2023/07/07	2024/07/06
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01075	2023/07/07	2024/07/06
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Test Equipment Of RF Conducted Test

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2023/08/30	2024/08/29
Spectrum	Agilent	N9020A	MY49100060	2023/08/30	2024/08/29
Spectrum	Agilent	N9020A	MY54420161	2023/08/30	2024/08/29
Signal Generator	Agilent	N5182A	MY47420955	2023/08/30	2024/08/29
Signal Generator	Agilent	N5181A	MY46240904	2023/07/07	2024/07/06
Signal Generator	R&S	CMW500	132429	2023/08/30	2024/08/29
BluetoothTester	Anritsu	MT8852B	06262047872	2023/08/30	2024/08/29
Power probe	DARE	RPR3006W	14I00889SN042	2023/09/01	2024/08/31
Power detection box	CDKMV	MW100-PSB	MW201020JYT	2023/07/07	2024/07/06
DCPowersupply	zhaoxin	KXN-305D	20K305D1221363	2023/08/30	2024/08/29
DCPowersupply	zhaoxin	RXN-1505D	19R1505D050168	2023/08/30	2024/08/29

2.4GHz/5GHz RF Test software	MTS	MTS 8310	Version 2.0.0.0	N/A	N/A
Audio Analyzer	Audio Precision	ATS-1	ATS141094	2023/07/07	2024/07/06

11 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


11.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.53dBi.

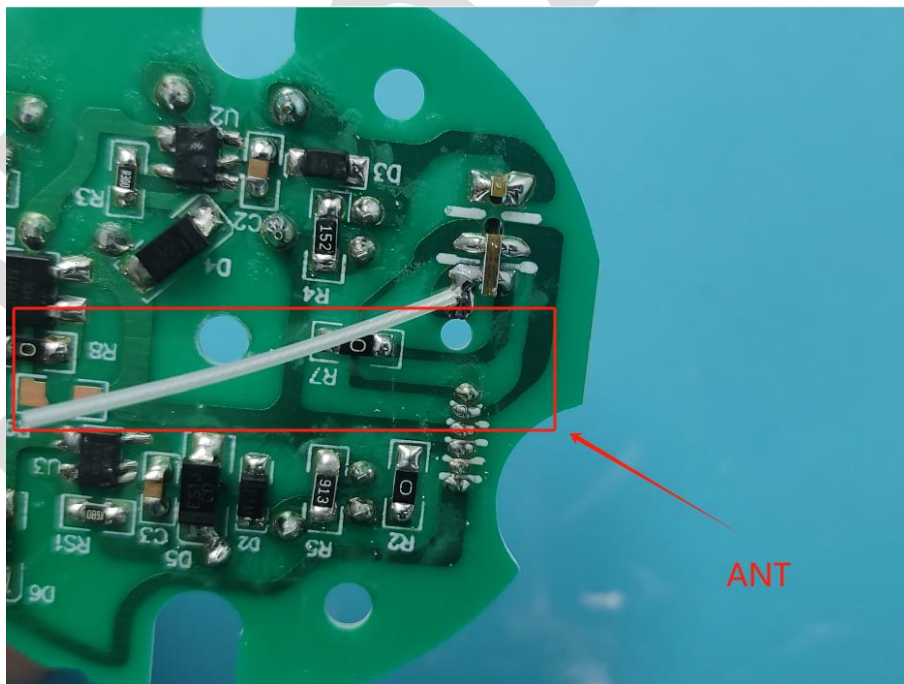

12 RADIATED SPURIOUS EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Leo
Temperature	25℃
Humidity	60%

12.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

12.2 BLOCK DIAGRAM OF TEST SETUP

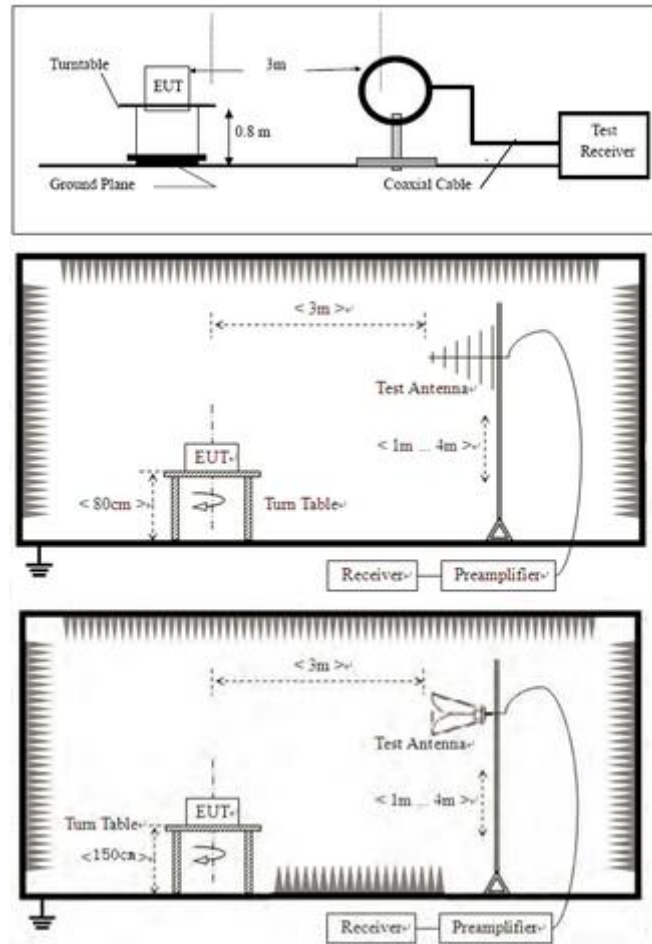

12.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

12.4 TEST DATA


Remark: During the test, pre-scan the 802.11b/g/n mode, and found the 802.11b mode which it is worse case.

[TestMode: TX mode (SE) below 1G]; [Polarity: Horizontal]

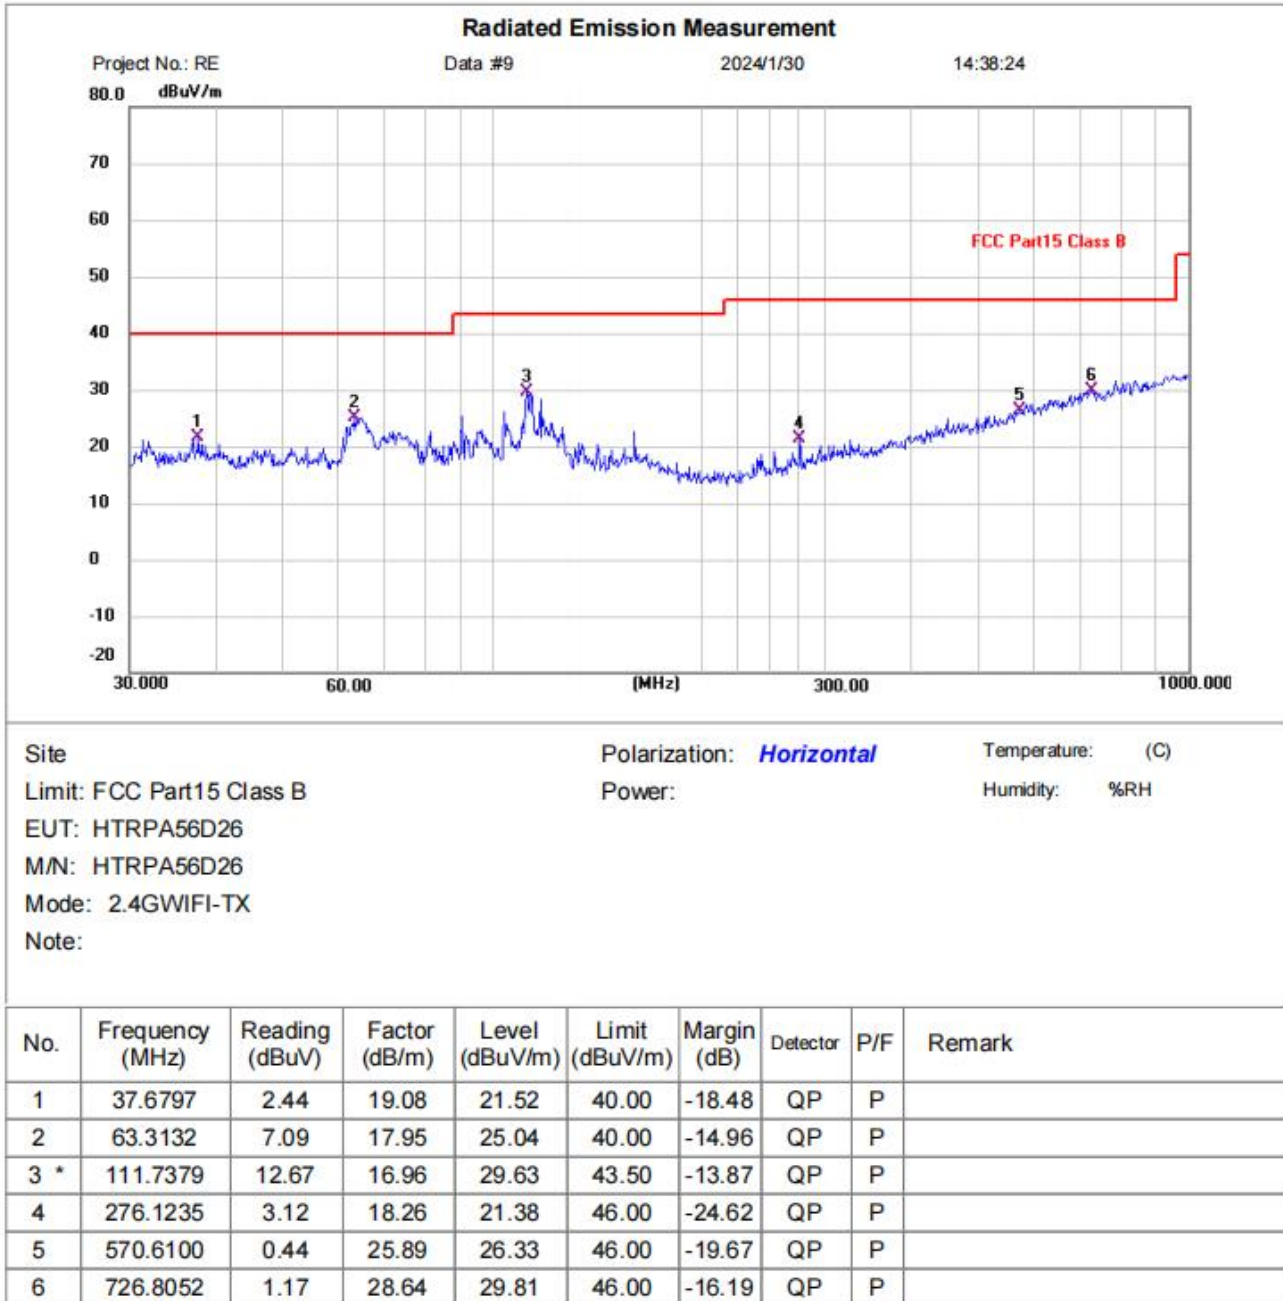

Test Result: Pass


[TestMode: TX mode (SE) below 1G]; [Polarity: Vertical]

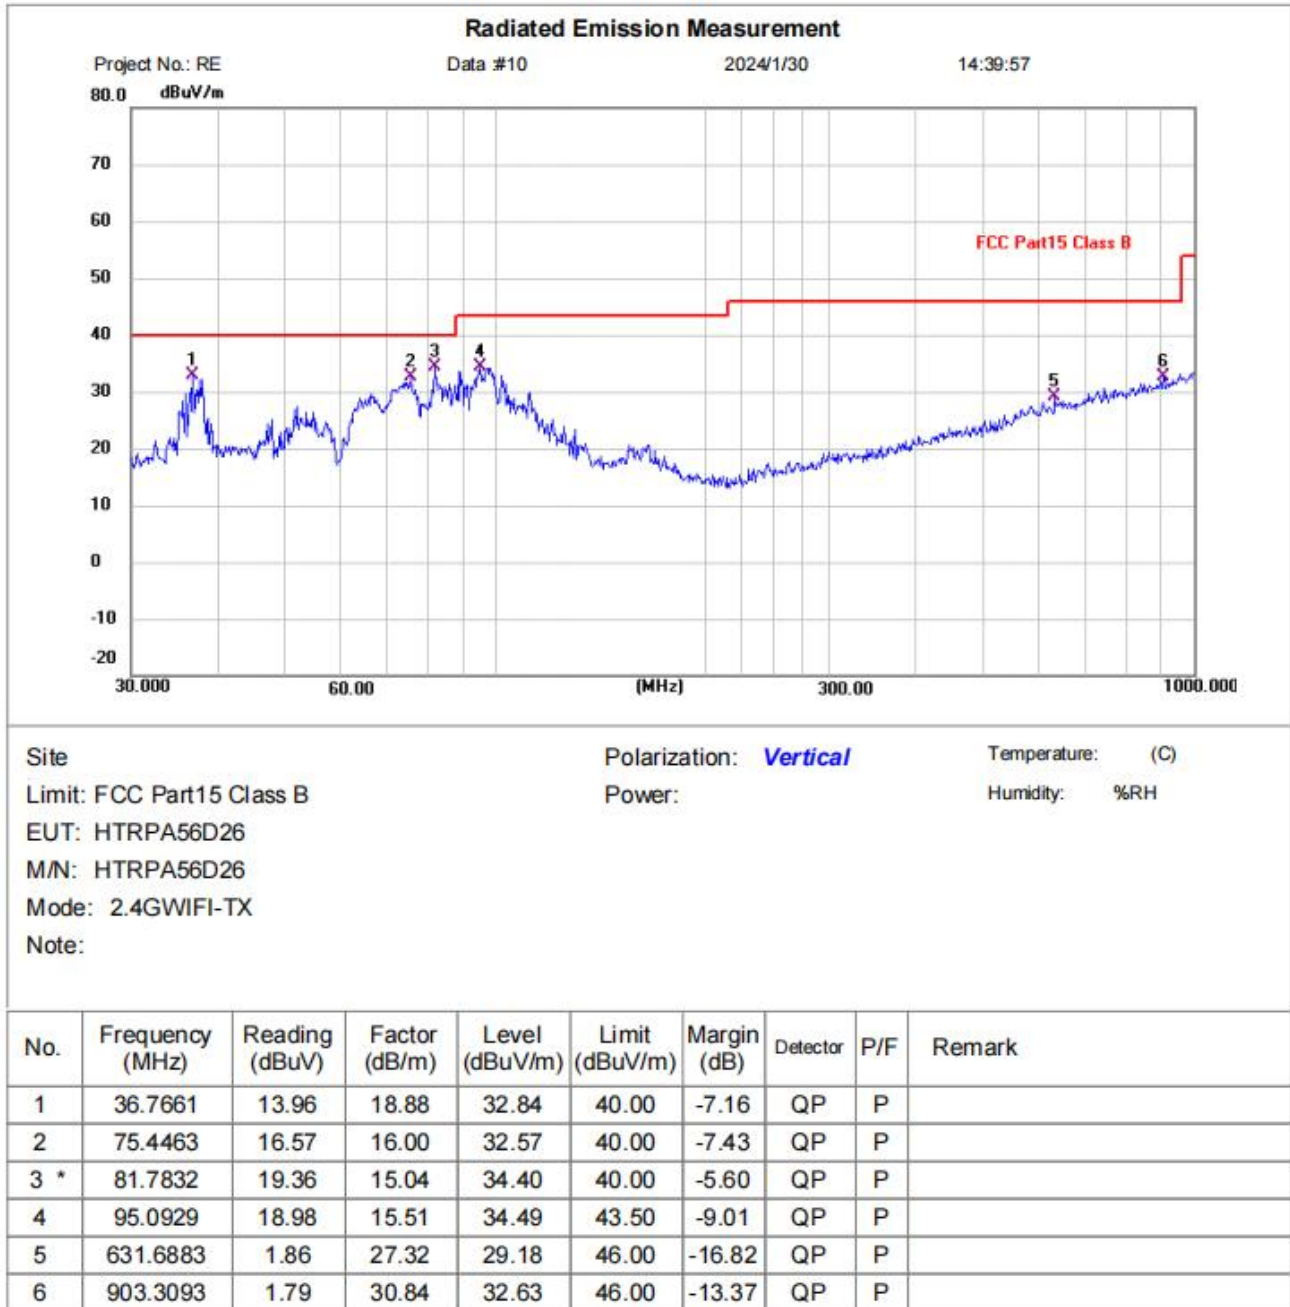

Test Result: Pass

Above 1GHz:

[TestMode: TX B low channel]; [Polarity: Horizontal]

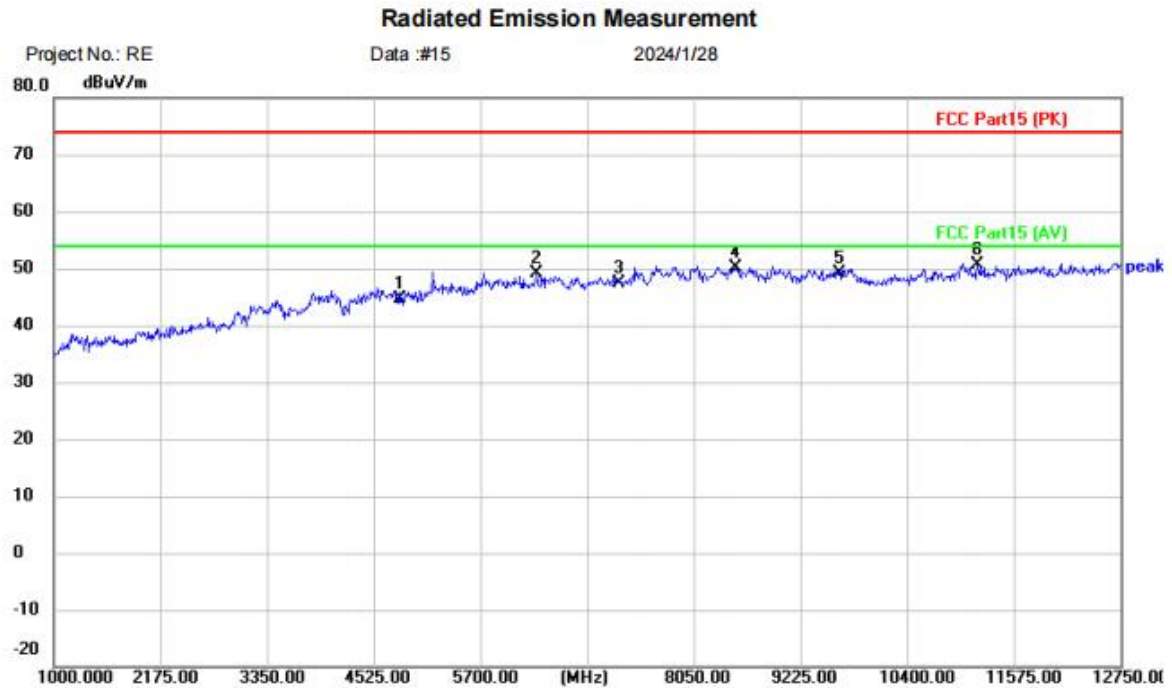


Site: Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: HTRPA56D26
M/N: HTRPA56D26
Mode: 2.4GWIFI-B-2412
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4824.000	38.34	6.40	44.74	74.00	-29.26	peak	
2		6322.750	38.06	11.09	49.15	74.00	-24.85	peak	
3		7236.000	35.69	11.59	47.28	74.00	-26.72	peak	
4		8508.250	37.33	12.90	50.23	74.00	-23.77	peak	
5		9648.000	36.22	13.01	49.23	74.00	-24.77	peak	
6	*	11175.50	37.36	13.30	50.66	74.00	-23.34	peak	

Test Result: Pass

[TestMode: TX B low channel]; [Polarity: Vertical]

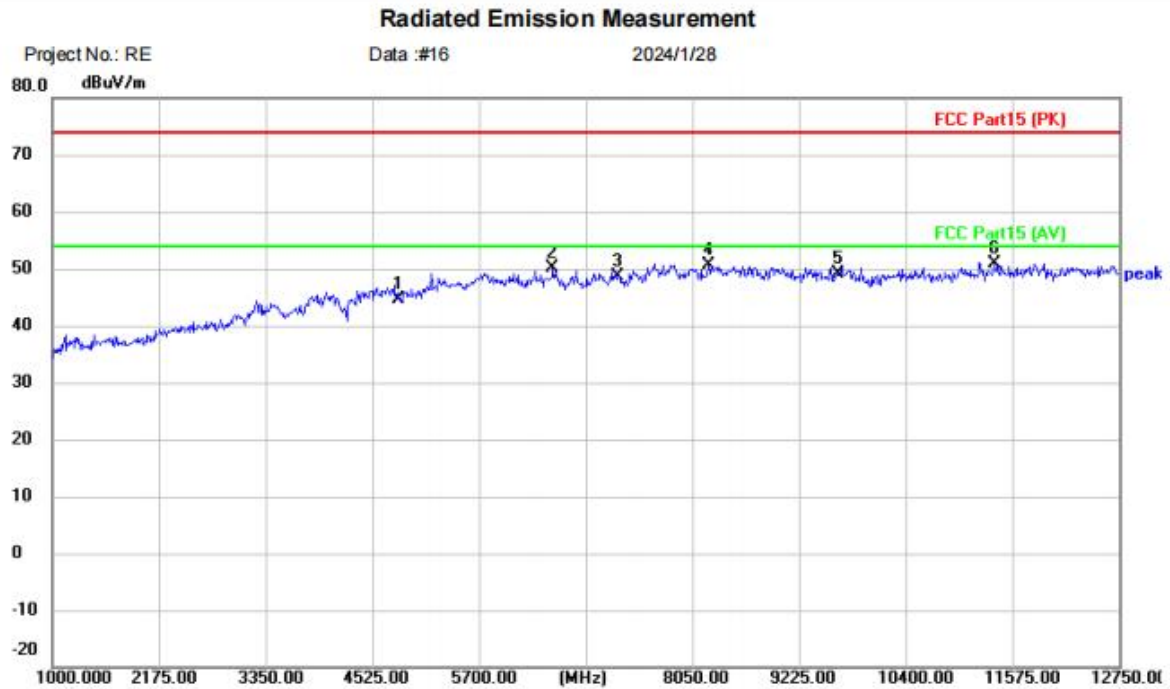


Site: Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: HTRPA56D26
M/N: HTRPA56D26
Mode: 2.4GWIFI-B-2412
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4824.000	38.26	6.40	44.66	74.00	-29.34	peak	
2		6510.750	38.94	11.20	50.14	74.00	-23.86	peak	
3		7236.000	37.12	11.59	48.71	74.00	-25.29	peak	
4		8226.250	37.65	12.88	50.53	74.00	-23.47	peak	
5		9648.000	36.13	13.01	49.14	74.00	-24.86	peak	
6	*	11375.25	37.49	13.30	50.79	74.00	-23.21	peak	


Test Result: Pass

[TestMode: TX B mid channel]; [Polarity: Horizontal]

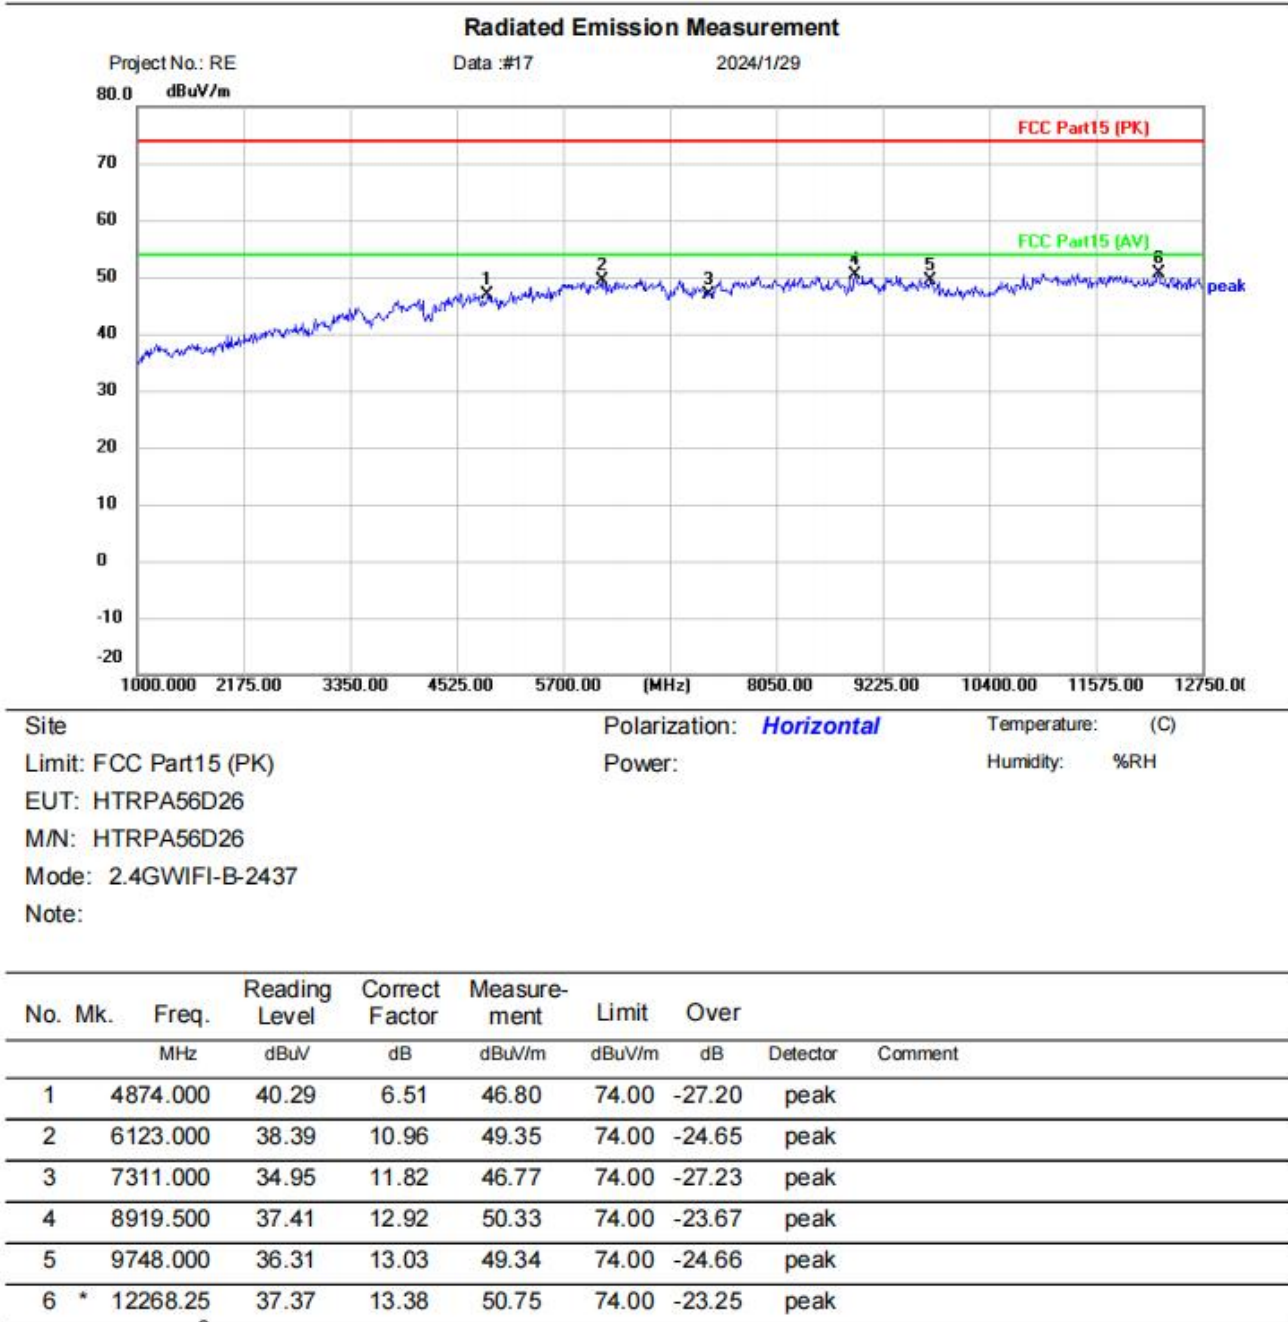


Test Result: Pass

[TestMode: TX B mid channel]; [Polarity: Vertical]

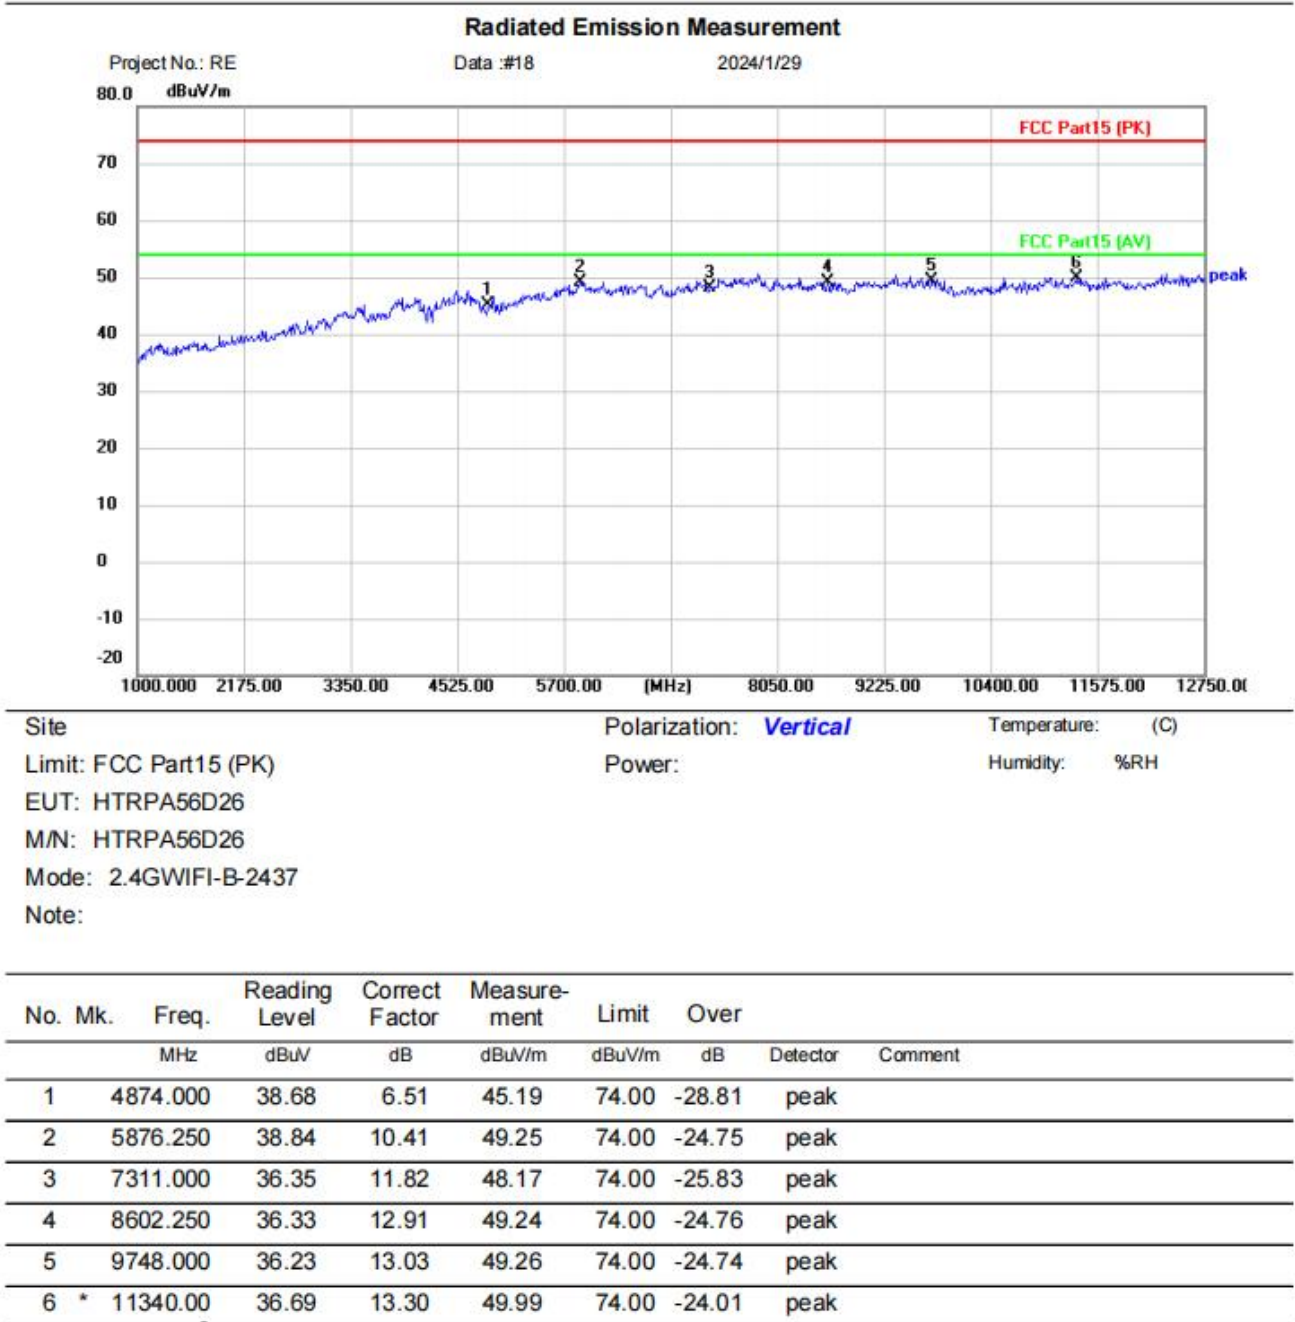

Test Result: Pass

[TestMode: TX B high channel]; [Polarity: Vertical]

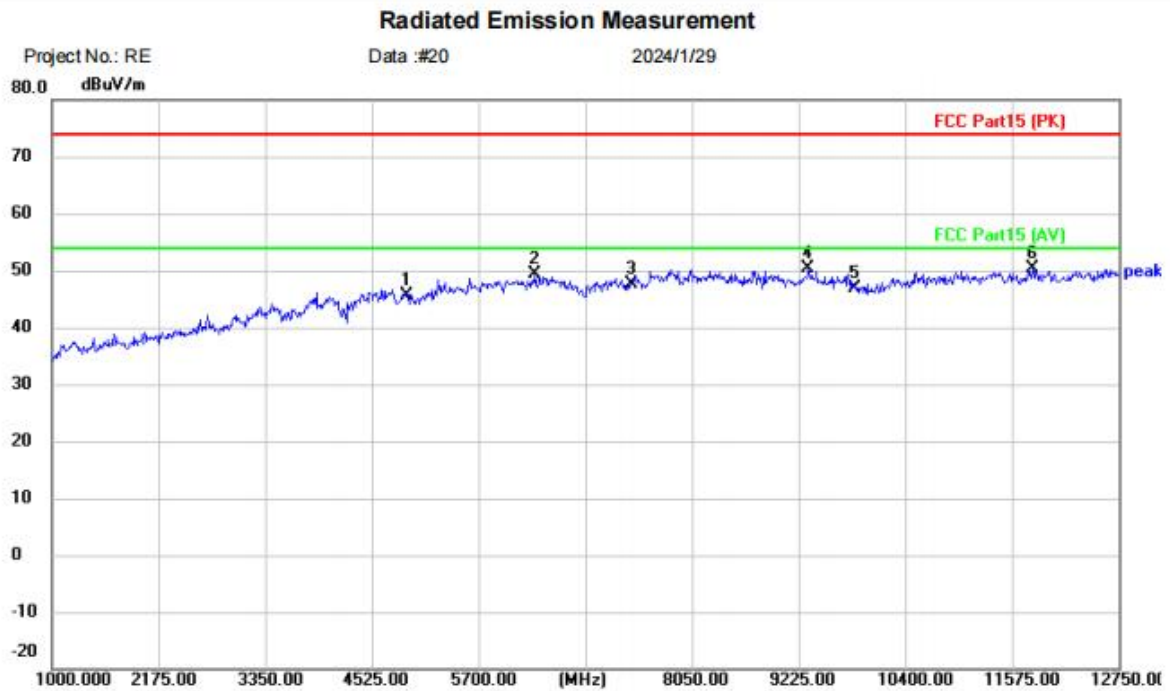


Site: Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: HTRPA56D26
M/N: HTRPA56D26
Mode: 2.4GWIFI-B-2462
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4924.000	39.01	6.62	45.63	74.00	-28.37	peak	
2		6322.750	38.24	11.09	49.33	74.00	-24.67	peak	
3		7386.000	35.61	12.05	47.66	74.00	-26.34	peak	
4	*	9330.750	37.37	12.97	50.34	74.00	-23.66	peak	
5		9848.000	33.74	13.04	46.78	74.00	-27.22	peak	
6		11798.25	36.94	13.32	50.26	74.00	-23.74	peak	

Test Result: Pass

[TestMode: TX B high channel]; [Polarity: Horizontal]

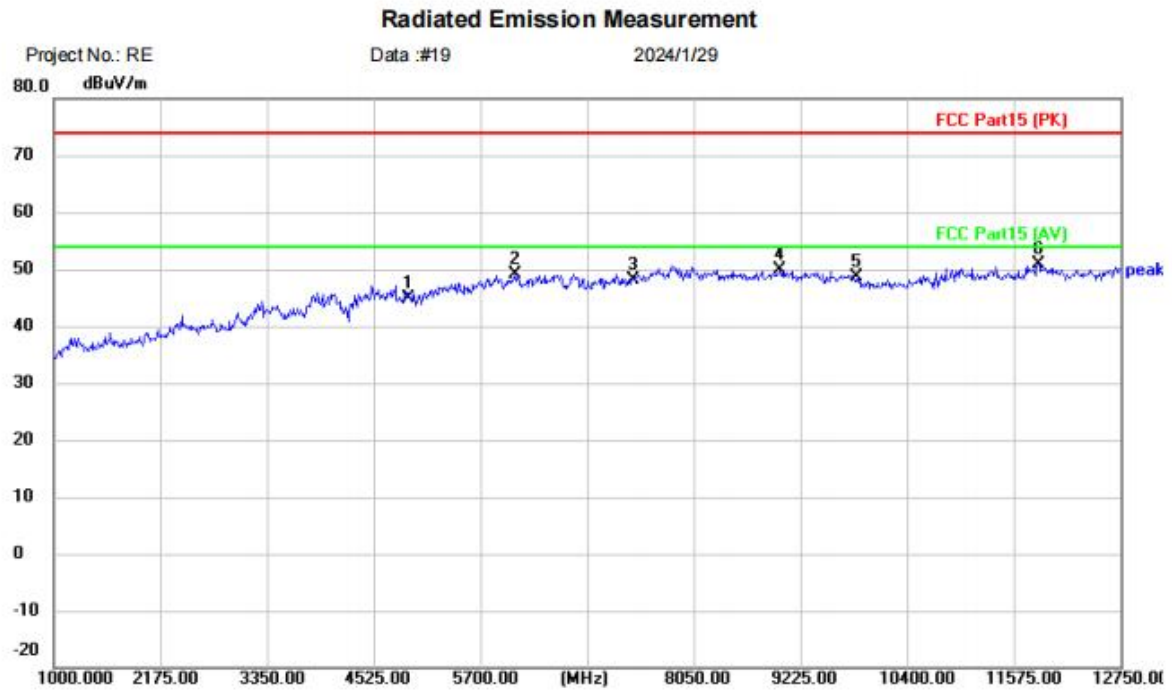

Site Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: HTRPA56D26
M/N: HTRPA56D26
Mode: 2.4GWIFI-B-2462
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4924.000	38.27	6.62	44.89	74.00	-29.11	peak	
2		6087.750	38.17	10.94	49.11	74.00	-24.89	peak	
3		7386.000	36.15	12.05	48.20	74.00	-25.80	peak	
4		9001.750	37.06	12.93	49.99	74.00	-24.01	peak	
5		9848.000	35.56	13.04	48.60	74.00	-25.40	peak	
6	*	11845.25	37.66	13.32	50.98	74.00	-23.02	peak	

Test Result: Pass

13 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Leo
Temperature	25°C
Humidity	60%

13.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

13.2 BLOCK DIAGRAM OF TEST SETUP

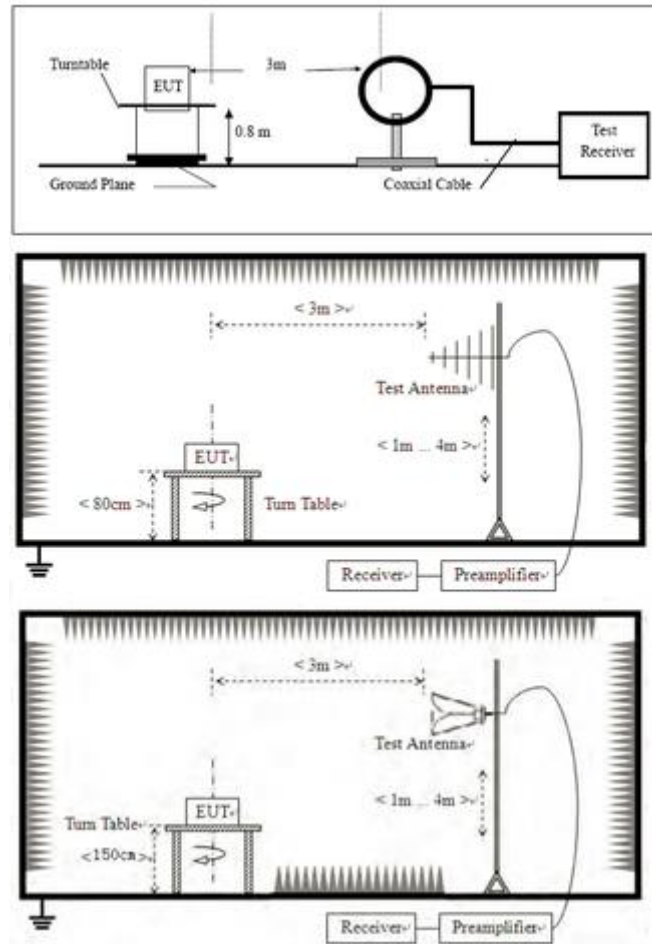

13.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

13.4 TEST DATA


[TestMode: TX B low channel]; [Polarity: Horizontal]

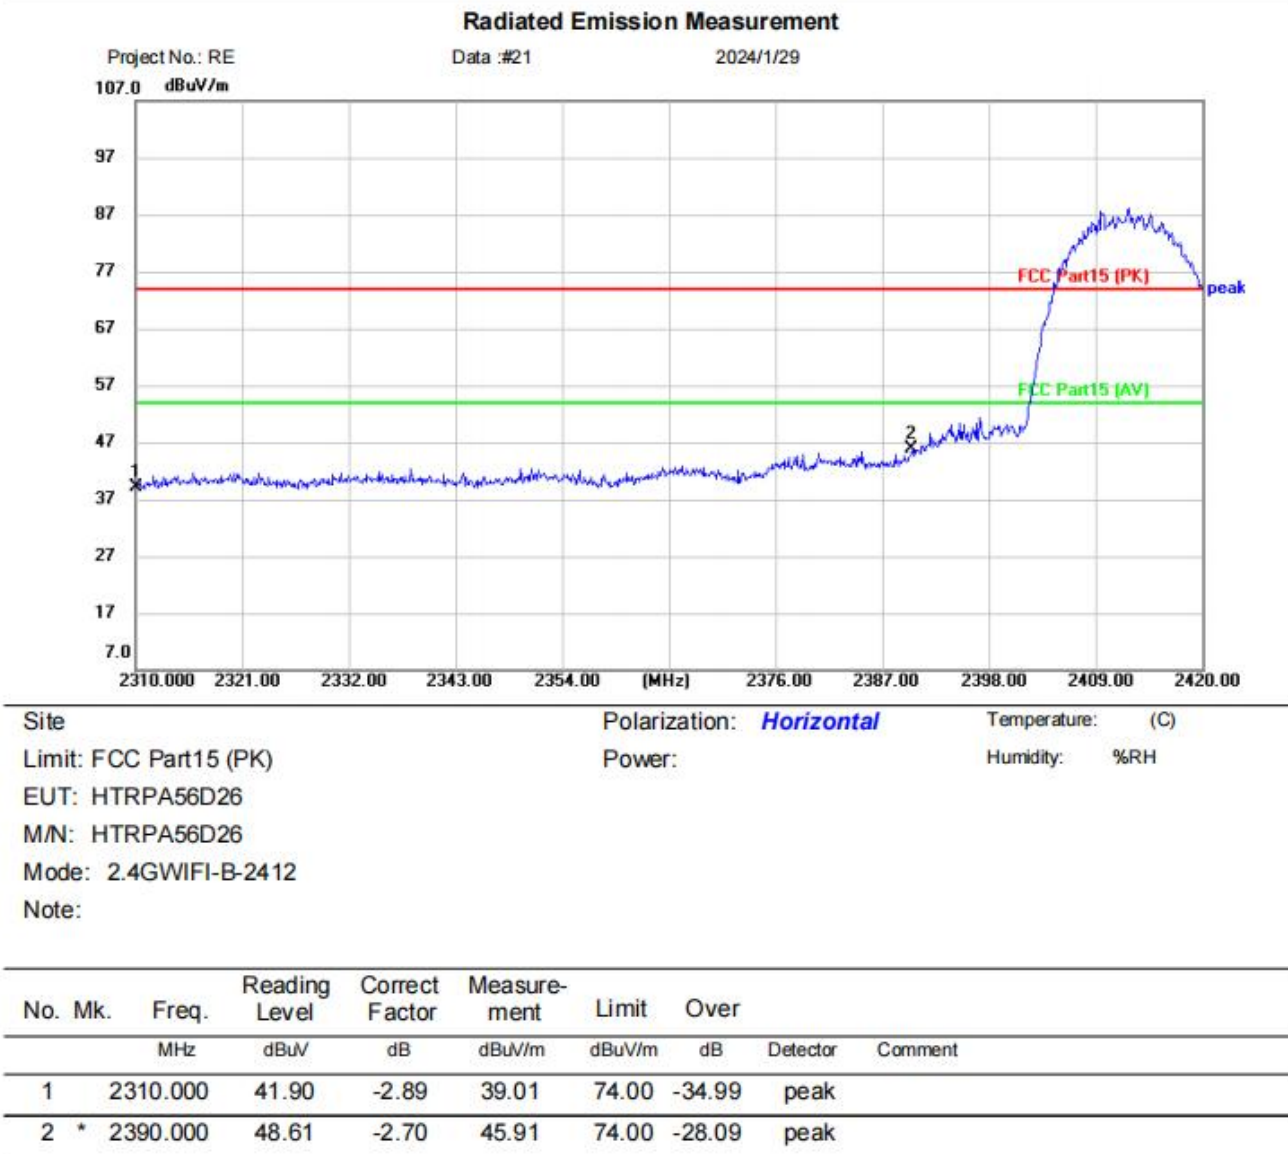

Test Result: Pass

[TestMode: TX B low channel]; [Polarity: Vertical]

Radiated Emission Measurement

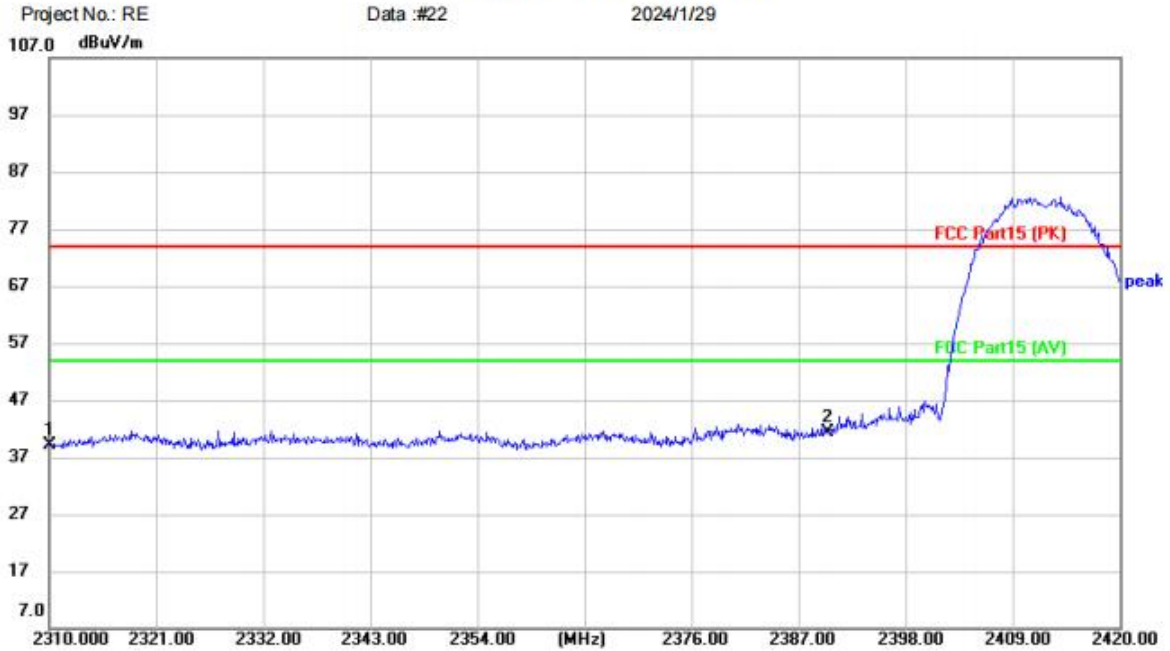

Site Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: HTRPA56D26

M/N: HTRPA56D26

Mode: 2.4GWIFI-B-2412

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2310.000	42.05	-2.89	39.16	74.00	-34.84	peak	
2	*	2390.000	44.07	-2.70	41.37	74.00	-32.63	peak	

Test Result: Pass

[TestMode: TX B high channel]; [Polarity: Horizontal]

Radiated Emission Measurement




Site Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: HTRPA56D26
M/N: HTRPA56D26
Mode: 2.4GWIFI-B-2462
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	44.36	-2.91	41.45	74.00	-32.55	peak	
2		2500.000	43.31	-3.00	40.31	74.00	-33.69	peak	

Test Result: Pass

[TestMode: TX B high channel]; [Polarity: Vertical]

Radiated Emission Measurement

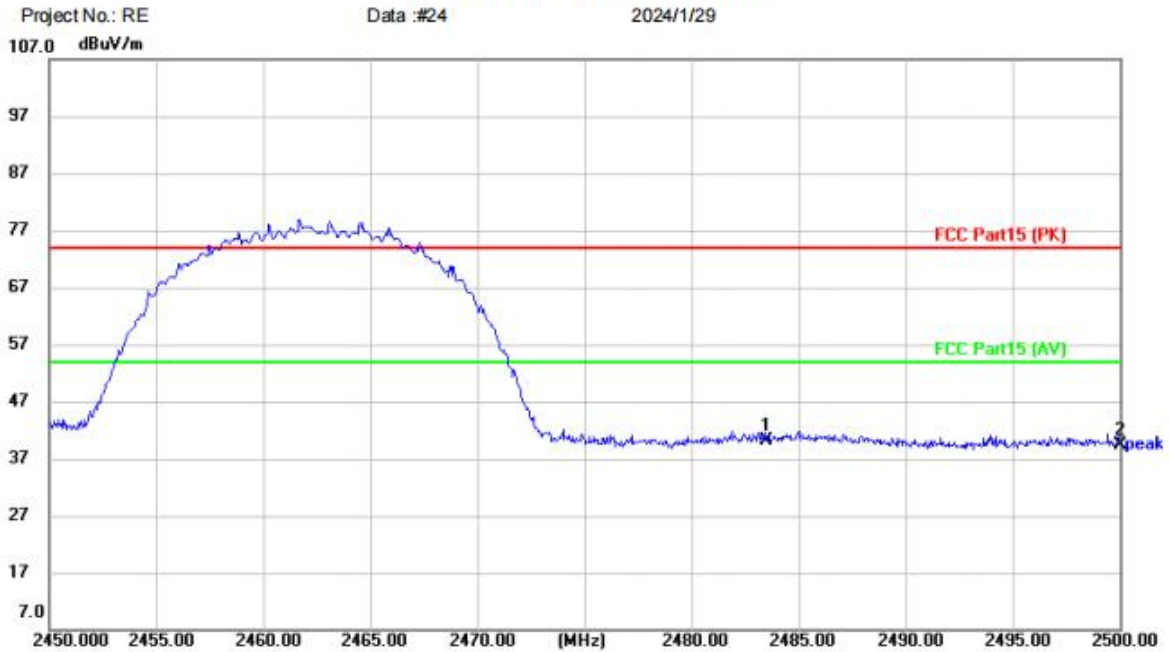


Site Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: HTRPA56D26
M/N: HTRPA56D26
Mode: 2.4GWIFI-B-2462
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	42.95	-2.91	40.04	74.00	-33.96	peak	
2		2500.000	42.45	-3.00	39.45	74.00	-34.55	peak	

Test Result: Pass

[TestMode: TX G low channel]; [Polarity: Vertical]

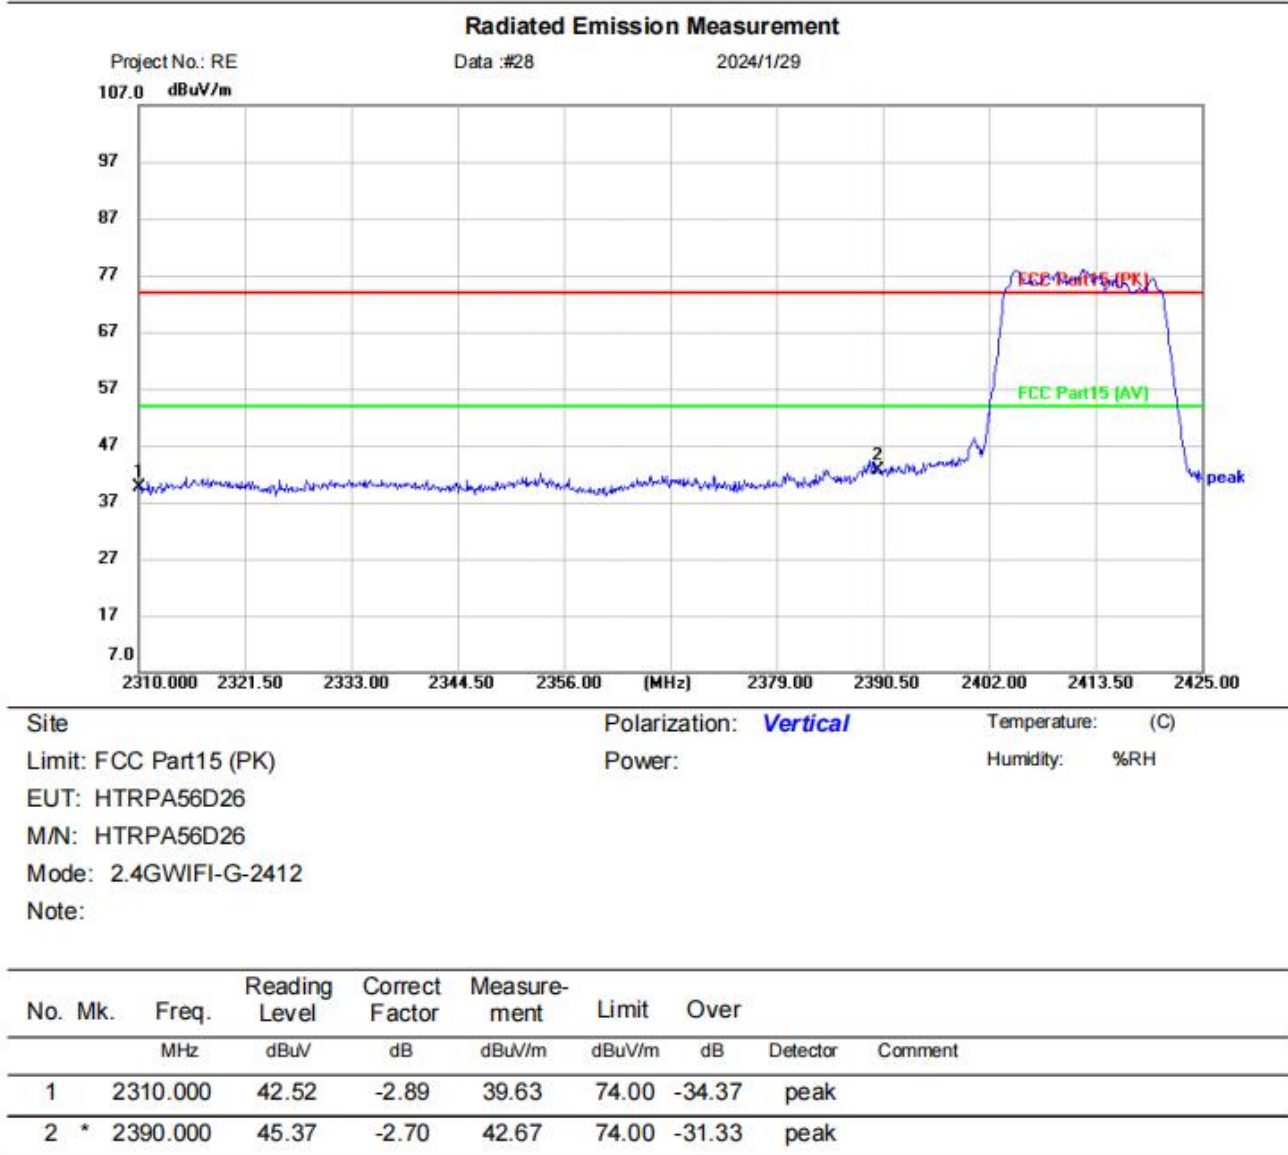

Test Result: Pass

[TestMode: TX G low channel]; [Polarity: Horizontal]

Radiated Emission Measurement



Site Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: HTRPA56D26
M/N: HTRPA56D26
Mode: 2.4GWIFI-G-2412
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	43.17	-2.89	40.28	74.00	-33.72	peak	
2	*	2390.000	50.27	-2.70	47.57	74.00	-26.43	peak	

Test Result: Pass

[TestMode: TX G high channel]; [Polarity: Vertical]

Radiated Emission Measurement



Site Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: HTRPA56D26

M/N: HTRPA56D26

Mode: 2.4GWIFI-G-2462


Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	43.71	-2.91	40.80	74.00	-33.20	peak	
2		2500.000	42.29	-3.00	39.29	74.00	-34.71	peak	

Test Result: Pass

[TestMode: TX G high channel]; [Polarity: Horizontal]

Radiated Emission Measurement

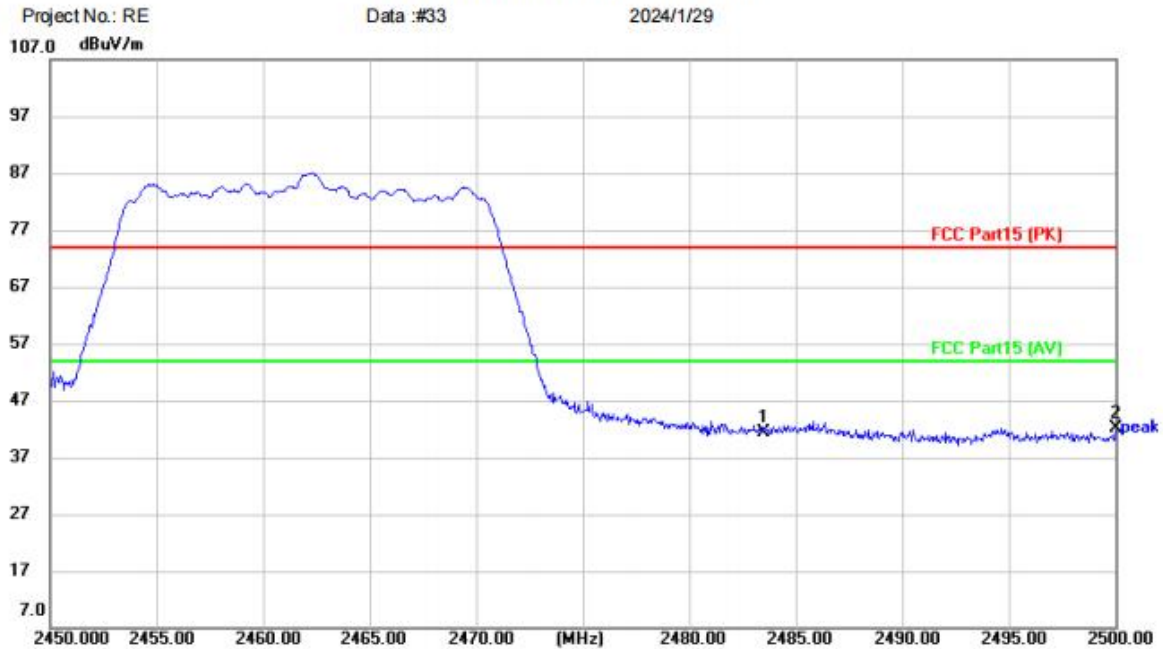


Site Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: HTRPA56D26
M/N: HTRPA56D26
Mode: 2.4GWIFI-G-2462
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2483.500	44.36	-2.91	41.45	74.00	-32.55	peak	
2	*	2500.000	45.06	-3.00	42.06	74.00	-31.94	peak	

Test Result: Pass

[TestMode: TX N20 low channel]; [Polarity: Vertical]

Radiated Emission Measurement

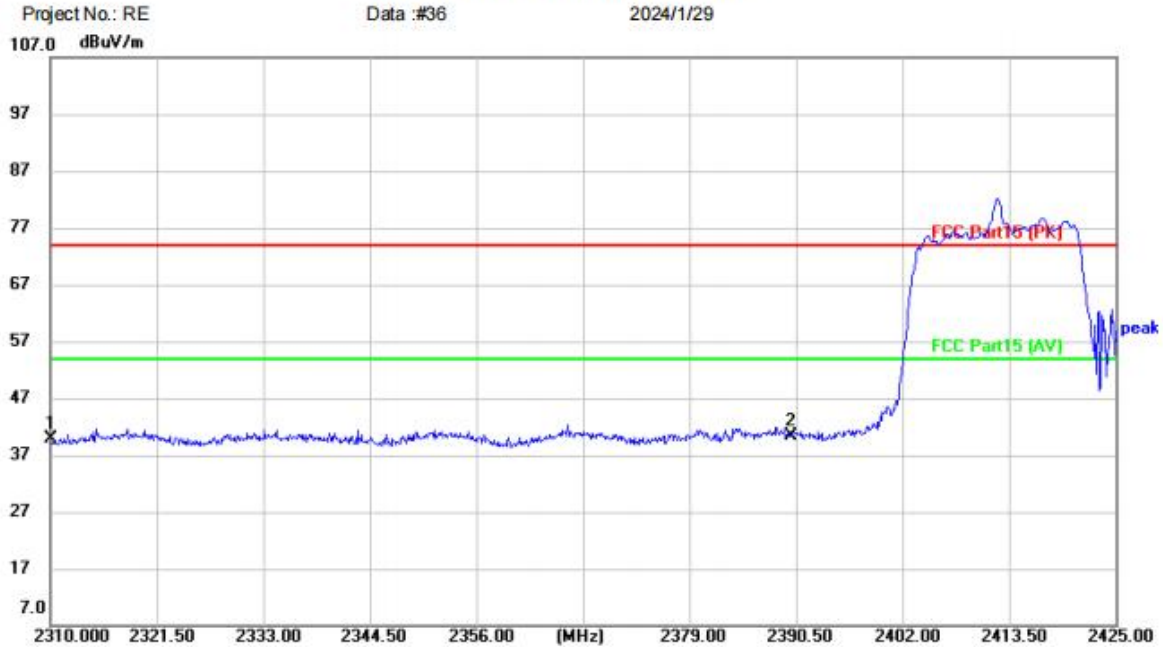

Site

Polarization: **Vertical**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: HTRPA56D26

M/N: HTRPA56D26

Mode: 2.4GWIFI-11N20-2412

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	42.78	-2.89	39.89	74.00	-34.11	peak	
2	*	2390.000	43.03	-2.70	40.33	74.00	-33.67	peak	

Test Result: Pass

[TestMode: TX N20 low channel]; [Polarity: Horizontal]

Radiated Emission Measurement




Site Polarization: **Horizontal** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: HTRPA56D26
M/N: HTRPA56D26
Mode: 2.4GWIFI-11N20-2412
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	42.94	-2.89	40.05	74.00	-33.95	peak	
2	*	2390.000	48.09	-2.70	45.39	74.00	-28.61	peak	

Test Result: Pass

[TestMode: TX N20 high channel]; [Polarity: Vertical]

Radiated Emission Measurement

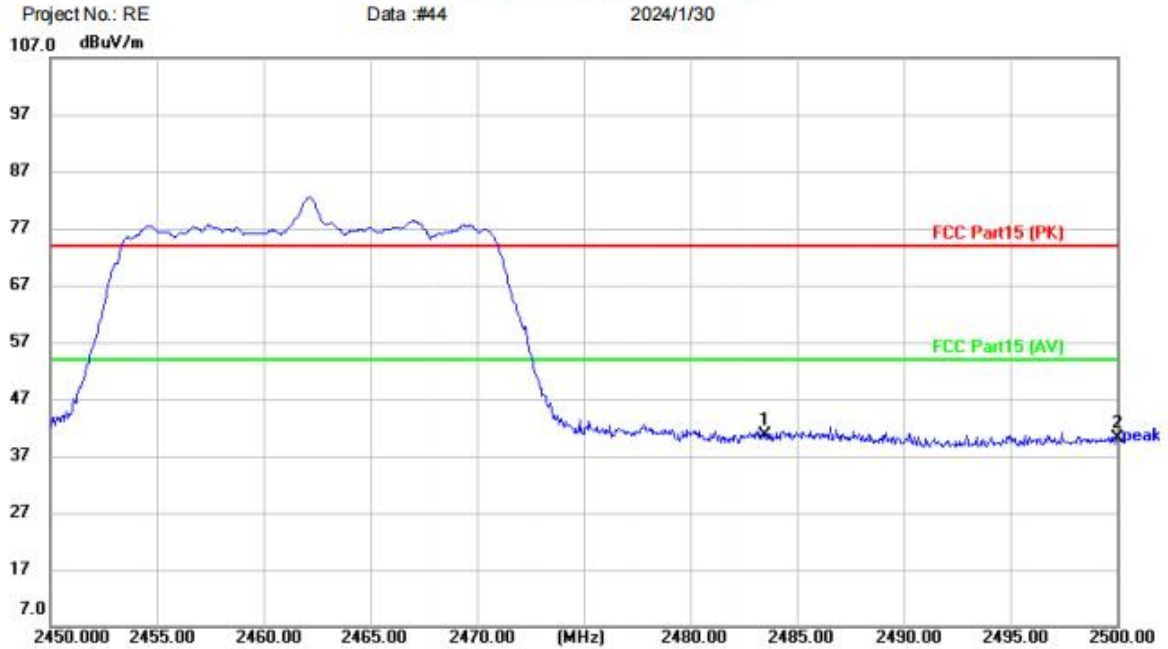

Site

Polarization: **Vertical**

Temperature: (C)

Limit: FCC Part15 (PK)

Power:

Humidity: %RH

EUT: HTRPA56D26

M/N: HTRPA56D26


Mode: 2.4GWIFI-11N20-2462

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	43.52	-2.91	40.61	74.00	-33.39	peak	
2		2500.000	43.25	-3.00	40.25	74.00	-33.75	peak	

Test Result: Pass

[TestMode: TX N20 high channel]; [Polarity: Horizontal]

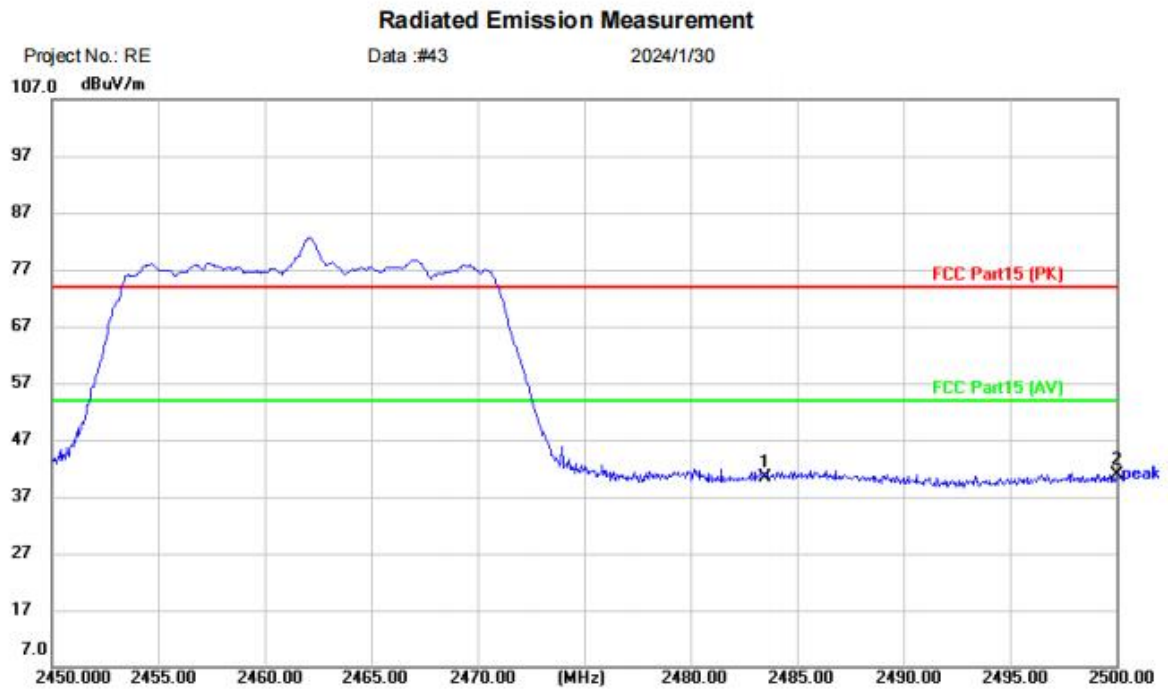

Site: Polarization: **Horizontal** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: HTRPA56D26

M/N: HTRPA56D26

Mode: 2.4GWIFI-11N20-2462


Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2483.500	43.40	-2.91	40.49	74.00	-33.51	peak	
2	*	2500.000	43.79	-3.00	40.79	74.00	-33.21	peak	

Test Result: Pass

[TestMode: TX N40 low channel]; [Polarity: Vertical]

Radiated Emission Measurement

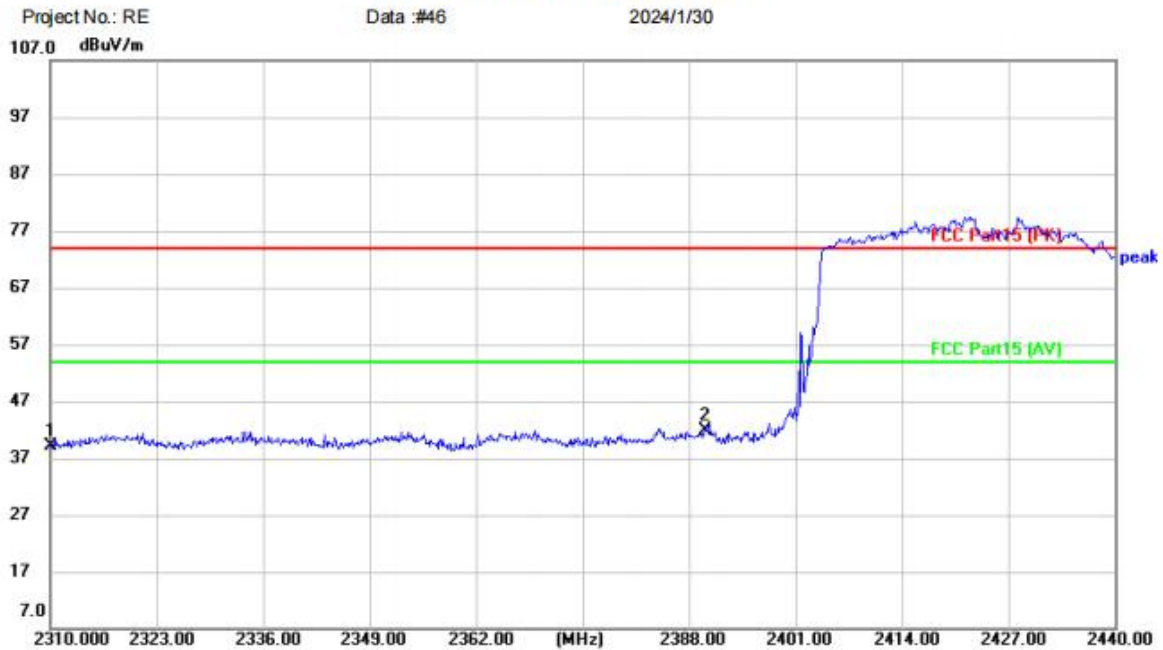


Site Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: HTRPA56D26
M/N: HTRPA56D26
Mode: 2.4GWIFI-11N40-2422
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	41.98	-2.89	39.09	74.00	-34.91	peak	
2	*	2390.000	44.47	-2.70	41.77	74.00	-32.23	peak	

Test Result: Pass

[TestMode: TX N40 low channel]; [Polarity: Horizontal]

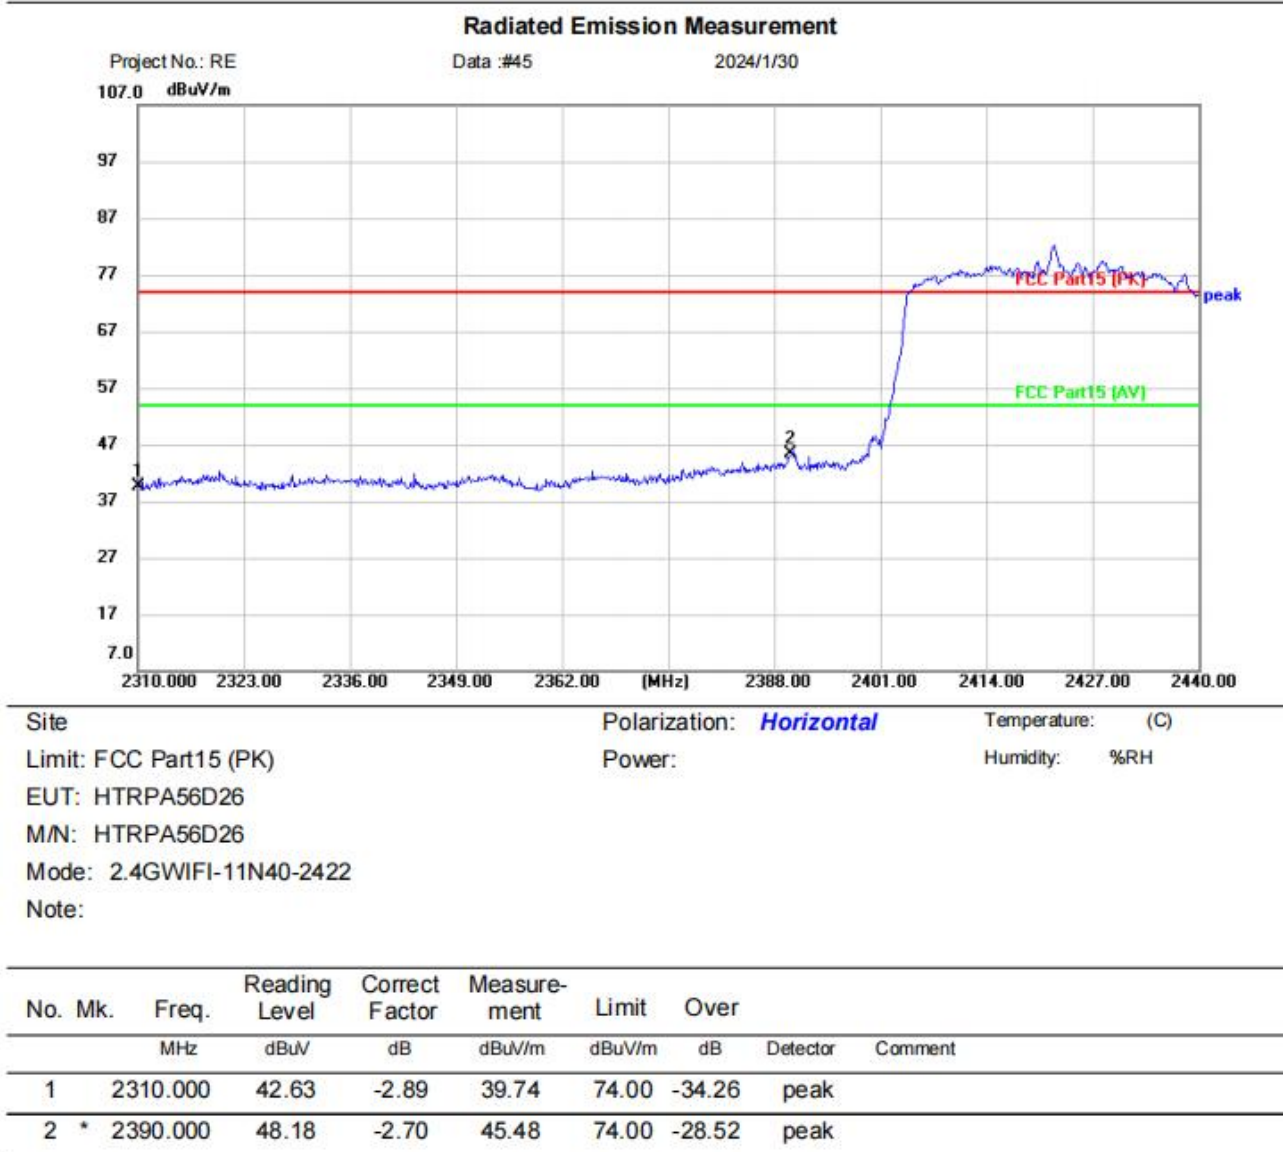

Test Result: Pass

[TestMode: TX N40 high channel]; [Polarity: Vertical]

Radiated Emission Measurement




Site Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: HTRPA56D26
M/N: HTRPA56D26
Mode: 2.4GWIFI-11N40-2452
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2483.500	43.76	-2.91	40.85	74.00	-33.15	peak	
2		2500.000	42.04	-3.00	39.04	74.00	-34.96	peak	

Test Result: Pass

[TestMode: TX N40 high channel]; [Polarity: Horizontal]

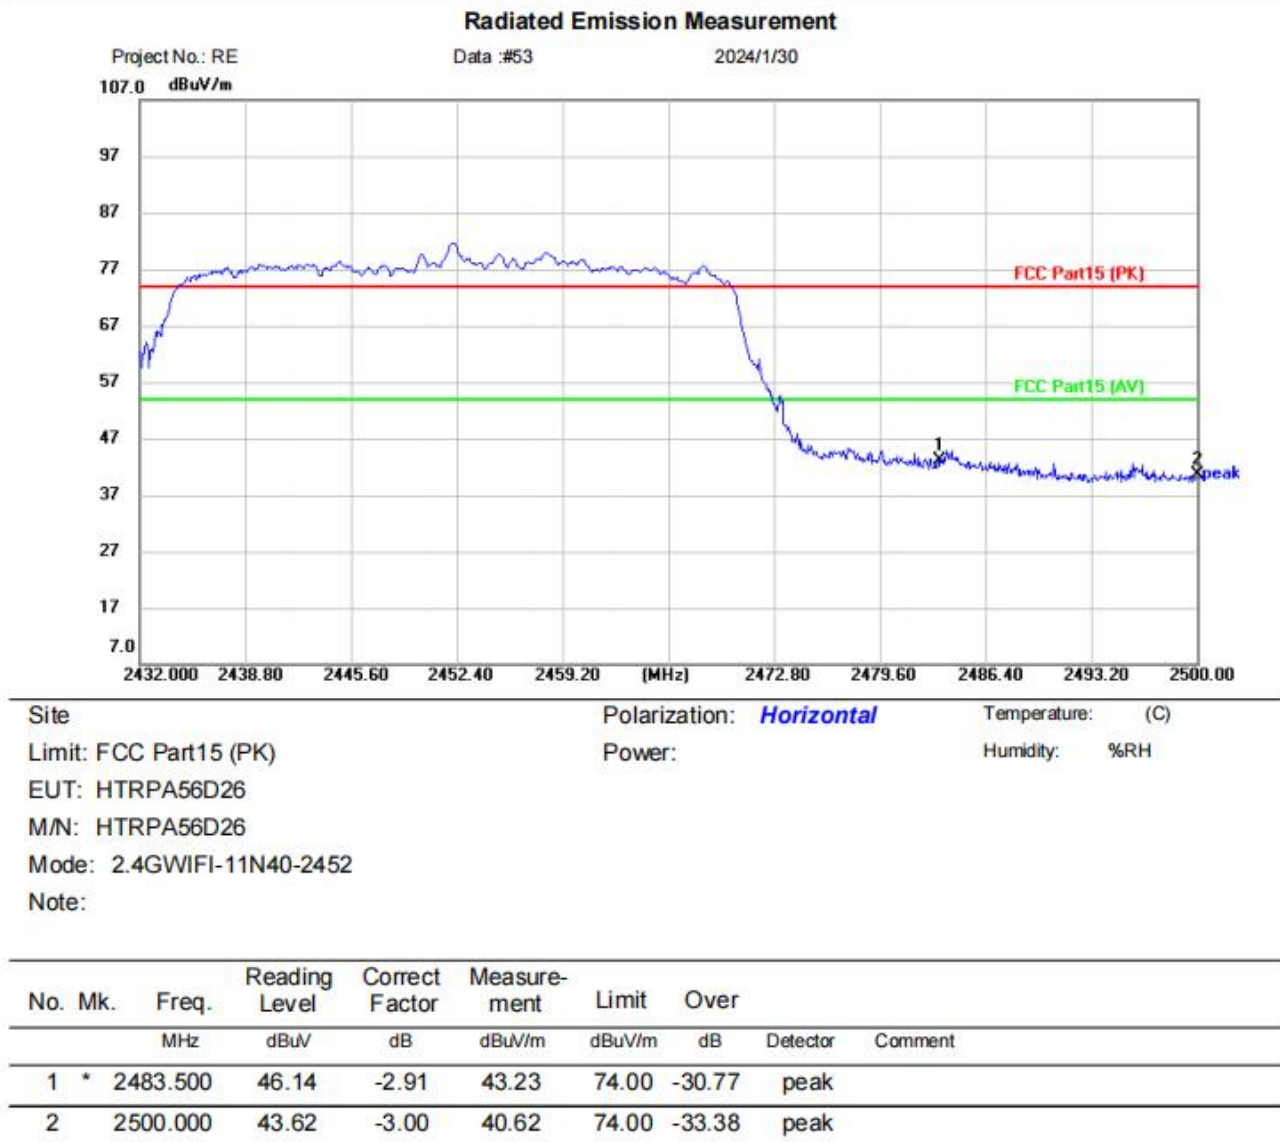**Test Result: Pass**


14 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Leo
Temperature	25°C
Humidity	60%

14.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	---

14.2 BLOCK DIAGRAM OF TEST SETUP

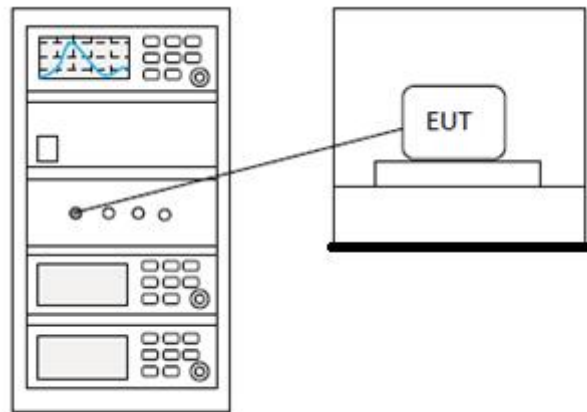

14.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


15 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Leo
Temperature	25°C
Humidity	60%

15.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	---

15.2 BLOCK DIAGRAM OF TEST SETUP

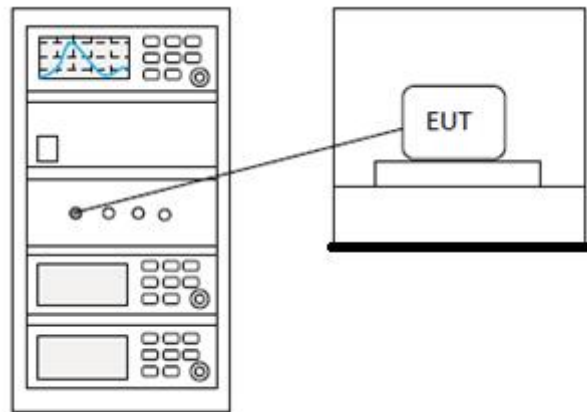

15.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


16 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Leo
Temperature	25°C
Humidity	60%

16.1 LIMITS

Limit:	≥500 kHz
--------	----------

16.2 BLOCK DIAGRAM OF TEST SETUP

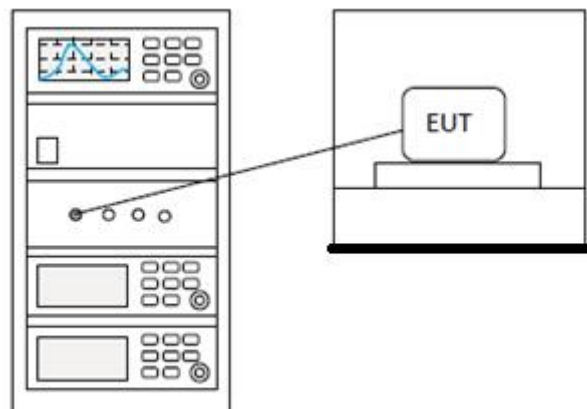

16.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


17 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Leo
Temperature	25°C
Humidity	60%

17.1 LIMITS

Limit:	≤8dBm in any 3 kHz band during any time interval of continuous transmission
---------------	---

17.2 BLOCK DIAGRAM OF TEST SETUP

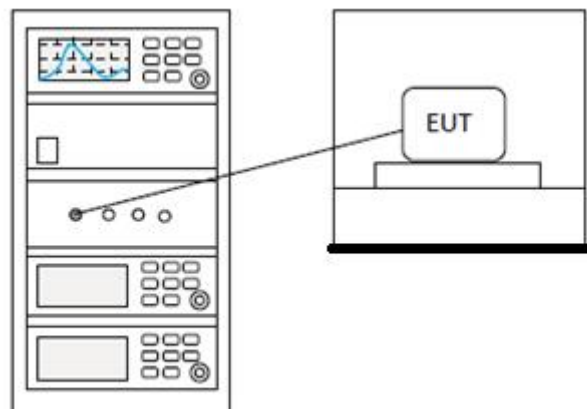

17.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details
--


18 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5 & Section 11.9.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Leo
Temperature	25°C
Humidity	60%

18.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq \text{hopping channels} < 50$
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

18.2 BLOCK DIAGRAM OF TEST SETUP

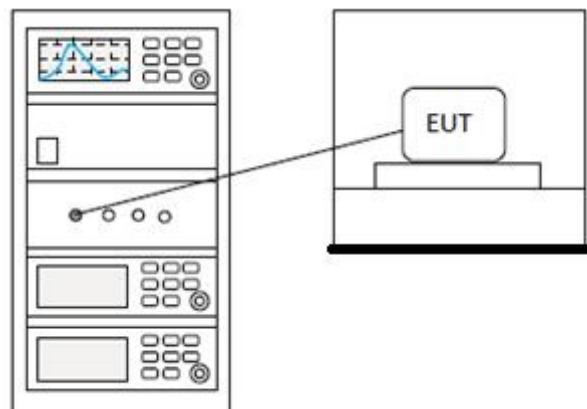

18.3 TEST DATA**Pass: Please Refer To Appendix: Appendix1 For Details**

BlueAsia

19 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Leo
Temperature	25℃
Humidity	60%

19.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

19.2 BLOCK DIAGRAM OF TEST SETUP

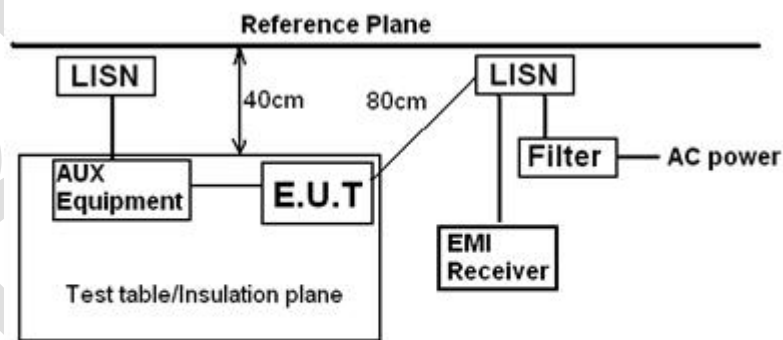

Remark:
E.U.T: Equipment Under Test
LISN: Line Impedance Stabilization Network
Test table height=0.8m

19.3 PROCEDURE


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: $LISN = Read\ Level + Cable\ Loss + LISN\ Factor$


19.4 TEST DATA

[TestMode: TX]; [Line: Line]; [Power:AC120V/60Hz]

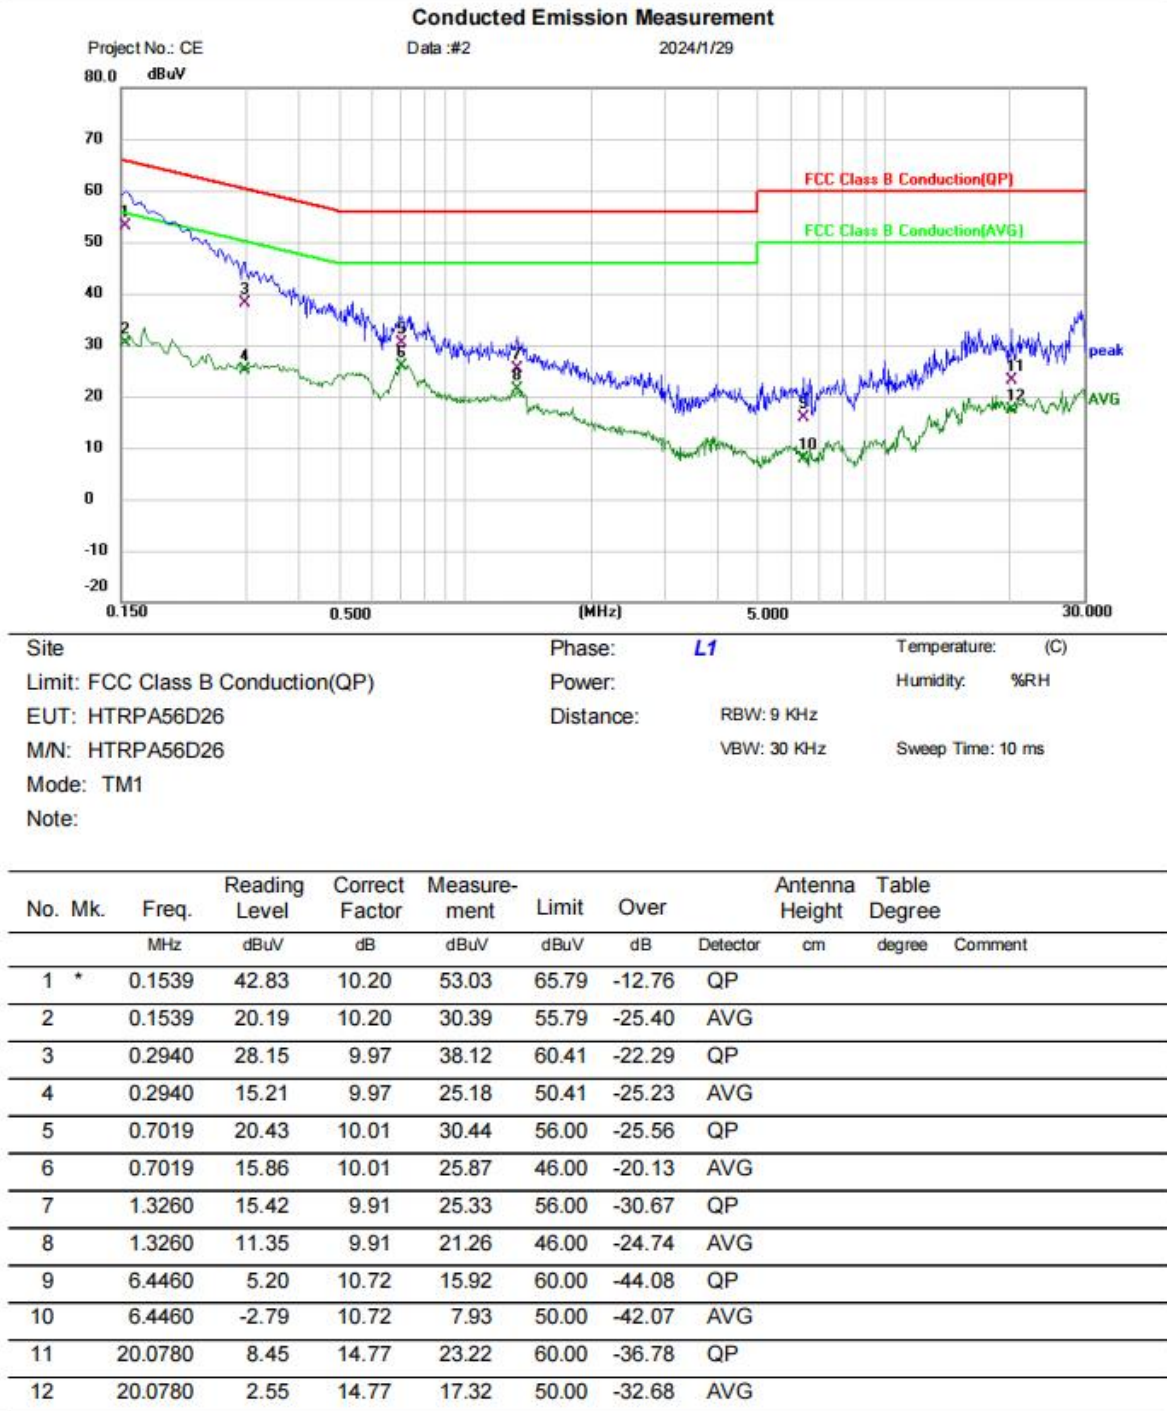

Test Result: Pass

[TestMode: TX]; [Line: Nutral] ;[Power:AC120V/60Hz]

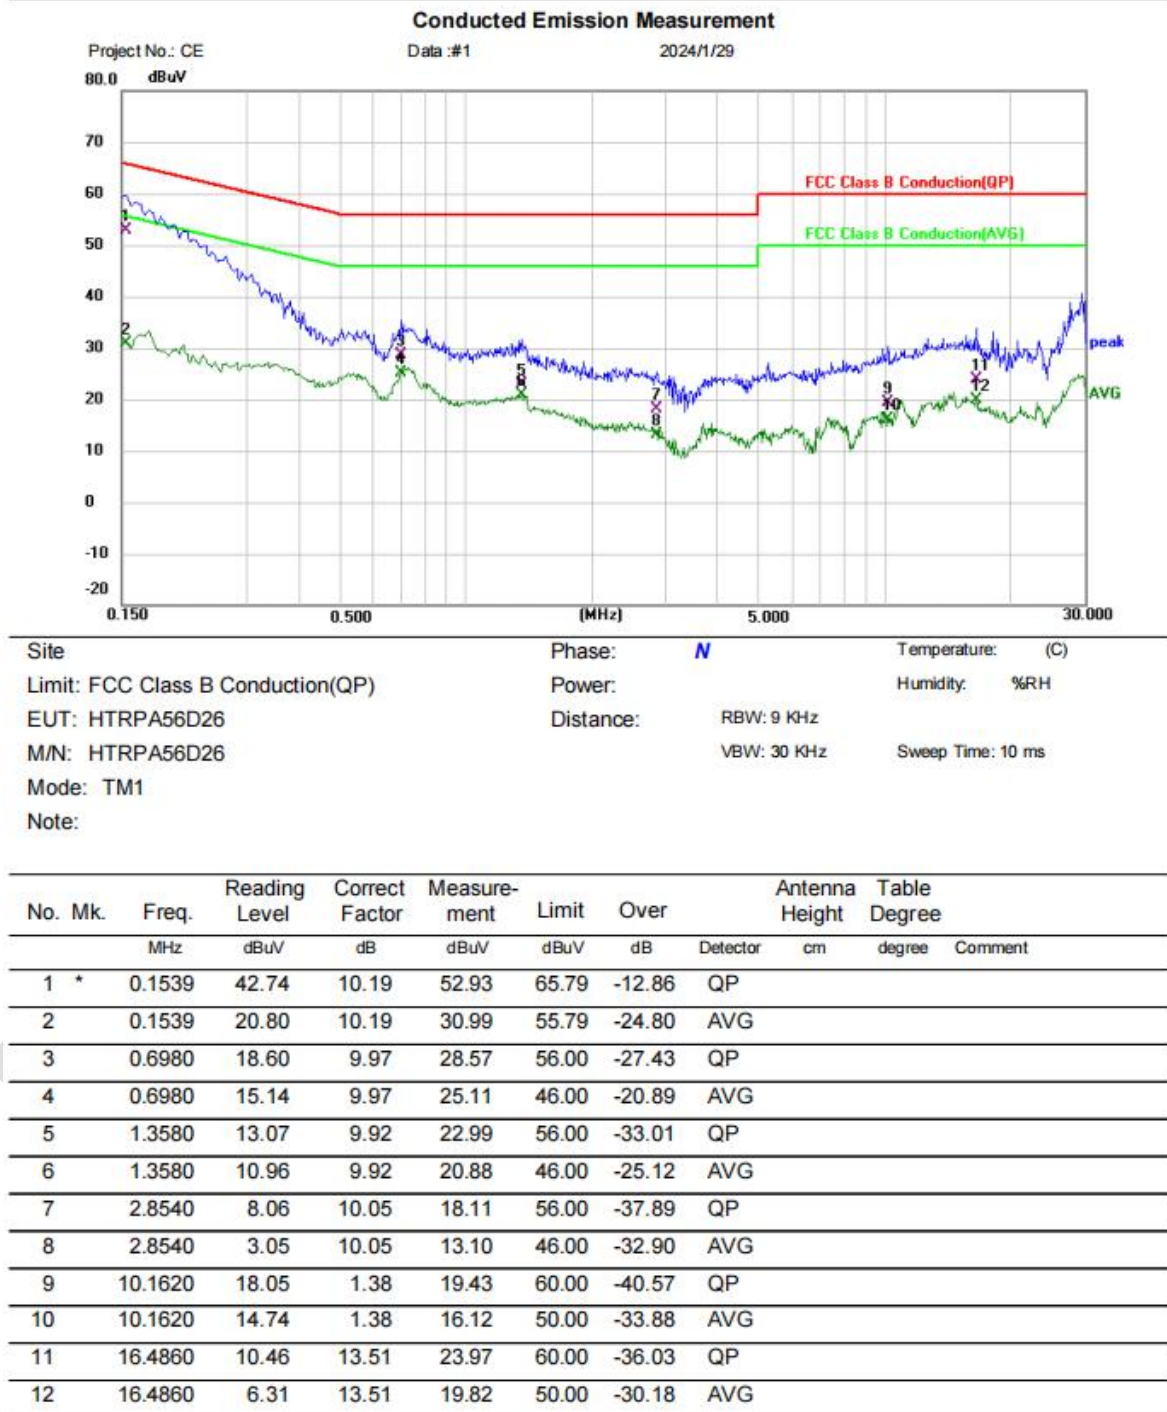

Test Result: Pass


20 APPENDIX

Appendix1


20.1 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	14.129	30	Pass
NVNT	b	2437	Ant1	13.839	30	Pass
NVNT	b	2462	Ant1	14.909	30	Pass
NVNT	g	2412	Ant1	13.937	30	Pass
NVNT	g	2437	Ant1	13.374	30	Pass
NVNT	g	2462	Ant1	14.352	30	Pass
NVNT	n20	2412	Ant1	12.835	30	Pass
NVNT	n20	2437	Ant1	13.225	30	Pass
NVNT	n20	2462	Ant1	14.676	30	Pass
NVNT	n40	2422	Ant1	11.557	30	Pass
NVNT	n40	2437	Ant1	12.314	30	Pass
NVNT	n40	2452	Ant1	12.715	30	Pass


Power NVNT b 2412MHz Ant1

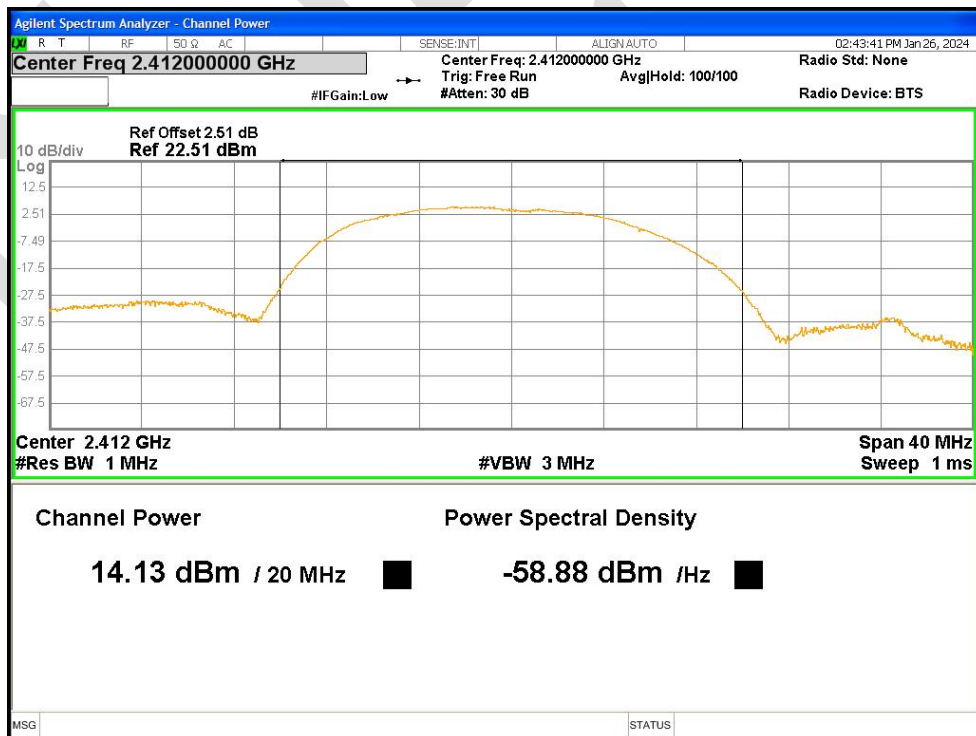


Power NVNT b 2437MHz Ant1

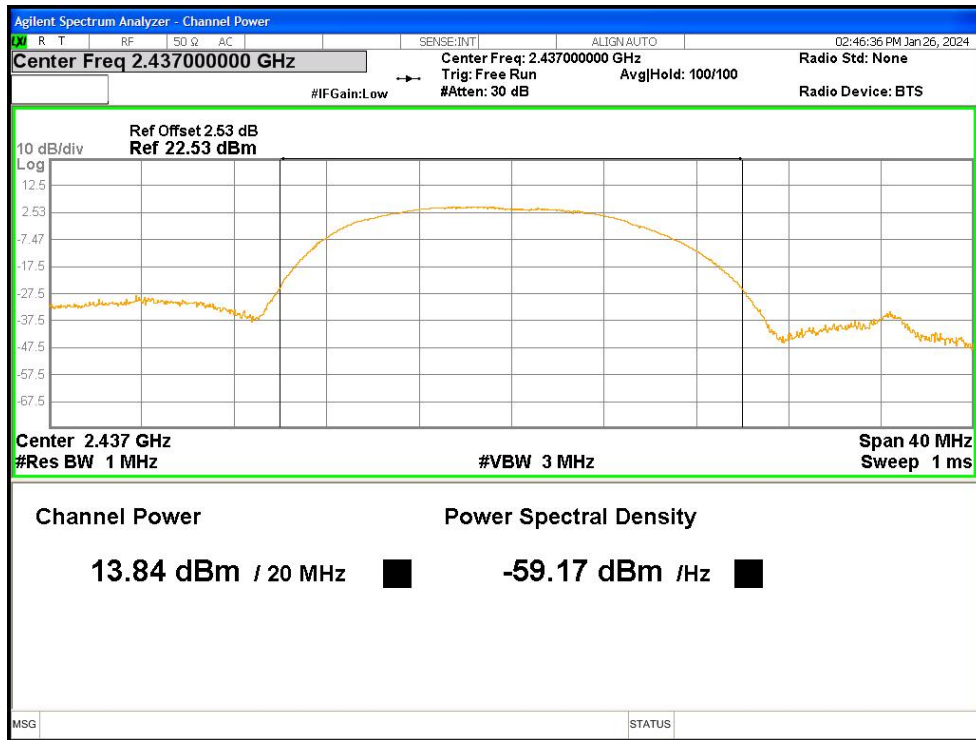


Power NVNT b 2462MHz Ant1

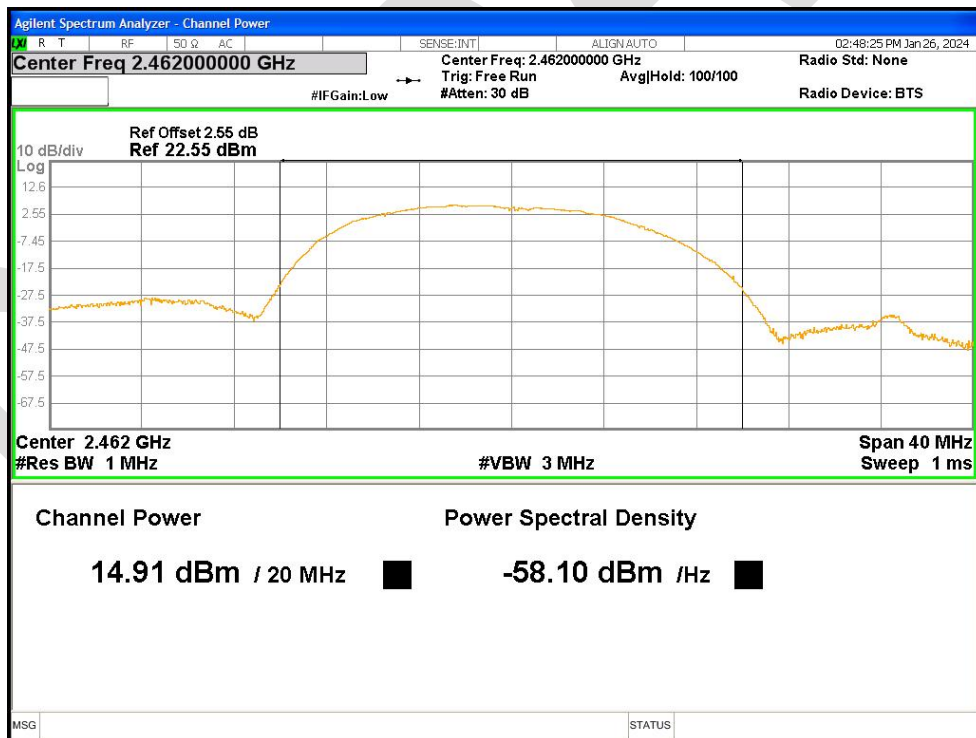


Power NVNT g 2412MHz Ant1

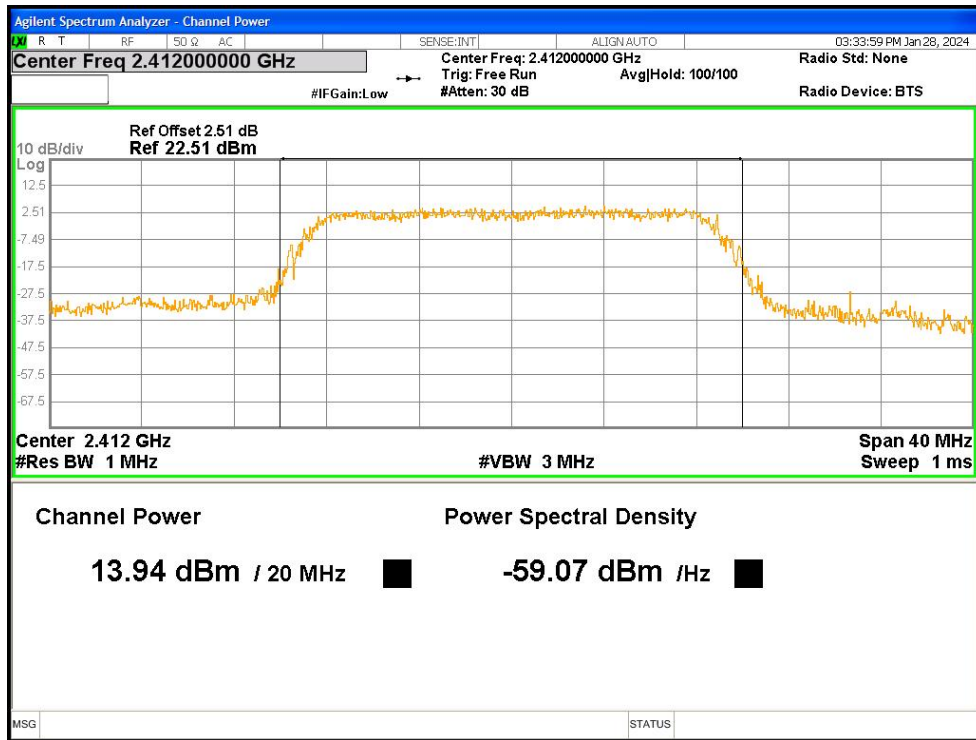


Power NVNT g 2437MHz Ant1

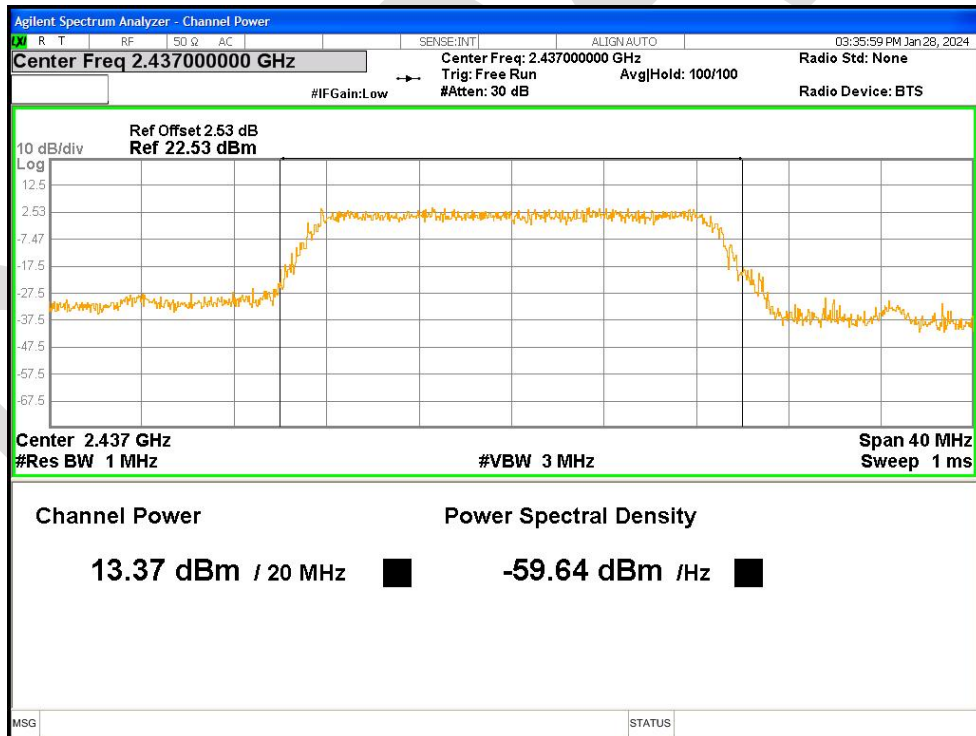


Power NVNT g 2462MHz Ant1

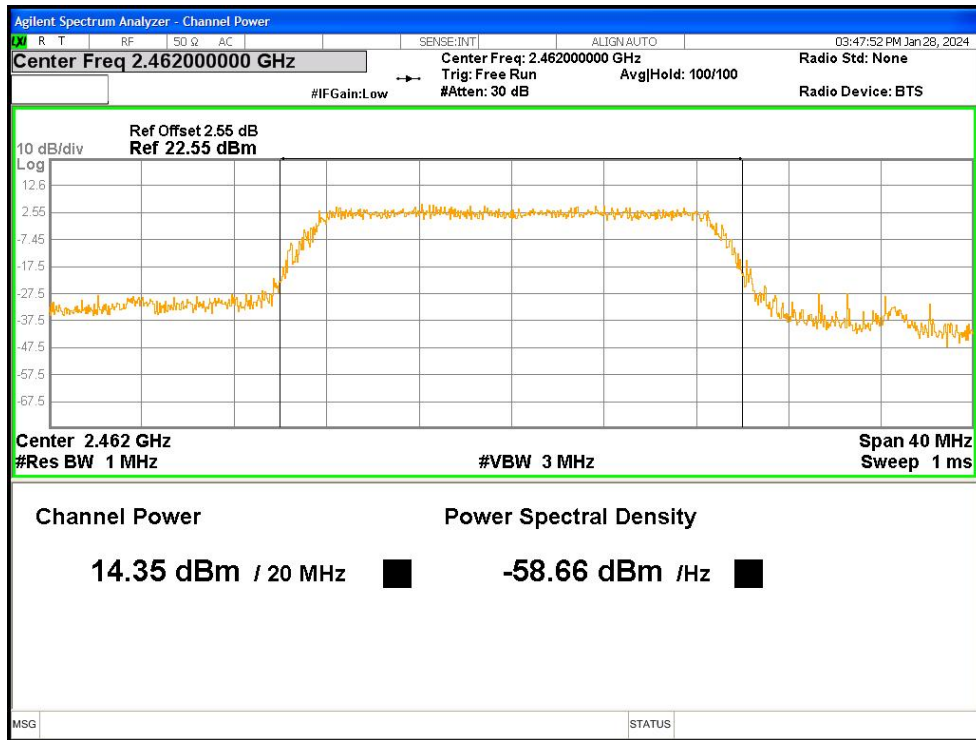


Power NVNT n20 2412MHz Ant1

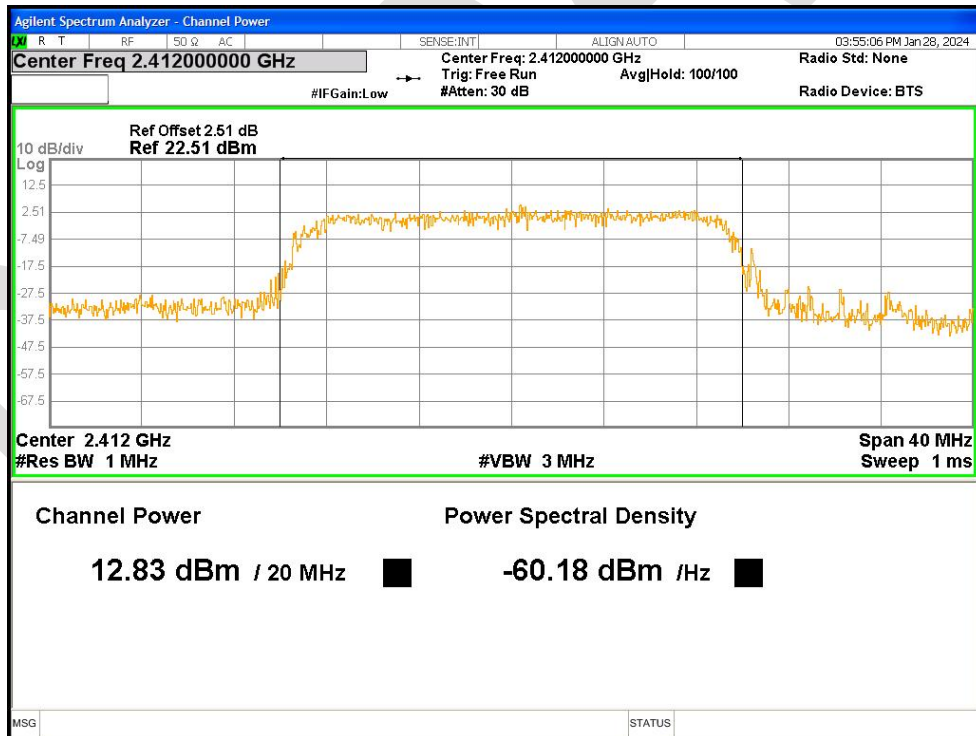


Power NVNT n20 2437MHz Ant1

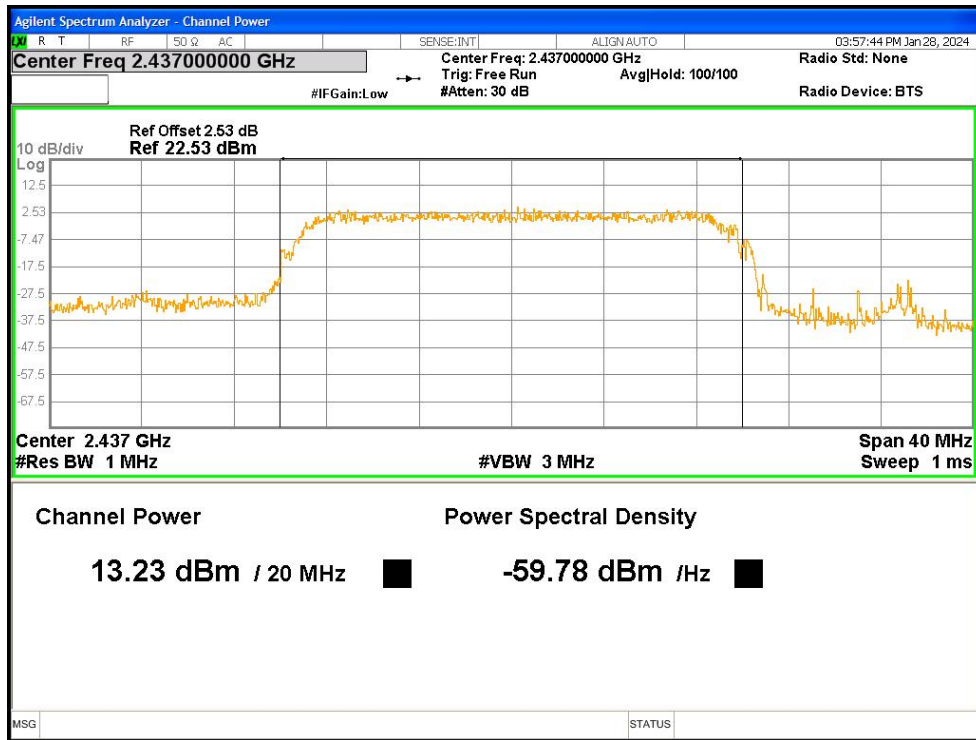


Power NVNT n20 2462MHz Ant1

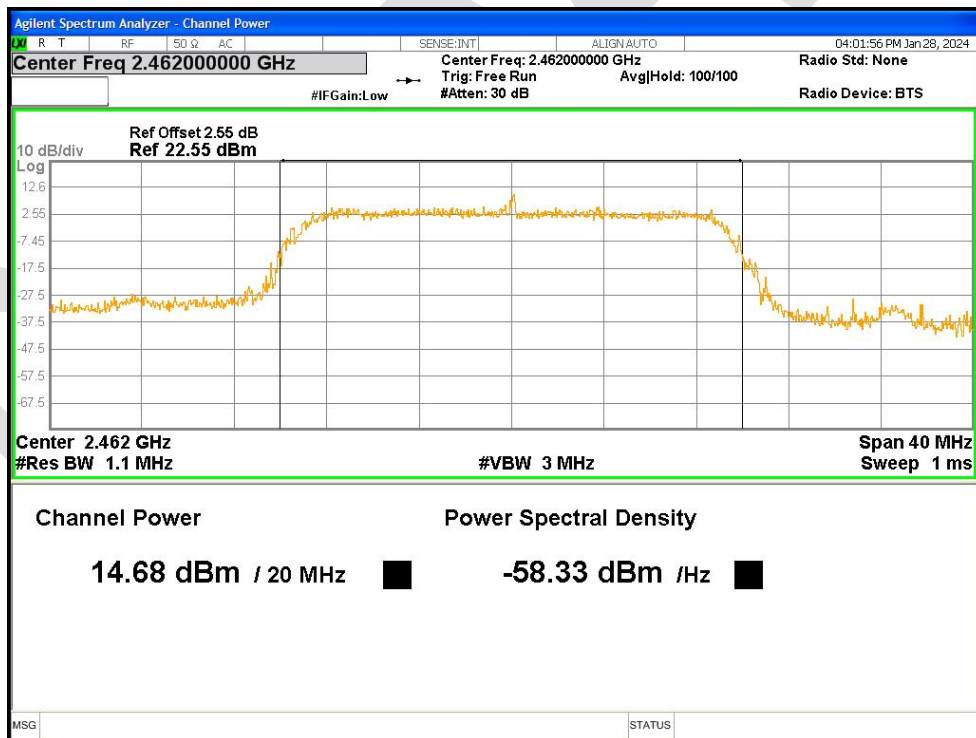


Power NVNT n40 2422MHz Ant1

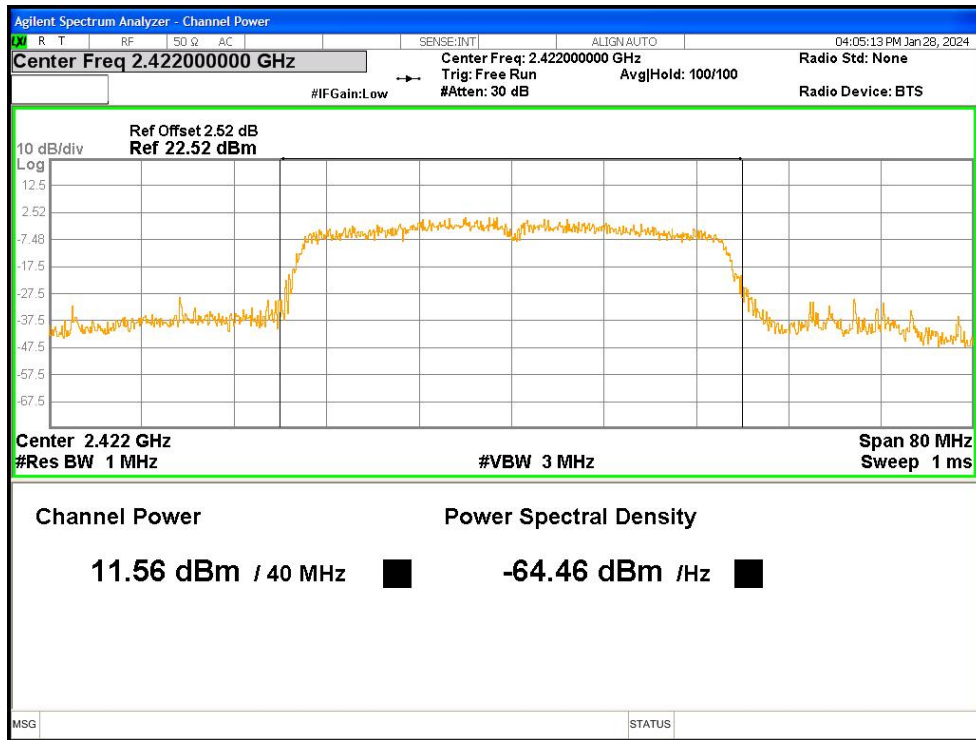

Power NVNT n40 2437MHz Ant1

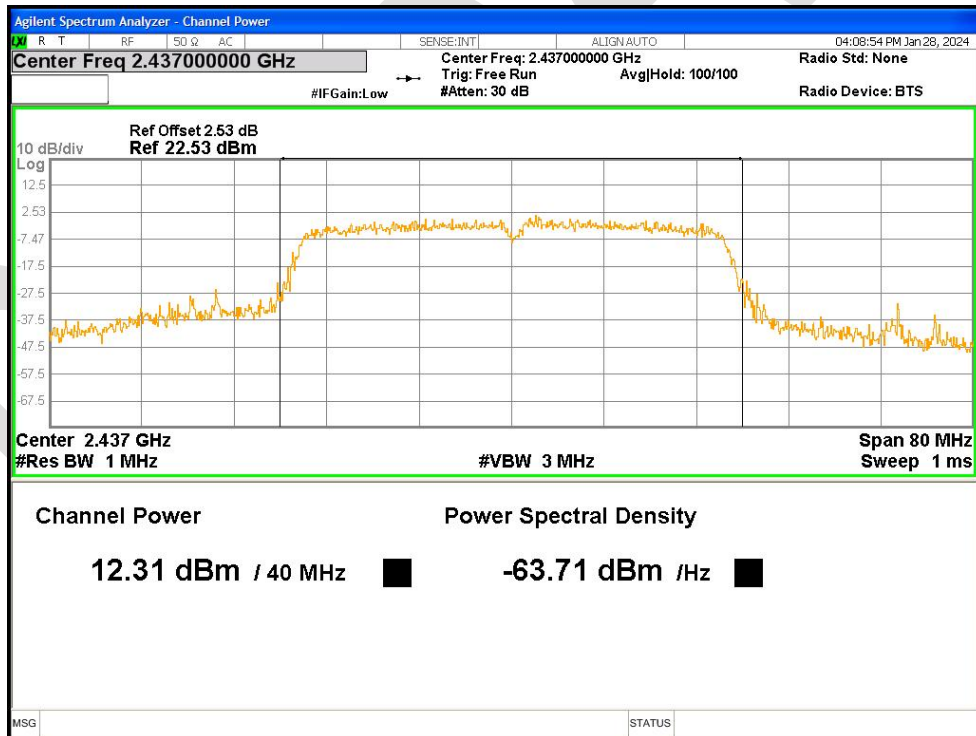


Power NVNT n40 2452MHz Ant1

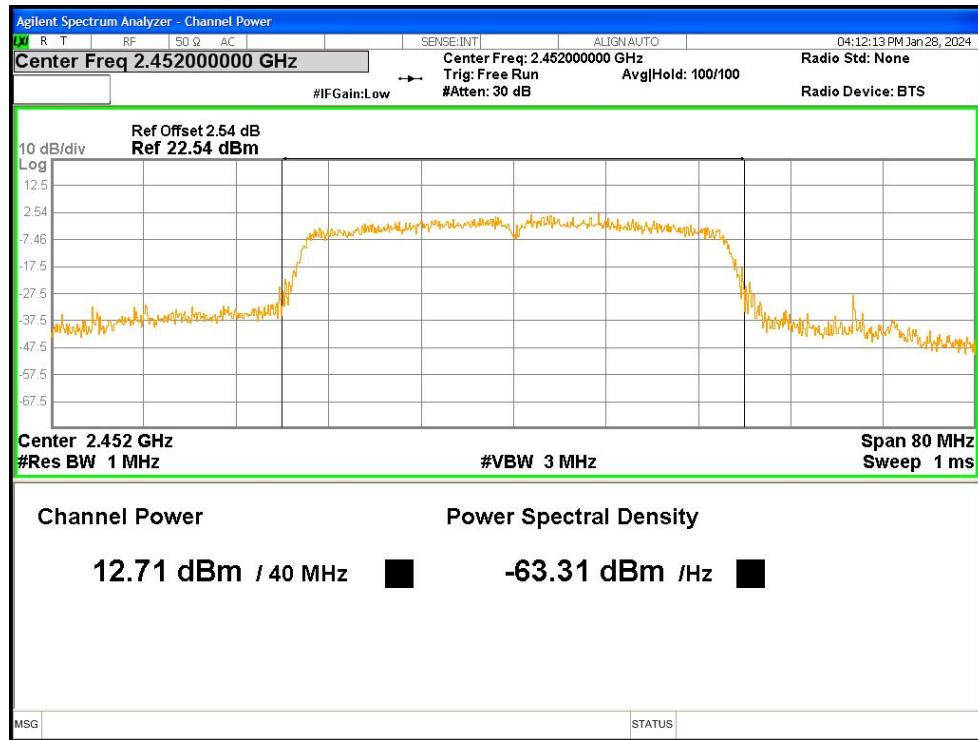


20.2 -6DB BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	11.051	0.5	Pass
NVNT	b	2437	Ant1	11.069	0.5	Pass
NVNT	b	2462	Ant1	10.561	0.5	Pass
NVNT	g	2412	Ant1	16.976	0.5	Pass
NVNT	g	2437	Ant1	17.324	0.5	Pass
NVNT	g	2462	Ant1	16.629	0.5	Pass
NVNT	n20	2412	Ant1	17.519	0.5	Pass
NVNT	n20	2437	Ant1	18.277	0.5	Pass
NVNT	n20	2462	Ant1	17.73	0.5	Pass
NVNT	n40	2422	Ant1	28.794	0.5	Pass
NVNT	n40	2437	Ant1	32.421	0.5	Pass
NVNT	n40	2452	Ant1	33.92	0.5	Pass


-6dB Bandwidth NVNT b 2412MHz Ant1

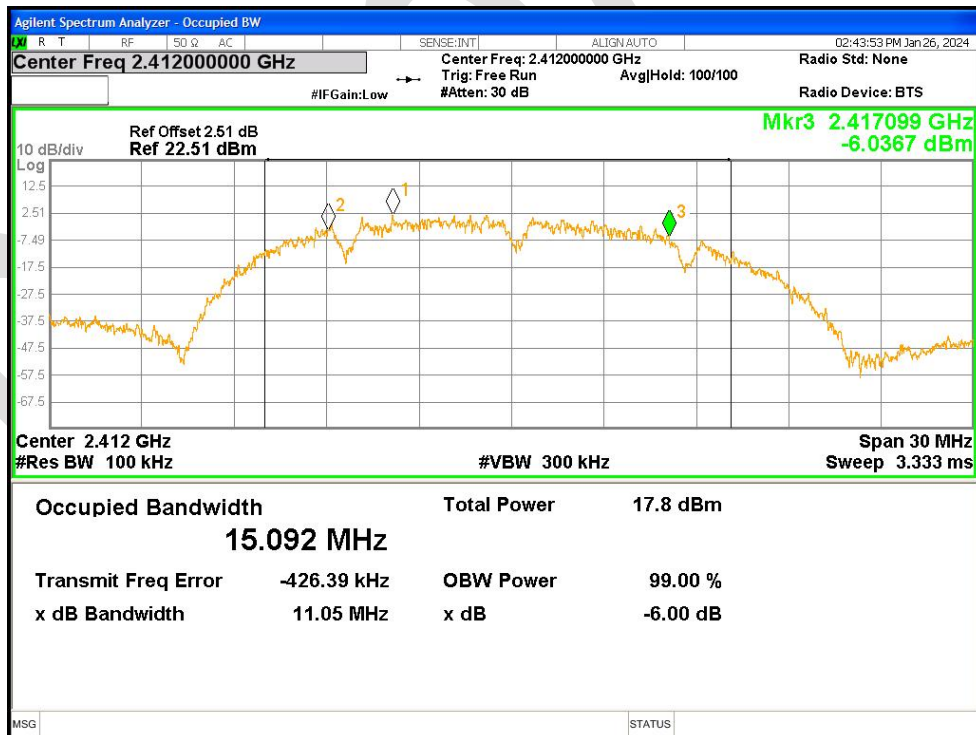


-6dB Bandwidth NVNT b 2437MHz Ant1

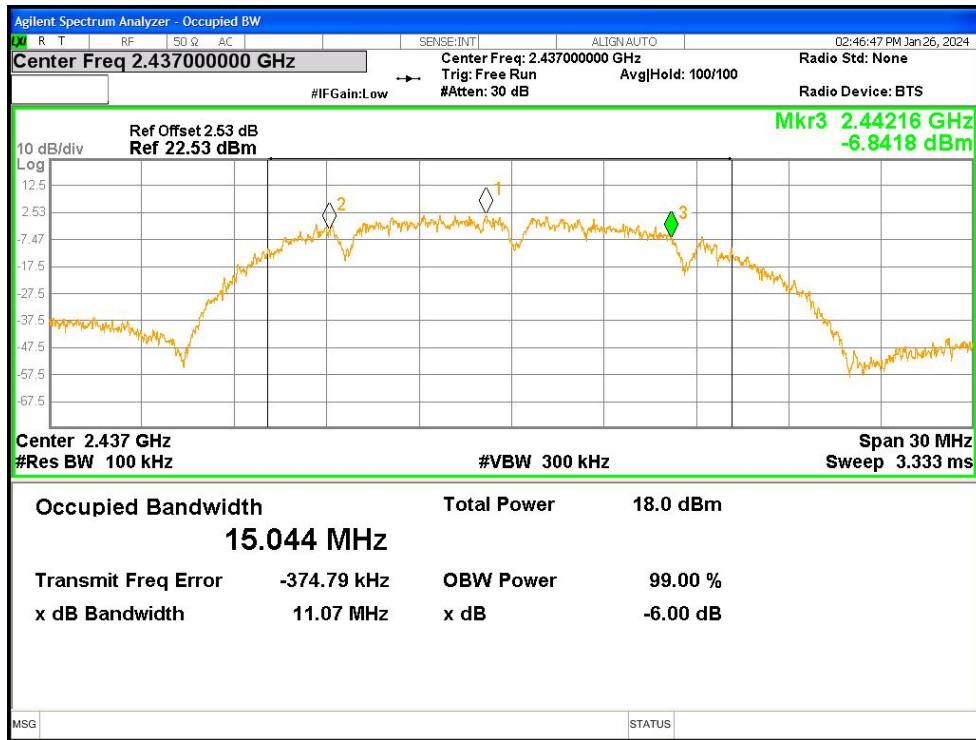


-6dB Bandwidth NVNT b 2462MHz Ant1

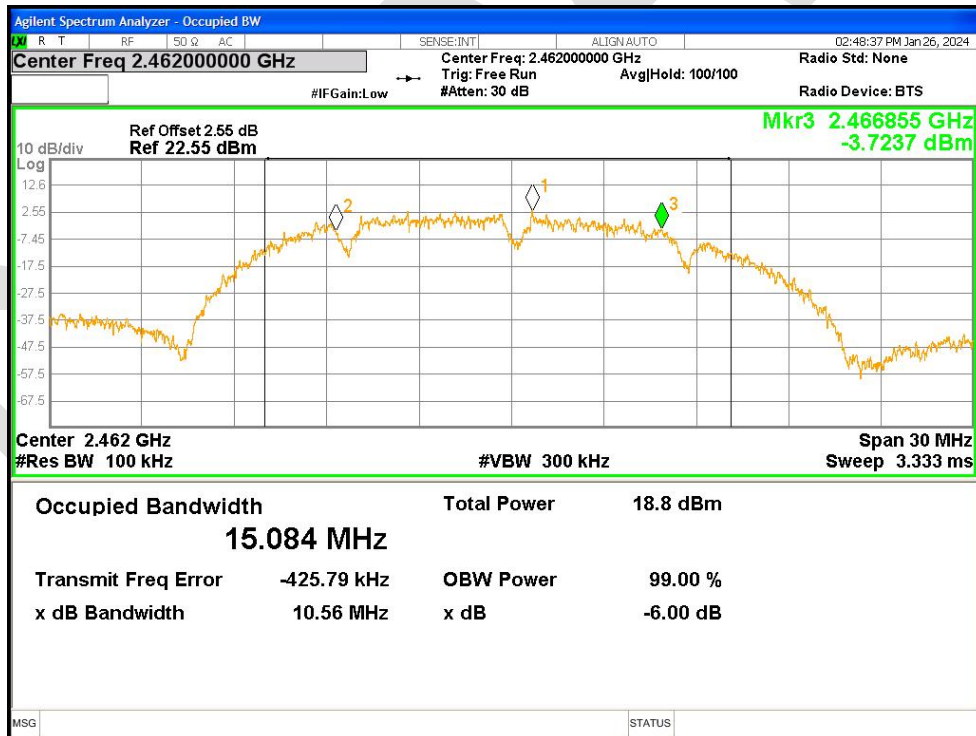


-6dB Bandwidth NVNT g 2412MHz Ant1

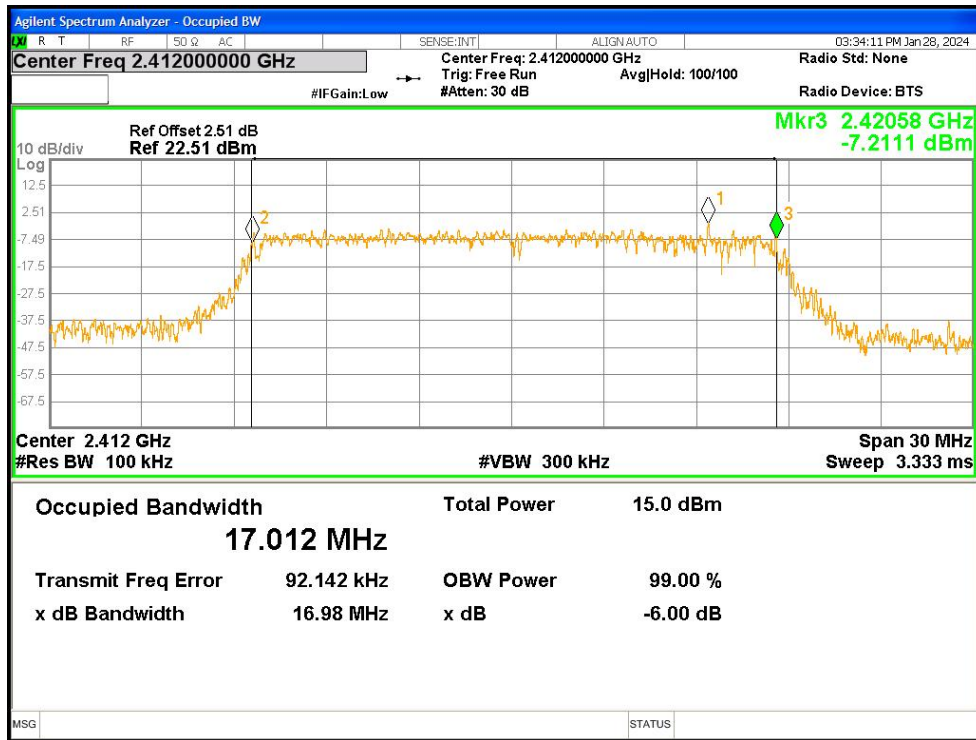


-6dB Bandwidth NVNT g 2437MHz Ant1

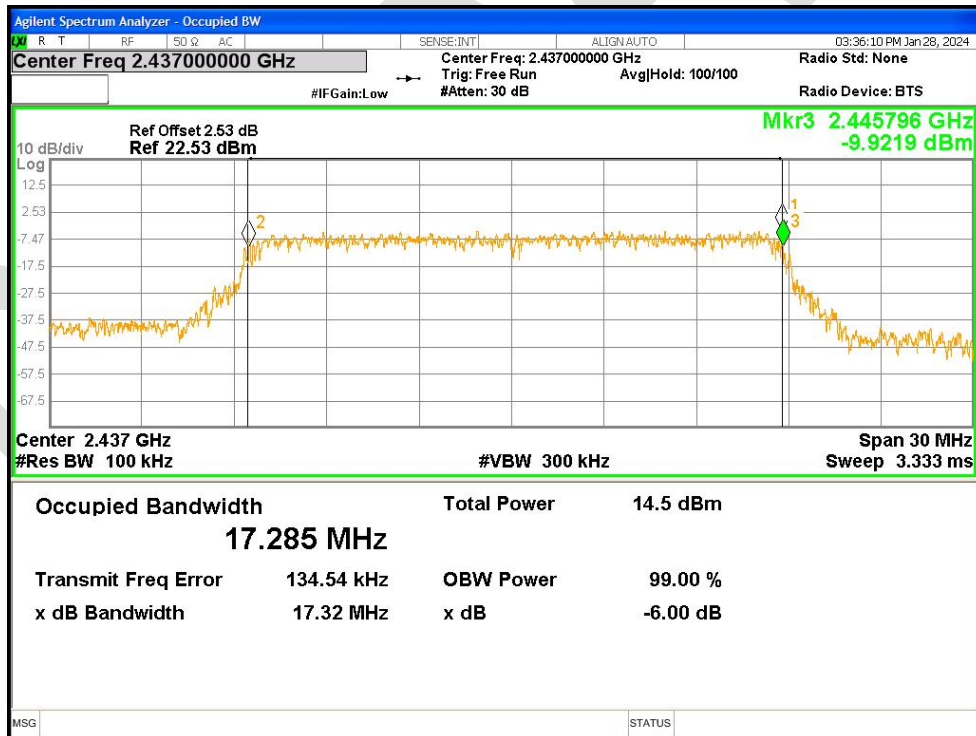


-6dB Bandwidth NVNT g 2462MHz Ant1

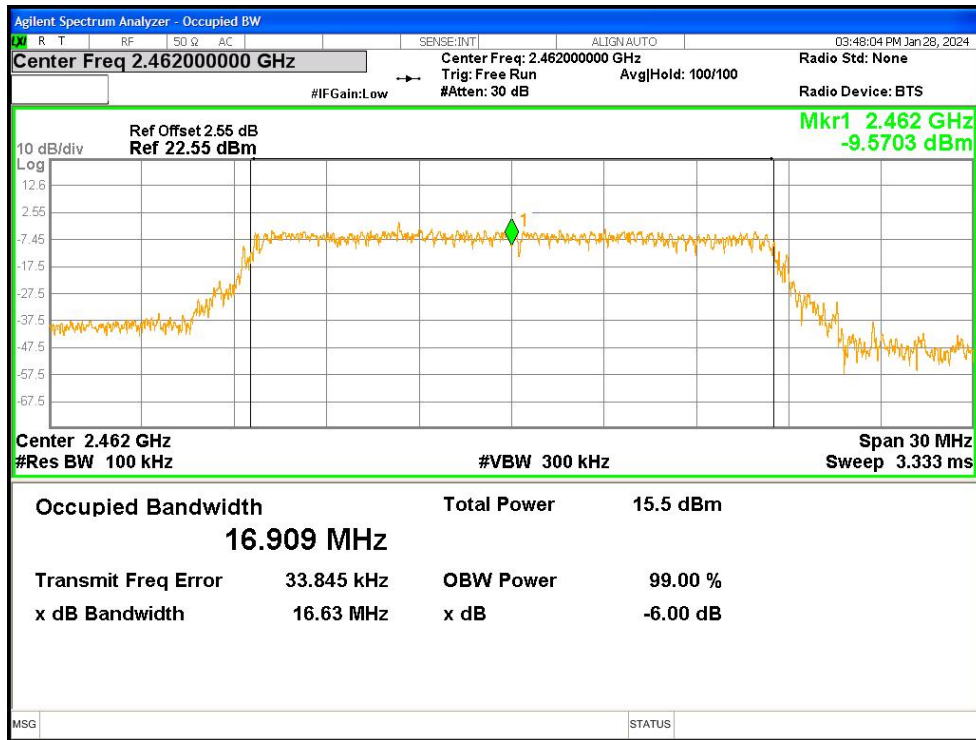


-6dB Bandwidth NVNT n20 2412MHz Ant1

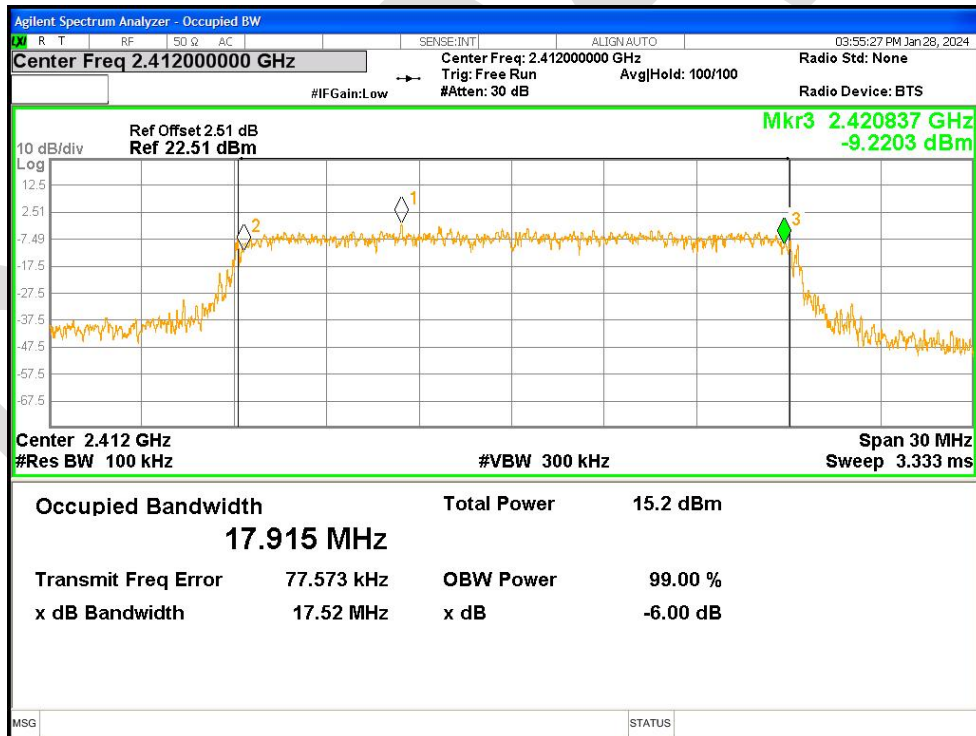

-6dB Bandwidth NVNT n20 2437MHz Ant1

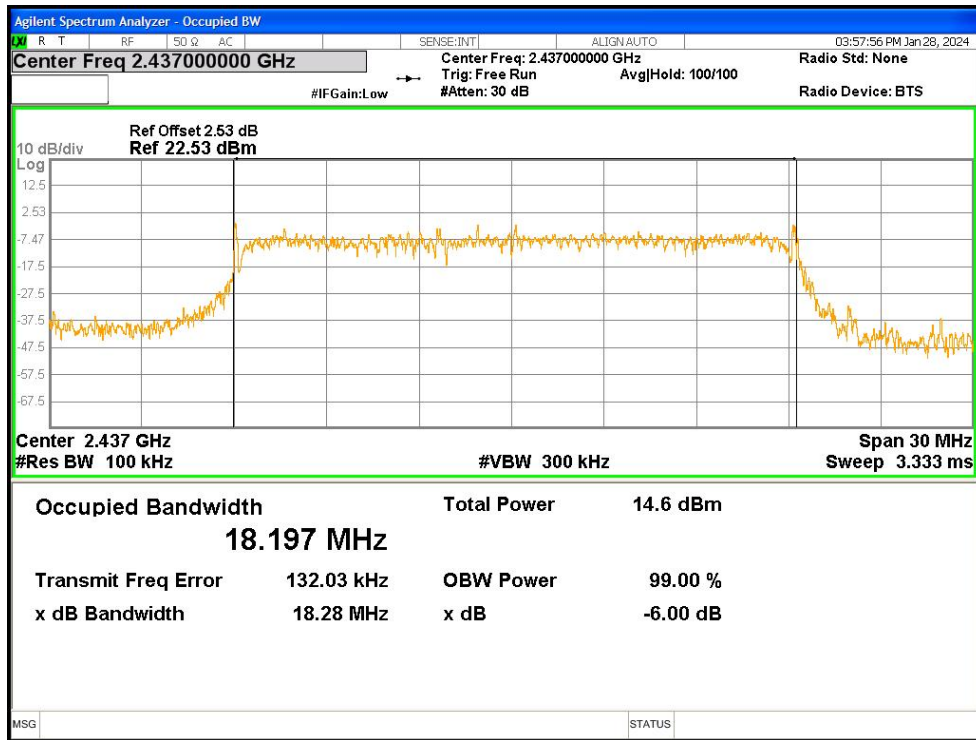

-6dB Bandwidth NVNT n20 2462MHz Ant1

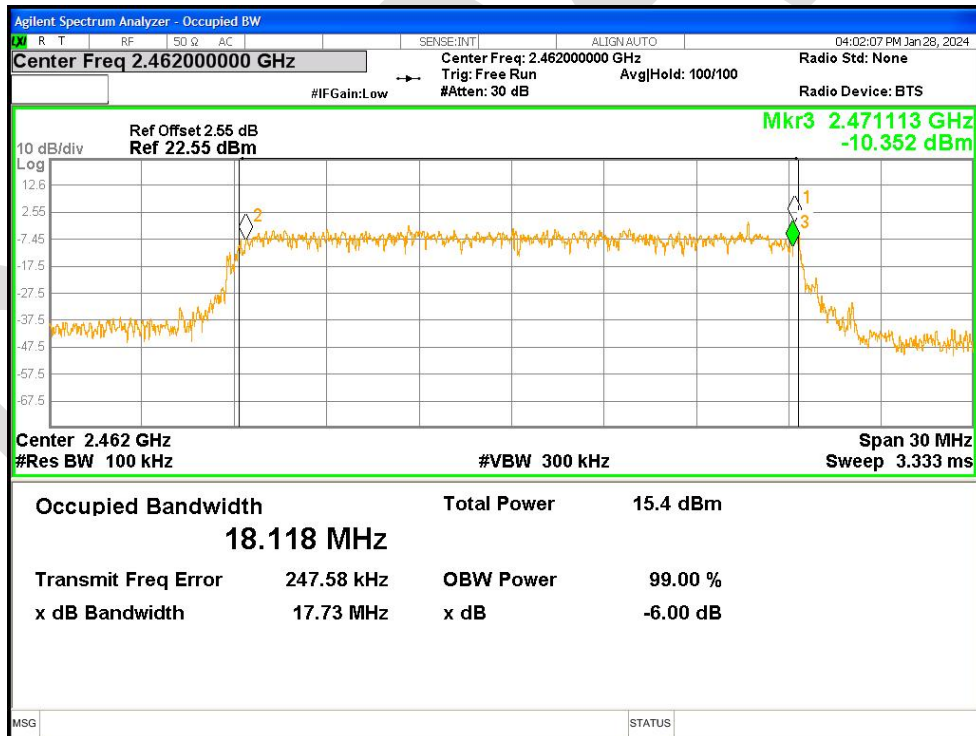

-6dB Bandwidth NVNT n40 2422MHz Ant1