



TEST Report

Applicant: YEAHER INC.

Address of Applicant: 51 Steel Dr,Unit A, New Castle,Delaware,19720

Manufacturer : Nimo Direct Inc.

Address of Manufacturer : 51 Steel Dr,Unit A, New Castle,Delaware,19720

Equipment Under Test (EUT)

Product Name: Portable Computer

Model No.: N172S

Series model: N172L, N172B

Trade Mark: N/A

FCC ID: 2BEMH-N172S

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: Sep. 30, 2024

Date of Test: Sep. 30, 2024 ~ Oct. 22, 2024

Date of report issued: Oct. 22, 2024

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.



Report No.: HTT202409755F03

1. Version

Version No.	Date	Description
00	Oct. 22, 2024	Original

Tested/ Prepared By

Heber He

Date:

Oct. 22, 2024

Project Engineer

Check By:

Bruce Zhu

Date:

Oct. 22, 2024

Reviewer

Approved By :

Kevin Yang

Date:

Oct. 22, 2024

Authorized Signature





2. Contents

	Page
1. VERSION	2
2. CONTENTS	3
3. TEST SUMMARY	4
4. GENERAL INFORMATION	5
4.1. GENERAL DESCRIPTION OF EUT	5
4.2. TEST MODE	7
4.3. DESCRIPTION OF SUPPORT UNITS	7
4.4. DEVIATION FROM STANDARDS	7
4.5. ABNORMALITIES FROM STANDARD CONDITIONS	7
4.6. TEST FACILITY	7
4.7. TEST LOCATION	7
4.8. ADDITIONAL INSTRUCTIONS	7
5. TEST INSTRUMENTS LIST	8
6. TEST RESULTS AND MEASUREMENT DATA	9
6.1. CONDUCTED EMISSIONS	9
6.2. CONDUCTED OUTPUT POWER	12
6.3. CHANNEL BANDWIDTH	13
6.4. POWER SPECTRAL DENSITY	15
6.5. BAND EDGES	17
6.5.1 <i>Conducted Emission Method</i>	17
6.5.2 <i>Radiated Emission Method</i>	19
6.6. SPURIOUS EMISSION	21
6.6.1 <i>Conducted Emission Method</i>	21
6.6.2 <i>Radiated Emission Method</i>	23
6.7. ANTENNA REQUIREMENT	30
7. TEST SETUP PHOTO	31
8. EUT CONSTRUCTIONAL DETAILS	31



Report No.: HTT202409755F03

3. Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Remarks:

1. *Pass: The EUT complies with the essential requirements in the standard.*
2. *Test according to ANSI C63.10:2013*

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.37 dB	(1)
Radiated Emission	1~18GHz	5.40 dB	(1)
Radiated Emission	18~40GHz	5.45 dB	(1)
Conducted Disturbance	0.15~30MHz	2.68 dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.



Report No.: HTT202409755F03

4. General Information

4.1. General Description of EUT

Product Name:	Portable Computer
Model No.:	N172S
Series model:	N172L, N172B
Test sample(s) ID:	HTT202409755-1(Engineer sample) HTT202409755-2(Normal sample)
Operation frequency	2402~2480 MHz
Number of Channels	40
Modulation Type	GFSK
Channel separation	2MHz
Antenna Type:	FPC Antenna
Antenna Gain:	-0.84 dBi
Power Supply:	DC 11.4V From Battery and DC 20.0V From External Circuit
Adapter Information:	Model: A879-200500C-US1 Input: 100-240V~50/60Hz,2.5A Output: PD 5V==3A/9V==3A/12V==3A/15V==3A/20V==5A PPS 3.3-21V==5A 100W Max



Report No.: HTT202409755F03

Channel	Frequency(MHz)	Channel	Frequency(MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz



Report No.: HTT202409755F03

4.2. Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

4.3. Description of Support Units

None.

4.4. Deviation from Standards

None.

4.5. Abnormalities from Standard Conditions

None.

4.6. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:
FCC-Registration No.: 779513 Designation Number: CN1319 Shenzhen HTT Technology Co.,Ltd. has been accredited on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.
A2LA-Lab Cert. No.: 6435.01 Shenzhen HTT Technology Co.,Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.
The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

4.7. Test Location

All tests were performed at:
Shenzhen HTT Technology Co.,Ltd. 1F, Building B, Huafeng International Robotics Industrial Park, Hangcheng Road, Nanchang Community, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China Tel: 0755-23595200 Fax: 0755-23595201

4.8. Additional Instructions

Test Software	Special AT test command provided by manufacturer to Keep the EUT in continuously transmitting mode and hopping mode
Power level setup	Default




5. Test Instruments list


Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	Shenzhen C.R.T technology co., LTD	9*6*6	HTT-E028	Aug. 10 2024	Aug. 09 2027
2	Control Room	Shenzhen C.R.T technology co., LTD	4.8*3.5*3.0	HTT-E030	Aug. 10 2024	Aug. 09 2027
3	EMI Test Receiver	Rohde&Schwarz	ESCI7	HTT-E022	Apr. 26 2024	Apr. 25 2025
4	Spectrum Analyzer	Rohde&Schwarz	FSP	HTT-E037	Apr. 26 2024	Apr. 25 2025
5	Coaxial Cable	ZDecl	ZT26-NJ-NJ-0.6M	HTT-E018	Apr. 26 2024	Apr. 25 2025
6	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-2M	HTT-E019	Apr. 26 2024	Apr. 25 2025
7	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-0.6M	HTT-E020	Apr. 26 2024	Apr. 25 2025
8	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-8.5M	HTT-E021	Apr. 26 2024	Apr. 25 2025
9	Composite logarithmic antenna	Schwarzbeck	VULB 9168	HTT-E017	May. 21 2024	May. 20 2025
10	Horn Antenna	Schwarzbeck	BBHA9120D	HTT-E016	May. 20 2024	May. 19 2025
11	Loop Antenna	Zhinan	ZN30900C	HTT-E039	Apr. 26 2024	Apr. 25 2025
12	Horn Antenna	Beijing Hangwei Dayang	OBH100400	HTT-E040	Apr. 26 2024	Apr. 25 2025
13	low frequency Amplifier	Sonoma Instrument	310	HTT-E015	Apr. 26 2024	Apr. 25 2025
14	high-frequency Amplifier	HP	8449B	HTT-E014	Apr. 26 2024	Apr. 25 2025
15	Variable frequency power supply	Shenzhen Anbiao Instrument Co., Ltd	ANB-10VA	HTT-082	Apr. 26 2024	Apr. 25 2025
16	EMI Test Receiver	Rohde & Schwarz	ESCS30	HTT-E004	Apr. 26 2024	Apr. 25 2025
17	Artificial Mains	Rohde & Schwarz	ESH3-Z5	HTT-E006	May. 23 2024	May. 22 2025
18	Artificial Mains	Rohde & Schwarz	ENV-216	HTT-E038	May. 23 2024	May. 22 2025
19	Cable Line	Robinson	Z302S-NJ-BNCJ-1.5M	HTT-E001	Apr. 26 2024	Apr. 25 2025
20	Attenuator	Robinson	6810.17A	HTT-E007	Apr. 26 2024	Apr. 25 2025
21	Variable frequency power supply	Shenzhen Yanghong Electric Co., Ltd	YF-650 (5KVA)	HTT-E032	Apr. 26 2024	Apr. 25 2025
22	Control Room	Shenzhen C.R.T technology co., LTD	8*4*3.5	HTT-E029	Aug. 10 2024	Aug. 09 2027
23	DC power supply	Agilent	E3632A	HTT-E023	Apr. 26 2024	Apr. 25 2025
24	EMI Test Receiver	Agilent	N9020A	HTT-E024	Apr. 26 2024	Apr. 25 2025
25	Analog signal generator	Agilent	N5181A	HTT-E025	Apr. 26 2024	Apr. 25 2025
26	Vector signal generator	Agilent	N5182A	HTT-E026	Apr. 26 2024	Apr. 25 2025
27	Power sensor	Keysight	U2021XA	HTT-E027	Apr. 26 2024	Apr. 25 2025
28	Temperature and humidity meter	Shenzhen Anbiao Instrument Co., Ltd	TH10R	HTT-074	Apr. 28 2024	Apr. 27 2025
29	Radiated Emission Test Software	Farad	EZ-EMC	N/A	N/A	N/A
30	Conducted Emission Test Software	Farad	EZ-EMC	N/A	N/A	N/A
31	RF Test Software	panshanrf	TST	N/A	N/A	N/A

6. Test results and Measurement Data


6.1. Conducted Emissions

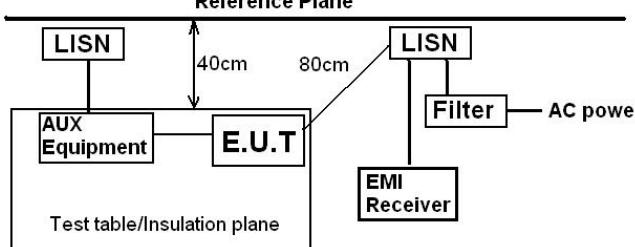Test Requirement:	FCC Part15 C Section 15.207																
Test Method:	ANSI C63.10:2013																
Test Frequency Range:	150KHz to 30MHz																
Class / Severity:	Class B																
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto																
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
	* Decreases with the logarithm of the frequency.																
Test setup:	<p style="text-align: center;">Reference Plane</p>  <p><i>Remark:</i> <i>E.U.T: Equipment Under Test</i> <i>LISN: Line Impedance Stabilization Network</i> <i>Test table height=0.8m</i></p>																
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 																
Test Instruments:	Refer to section 6.0 for details																
Test mode:	Refer to section 5.2 for details																
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar											
Test voltage:	AC 120V, 60Hz																
Test results:	PASS																

Remark: Both high and low voltages have been tested to show only the worst low voltage test data.

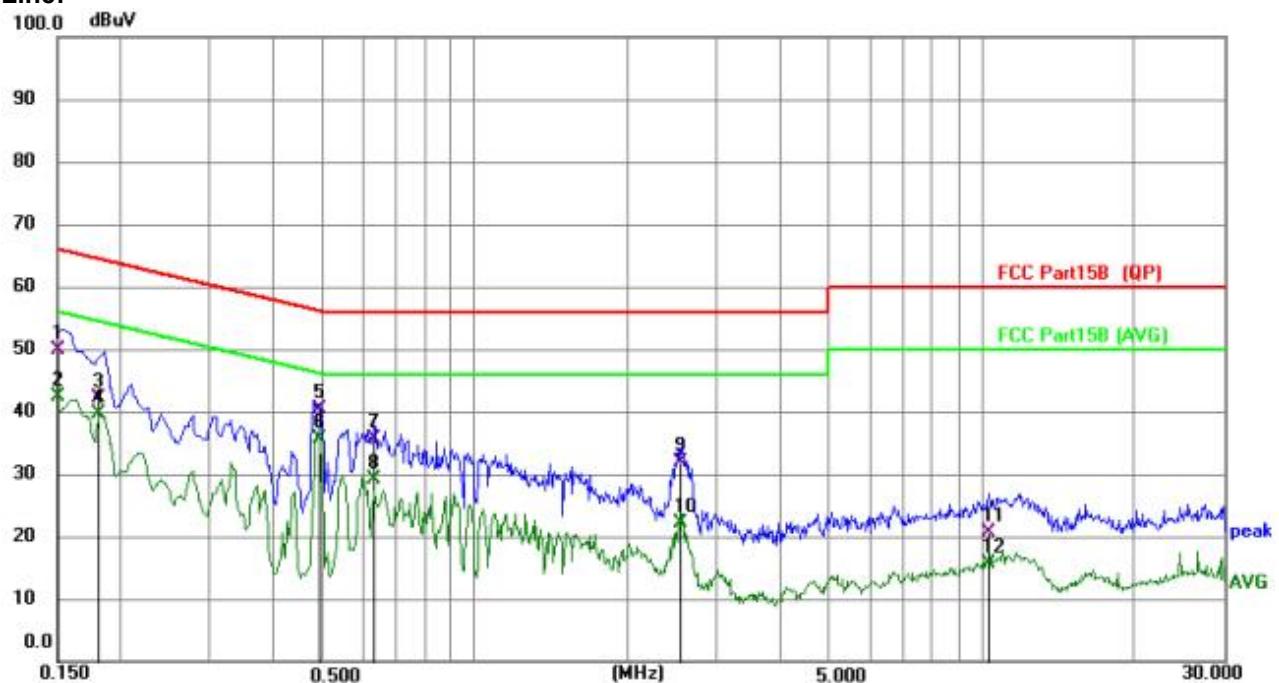Measurement data:
Line:


No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Over Detector
1		0.1508	39.69	10.16	49.85	65.96	-16.11	QP
2		0.1508	32.28	10.16	42.44	55.96	-13.52	AVG
3		0.1813	31.91	10.19	42.10	64.43	-22.33	QP
4		0.1813	29.39	10.19	39.58	54.43	-14.85	AVG
5		0.4943	30.08	10.29	40.37	56.10	-15.73	QP
6 *		0.4943	25.22	10.29	35.51	46.10	-10.59	AVG
7		0.6341	25.27	10.32	35.59	56.00	-20.41	QP
8		0.6341	18.88	10.32	29.20	46.00	-16.80	AVG
9		2.5544	21.33	10.46	31.79	56.00	-24.21	QP
10		2.5544	11.70	10.46	22.16	46.00	-23.84	AVG
11		10.3051	9.83	10.72	20.55	60.00	-39.45	QP
12		10.3051	4.96	10.72	15.68	50.00	-34.32	AVG

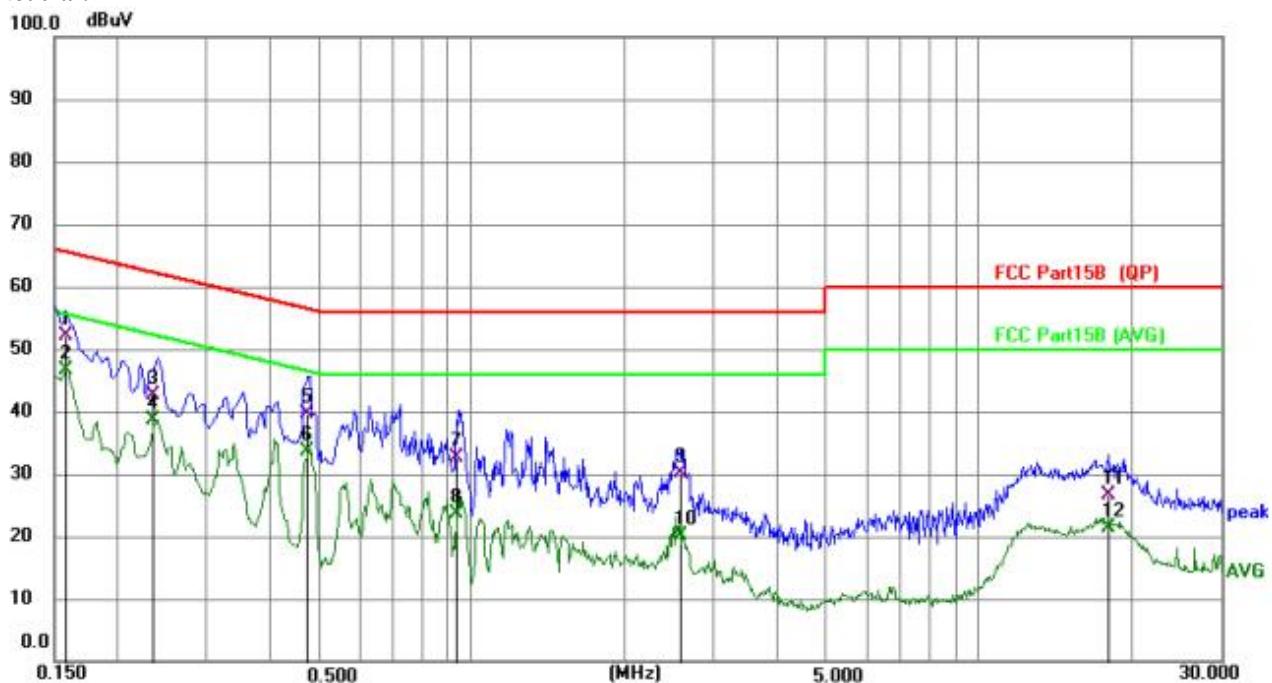
Neutral:


No.	Mk.	Freq.	Reading	Correct Factor	Measure- ment	Limit	Over	Detector
			Level					
		MHz		dB	dBuV	dBuV	dB	
1		0.1582	41.98	10.16	52.14	65.56	-13.42	QP
2	*	0.1582	36.46	10.16	46.62	55.56	-8.94	AVG
3		0.2349	32.30	10.22	42.52	62.27	-19.75	QP
4		0.2349	28.41	10.22	38.63	52.27	-13.64	AVG
5		0.4700	29.42	10.27	39.69	56.51	-16.82	QP
6		0.4700	23.48	10.27	33.75	46.51	-12.76	AVG
7		0.9368	22.40	10.33	32.73	56.00	-23.27	QP
8		0.9368	13.32	10.33	23.65	46.00	-22.35	AVG
9		2.5975	19.69	10.43	30.12	56.00	-25.88	QP
10		2.5975	9.60	10.43	20.03	46.00	-25.97	AVG
11		17.9576	15.38	11.24	26.62	60.00	-33.38	QP
12		17.9576	10.17	11.24	21.41	50.00	-28.59	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Los


6.2. Conducted Output Power

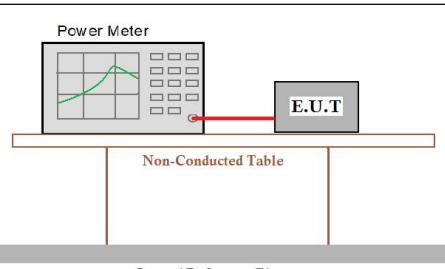Test Requirement:	FCC Part15 C Section 15.247 (b)(3)					
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05r02					
Limit:	30dBm					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Measurement Data

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	10.90	<=30	Pass
		2440	10.40	<=30	Pass
		2480	10.07	<=30	Pass
2M	SISO	2402	10.92	<=30	Pass
		2440	10.55	<=30	Pass
		2480	10.27	<=30	Pass

6.3. Channel Bandwidth

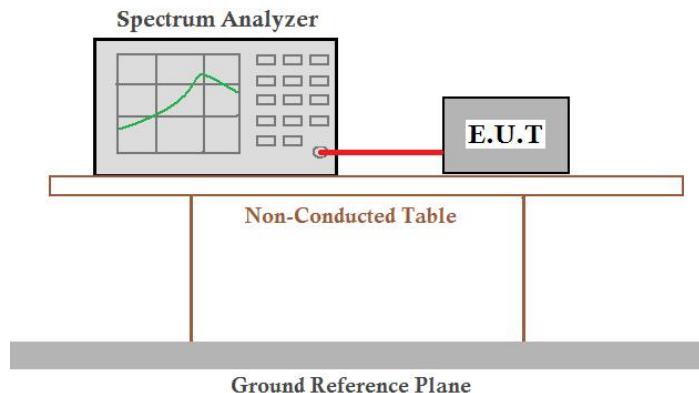
Test Requirement:	FCC Part15 C Section 15.247 (a)(2)					
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05r02					
Limit:	>500KHz					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Measurement Data


Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.668	>=0.5	Pass
		2440	1	0.679	>=0.5	Pass
		2480	1	0.669	>=0.5	Pass
2M	SISO	2402	1	1.172	>=0.5	Pass
		2440	1	1.166	>=0.5	Pass
		2480	1	1.191	>=0.5	Pass

Test plot as follows:


1M

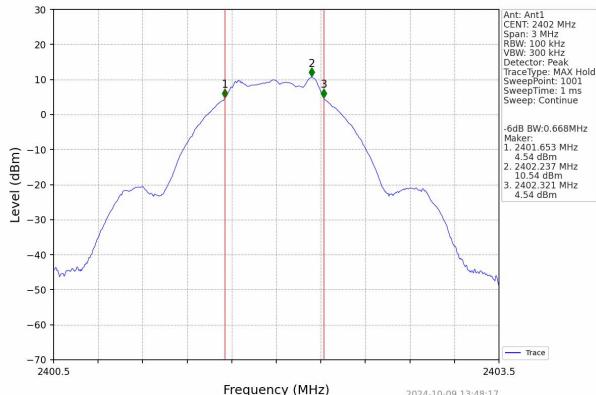


2M

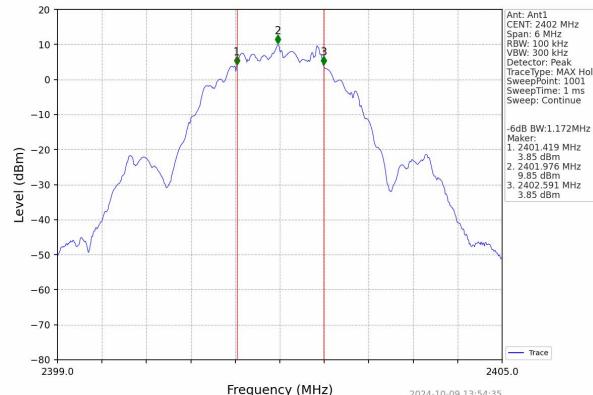


Lowest channel

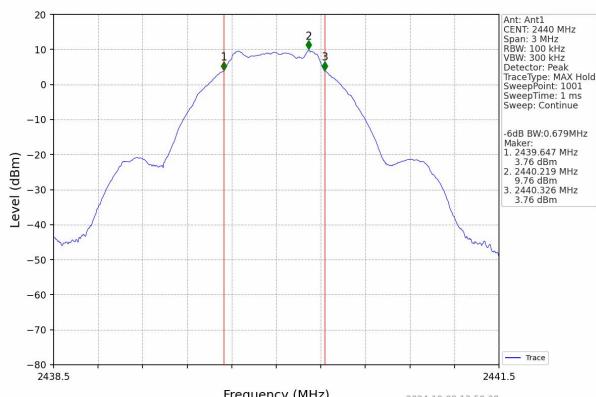


Lowest channel

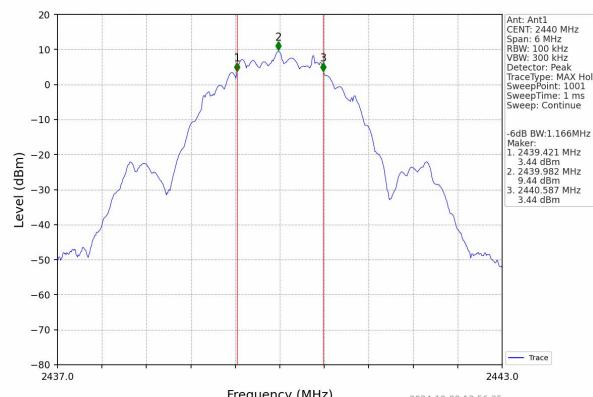

Middle channel

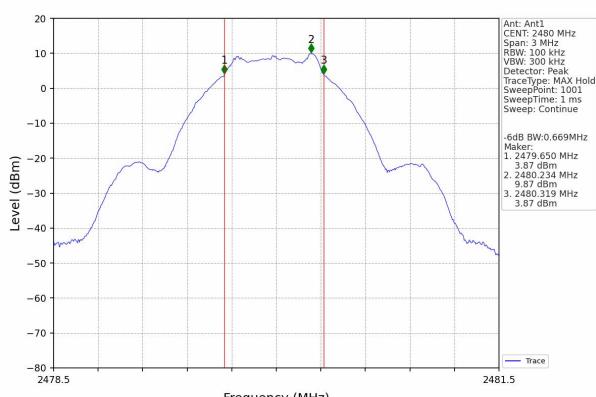


Middle channel

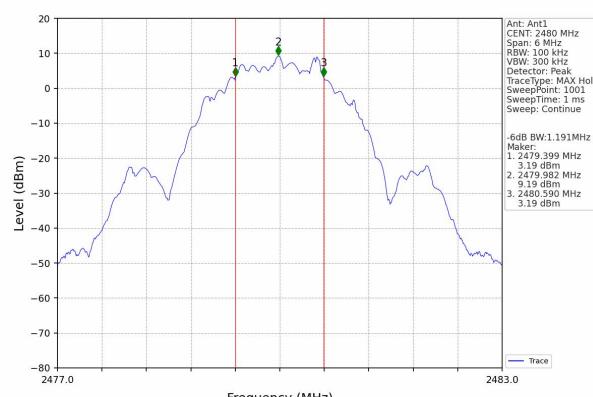

Highest channel

Highest channel

6.4. Power Spectral Density

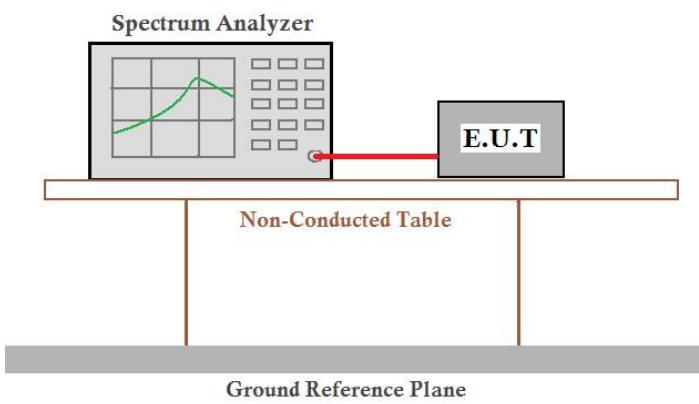
Test Requirement:	FCC Part15 C Section 15.247 (e)					
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05r02					
Limit:	8dBm/3kHz					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Measurement Data


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-5.54	<=8	Pass
		2440	-5.86	<=8	Pass
		2480	-6.17	<=8	Pass
2M	SISO	2402	-7.66	<=8	Pass
		2440	-8.06	<=8	Pass
		2480	-8.74	<=8	Pass

Test plot as follows:


1M

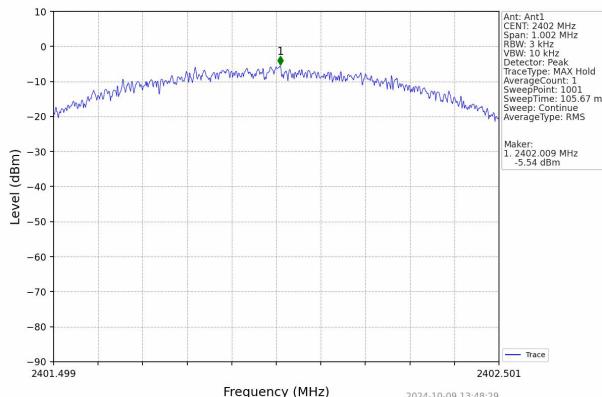


2M

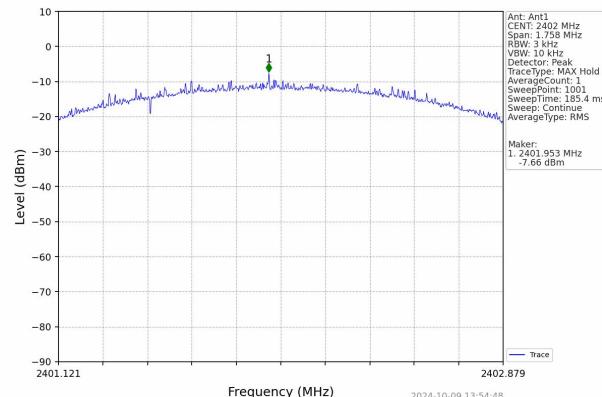


Lowest channel

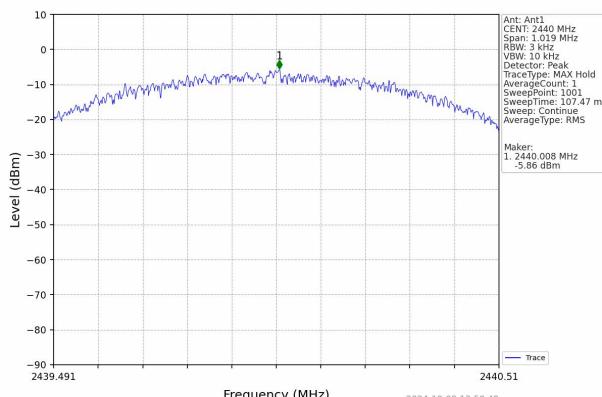


Lowest channel

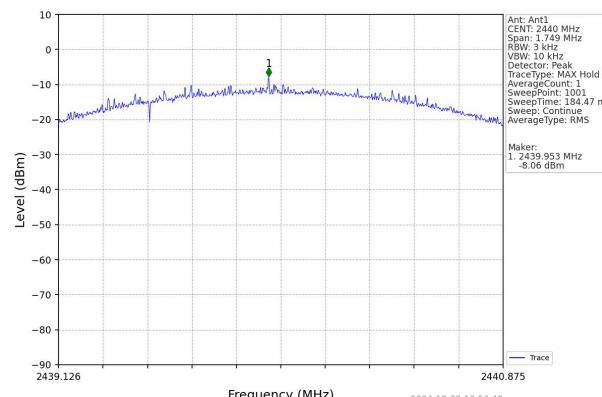

Middle channel

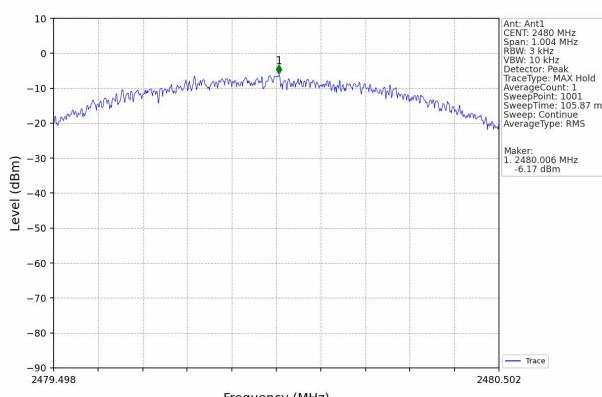

Middle channel

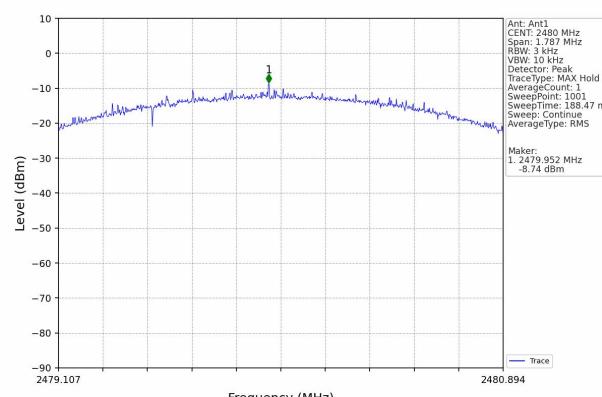


Highest channel

Highest channel


6.5. Band edges

6.5.1 Conducted Emission Method

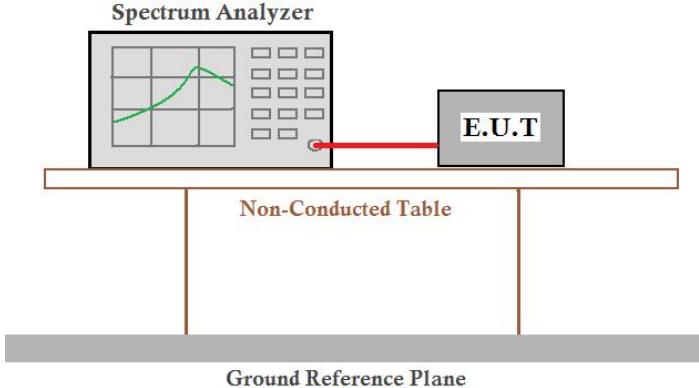
Test Requirement:	FCC Part15 C Section 15.247 (d)					
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05r02					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Test plot as follows:

1M

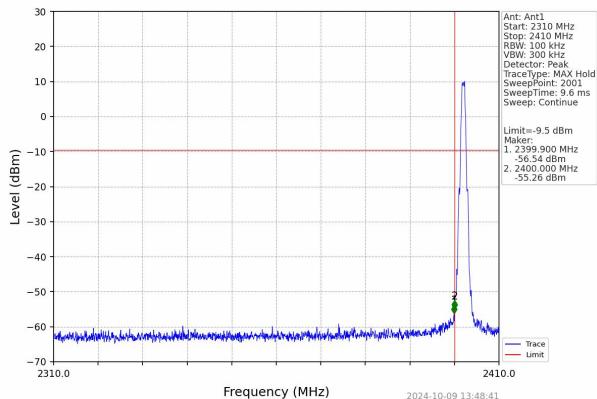


Lowest channel

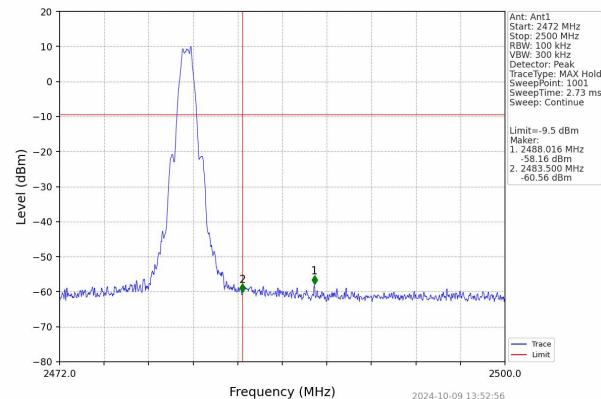


Highest channel

2M

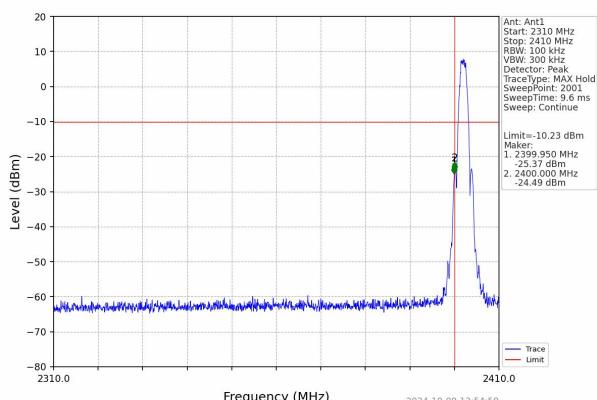


Lowest channel

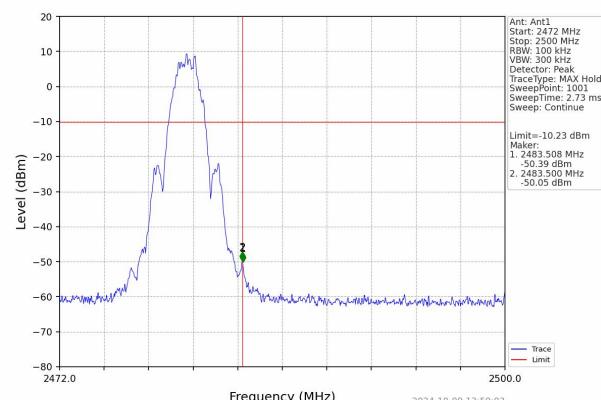

Highest channel

6.5.2 Radiated Emission Method

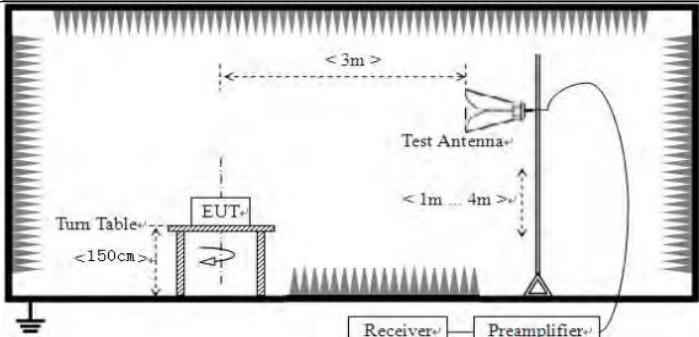Test Requirement:	FCC Part15 C Section 15.209 and 15.205											
Test Method:	ANSI C63.10:2013											
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.											
Test site:	Measurement Distance: 3m											
Receiver setup:	Frequency	Detector	RBW	VBW	Value							
	Above 1GHz	Peak	1MHz	3MHz	Peak							
Limit:	Frequency	Limit (dBuV/m @3m)	Value									
			54.00									
	Above 1GHz	74.00	Average									
Test setup:												
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report. 											
Test Instruments:	Refer to section 6.0 for details											
Test mode:	Refer to section 5.2 for details											
Test results:	Pass											
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.: 1012mbar							

**Measurement Data**


Remark: GFSK(1M), GFSK(2M) all have been tested, only worse case GFSK(1M) is reported.

Operation Mode: GFSK (1M)

Frequency(MHz):			2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
2390.00	60.95	PK	74	13.05	62.34	27.2	4.31	32.9	-1.39
2390.00	44.52	AV	54	9.48	45.91	27.2	4.31	32.9	-1.39
Frequency(MHz):			2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
2390.00	58.72	PK	74	15.28	60.11	27.2	4.31	32.9	-1.39
2390.00	46.40	AV	54	7.60	47.79	27.2	4.31	32.9	-1.39
Frequency(MHz):			2480		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
2483.50	56.05	PK	74	17.95	56.98	27.4	4.47	32.8	-0.93
2483.50	44.89	AV	54	9.11	45.82	27.4	4.47	32.8	-0.93
Frequency(MHz):			2480		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
2483.50	55.60	PK	74	18.40	56.53	27.4	4.47	32.8	-0.93
2483.50	44.00	AV	54	10.00	44.93	27.4	4.47	32.8	-0.93


6.6. Spurious Emission

6.6.1 Conducted Emission Method

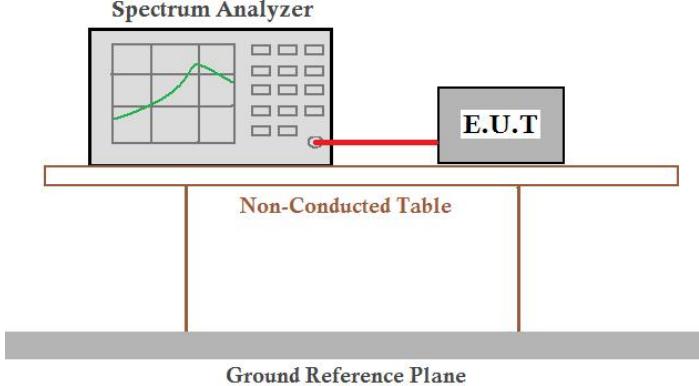Test Requirement:	FCC Part15 C Section 15.247 (d)					
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05r02					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar


Test plot as follows:

GFSK






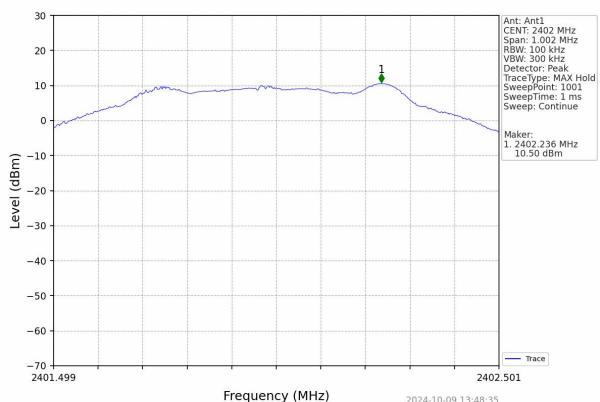


1M


reference


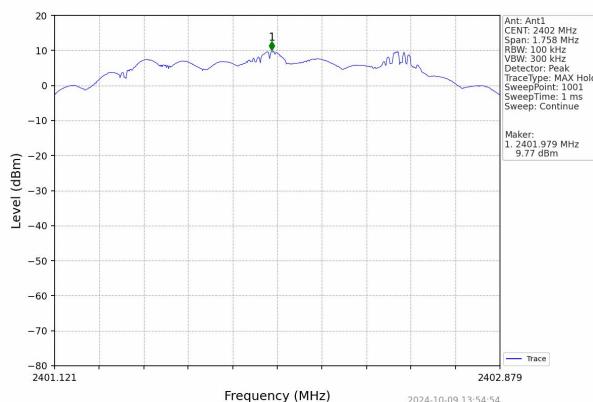


2M

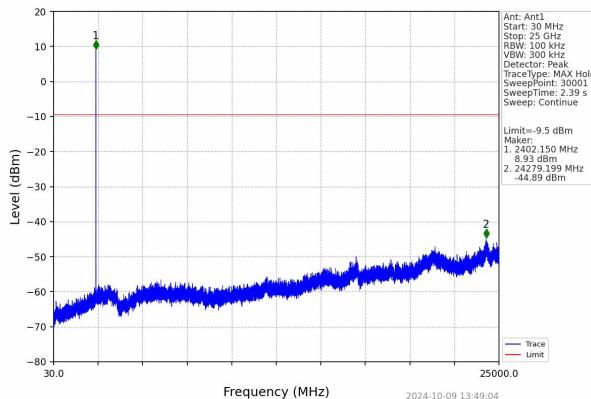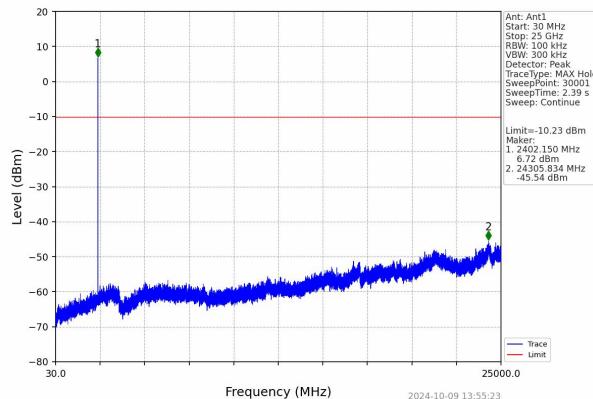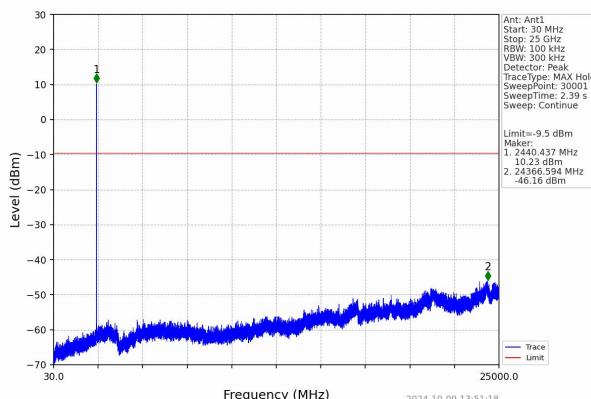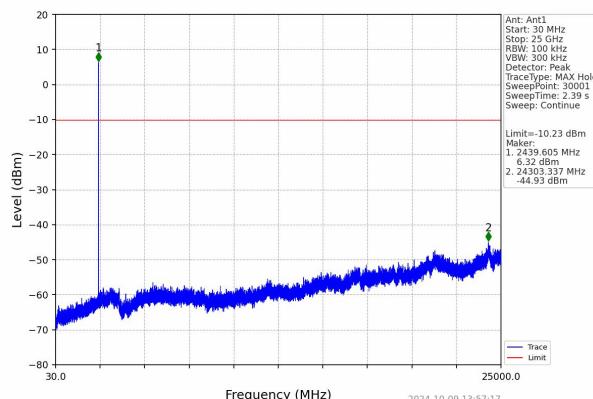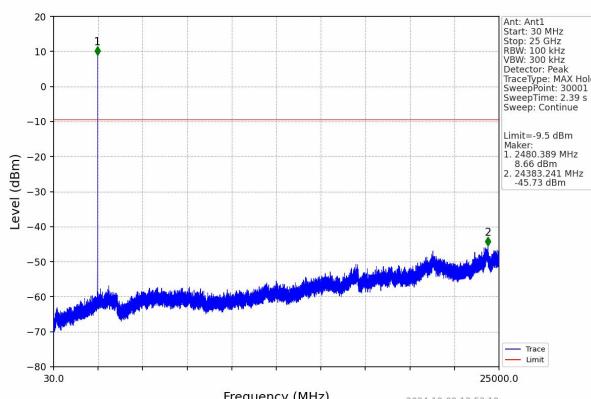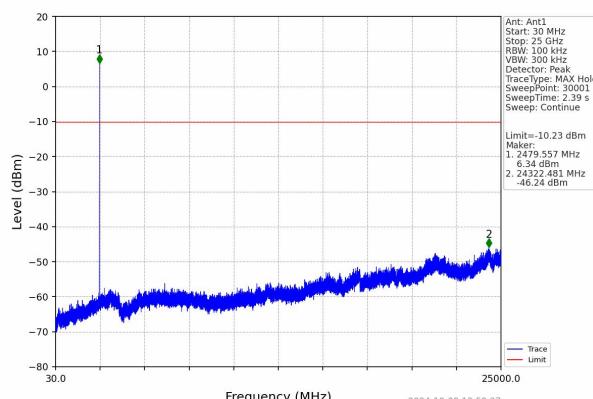GFSK
1M

2M

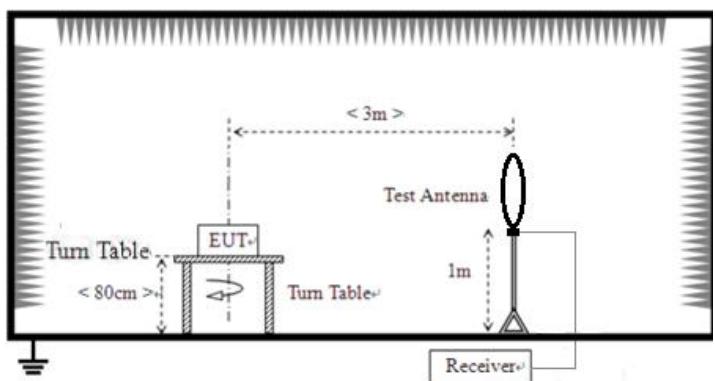Low Channel

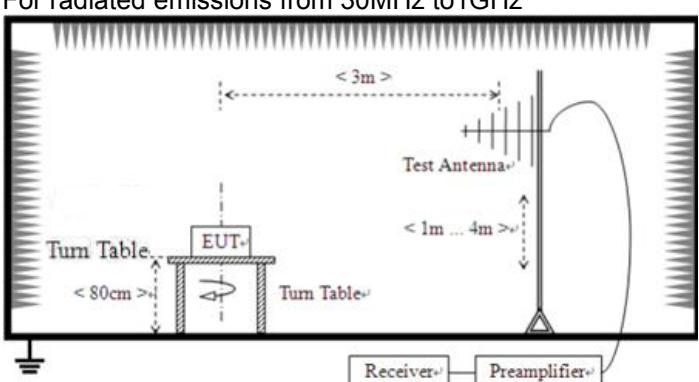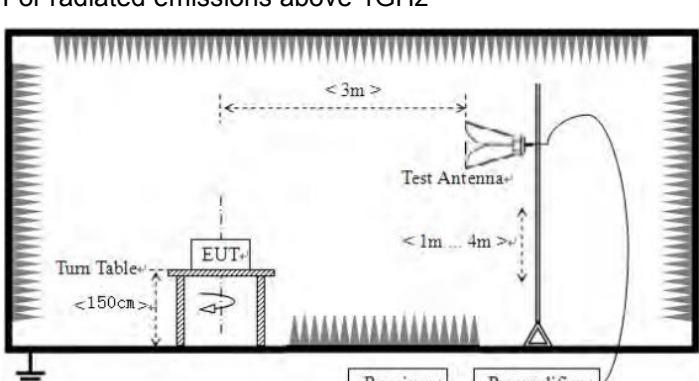Low Channel

Mid Channel

Mid Channel

High Channel
High Channel

6.6.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209						
Test Method:	ANSI C63.10:2013						
Test Frequency Range:	9kHz to 25GHz						
Test site:	Measurement Distance: 3m						
Receiver setup:	Frequency	Detector	RBW	VBW	Value		
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak		
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak		
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak		
	Above 1GHz	Peak	1MHz	3MHz	Peak		
		Peak	1MHz	10Hz	Average		
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance			
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m			
	0.490MHz-1.705MHz	24000/F(KHz)	QP	30m			
	1.705MHz-30MHz	30	QP	30m			
	30MHz-88MHz	100	QP	3m			
	88MHz-216MHz	150	QP				
	216MHz-960MHz	200	QP				
	960MHz-1GHz	500	QP				
	Above 1GHz	500	Average				
		5000	Peak				
Test setup:	For radiated emissions from 9kHz to 30MHz						
							

	<p>For radiated emissions from 30MHz to 1GHz</p> 
	<p>For radiated emissions above 1GHz</p> 
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details



Report No.: HTT202409755F03

Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					


Measurement data:

Remarks:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.
2. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
3. Based on all tested data, the EUT complied with the FCC Part 15.207 standard limit for a wireless device, and with the worst case as BLE 1M 2402MHz as below:


■ Below 1GHz

■ Horizontal

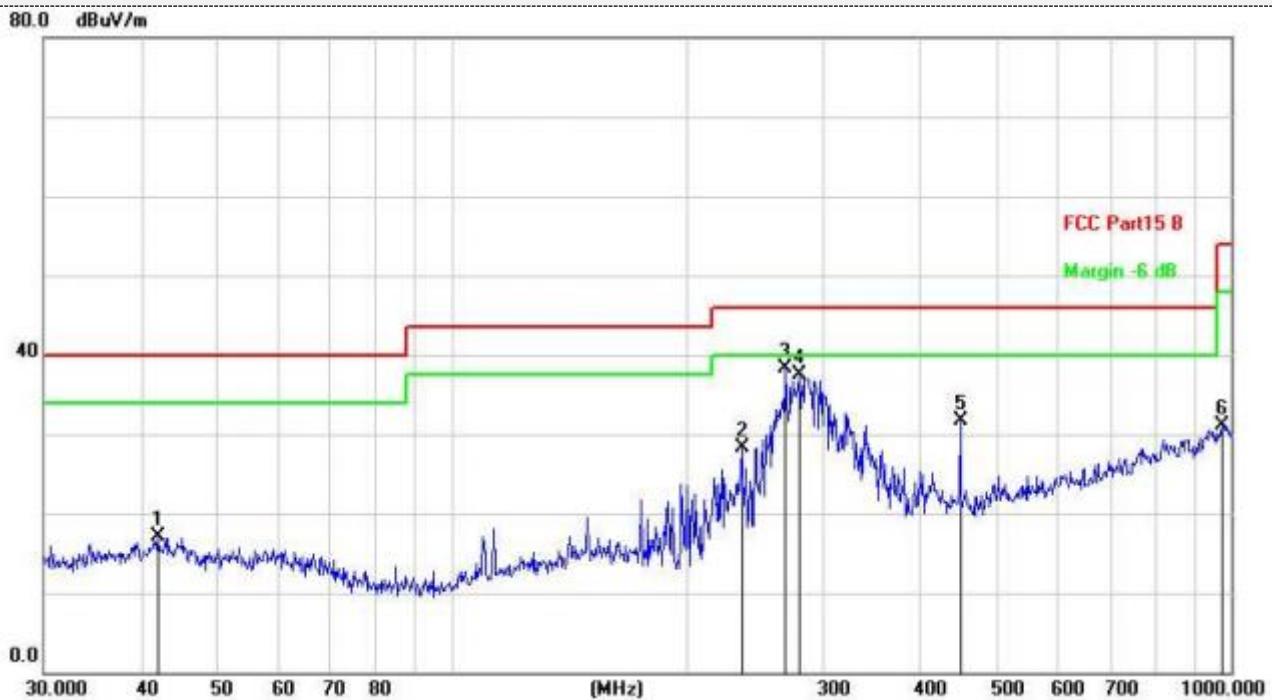

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dB/m	Over dB	Over Detector
1		42.0066	27.43	-10.25	17.18	40.00	-22.82	peak
2		235.8164	40.41	-12.11	28.30	46.00	-17.70	peak
3	*	268.4853	49.74	-11.38	38.36	46.00	-7.64	peak
4		280.0237	48.82	-11.36	37.46	46.00	-8.54	peak
5		449.5558	38.01	-6.31	31.70	46.00	-14.30	peak
6		972.3374	27.81	3.38	31.19	54.00	-22.81	peak

Vertical

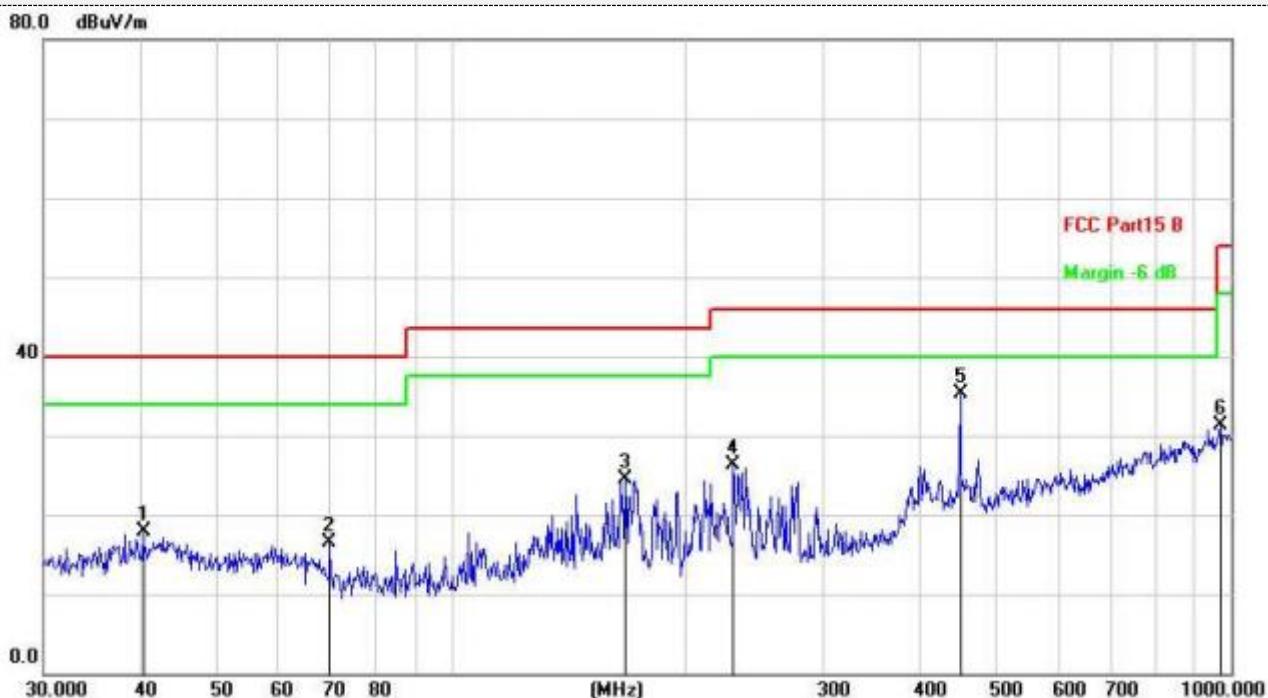

No.	Mk.	Reading		Correct Factor	Measure- ment	Limit	Over
		Freq.	Level				
		MHz	dB _{uV}	dB/m	dB _{uV/m}	dB	Detector
1	40.2757	28.04	-10.22	17.82	40.00	-22.18	peak
2	69.8450	29.87	-13.31	16.56	40.00	-23.44	peak
3	167.2368	35.43	-10.85	24.58	43.50	-18.92	peak
4	230.0985	38.83	-12.48	26.35	46.00	-19.65	peak
5 *	449.5558	41.61	-6.31	35.30	46.00	-10.70	peak
6	968.9338	28.03	3.34	31.37	54.00	-22.63	peak

Final Level = Receiver Read level + Correct Factor



■ Above 1-25GHz

Frequency(MHz):			2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4804.00	59.35	PK	74	14.65	53.65	31	6.5	31.8	5.7
4804.00	42.51	AV	54	11.49	36.81	31	6.5	31.8	5.7
7206.00	53.47	PK	74	20.53	40.82	36	8.15	31.5	12.65
7206.00	44.12	AV	54	9.88	31.47	36	8.15	31.5	12.65

Frequency(MHz):			2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4804.00	58.70	PK	74	15.30	53.00	31	6.5	31.8	5.7
4804.00	44.13	AV	54	9.87	38.43	31	6.5	31.8	5.7
7206.00	53.20	PK	74	20.80	40.55	36	8.15	31.5	12.65
7206.00	44.09	AV	54	9.91	31.44	36	8.15	31.5	12.65

Frequency(MHz):			2440		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4880.00	60.30	PK	74	13.70	54.14	31.2	6.61	31.65	6.16
4880.00	44.08	AV	54	9.92	37.92	31.2	6.61	31.65	6.16
7320.00	51.98	PK	74	22.02	39.03	36.2	8.23	31.48	12.95
7320.00	44.57	AV	54	9.43	31.62	36.2	8.23	31.48	12.95



Frequency(MHz):			2440		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4880.00	61.37	PK	74	12.63	55.21	31.2	6.61	31.65	6.16
4880.00	44.08	AV	54	9.92	37.92	31.2	6.61	31.65	6.16
7320.00	52.59	PK	74	21.41	39.64	36.2	8.23	31.48	12.95
7320.00	43.39	AV	54	10.61	30.44	36.2	8.23	31.48	12.95

Frequency(MHz):			2480		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4960.00	62.78	PK	74	11.22	56.12	31.4	6.76	31.5	6.66
4960.00	41.95	AV	54	12.05	35.29	31.4	6.76	31.5	6.66
7440.00	53.34	PK	74	20.66	40.04	36.4	8.35	31.45	13.3
7440.00	45.47	AV	54	8.53	32.17	36.4	8.35	31.45	13.3

Frequency(MHz):			2480		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4960.00	64.44	PK	74	9.56	57.78	31.4	6.76	31.5	6.66
4960.00	43.72	AV	54	10.28	37.06	31.4	6.76	31.5	6.66
7440.00	55.09	PK	74	18.91	41.79	36.4	8.35	31.45	13.3
7440.00	44.88	AV	54	9.12	31.58	36.4	8.35	31.45	13.3

Remark:

- (1) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed.



6.7. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Antenna Connected Construction

The maximum gain of antenna was -0.84 dBi.

Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Shenzhen HTT Technology Co.,Ltd. does not assume any responsibility.



Report No.: HTT202409755F03

7. Test Setup Photo

Reference to the **appendix I** for details.

8. EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----