Power Density Measurement Report

Application No.:	SZCR2504001358AT
Applicant:	YEAHER INC.
Address of Applicant:	51 Steel Dr, Unit A, New Castle, DE 19720 United States
Manufacturer:	Nimo Direct Inc.
Address of Manufacturer:	51 Steel Dr, Unit A, New Castle, DE 19720 United States
Product Name:	Portable Computer
Model No.:	N175B, N175L ♣
♣	Please refer to section 1.2 of this report which indicates which model was actually tested and which were electrically identical.
FCC ID:	2BEMH-N175B
Standards:	FCC 47CFR §2.1093 IEC/IEEE 63195-1:2022 IEC/IEEE 62209-1528:2020
Date of Receipt:	2025/02/19
Date of Test:	2025/03/27
Date of Issue:	2025/04/16
Test conclusion:	**PASS ***

*In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Keny Xu

EMC Laboratory Manager

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 www.sgsgroup.com.cn
中国・广东・深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 sgs.china@sgs.com

Revision History			
Report Number	***Revision***	***Description***	***Issue Date***
SZCR250400135801	01	Original	2025/04/16

Authorized for issue by:

Calvin Weng / Project Engineer



Eric Fu / Reviewer

TEST SUMMARY

Frequency Band	Reported PD (W/m²)
WIFI 6E	9.36
PD Limit	10

CONTENTS

1 General Information

1.1 Test Location

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
Address:	No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China
Post code:	518057
Test Engineer:	Bert Xu

1.2 General Description of EUT

Device Type :	portable device		
Exposure Category:	uncontrolled environment / general population		
Product Name:	Portable Computer		
Model No.(EUT):	N175B, N175L		
FCC ID:			
Product Phase:	production unit		
Hardware Version:	V20		
Software Version:	V36.01		
Modulation Mode:	OFDMA		
Frequency Bands:	Band	Tx (MHz)	Rx (MHz)
	UNII-5	5925-6425	5925-6425
	UNII-6	6425-6525	6425-6525
	UNII-7	6525-6875	6525-6875
	UNII-8	6875-7125	6875-7125

Note: *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, SGS is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
Remark:
1. As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.
2. There are series models mentioned in this report, and they are identical in electrical and electronic characters. Only the model N175B was tested since their differences were the model number and color appearance.

1.3 Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
ANSI/IEEE C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEC/IEEE 62209-1528:2020	Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)
IEC/IEEE 63195-1:2022	Assessment of power density of human exposure to radio frequency fields from wireless devices in close proximity to the head and body (frequency range of 6 GHz to 300 GHz) – Part 1: Measurement procedure
KDB 447498 D04	Interim General RF Exposure Guidance v01
KDB 248227 D01	SAR Guidance for IEEE 802 11 Wi-Fi SAR v02r02

1.4 RF exposure limit for above 6GHz

According to ANSI/IEEE C95.1-1992, the criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in §1.1310.

Peak Spatially Averaged Power Density was evaluated over a circular area of 4cm2 per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm^2)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f2)	6
30-300	61.4	0.163	1.0	6
300-1500			f/300	6
1500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f2)	30
30-300	27.5	0.073	0.2	30
300-1500			f/1500	30
1500-100,000			1.0	30

Note: 1.0 mW/cm^2 is equal to 10 W/m^2

2 System Description and Setup

2.1 Power density measurement system

Power density measurements for mmWave frequencies were performed using SPEAG DASY6 with cDASY6 5G module. The DASY6 included a high precision robotics system (Staubli), robot controller, desktop computer, near-field probe, probe alignment sensor, and the 5G phantom cover.

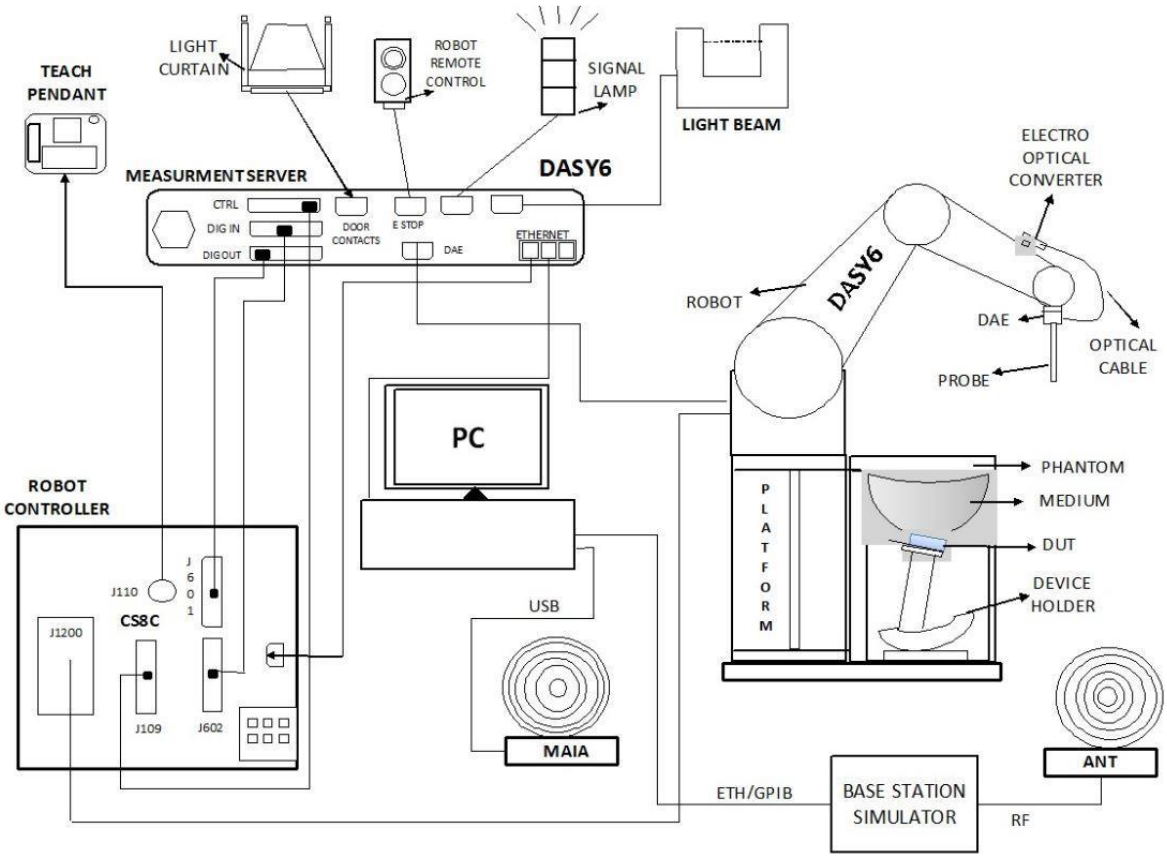

Measurement System Configuration

2.2 EUmmWaVe probe

Frequency	750 MHz – 110 GHz
Probe Overall Length	320 mm
Probe Body Diameter	8.0 mm
Tip Length	23.0 mm
Tip Diameter	8.0 mm
Probe's two dipoles length	0.9 mm – Diode loaded
Dynamic Range	< 20 V/m - 10000 V/m with PRE-10 (min < 50 V/m - 3000 V/m)
Position Precision	< 0.2 mm
Distance between diode sensors and probe's tip	1.5 mm
Minimum Mechanical separation between probe tip and a Surface	0.5 mm
Applications	E-field measurements of 5G devices and other mm-wave transmitters operating above 10GHz in < 2 mm distance from device (free-space) Power density, H-field and far-field analysis using total field reconstruction.
Compatibility	cDASY6 + 5G-Module SW1.0 and higher

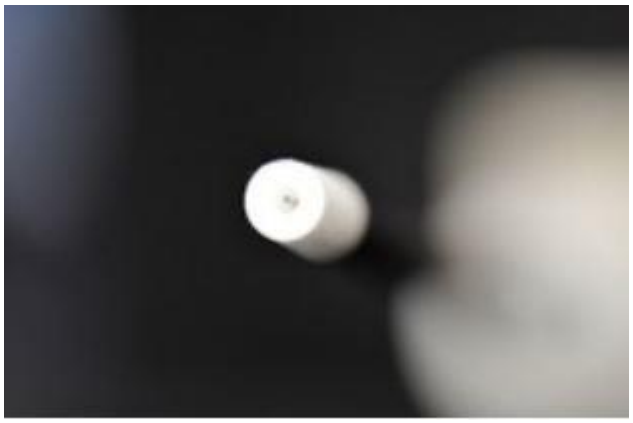

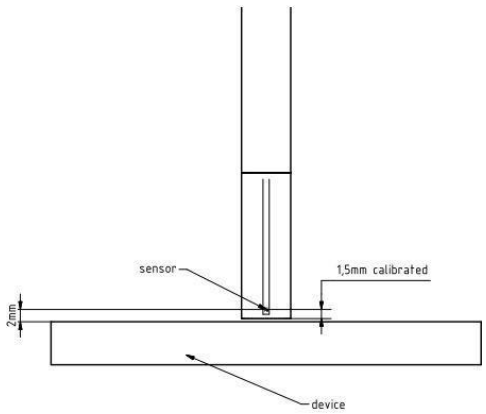

The EUmmWaVe probe is based on the pseudo-vector probe design, which not only measures the field magnitude but also derives its polarization ellipse. The design entails two small 0.8mm dipole sensors mechanically protected by high-density foam, printed on both sides of a 0.9mm wide and 0.12mm thick glass substrate. The body of the probe is specifically constructed to minimize distortion by the scattered fields. The probe consists of two sensors with different angles (1 and 2) arranged in the same plane in the probe axis. Three or more measurements of the two sensors are taken for different probe rotational angles to derive the amplitude and polarization information. The probe design allows measurements at distances as small as 2mm from the sensors to the surface of the device under test (DUT). The typical sensor to probe tip distance is 1.5 mm. The exact distance is calibrated.

Data Acquisition Electronics (DAE)

Model	DAE	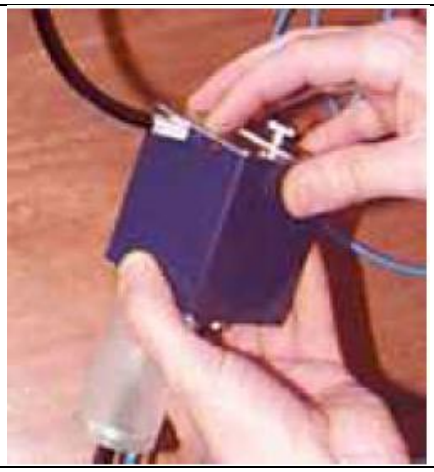
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16-bit resolution and two range settings: 4mV,400mV)	
Input Offset Voltage	< 5μV (with auto zero)	
Input Bias Current	< 50 f A	
Dimensions	60 x 60 x 68 mm	

2.3 Scan configuration

Fine-resolution scans on 2 different planes are performed to reconstruct the E- and H-fields as well as the power density; the z-distance between the 2 planes is set to λ/4. The (x, y) grid step is also setλ/4, the grid extent is set to sufficiently large to identify the field pattern and the peak.

3 System Verification Procedure

3.1 PD Test System Verification

The system was verified to be within ±0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check.

The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes.

Frequency [GHz]	Grid step	Grid extent X/Y [mm]	Measurement points
10	0.25 ($\frac{\lambda}{4}$)	120/120	16 × 16
30	0.25 ($\frac{\lambda}{4}$)	60/60	24 × 24
60	0.25 ($\frac{\lambda}{4}$)	32.5/32.5	26 × 26
90	0.25 ($\frac{\lambda}{4}$)	30/30	36 × 36

Settings for measurement of verification sources

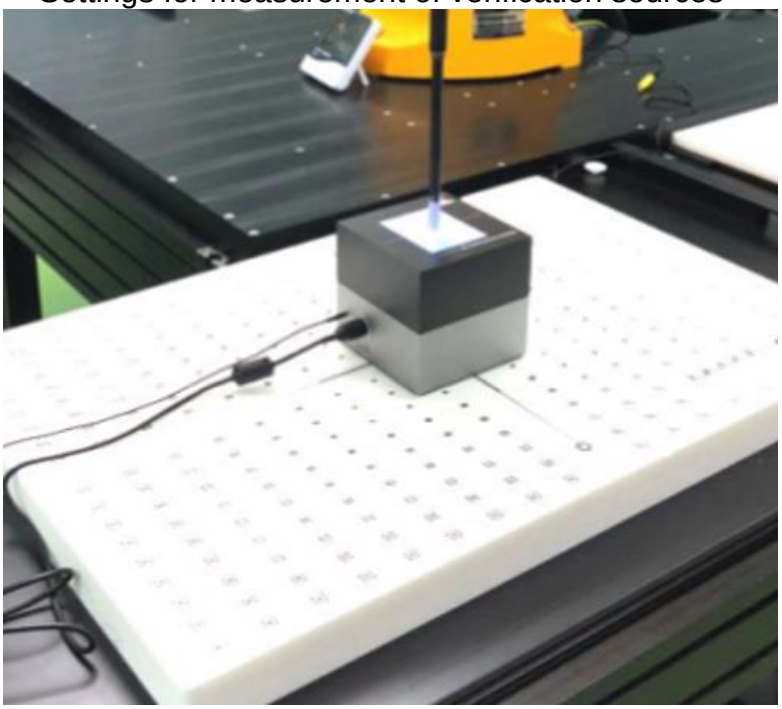

System Verification Setup Photo

3.2 PD System Verification Results

Frequent	Measured PD W/m²	Target PD W/m²	Circular Deviation (Within ±0.66dB)	Test Date
	4cm²	4cm²	4cm²	
10G HZ Source	171.00	183	-0.29	2025/03/27

3.3 Detailed System Check Results

Please see the Appendix A

4 Measurement Data

1. The PD test was performed of a 2mm separation between sensor and EUT surface (the probe tip is 0.5mm to the EUT surface), 2 mm separation distance PD testing is for hotspot and body worn exposure conditions.

2. According to TCBC Workshop in October 2018, 4 cm^2 averaging area are used.

4.1 Measurement of RF Conducted Power

WIFI 6E Ant 1 SISO						
Band	Mode	Channel	Frequency (MHz)	Data Rate	Average Power (dBm)	Tune up
U - NII - 5 6.2GHz	802.11a	1	5955	6Mbps	7.38	8.50
		45	6175		8.83	10.00
		93	6415		8.27	9.50
	802.11ax HE160	15	6025	MCS0	14.32	15.50
		47	6185		14.27	15.50
		79	6345		14.14	15.50
U - NII - 6 6.5GHz	802.11a	97	6435	6Mbps	9.73	11.00
		105	6475		9.72	11.00
		113	6515		9.34	10.50
	802.11ax HE160	111	6505	MCS0	15.07	16.50
U - NII - 7 6.7GHz	802.11a	117	6535	6Mbps	9.93	11.00
		153	6715		10.21	11.50
		181	6855		10.56	12.00
	802.11ax HE160	143	6665	MCS0	15.43	16.50
		175	6825		16.48	17.50
U - NII - 8 7.0GHz	802.11a	185	6875	6Mbps	10.49	11.50
		213	7015		10.61	12.00
		233	7115		10.52	12.00
	802.11ax HE160	207	6985	MCS0	15.96	17.00

WIFI 6E MIMO								
Band	Mode	Channel	Frequency (MHz)	Data Rate	Average Power (dBm)	Average Power (dBm)	Average Power (dBm)	Tune up
U - NII - 5 6.2GHz	802.11a	1	5955	6Mbps	2.36	2.19	5.29	6.50
		45	6175		2.63	2.07	5.37	6.50
		93	6415		1.62	2.53	5.11	6.50
	802.11ax HE20	1	5955	MCS0	3.17	3.05	6.12	7.50
		45	6175		2.79	3.33	6.08	7.50
		93	6415		2.69	3.37	6.05	7.50
	802.11ax HE40	3	5985	MCS0	4.50	4.59	7.56	9.00
		43	6165		5.13	4.99	8.07	9.50
		91	6405		4.32	6.33	8.45	9.50
	802.11ax HE80	7	5985	MCS0	6.99	7.75	10.40	11.50
		39	6145		7.67	7.66	10.68	12.00
		87	6385		7.24	8.82	11.11	12.50
	802.11ax HE160	15	6025	MCS0	10.74	11.21	13.99	15.00
		47	6185		10.51	11.06	13.80	15.00
		79	6345		10.48	11.02	13.77	15.00
U - NII - 6 6.5GHz	802.11a	97	6435	6Mbps	4.28	5.78	8.10	9.50
		105	6475		3.67	5.87	7.92	9.00
		113	6515		4.09	5.67	7.96	9.00
	802.11ax HE20	97	6435	MCS0	4.62	6.24	8.52	10.00
		105	6475		4.21	6.19	8.32	9.50
		113	6515		4.93	6.78	8.96	10.00
	802.11ax HE40	99	6445	MCS0	6.24	7.88	10.15	11.50
		107	6485		5.65	8.38	10.24	11.50
	802.11ax HE80	103	6465	MCS0	9.68	11.77	13.86	15.00
		119	6545		10.91	10.77	13.85	15.00
	802.11ax HE160	111	6505	MCS0	12.95	13.34	16.16	17.50
U - NII - 7 6.7GHz	802.11a	117	6535	6Mbps	2.87	5.45	7.36	8.50
		153	6715		4.15	4.36	7.27	8.50
		181	6855		3.87	4.53	7.22	8.50
	802.11ax HE20	117	6535	MCS0	3.75	5.88	7.95	9.00
		153	6715		3.18	3.04	6.12	7.50
		181	6855		4.19	5.06	7.66	9.00
	802.11ax HE40	115	6525	MCS0	7.75	7.14	10.47	11.50
		123	6565		5.76	7.94	10.00	11.00
		155	6725		6.69	6.99	9.85	11.00
		179	6845		6.85	7.36	10.12	11.50
	802.11ax HE80	135	6625	MCS0	8.92	10.53	12.81	14.00
		151	6705		9.84	10.15	13.01	14.50

		167	6785		10	9.9	12.96	14.00
	802.11ax HE160	143	6665	MCS0	9.71	10.3	13.03	14.50
		175	6825		10.55	10.92	13.75	15.00
U - NII - 8 7.0GHz	802.11a	185	6875	6Mbps	3.78	5.2	7.56	9.00
		213	7015		4.25	4.43	7.35	8.50
		233	7115		4.82	4.16	7.51	9.00
	802.11ax HE20	185	6875	MCS0	4.18	5.81	8.08	9.50
		213	7015		5	5.11	8.07	9.50
		233	7115		6	5.12	8.59	10.00
	802.11ax HE40	187	6885	MCS0	6.52	7.88	10.26	11.50
		211	7005		5.52	7.25	9.48	10.50
		227	7085		6.18	7.57	9.94	11.00
	802.11ax HE80	183	6865	MCS0	10.5	11.05	13.79	15.00
		199	6945		10.28	11.04	13.69	15.00
		215	7025		9.84	10.46	13.17	14.50
	802.11ax HE160	207	6985	MCS0	9.42	11.57	13.64	15.00

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 sgs.china@sgs.com

4.2 PD Test Data

Wi-Fi 6E PD Test Record Ant1															
Test position	Test mode	Test ch./Freq.	Distance (mm)	Grid Step (λ)	Duty Cycle	Duty Cycle Scaled factor	iPDn	iPD ratio	Measured PD 4cm^2 (W/m^2)	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaling Factor for measurement uncertainty	Tune up Scaled factor	Scaled PD 4cm^2 (W/m^2)
Power Density Test DATA															
Top Edge	802.11ax 160M	175/6825	2	0.0625	100.00%	1	/	/	2.010	0.06	16.48	17.50	1.5493	1.265	3.939
Back face	802.11ax 160M	175/6825	2	0.0625	100.00%	1	38.00	0.38	4.31	0.06	16.48	17.50	1.5493	1.265	**8.445**
Back face	802.11ax 160M	175/6825	9.2	0.0625	100.00%	1	34.80		2.410	-0.05	16.48	17.50	1.5493	1.265	4.722
Back face	802.11ax 160M	15/6025	2	0.0625	100.00%	1	/	/	0.911	0.01	14.32	15.50	1.5493	1.312	1.852
Back face	802.11ax 160M	111/6505	2	0.0625	100.00%	1	/	/	0.759	0.03	15.07	16.50	1.5493	1.390	1.634
Back face	802.11ax 160M	207/6985	2	0.0625	100.00%	1	/	/	3.470	0.04	15.96	17.00	1.5493	1.271	6.831
Wi-Fi 6E PD Test Record MIMO															
Test position	Test mode	Test ch./Freq.	Distance (mm)	Grid Step (λ)	Duty Cycle	Duty Cycle Scaled factor	iPDn	iPD ratio	Measured PD 4cm^2 (W/m^2)	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaling Factor for measurement uncertainty	Tune up Scaled factor	Scaled PD 4cm^2 (W/m^2)
Power Density Test DATA															
Top Edge	802.11ax 160M	111/6505	2	0.0625	100.00%	1	/	/	0.932	0.06	16.16	17.50	1.5493	1.361	1.966
Back face	802.11ax 160M	111/6505	2	0.0625	100.00%	1	16.10	0.71	2.14	0.07	16.16	17.50	1.5493	1.361	4.514
Back face	802.11ax 160M	111/6505	9.2	0.0625	100.00%	1	13.68		0.960	-0.05	16.16	17.50	1.5493	1.361	2.025
Back face-Battery	802.11ax 160M	175/6825	2	0.0625	100.00%	1	/	/	4.530	0.01	13.75	15.00	1.5493	1.334	**9.359**
Back face	802.11ax 160M	175/6825	2	0.0625	100.00%	1	/	/	4.380	0.06	13.75	15.00	1.5493	1.334	9.049
Back face	802.11ax 160M	15/6025	2	0.0625	100.00%	1	/	/	0.922	-0.09	13.99	15.00	1.5493	1.261	1.802
Back face	802.11ax 160M	207/6985	2	0.0625	100.00%	1	/	/	4.140	-0.03	13.64	15.00	1.5493	1.368	8.773

5 Equipment list

Test Platform	SPEAG DASY Professional
Description	PD Test System
Software Reference	cDASY6 V2.2.0.76

Hardware Reference

	Equipment	Manufacturer	Model	Inventory No.	Calibration Date	Due date of calibration
☒	Test Phantom	SPEAG	mmWave	SZ-WSR-A-029	NCR	NCR
☒	DAE	SPEAG	DAE4	SZ-WSR-M-031	2025/02/17	2026/02/16
☒	E-U Probe	SPEAG	EUmmWV4	SZ-WSR-M-048	2024/8/23	2025/8/22
☒	5G Verification Source	SPEAG	10GHz	SZ-WSR-M-048	2024/8/20	2025/8/19
☒	Dielectric parameter probes	SPEAG	DAKS-3.5	SZ-WSR-M-053	2024/6/26	2025/6/25
☒	RF Bi-Directional Coupler	Agilent	86205-60001	SZ-WSR-A-004	NCR	NCR
☒	Signal Generator	Agilent	N5171B	SZ-WSR-M-006	2025/1/7	2026/1/6
☒	Preamplifier	Mini-Circuits	ZHL-42W	SZ-WSR-A-001	NCR	NCR
☒	Preamplifier	Compliance Directions Systems Inc.	AMP28-3W	SZ-WSR-A-002	NCR	NCR
☒	Power Meter	Agilent	E4416A	SZ-WSR-M-007	2025/1/7	2026/1/6
☒	Power Sensor	Agilent	8481H	SZ-WSR-M-008	2025/1/7	2026/1/6
☒	Power Sensor	R&S	NRP-Z92	SZ-WSR-M-009	2025/1/8	2026/1/7
☒	Attenuator	SHX	TS2-3dB	SZ-WSR-A-012	NCR	NCR
☒	Humidity and Temperature Indicator	CHIGAO	HTC-1	SZ-WSR-M-013	2024/05/28	2025/05/27

6 Measurement Uncertainty

a	b	c	d	e	f=b*e/d	g
Error Description	Uncertainty Value (±dB)	Probability	Div.	Ci	Standard Uncertainty (±dB)	Vi (Veff)
Probe Calibration	0.49	N	1	1	0.49	∞
Probe correction	0.00	R	1.732	1	0.00	∞
Frequency response (BW ≤1 GHz)	0.20	R	1.732	1	0.12	∞
Sensor cross coupling	0.00	R	1.732	1	0.00	∞
Isotropy	0.50	R	1.732	1	0.29	∞
Linearity	0.20	R	1.732	1	0.12	∞
Probe scattering	0.00	R	1.732	1	0.00	∞
Probe positioning offset	0.30	R	1.732	1	0.17	∞
Probe positioning repeatability	0.04	R	1.732	1	0.02	∞
Sensor mechanical offset	0.00	R	1.732	1	0.00	∞
Probe spatial resolution	0.00	R	1.732	1	0.00	∞
Field impedance dependance	0.00	R	1.732	1	0.00	∞
Amplitude and phase drift	0.00	R	1.732	1	0.00	∞
Amplitude and phase noise	0.04	R	1.732	1	0.02	∞
Measurement area truncation	0.00	R	1.732	1	0.00	∞
Data acquisition	0.03	N	1	1	0.03	∞
Sampling	0.00	R	1.732	1	0.00	∞
Field reconstruction	2.00	R	1.732	1	1.15	∞
Forward transformation	0.00	R	1.732	1	0.00	∞
Power density scaling	0.00	R	1.732	1	0.00	∞
Spatial averaging	0.10	R	1.732	1	0.06	∞
System detection limit	0.04	R	1.732	1	0.02	∞
Probe coupling with DUT	0.00	R	1.732	1	0.00	∞
Modulation response	0.40	R	1.732	1	0.23	∞
Integration time	0.00	R	1.732	1	0.00	∞
Response time	0.00	R	1.732	1	0.00	∞
Device holder influence	0.10	R	1.732	1	0.06	∞
DUT alignment	0.00	R	1.732	1	0.00	∞
RF ambient conditions	0.04	R	1.732	1	0.02	∞
Ambient reflections	0.04	R	1.732	1	0.02	∞
Immunity / secondary reception	0.00	R	1.732	1	0.00	∞
Drift of the DUT		R	1.732	1	0.00	∞
Combined Std. Uncertainty					1.33	
Expanded STD Uncertainty (95%)，K=2					2.67	

7 Calibration certificate

Please see the Appendix C

8 Photographs

Please see the Appendix D

Appendix A: Detailed System Check Results

Appendix B: Detailed Test Results

Appendix C: Calibration certificate

Appendix D: Photographs

---END---