

TEST REPORT

Application No.: KSCR2501000028AT
FCC ID: 2BEMH-N175B
Applicant: YEAHER INC.
Address of Applicant: 51 Steel Dr, Unit A, New Castle, DE 19720 United States
Manufacturer: Nimo Direct Inc.
Address of Manufacturer: 51 Steel Dr, Unit A, New Castle, DE 19720 United States
Equipment Under Test (EUT):
EUT Name: Portable Computer
Model No.: N175B,N175L ♣
♣ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Standard(s) : 47 CFR Part 15, Subpart E 15.407
Date of Receipt: 2025-01-03
Date of Test: 2025-01-17 to 2025-03-14
Date of Issue: 2025-06-30

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Revision Record			
Version	Description	Date	Remark
00	Original	2025-06-30	/

Authorized for issue by:			
Tested By		<i>Tommie Tang</i>	
		<u>Tommie_Tang/Project Engineer</u>	
Approved By		<i>Terry Hou</i>	
		<u>Terry Hou /Reviewer</u>	

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)	Pass
Maximum Conducted output power		ANSI C63.10 (2013) Section 12.3	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Radiated Emissions (Below 1GHz)		ANSI C63.10 (2013) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions (Above 1GHz)		ANSI C63.10 (2013) Section 6.6	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass

Note1: There are series models mentioned in this report, and they are identical in electrical and electronic characters. Only the model N175B was tested since their differences were the model number and appearance.

Note2:

- (i) The Host Laptop(FCC ID: 2BEMH-N175B) integrated a certified module from Hon Lin Technology Co., Ltd. (FCC ID: 2AQ68MT7922A22M).
- (ii) Hon Lin module (FCC ID: 2AQ68MT7922A22M) is a change ID from MediaTek Inc. (FCC ID: RAS-MT7922A22M, grant date 12/26/2024).
- (iii) The change ID application (FCC ID: 2AQ68MT7922A22M) did not upload test reports, thus the referenced module reports are from MTK module (FCC ID: RAS-MT7922A22M).
- (iv) The MTK module (FCC ID: RAS-MT7922A22M) was original granted as DSS+DTS+NII on 07/08/2021, then add equipment class of 6XD on 09/27/2021, and then add 6CD on 08/29/2023.
- (v) The Host Laptop(FCC ID: 2BEMH-N175B) only apply as DSS+DTS+NII+6XD, the 6CD of standard power level will be disabled by software on the Laptop, the reference module reports are as below:

Equipment Class	Reference test report number from Module (FCC ID: RAS-MT7922A22M)	Reference test items	Re-test items
6XD (Low power level)	RFBARR-WTW-P21030485A-6 (Original) RFBARR-WTW-P21030485L-6 (C2PC) RFBARR-WTW-P21030485P (C2PC)	26dB Bandwidth. 99% Bandwidth. In-band Mask. Power Spectral Density. CBP.	Conducted Power, AC Conducted Emission, Radiated Spurious Emission.

6CD (Standard power level)	RFBARR-WTW-P22120081B-4 (Original) RFBARR-WTW-P22120081S-3 (C2PC)	None	None
-------------------------------	--	------	------

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents.....	5
4 General Information.....	6
4.1 Details of E.U.T.	6
4.2 Power level setting using in test:	7
4.3 Worst-case configuration and mode	9
4.4 Description of Support Units	10
4.5 Measurement Uncertainty	11
4.6 Test Location	12
4.7 Test Facility	12
4.8 Deviation from Standards.....	12
4.9 Abnormalities from Standard Conditions.....	12
5 Equipment List	13
6 Radio Spectrum Technical Requirement.....	14
6.1 Antenna Requirement	14
7 Radio Spectrum Matter Test Results	15
7.1 AC Power Line Conducted Emissions	15
7.2 Maximum e.i.r.p.	19
7.3 Radiated Spurious Emissions	20
8 Test Setup Photo	155
9 EUT Constructional Details (EUT Photos).....	155
10 Appendix.....	156

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 20V,5A by adapter Adapter Model: A879-200500C-US1 Input: 100-240V,50/60Hz,2.5A Output: PD: 5V,3A/9V,3A/12V,3A/15V,3A/20V,5A PPS: 3.3V-21V,5A,100W Max
Operation Frequency/Number of channels (20MHz):	U-NII-5: 5955-6415MHz (24 Channels); U-NII-6: 6435-6515MHz (5 Channels); U-NII-7: 6535-6875MHz (18Channels); U-NII-8: 6895-7115MHz (12Channels)
Operation Frequency/Number of channels/(40MHz):	U-NII-5: 5965-6405MHz (12 Channels); U-NII-6: 6445-6525MHz (3 Channels); U-NII-7: 6565-6885MHz (9 Channels); U-NII-8: 6925-7045MHz (5 Channels)
Operation Frequency/Number of channels (80MHz):	U-NII-5: 5985-6385MHz (6 Channels); U-NII-6: 6465-6545MHz (2 Channels); U-NII-7: 6545-6785MHz (4 Channels); U-NII-8: 6945-7025MHz (2 Channels)
Operation Frequency/Number of channels (160MHz):	U-NII-5: 6025-6345MHz (3 Channels); U-NII-6: 6505MHz (1 Channel); U-NII-7: 6665-6825MHz (2 Channels); U-NII-8: 6985MHz (1 Channel)
Modulation Type:	802.11a: OFDM (BPSK, QPSK, 16QAM, 64QAM); 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024-QAM)
Channel Spacing:	802.11 a/ax 20: 20MHz; 802.11 ax 40: 40MHz; 802.11 ax 80: 80MHz; 802.11 ax 160: 160MHz
Antenna Type:	Antenna 1: FPC Antenna, Antenna 2: FPC Antenna
Antenna Gain:	Antenna 1: 5925-6425MHz: 2.83dBi, (Provided by the manufacturer) 6425-6525MHz: 1.28dBi, (Provided by the manufacturer) 6525-6875MHz: 1.1dBi, (Provided by the manufacturer) 6875-7125MHz: 0.56dBi (Provided by the manufacturer) Antenna 2: 5925-6425MHz: 2.56dBi, (Provided by the manufacturer) 6425-6525MHz: -0.95dBi, (Provided by the manufacturer) 6525-6875MHz: 0.52dBi, (Provided by the manufacturer) 6875-7125MHz: 0.56dBi (Provided by the manufacturer)

4.2 Power level setting using in test:

SISO:

Channel	802.11a		
	Ant 1		
	Power setting		
1	10		
45	8.5		
93	9		
97	10		
105	10.5		
113	10.5		
117	10.5		
153	8.5		
181	9.5		
185	9		
213	10.5		
233	10		
Channel	802.11ax (HE160))		
	Ant 1		
	RU Config	RU Position	Power setting
15	2x RU996	/	13.5
47	2x RU996	/	12.5
79	2x RU996	/	12
111	2x RU996	/	14
143	2x RU996	/	12.5
175	2x RU996	/	12.5
207	2x RU996	/	13.5

MIMO:

Channel	802.11a	802.11ax(HE20)		
	Ant 1/Ant 2	Ant 1/Ant 2		
	Power setting	RU Config	RU Position	Power setting
1	5.5	RU 242	/	1
		RU26	Left	-7
		RU106	Left	-2
45	4	RU 242	/	0.5
93	4	RU 242	/	1

		RU26	Right	-9
		RU106	Right	-3
97	7.5	RU 242	/	3
		RU26	Left	-9
		RU106	Left	-3
105	7.5	RU 242	/	3
113	8	RU 242	/	4
117	7.5	RU 242	/	3
		RU26	Left	-9
		RU106	Left	-1.5
153	6	RU 242	/	4.5
181	7	RU 242	/	3
		RU26	Right	-9
		RU106	Right	-3
185	7	RU 242	/	3
213	7.5	RU 242	/	3
233	8	RU 242	/	3
		RU26	Right	-9
		RU52	Right	-6
		RU106	Right	-1
Channel	802.11ax(HE40))			
	Ant 1/Ant 2			
	RU Config	RU Position	Power setting	
3	RU 484	/	4	
43	RU 484	/	3	
91	RU 484	/	4	
99	RU 484	/	5	
107	RU 484	/	6	
115	RU 484	/	4.5	
123	RU 484	/	6	
155	RU 484	/	3.5	
179	RU 484	/	5	
187	RU 484	/	6	
211	RU 484	/	6	
227	RU 484	/	6	
Channel	802.11ax(HE80))			
	Ant 1/Ant 2			
	RU Config	RU Position	Power setting	
7	RU 996	/	7	
39	RU 996	/	7	
87	RU 996	/	7	

103	RU 996	/	8
119	RU 996	/	7
135	RU 996	/	9
151	RU 996	/	7.5
167	RU 996	/	7
183	RU 996	/	8
199	RU 996	/	8
215	RU 996	/	8
Channel	802.11ax (HE160))		
	Ant 1/Ant 2		
	RU Config	RU Position	Power setting
15	2x RU996	/	11.5
47	2x RU996	/	11.5
79	2x RU996	/	10.5
111	2x RU996	/	11
143	2x RU996	/	11
175	2x RU996	/	11
207	2x RU996	/	11

4.3 Worst-case configuration and mode

Pre-scan / Final test	Mode Code	Description
Final test	08	TX mode (U-NII-5) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; the data rate @ MCS0 is the worst case of IEEE 802.11ax 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	09	TX mode (U-NII-6) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; the data rate @ MCS0 is the worst case of IEEE 802.11ax 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	10	TX mode (U-NII-7) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11ax 20/40/80/160, Only the data of worst case is recorded in the report.
Final test	11	TX mode (U-NII-8) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; the data rate @



Report No.: KSCR250100002805

Page: 10 of 161

		MCS0 is the worst case of IEEE 802.11ax 20/40/80/160, Only the data of worst case is recorded in the report.
--	--	--

4.4 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
--	--	--	--
The EUT has been tested as an independent unit.			

4.5 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4×10^{-8}
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Conducted Power	0.6dB
6	RF Power Density	2.9dB
7	Conducted Spurious Emissions	0.75dB
8	RF Radiated Power	5.2dB (Below 1GHz)
		5.9dB (Above 1GHz)
9	Radiated Spurious Emission Test	4.2dB (Below 30MHz)
		4.5dB (30MHz-1GHz)
		5.1dB (1GHz-18GHz)
		5.4dB (Above 18GHz)
10	Temperature Test	1°C
11	Humidity Test	3%
12	Supply Voltages	1.5%
13	Time	3%
Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.		

4.6 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

- **FCC**

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory. Designation Number: CN1172.

- **ISED**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 2324E

- **VCCI**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

4.8 Deviation from Standards

None

4.9 Abnormalities from Standard Conditions

None

5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
Conducted Emission at Mains Terminals						
1	EMI Test Receive	R&S	ESCI	KS301101	03/19/2024	03/18/2025
2	LISN	R&S	ENV216	KS301197	01/15/2025	01/14/2026
3	LISN	Schwarzbeck	NNLK 8129	KS301091	01/15/2025	01/14/2026
4	Pulse Limiter	R&S	ESH3-Z2	KUS1902E001	12/05/2024	12/04/2025
5	CE test Cable	Thermax	/	CZ301102	01/14/2025	01/13/2026
6	Test Software	ESE	E3_V 6.111221a	/	N.C.R	N.C.R
RF Conducted Test						
1	Spectrum Analyzer	Keysight	N9020A	KUS1911E004-2	08/01/2024	07/31/2025
2	Spectrum Analyzer	Keysight	N9020A	KUS2001M001-2	08/01/2024	07/31/2025
3	Spectrum Analyzer	Keysight	N9030B	KSEM021-1	01/15/2025	01/14/2026
4	Signal Generator	R&S	SMBV100B	KSEM032	03/19/2024	03/18/2025
5	Signal Generator	R&S	SMW200A	KSEM020-1	08/02/2024	08/01/2025
6	Signal Generator	Agilent	N5182A	KUS2001M001-1	08/01/2024	07/31/2025
7	Radio Communication Test Station	Anritsu	MT8000A	KSEM001-1	08/01/2024	07/31/2025
8	Radio Communication Analyzer	Anritsu	MT8821C	KSEM002-1	03/19/2024	03/18/2025
9	Universal Radio Communication Tester	R&S	CMW500	KUS1911E004-1	08/13/2024	08/12/2025
10	Switcher	TST	FY562	KUS2001M001-4	01/15/2025	01/14/2026
11	AC Power Source	EXTECH	6605	KS301178	N.C.R	N.C.R
12	DC Power Supply	Aglient	E3632A	KS301180	N.C.R	N.C.R
13	Conducted Test Cable	Thermax	RF01-RF04	CZ301111-CZ301120	01/14/2025	01/13/2026
14	Temp. / Humidity Chamber	TERCHY	MHK-120AK	KS301190	08/26/2024	08/25/2025
15	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-5	03/19/2024	03/18/2025
16	Software	BST	TST-PASS	/	NCR	NCR
RF Radiated Test						
1	Spectrum Analyzer	R&S	FSV40	KUS1806E003	08/06/2024	08/05/2025
2	Universal Radio Communication Tester	R&S	CMW500	KSEM009-1	03/19/2024	03/18/2025
3	Signal Generator	Agilent	E8257C	KS301066	08/06/2024	08/05/2025
4	Loop Antenna	COM-POWER	AL-130R	KUS1806E001	03/18/2023	03/17/2025
5	Bilog Antenna	TESEQ	CBL 6112D	KUS1806E005	06/29/2023	06/28/2025
6	Bilog Antenna	TESEQ	CBL 6112D	KUS1806E006	03/19/2024	03/18/2025
7	Horn-antenna(1-18GHz)	Schwarzbeck	BBHA9120D	KS301079	03/23/2024	03/22/2025
8	Horn-antenna(1-18GHz)	ETS-LINDGREN	3117	KS301186	04/07/2023	04/06/2025
9	Horn Antenna(18-40GHz)	Schwarzbeck	BBHA9170	CZ301058	01/07/2024	01/06/2026
10	Amplifier(30MHz~18GHz)	PANSHAN TECHNOLOGY	LNA:1~18G	KSEM010-1	01/15/2025	01/14/2026
11	Amplifier(18~40GHz)	PANSHAN TECHNOLOGY	LNA180400G40	KSEM038	08/12/2024	08/11/2025
12	RE Test Cable	REBES MICROWAVE	/	CZ301097	08/23/2024	08/22/2025
13	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-4	03/19/2024	03/18/2025
14	Software	Faratronic	EZ EMC-v 3A1	/	NCR	NCR
15	Software	ESE	E3_V 6.111221a	/	NCR	NCR

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna are FPC antennas and no consideration of replacement. The best case gain of the antennas are:

Antenna 1:

5925-6425MHz: 2.83dBi, (Provided by the manufacturer)

6425-6525MHz: 1.28dBi, (Provided by the manufacturer)

6525-6875MHz: 1.1dBi, (Provided by the manufacturer)

6875-7125MHz: 0.56dBi (Provided by the manufacturer)

Antenna 2:

5925-6425MHz: 2.56dBi, (Provided by the manufacturer)

6425-6525MHz: -0.95dBi, (Provided by the manufacturer)

6525-6875MHz: 0.52dBi, (Provided by the manufacturer)


6875-7125MHz: 0.56dBi (Provided by the manufacturer)

Antenna location: Refer to internal photo.

7 Radio Spectrum Matter Test Results

7.1 AC Power Line Conducted Emissions

Test Requirement:	47 CFR Part 15 Section 15.407(b)		
Test Method:	ANSI C63.10: 2013 Section 6.2		
Test Frequency Range:	150kHz to 30MHz		
Receiver Setup:	RBW = 9kHz, VBW = 30kHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	* Decreases with the logarithm of the frequency.		
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		

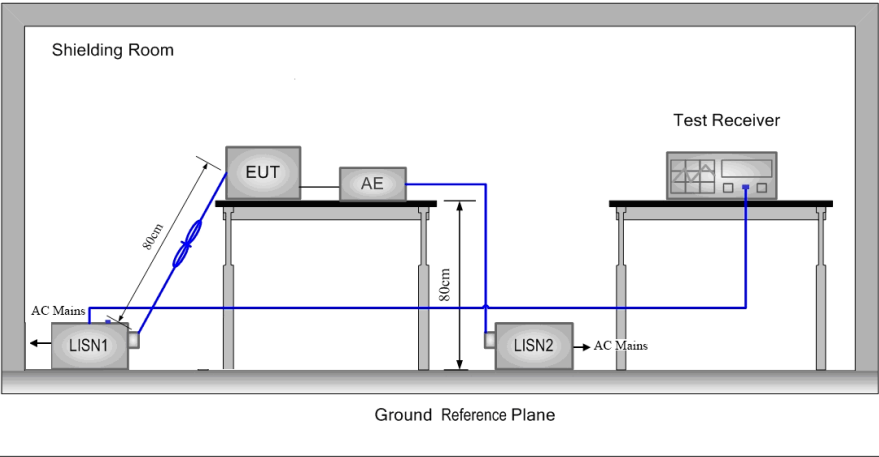
Test Setup:	
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Refer to section 4.3 for details. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5 for details
Test Results:	Pass

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Test Mode: 08; Line: Live line


Test Data :

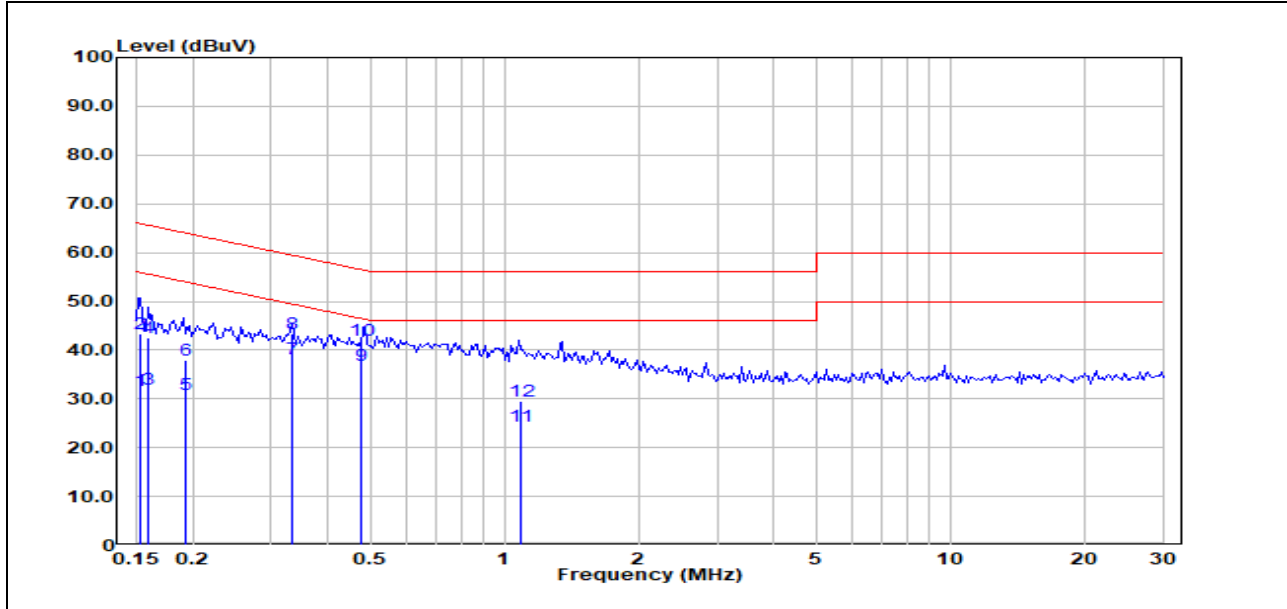

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1525	11.46	20.24	31.70	55.86	-24.16	Average
2	0.1525	23.16	20.24	43.40	65.86	-22.46	QP
3	0.1589	11.71	20.21	31.92	55.52	-23.60	Average
4	0.1589	22.41	20.21	42.62	65.52	-22.90	QP
5	0.1927	10.90	20.08	30.98	53.92	-22.94	Average
6	0.1927	17.98	20.08	38.06	63.92	-25.86	QP
7	0.3336	18.01	20.07	38.08	49.36	-11.28	Average
8	0.3336	23.24	20.07	43.31	59.36	-16.05	QP
9	0.4777	16.82	20.04	36.86	46.38	-9.52	Average
10	0.4777	21.99	20.04	42.03	56.38	-14.35	QP
11	1.0860	4.49	19.88	24.37	46.00	-21.63	Average
12	1.0860	9.64	19.88	29.52	56.00	-26.48	QP


Test Mode: 08; Line: Neutral Line

Test Data :

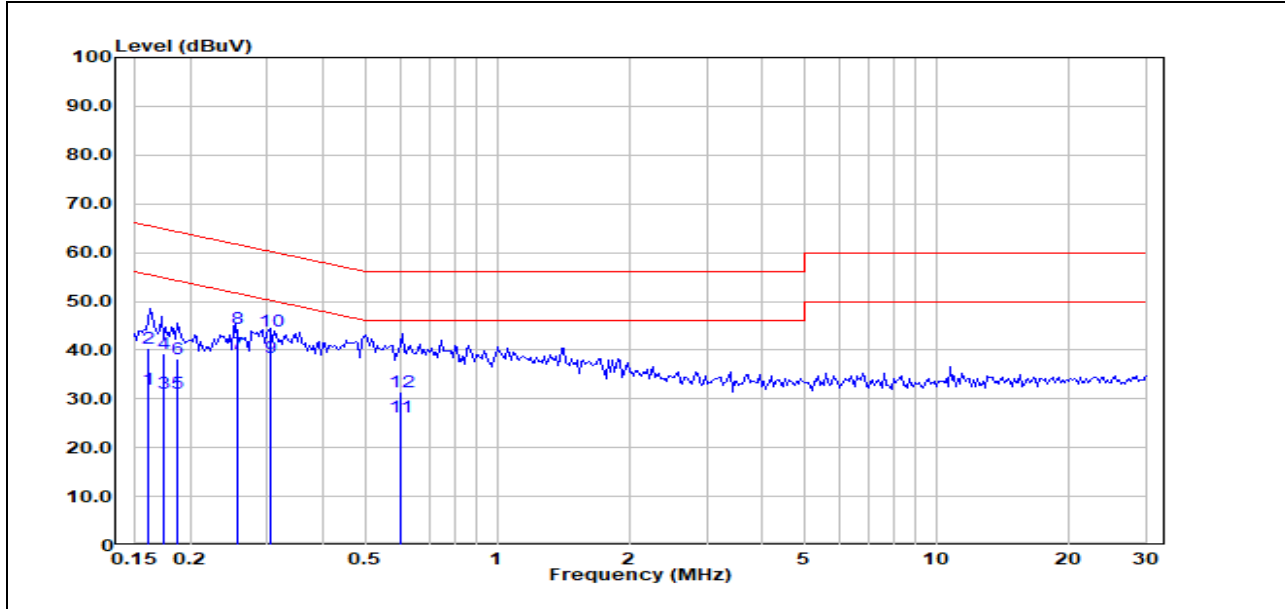

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1604	11.72	20.17	31.89	55.44	-23.55	Average
2	0.1604	20.32	20.17	40.49	65.44	-24.95	QP
3	0.1733	10.95	20.15	31.10	54.80	-23.70	Average
4	0.1733	19.09	20.15	39.24	64.80	-25.56	QP
5	0.1862	11.11	20.13	31.24	54.21	-22.97	Average
6	0.1862	18.07	20.13	38.20	64.21	-26.01	QP
7	0.2557	19.20	20.09	39.29	51.57	-12.28	Average
8	0.2557	24.47	20.09	44.56	61.57	-17.01	QP
9	0.3045	18.48	20.08	38.56	50.12	-11.56	Average
10	0.3045	23.70	20.08	43.78	60.12	-16.34	QP
11	0.6032	6.35	19.87	26.22	46.00	-19.78	Average
12	0.6032	11.45	19.87	31.32	56.00	-24.68	QP

7.2 Maximum e.i.r.p.

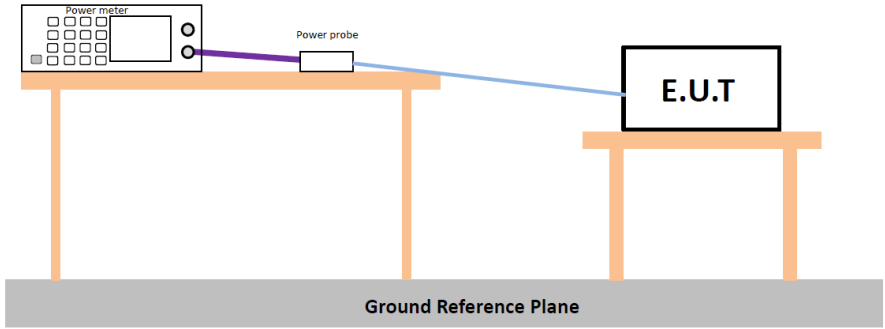Test Requirement:	47 CFR Part 15 Section 15.407(a) 15.407(a)(8)
Test Method:	ANSI C63.10 :2013 Section11.9.2.3
Test Setup:	 * Test with power meter (Detector function: Average)
Test Instruments:	Refer to section 5 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Refer to section 4.3 for details.
Limit:	For client devices operating under the control of an indoor access point in the 5.925-7.125GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.
Test Results:	Pass
The detailed test data see: Appendix	

7.3 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15 Section 15.205 and 15.209
Test Method:	ANSI C63.10: 2013 Section 6.4 / 6.5 / 6.6
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)
Test frequency:	9kHz ~ 40GHz(or 10 Harmonic)

Test Setup:

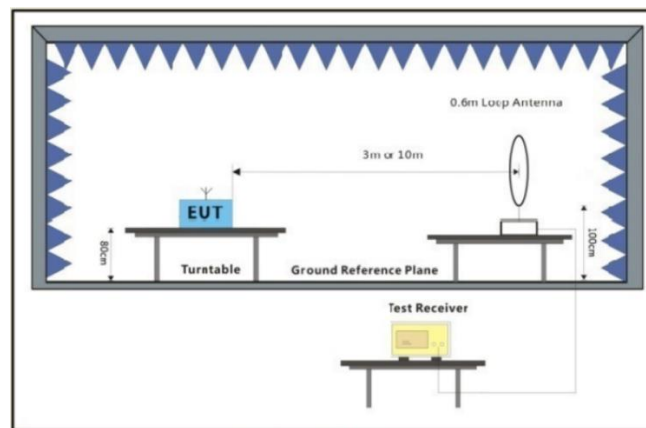


Figure 1. 9kHz to 30MHz

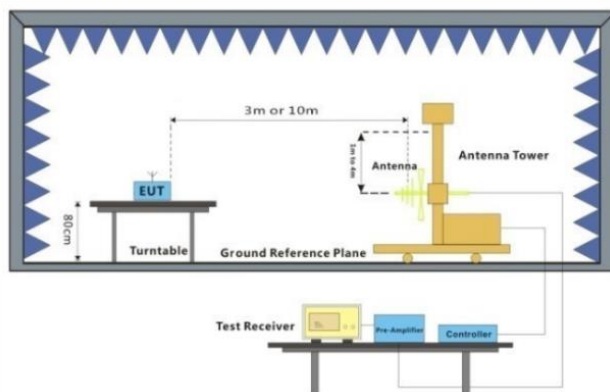


Figure 1. 30MHz to 1GHz



Figure 2. Above 1 GHz

Test Procedure:

- For below 1GHz test, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz test, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation (Distance from antenna to EUT is 1m for measurements >18GHz).
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and

	then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - Test the EUT in the outermost channels. - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. - Repeat above procedures until all frequencies measured was complete. - The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported - The disturbance above 18GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. - At a measurement distance of 1 meter the limit line was increased by $20 \times \text{LOG}(3/1) = 9.54 \text{ dB}$. Remark: - Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor - For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11a. Only the worst case is recorded in the report. - Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. - The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. - Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. - As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
--	--


	7. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. 8. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.
Test Configuration:	Measurements below 30MHz • RBW = 10 kHz • VBW = 30 kHz • Detector = Peak & Average & Quasi-peak • Trace mode = max hold Measurements Below 1000MHz • RBW = 120 kHz • VBW = 300 kHz • Detector = Quasi-peak • Trace mode = max hold Peak Measurements Above 1000 MHz • RBW = 1 MHz • VBW $\geq$ 3 MHz • Detector = Peak • Sweep time = auto • Trace mode = max hold Average Measurements Above 1000MHz • RBW = 1 MHz • VBW = 10Hz, when duty cycle is no less than 98 percent. • VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.
Final Test Mode:	Refer to section 4.3 for details. For below 1GHz part, through pre-scan all channels, but only the worst case is recorded in the report.
Instruments Used:	Refer to section 5 for details
Test Results:	Pass

Radiated emission below 1GHz:

Test Mode: 08; Polarity: Horizontal


Test Data :

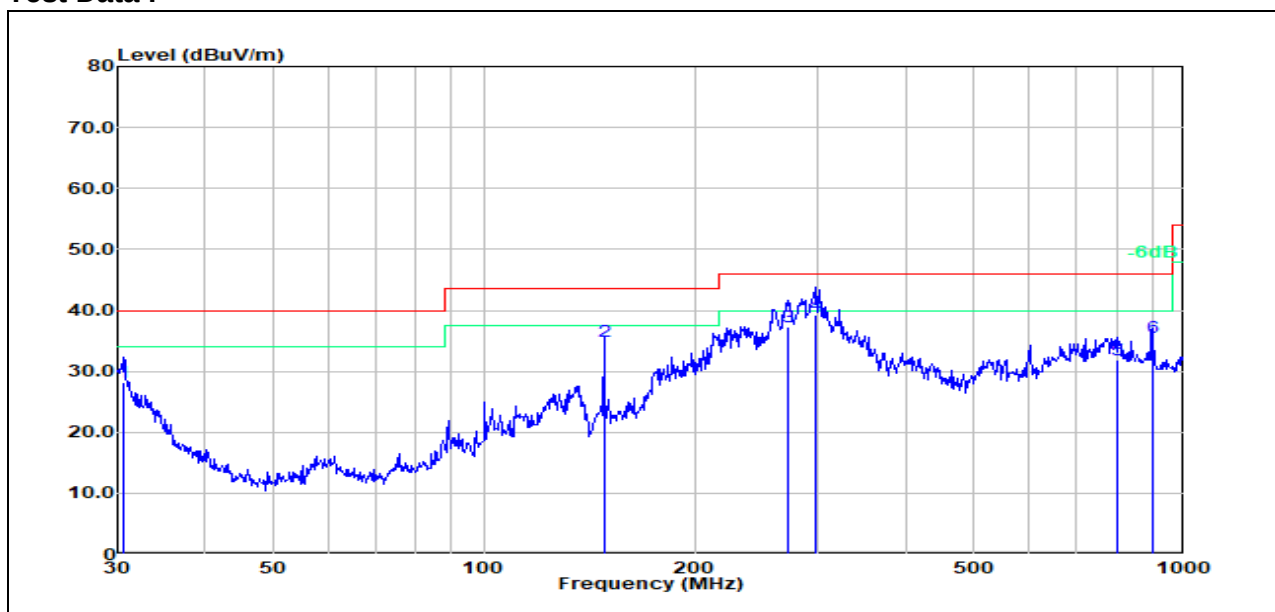

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor(dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	30.6380	9.20	18.91	28.11	40.00	-11.89	200	175	QP
2	148.4410	23.04	11.84	34.88	43.50	-8.62	100	323	QP
3	272.2780	22.24	15.10	37.34	46.00	-8.66	100	65	QP
4	298.2680	23.27	15.92	39.19	46.00	-6.81	200	275	QP
5	801.7860	7.41	24.54	31.95	46.00	-14.05	100	360	QP
6	900.1470	9.65	25.91	35.56	46.00	-10.44	100	39	QP

Test Mode: 08; Polarity: Vertical


Test Data :

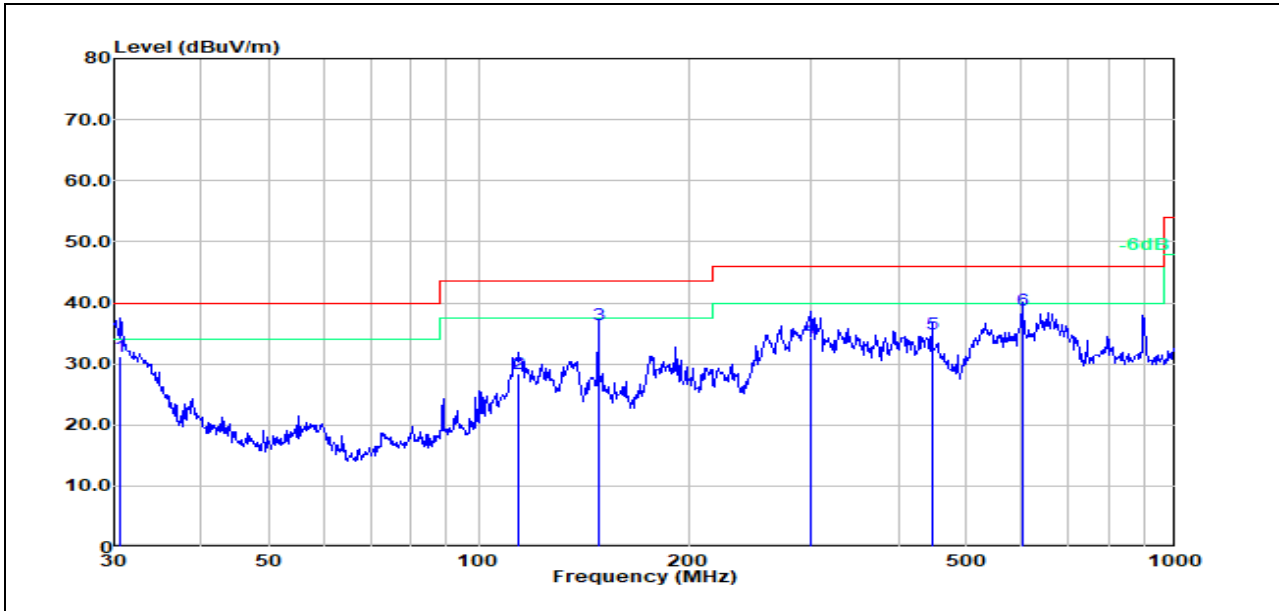

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	30.6380	12.36	18.91	31.27	40.00	-8.73	100	57	QP
2	114.1140	14.78	13.67	28.45	43.50	-15.05	100	288	QP
3	148.4410	24.51	11.84	36.35	43.50	-7.15	100	355	QP
4	299.3160	18.24	15.97	34.21	46.00	-11.79	100	0	QP
5	446.4140	15.88	19.08	34.96	46.00	-11.04	100	314	QP
6	601.4270	15.96	22.77	38.73	46.00	-7.27	100	262	QP


Radiated emission Above 1GHz:

Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

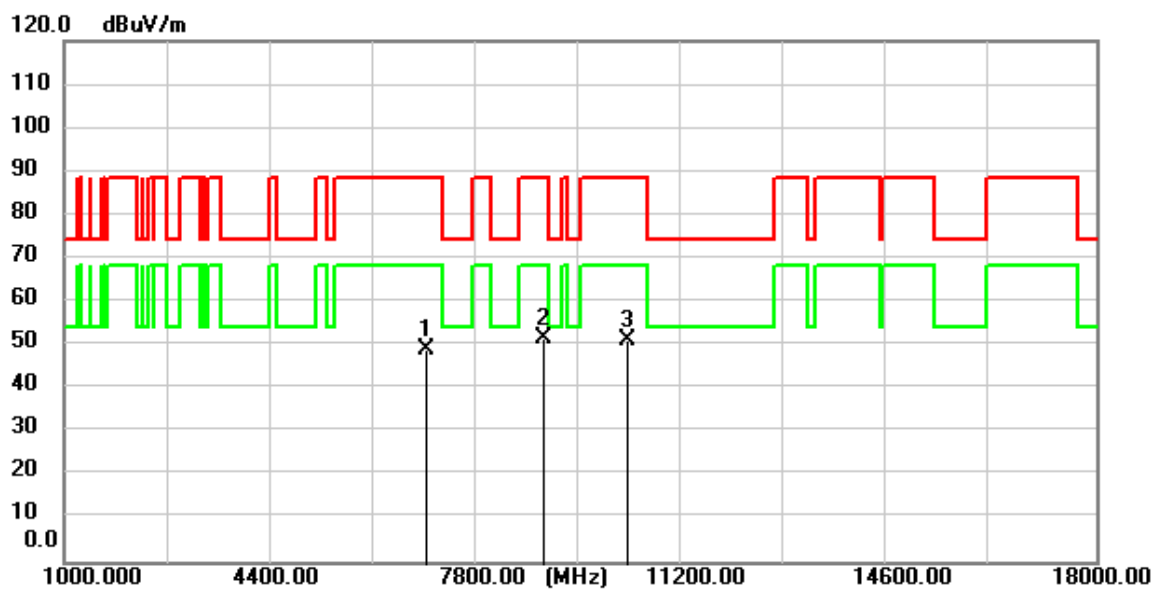


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6950.850	55.79	-6.92	48.87	88.20	-39.33	peak
2	8881.200	55.32	-3.73	51.59	88.20	-36.61	peak
3	10266.700	52.80	-1.55	51.25	88.20	-36.95	peak

Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

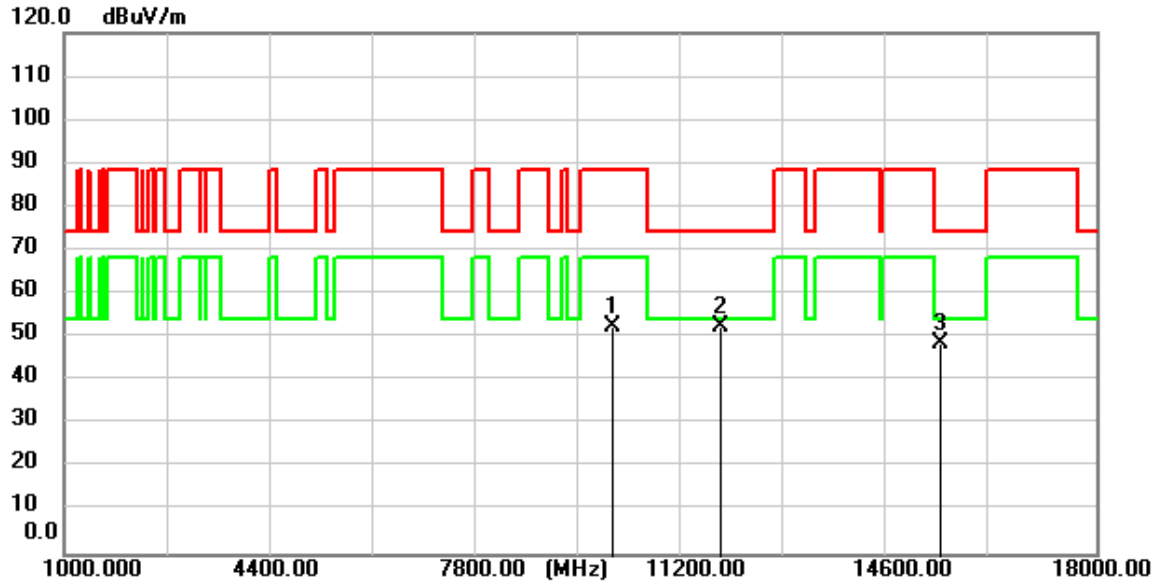


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10040.600	54.23	-1.53	52.70	88.20	-35.50	peak
2	11809.450	54.28	-1.73	52.55	74.00	-21.45	peak
3	15431.300	52.96	-4.50	48.46	74.00	-25.54	peak

Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

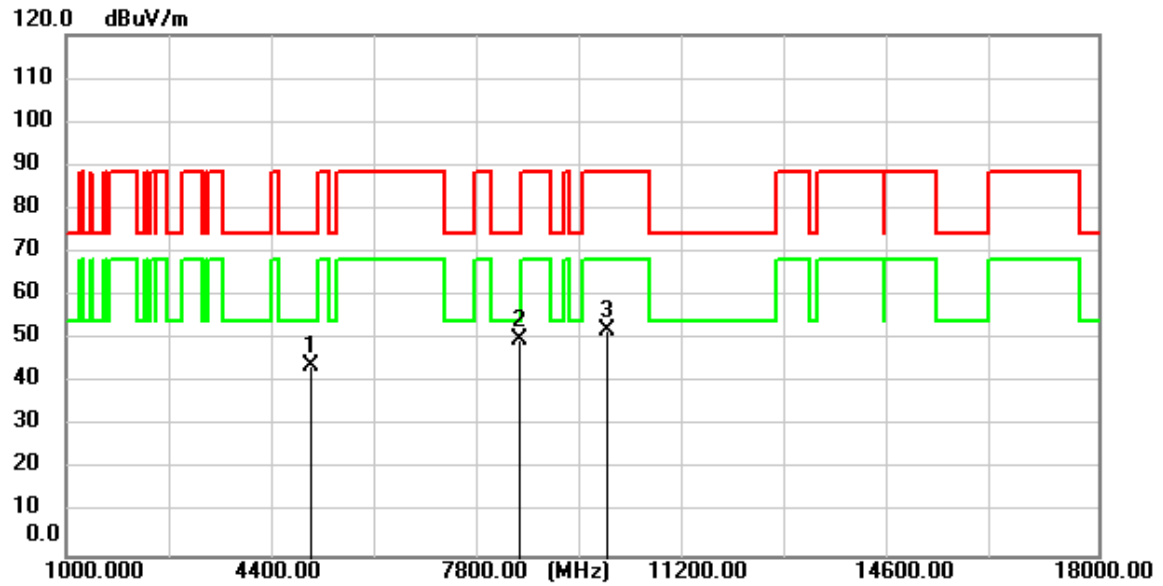


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5017.100	56.65	-12.82	43.83	74.00	-30.17	peak
2	8448.550	54.56	-4.44	50.12	74.00	-23.88	peak
3	9916.500	53.70	-1.55	52.15	88.20	-36.05	peak

Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

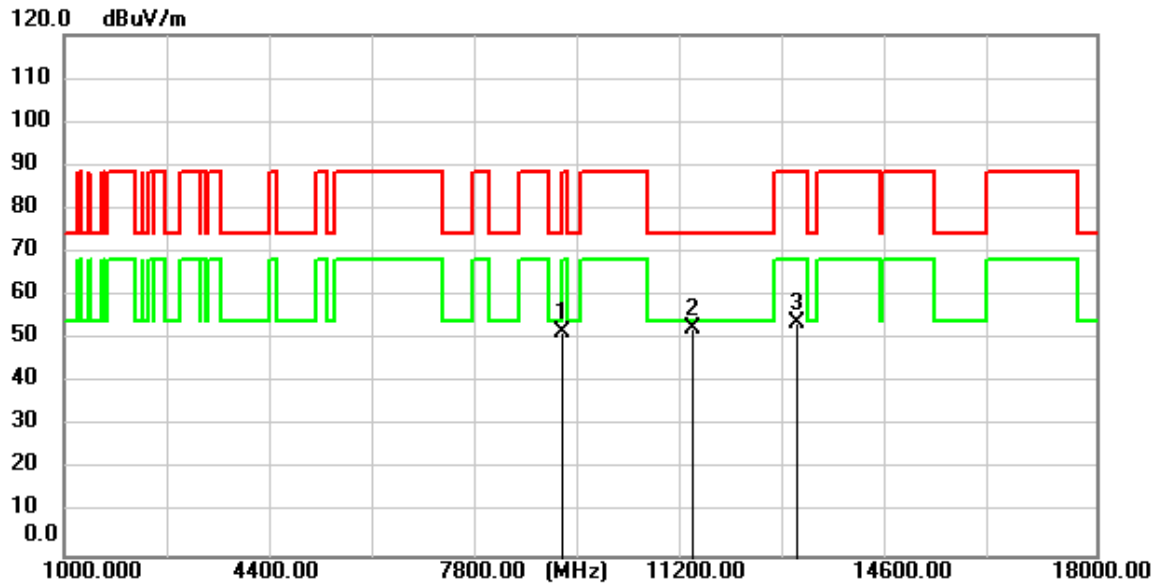


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9191.450	54.77	-3.06	51.71	74.00	-22.29	peak
2	11358.950	54.23	-1.66	52.57	74.00	-21.43	peak
3	13060.650	53.63	-0.05	53.58	88.20	-34.62	peak

Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

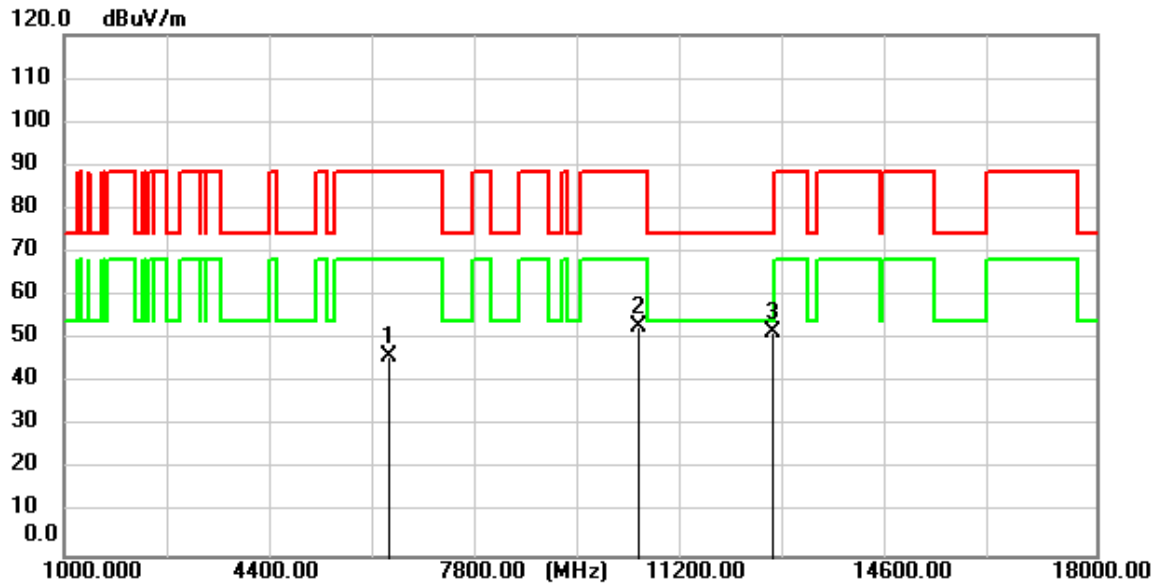


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6339.700	54.98	-8.96	46.02	88.20	-42.18	peak
2	10465.600	54.42	-1.57	52.85	88.20	-35.35	peak
3	12662.850	52.17	-0.66	51.51	74.00	-22.49	peak

Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

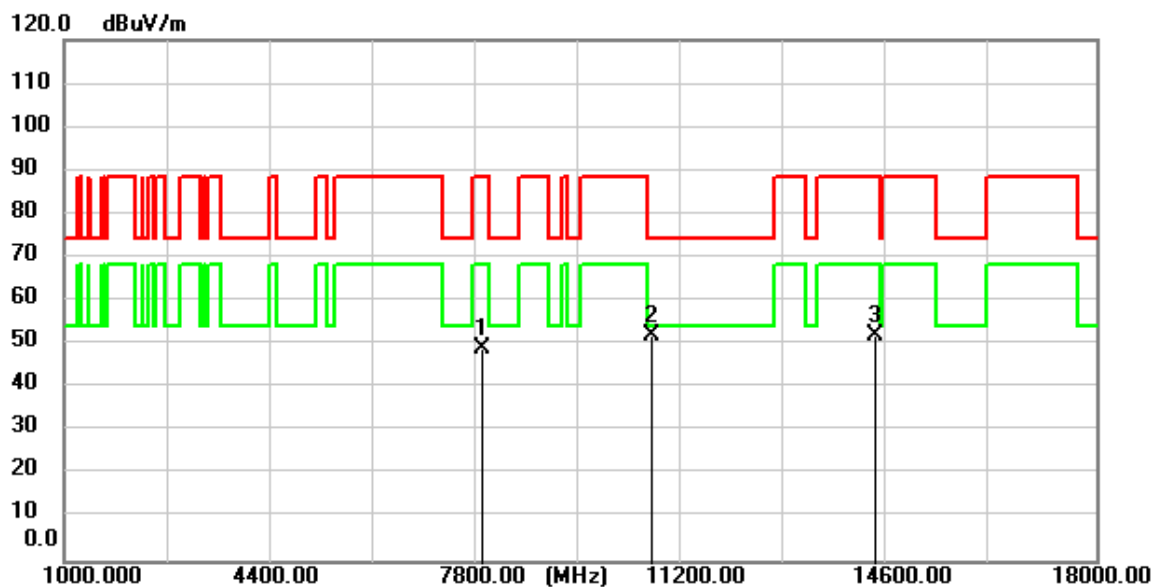


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7872.250	54.71	-5.46	49.25	88.20	-38.95	peak
2	10669.600	53.70	-1.58	52.12	74.00	-21.88	peak
3	14374.750	52.97	-0.91	52.06	88.20	-36.14	peak

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

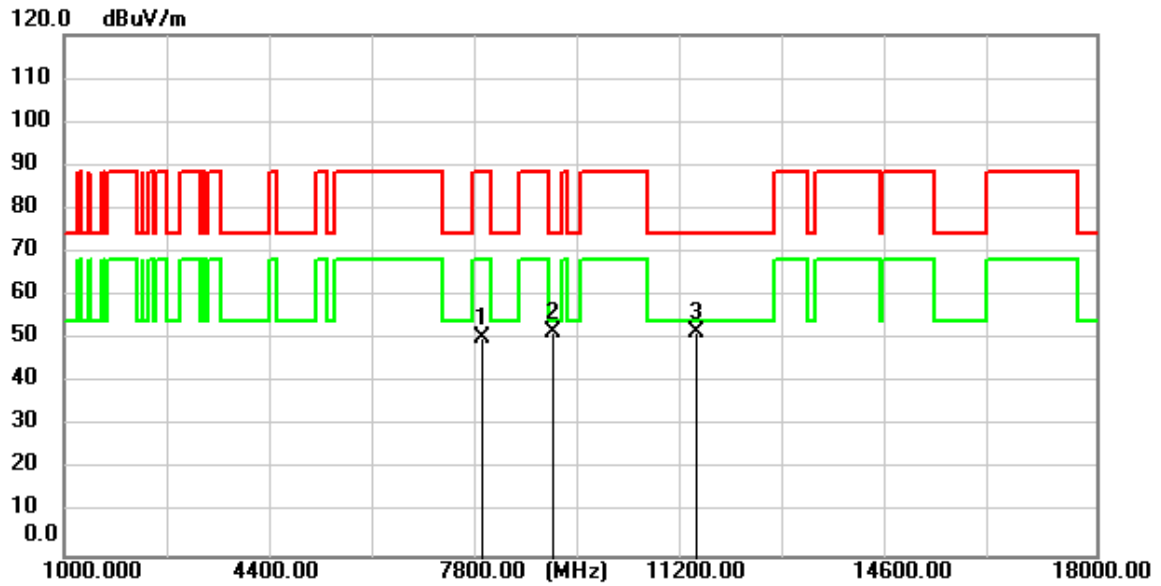


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7882.450	55.67	-5.44	50.23	88.20	-37.97	peak
2	9042.700	54.99	-3.40	51.59	74.00	-22.41	peak
3	11406.550	53.29	-1.67	51.62	74.00	-22.38	peak

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

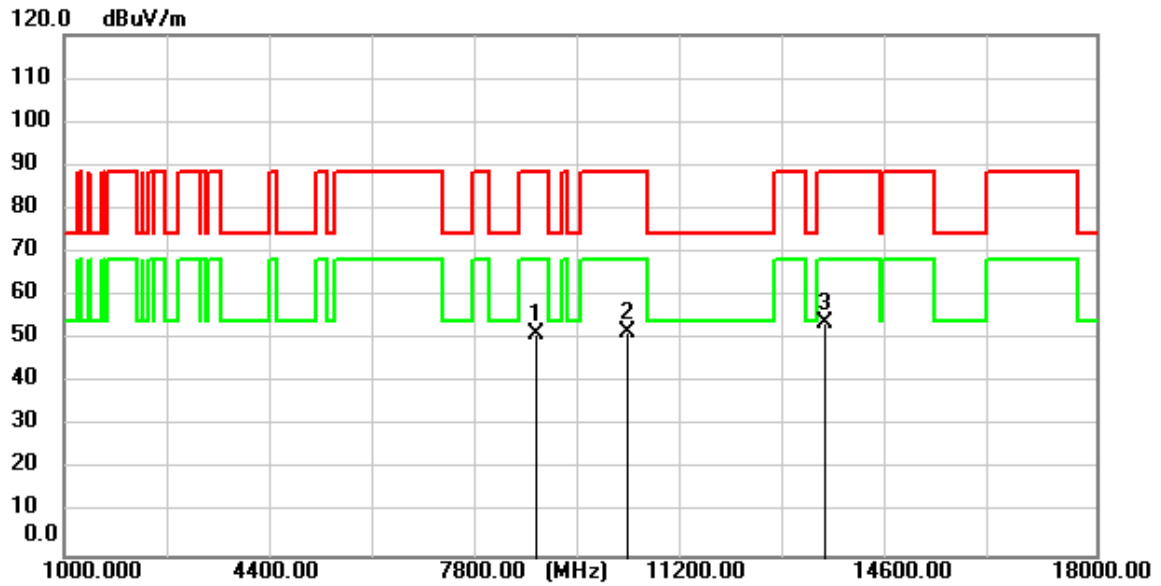


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8779.200	55.31	-3.90	51.41	88.20	-36.79	peak
2	10266.700	53.34	-1.55	51.79	88.20	-36.41	peak
3	13513.700	53.38	0.32	53.70	88.20	-34.50	peak

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

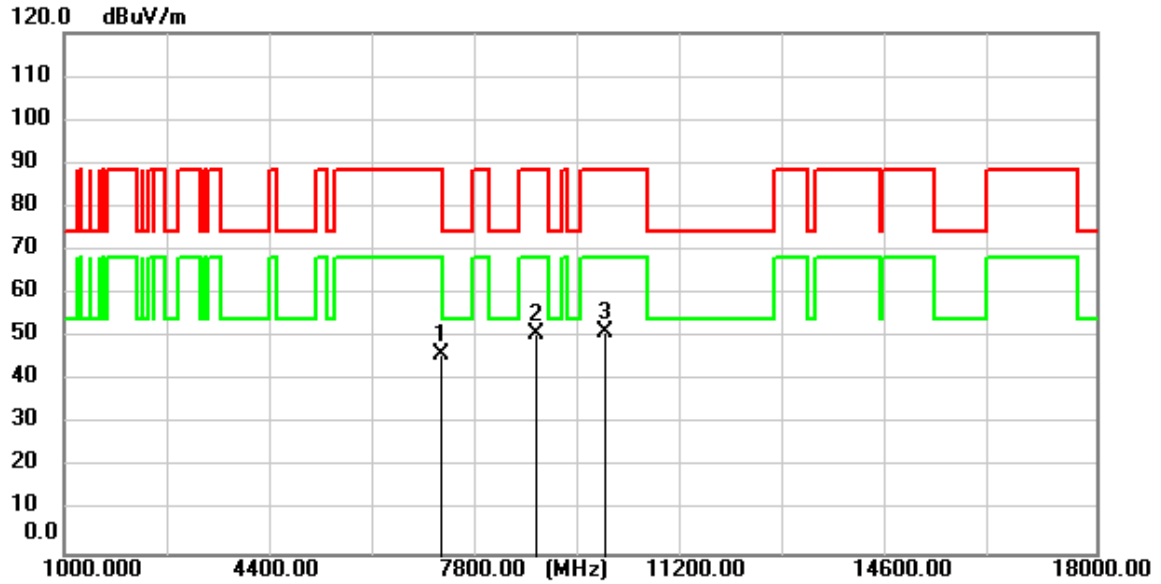


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7203.300	52.90	-6.64	46.26	88.20	-41.94	peak
2	8774.950	54.77	-3.90	50.87	88.20	-37.33	peak
3	9908.850	52.88	-1.55	51.33	88.20	-36.87	peak

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

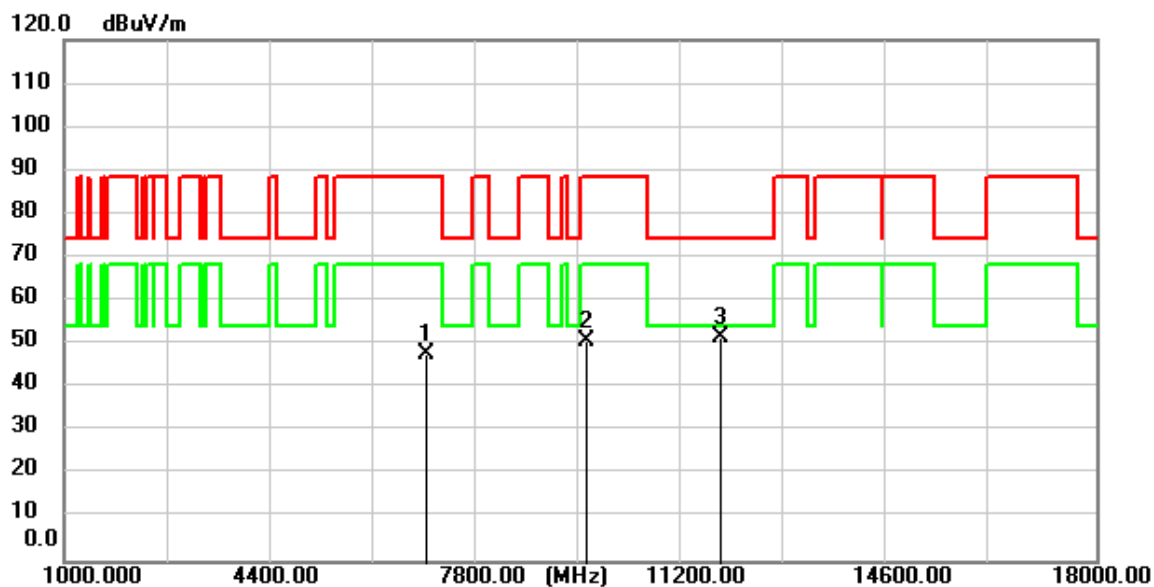


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6957.650	54.70	-6.91	47.79	88.20	-40.41	peak
2	9613.050	53.05	-2.10	50.95	88.20	-37.25	peak
3	11804.350	53.23	-1.73	51.50	74.00	-22.50	peak

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

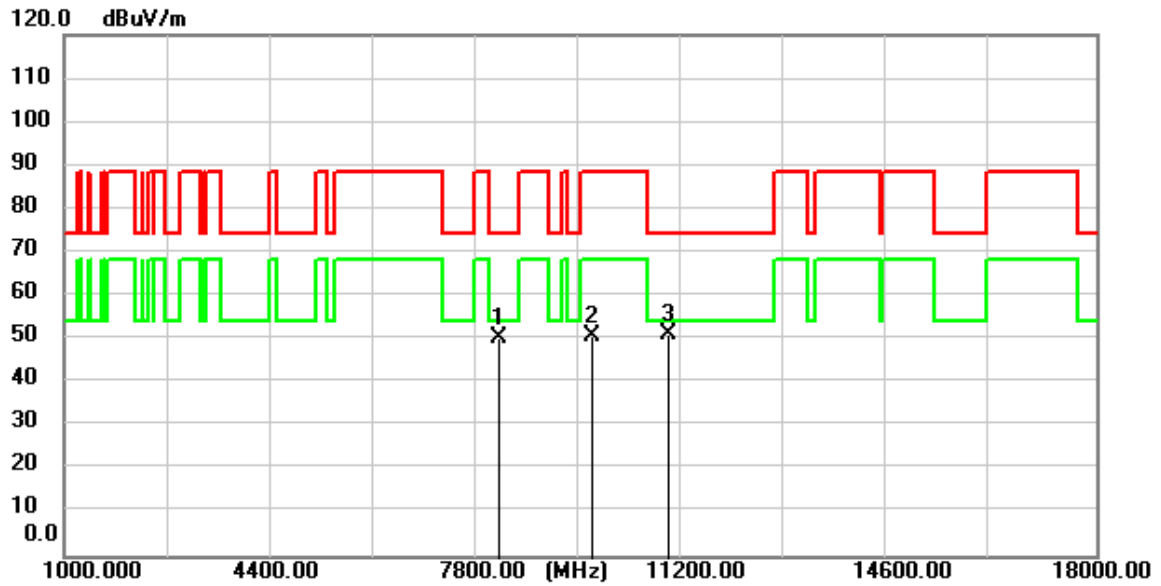


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8150.200	55.18	-4.93	50.25	74.00	-23.75	peak
2	9681.900	52.90	-1.94	50.96	88.20	-37.24	peak
3	10950.950	52.62	-1.60	51.02	74.00	-22.98	peak

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

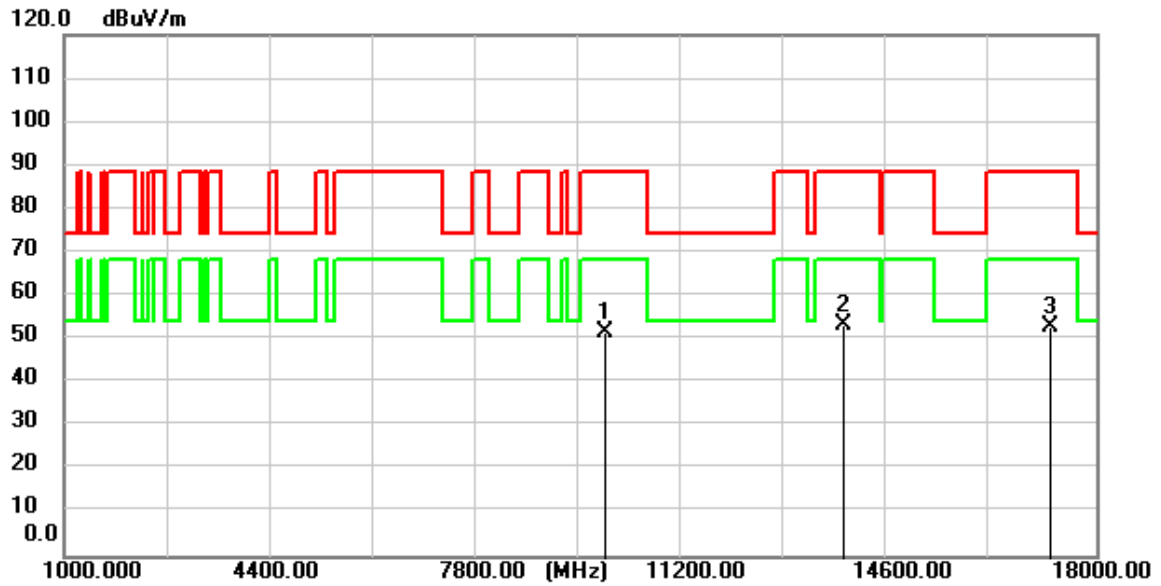


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9924.150	53.18	-1.54	51.64	88.20	-36.56	peak
2	13834.150	52.73	0.55	53.28	88.20	-34.92	peak
3	17223.950	51.81	1.22	53.03	88.20	-35.17	peak

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

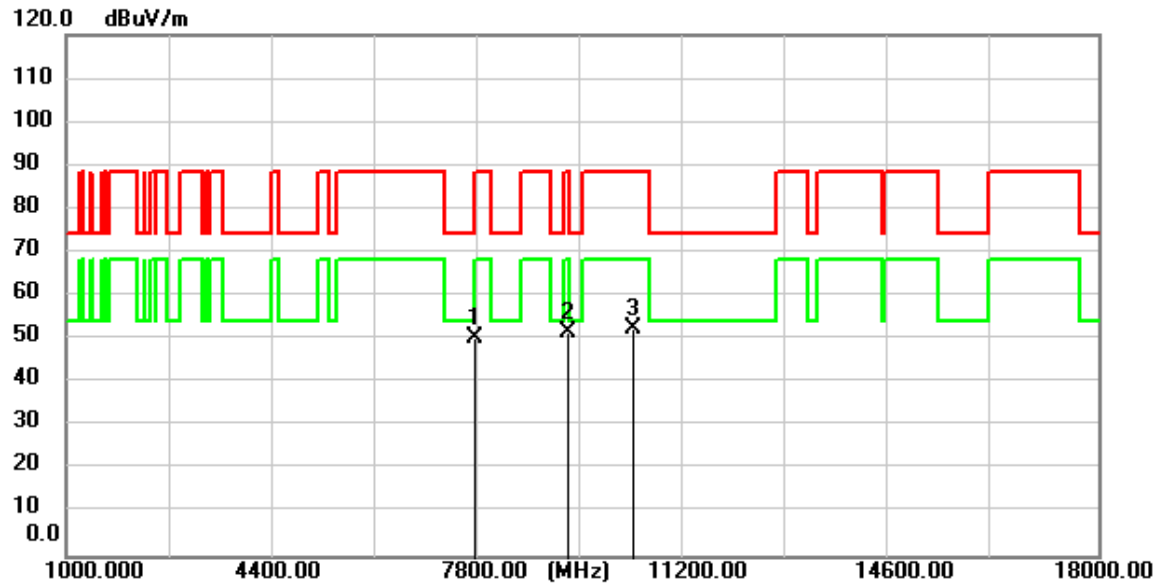


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7748.150	55.90	-5.71	50.19	74.00	-23.81	peak
2	9271.350	54.51	-2.88	51.63	88.20	-36.57	peak
3	10335.550	53.94	-1.55	52.39	88.20	-35.81	peak

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

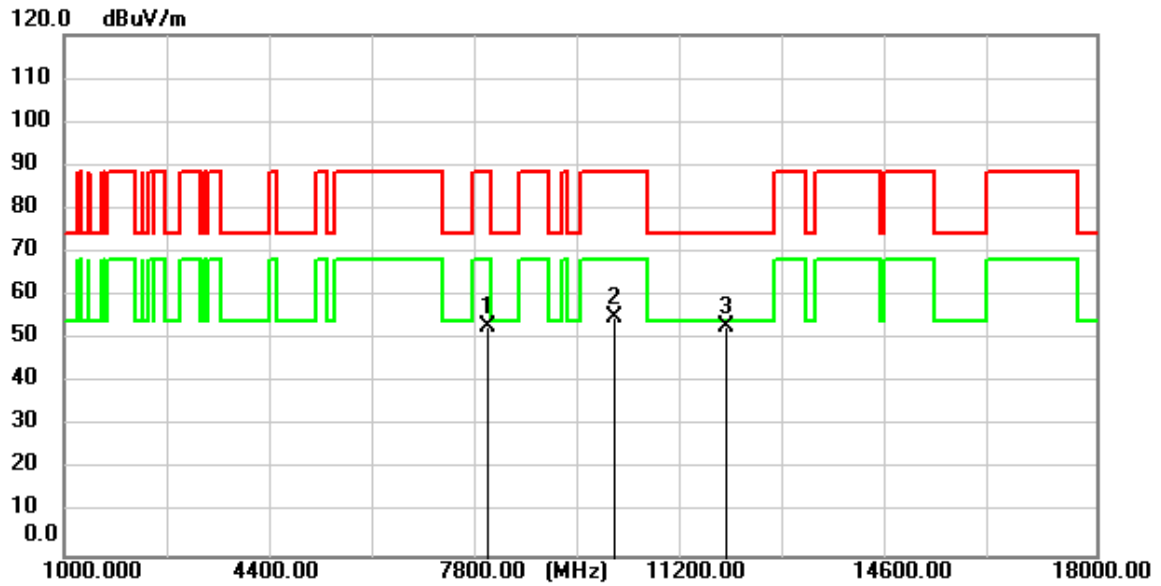


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7975.950	58.23	-5.25	52.98	88.20	-35.22	peak
2	10068.650	56.54	-1.54	55.00	88.20	-33.20	peak
3	11904.650	54.46	-1.74	52.72	74.00	-21.28	peak

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:middle

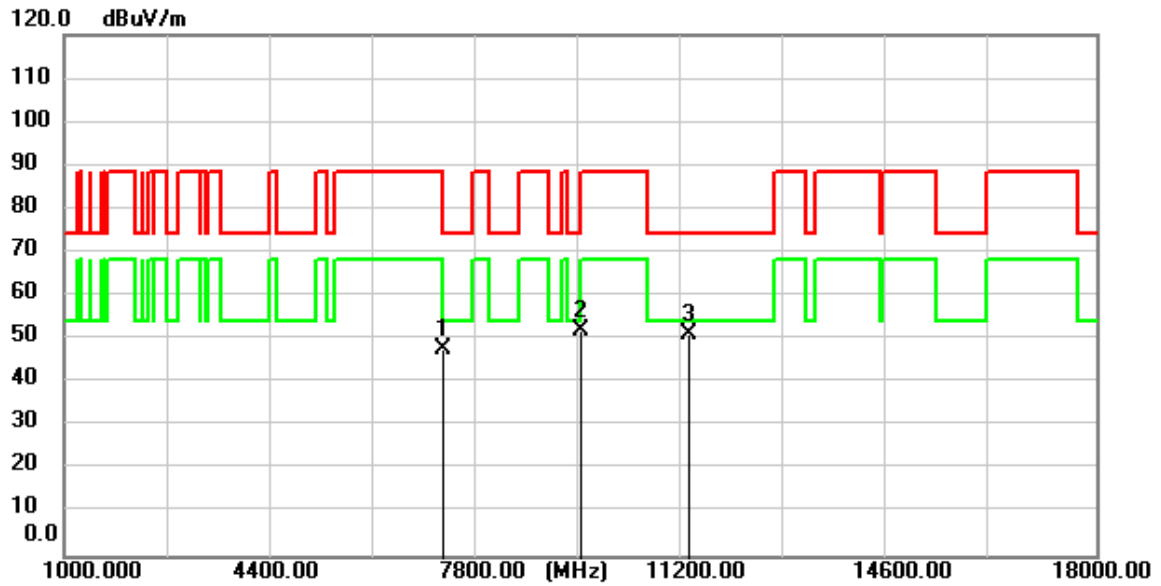


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7245.800	54.59	-6.59	48.00	88.20	-40.20	peak
2	9491.500	54.43	-2.37	52.06	74.00	-21.94	peak
3	11276.500	53.07	-1.66	51.41	74.00	-22.59	peak

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:middle

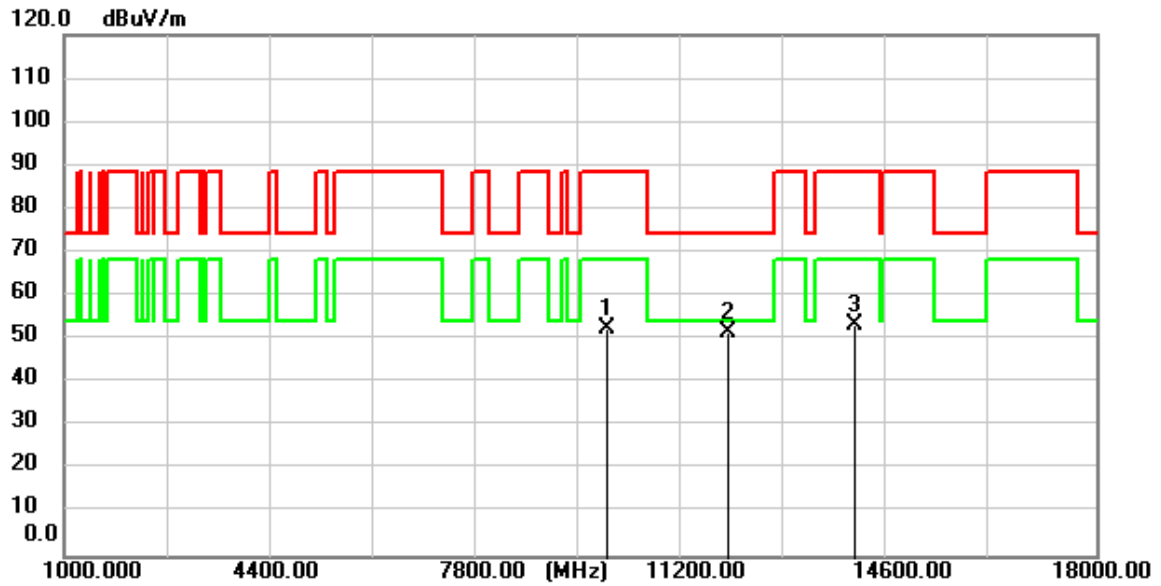


Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

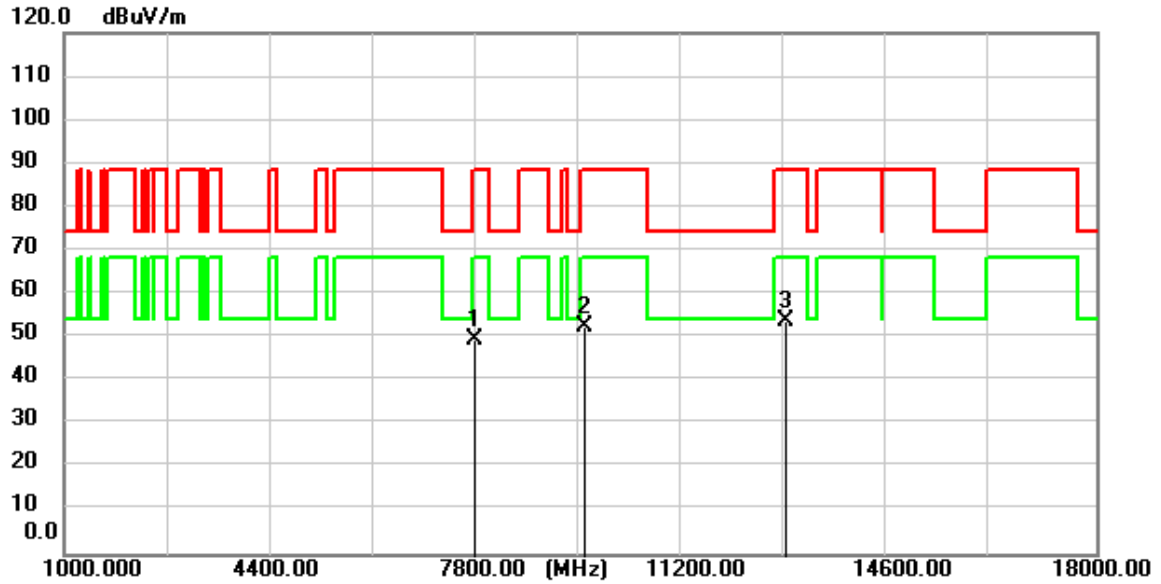


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7759.200	55.24	-5.69	49.55	88.20	-38.65	peak
2	9573.950	54.61	-2.19	52.42	88.20	-35.78	peak
3	12867.700	54.10	-0.35	53.75	88.20	-34.45	peak

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

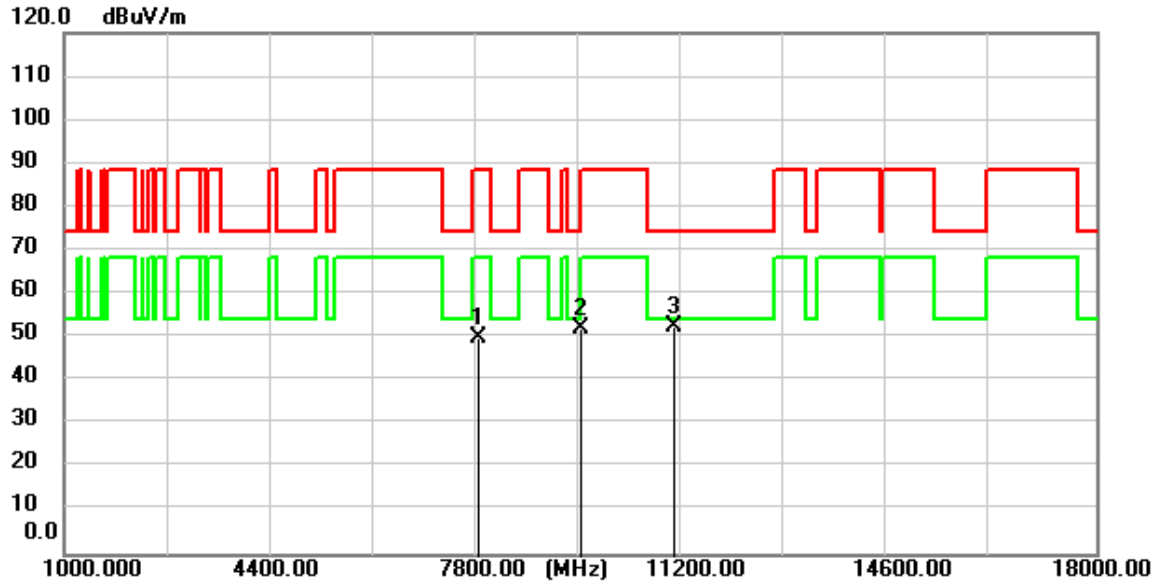


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7829.750	55.59	-5.55	50.04	88.20	-38.16	peak
2	9506.800	54.46	-2.34	52.12	88.20	-36.08	peak
3	11046.150	54.23	-1.62	52.61	74.00	-21.39	peak

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:Low

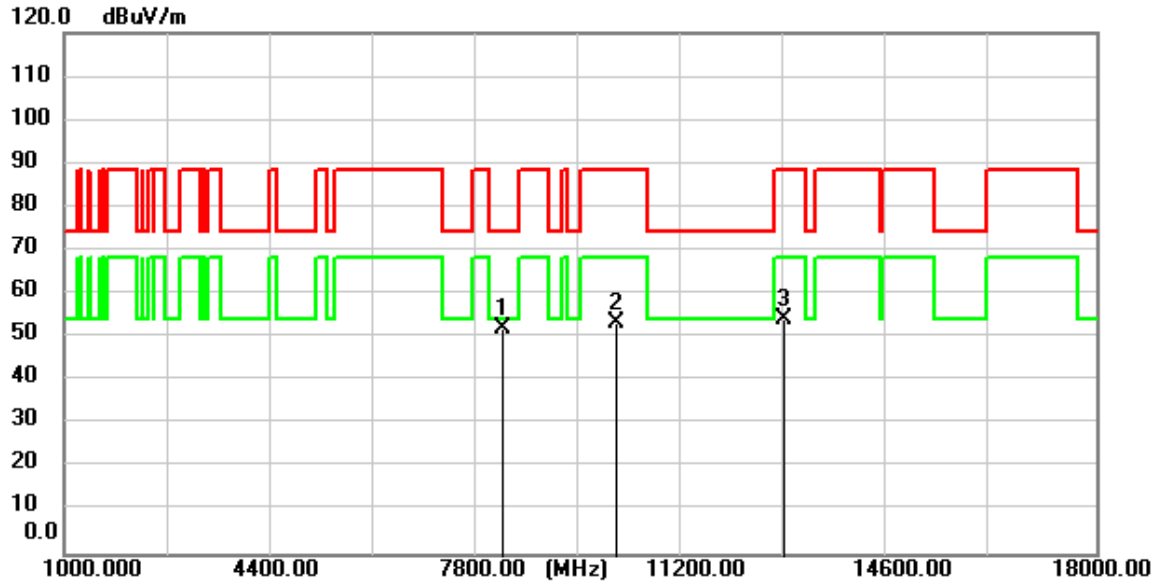


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8215.650	56.90	-4.83	52.07	74.00	-21.93	peak
2	10106.050	54.68	-1.53	53.15	88.20	-35.05	peak
3	12846.450	54.74	-0.38	54.36	88.20	-33.84	peak

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:Low

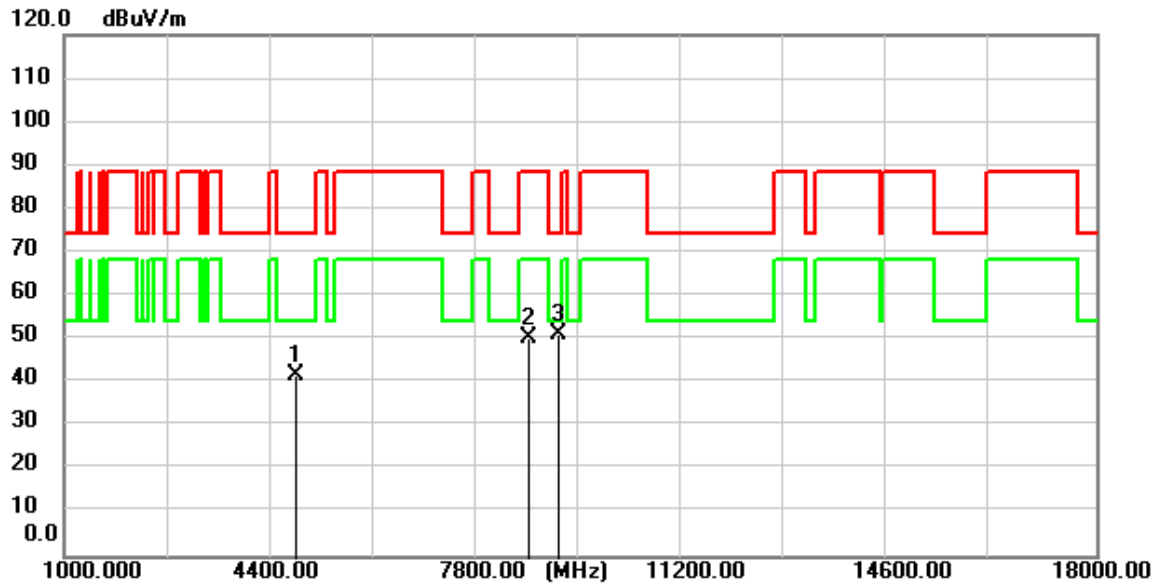


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4820.750	54.69	-13.10	41.59	74.00	-32.41	peak
2	8666.150	54.35	-4.08	50.27	88.20	-37.93	peak
3	9137.900	54.46	-3.18	51.28	74.00	-22.72	peak

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

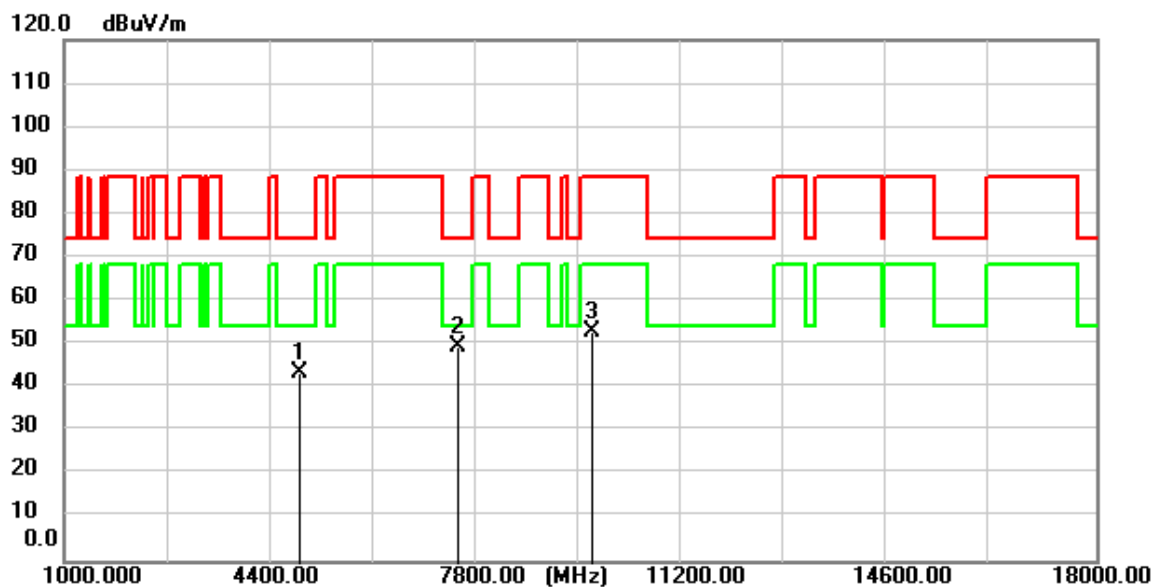


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4859.850	56.60	-13.04	43.56	74.00	-30.44	peak
2	7471.900	55.57	-6.26	49.31	74.00	-24.69	peak
3	9696.350	54.69	-1.90	52.79	88.20	-35.41	peak

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

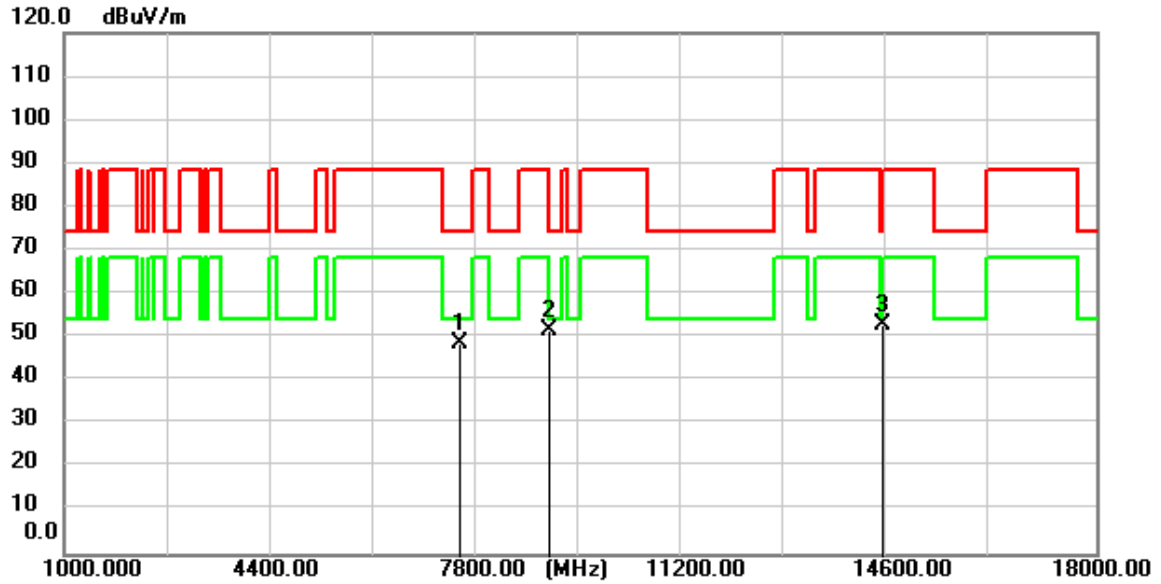


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7524.600	54.77	-6.16	48.61	74.00	-25.39	peak
2	8989.150	55.05	-3.52	51.53	88.20	-36.67	peak
3	14493.750	54.45	-1.35	53.10	74.00	-20.90	peak

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:High

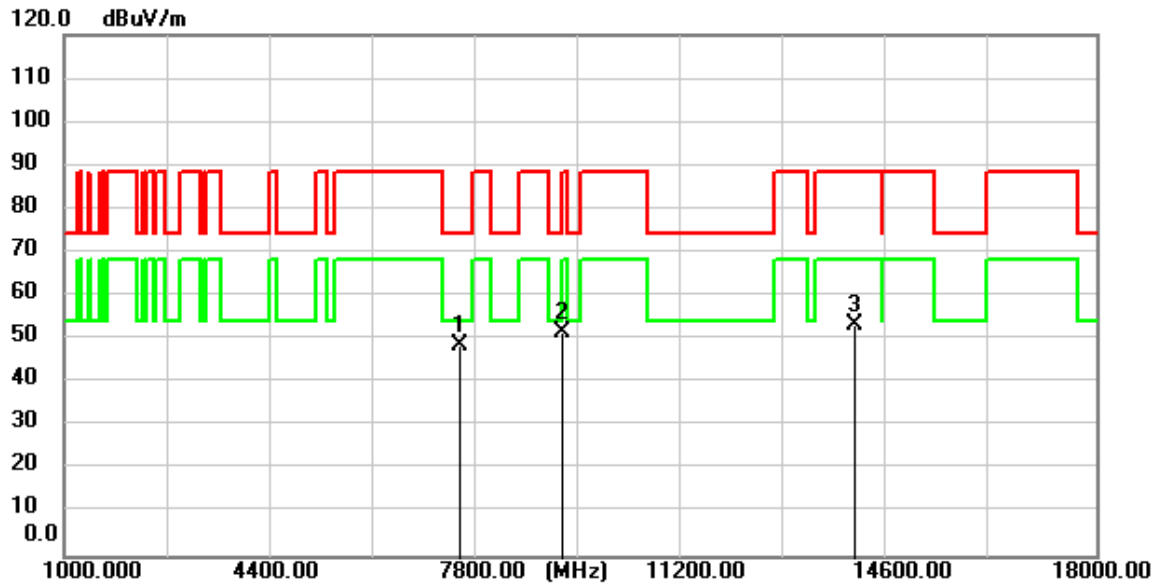


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7520.350	54.92	-6.17	48.75	74.00	-25.25	peak
2	9198.250	54.80	-3.04	51.76	74.00	-22.24	peak
3	14008.400	52.61	0.64	53.25	88.20	-34.95	peak

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:High

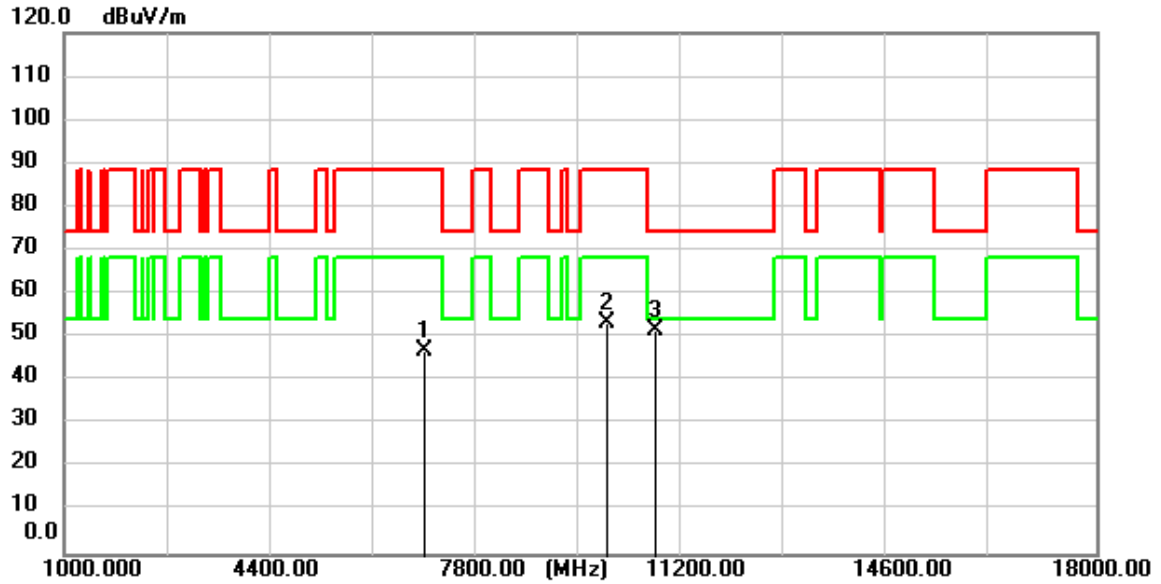


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6930.450	53.69	-6.94	46.75	88.20	-41.45	peak
2	9955.600	55.09	-1.53	53.56	88.20	-34.64	peak
3	10737.600	53.24	-1.58	51.66	74.00	-22.34	peak

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:Low

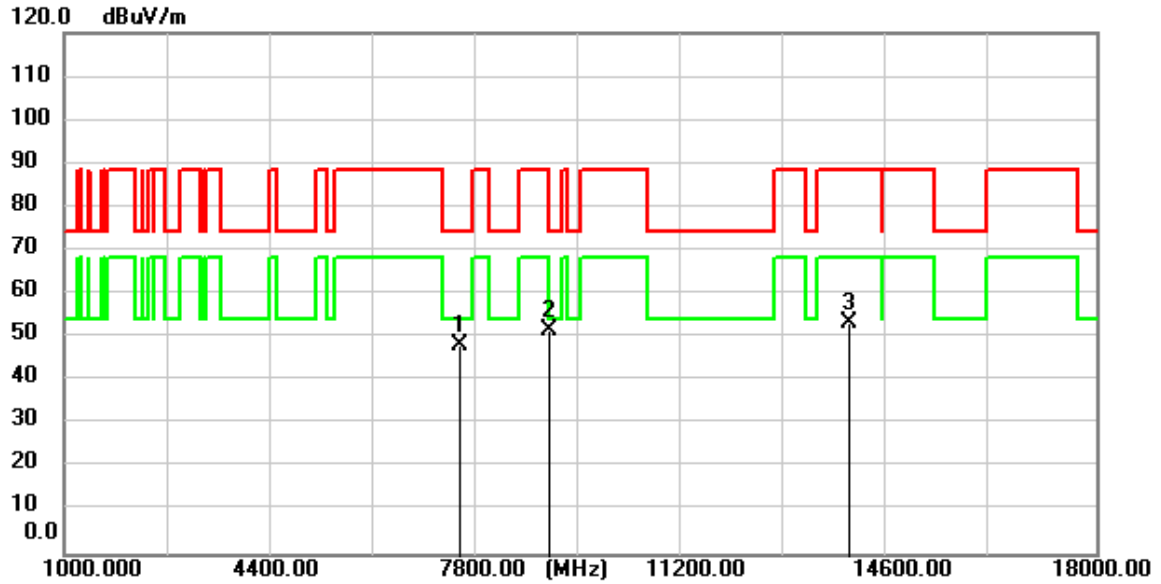


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7520.350	54.58	-6.17	48.41	74.00	-25.59	peak
2	8978.100	55.06	-3.55	51.51	88.20	-36.69	peak
3	13928.500	52.75	0.63	53.38	88.20	-34.82	peak

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:Low

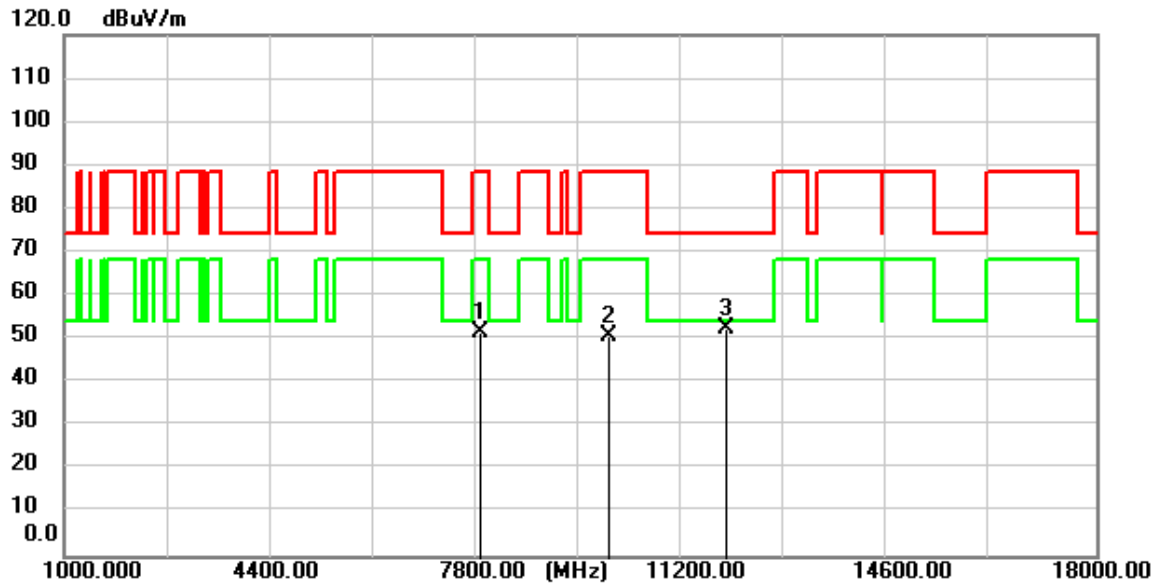


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7850.150	56.95	-5.50	51.45	88.20	-36.75	peak
2	9962.400	52.52	-1.53	50.99	88.20	-37.21	peak
3	11899.550	54.33	-1.75	52.58	74.00	-21.42	peak

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:Middle

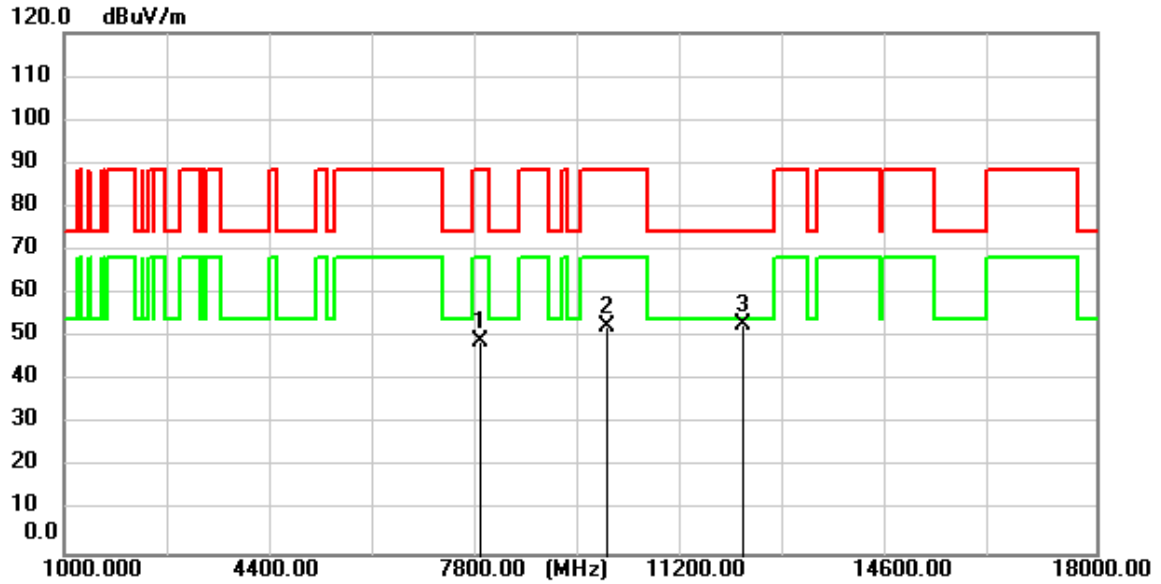


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7864.600	54.36	-5.48	48.88	88.20	-39.32	peak
2	9944.550	54.22	-1.54	52.68	88.20	-35.52	peak
3	12180.900	54.20	-1.41	52.79	74.00	-21.21	peak

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:Middle

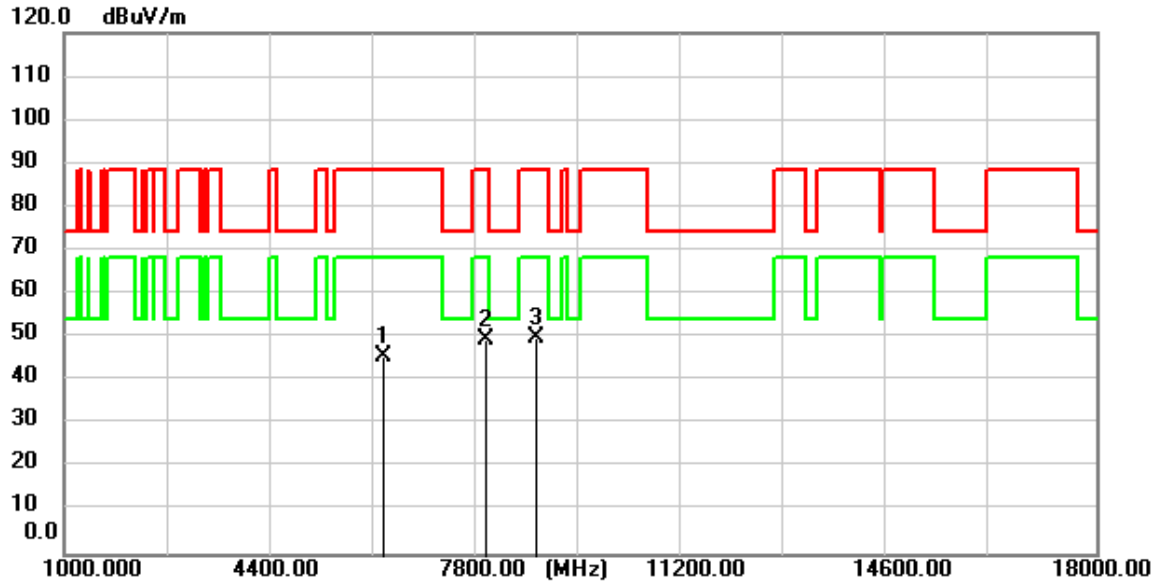


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6259.800	55.13	-9.33	45.80	88.20	-42.40	peak
2	7946.200	54.72	-5.31	49.41	88.20	-38.79	peak
3	8763.900	53.90	-3.92	49.98	88.20	-38.22	peak

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:High

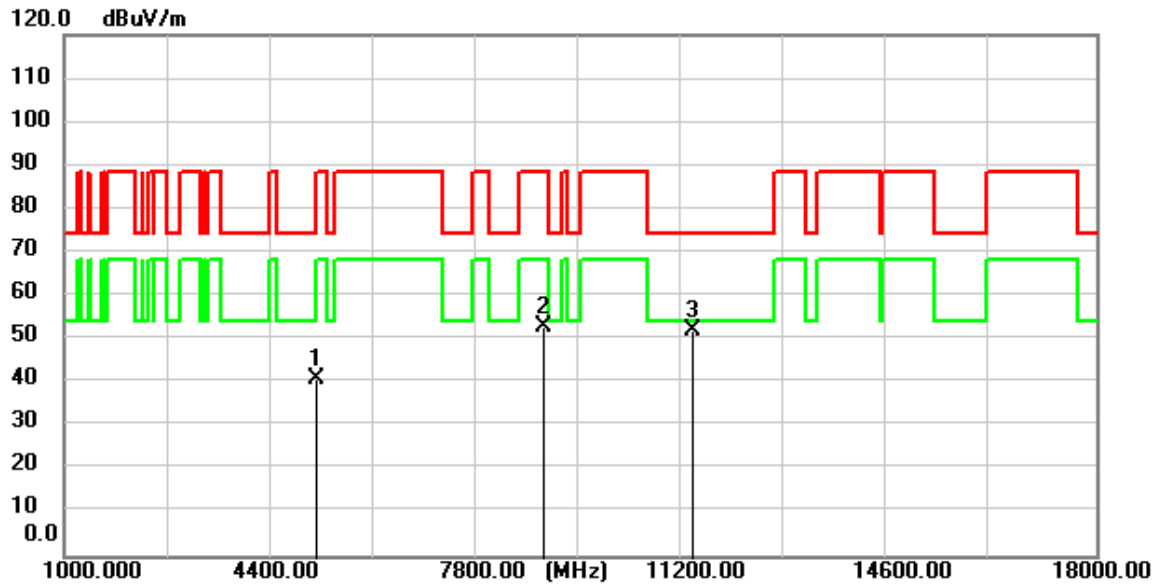


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5138.650	53.61	-12.67	40.94	74.00	-33.06	peak
2	8898.200	56.57	-3.70	52.87	88.20	-35.33	peak
3	11360.650	53.78	-1.66	52.12	74.00	-21.88	peak

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:High

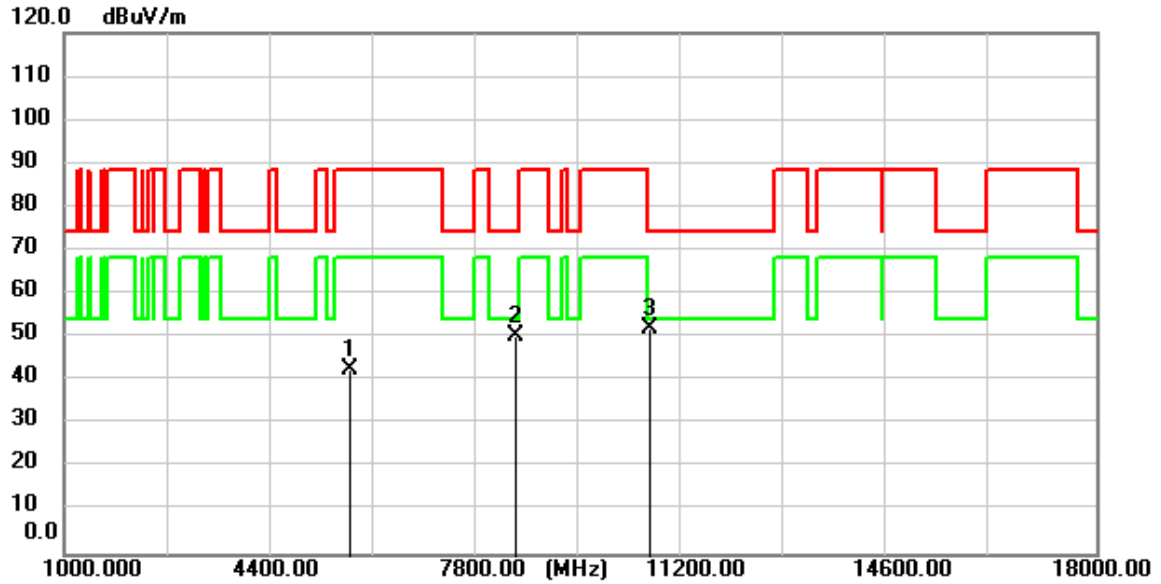


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5708.150	54.13	-11.61	42.52	88.20	-45.68	peak
2	8442.600	54.84	-4.45	50.39	74.00	-23.61	peak
3	10646.650	53.77	-1.58	52.19	74.00	-21.81	peak

Test Mode: 09; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

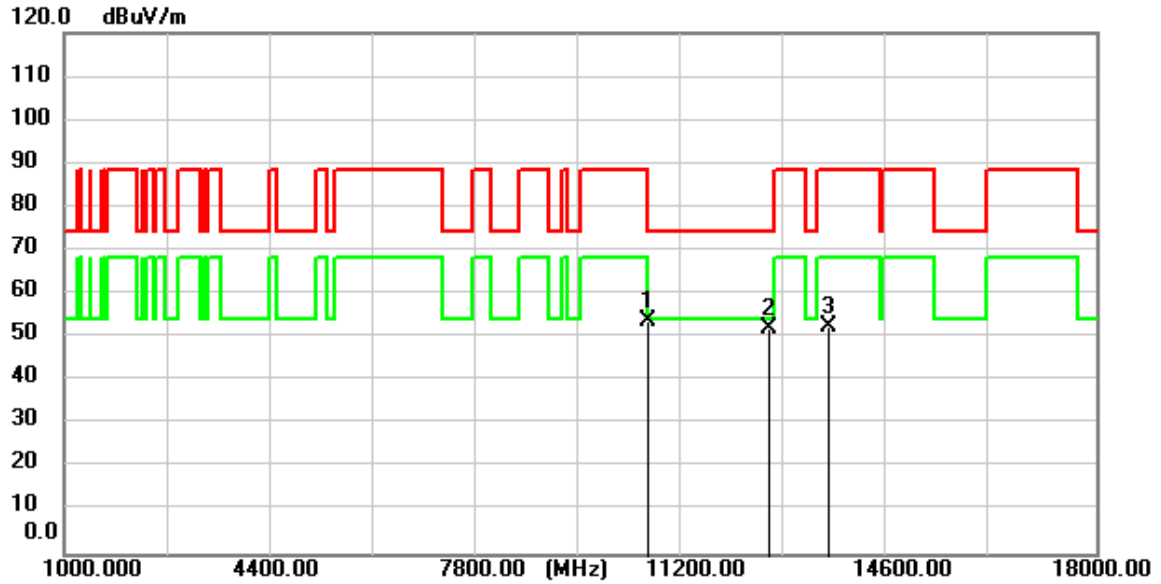


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10618.600	55.17	-1.57	53.60	74.00	-20.40	peak
2	12627.150	52.99	-0.72	52.27	74.00	-21.73	peak
3	13589.350	51.92	0.38	52.30	88.20	-35.90	peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

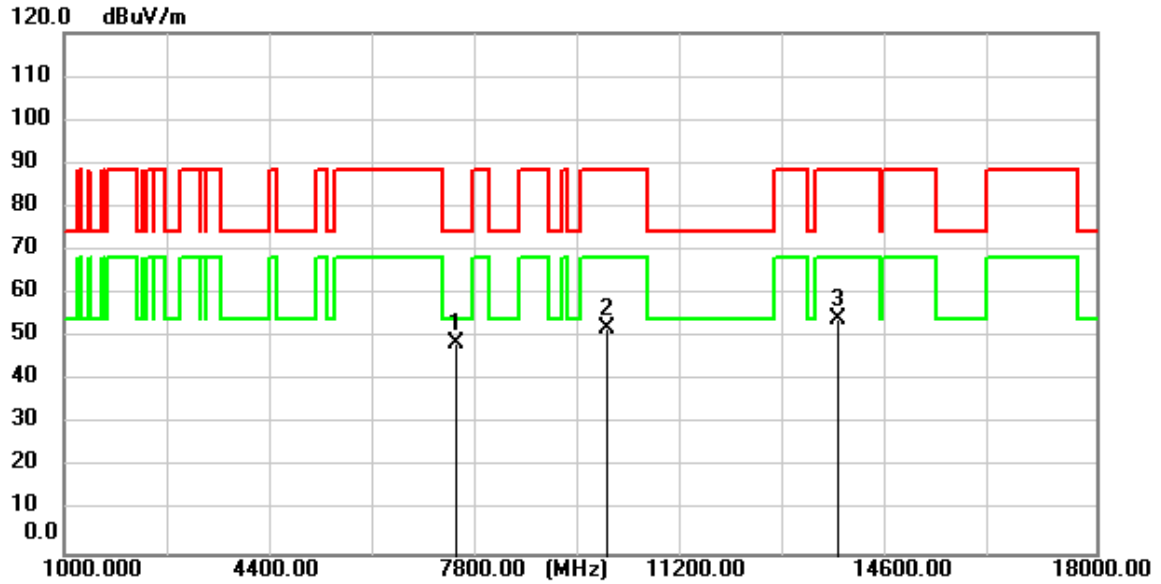


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7456.600	55.12	-6.29	48.83	74.00	-25.17	peak
2	9946.250	53.76	-1.54	52.22	88.20	-35.98	peak
3	13743.200	53.60	0.49	54.09	88.20	-34.11	peak

Test Mode: 09; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

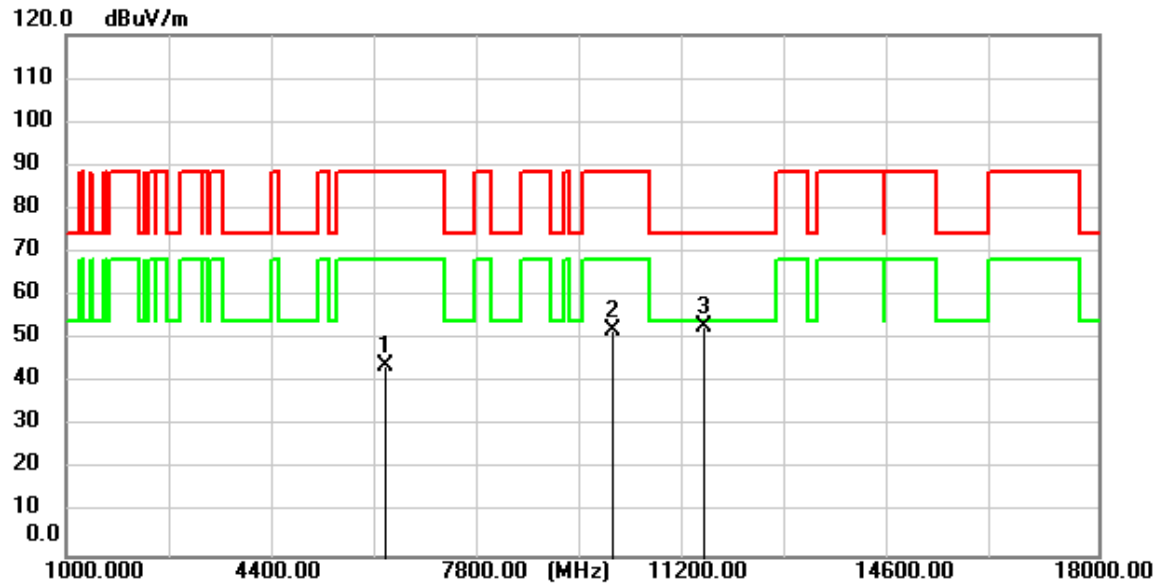


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6270.000	53.42	-9.29	44.13	88.20	-44.07	peak
2	9986.200	53.60	-1.53	52.07	88.20	-36.13	peak
3	11515.350	54.47	-1.68	52.79	74.00	-21.21	peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

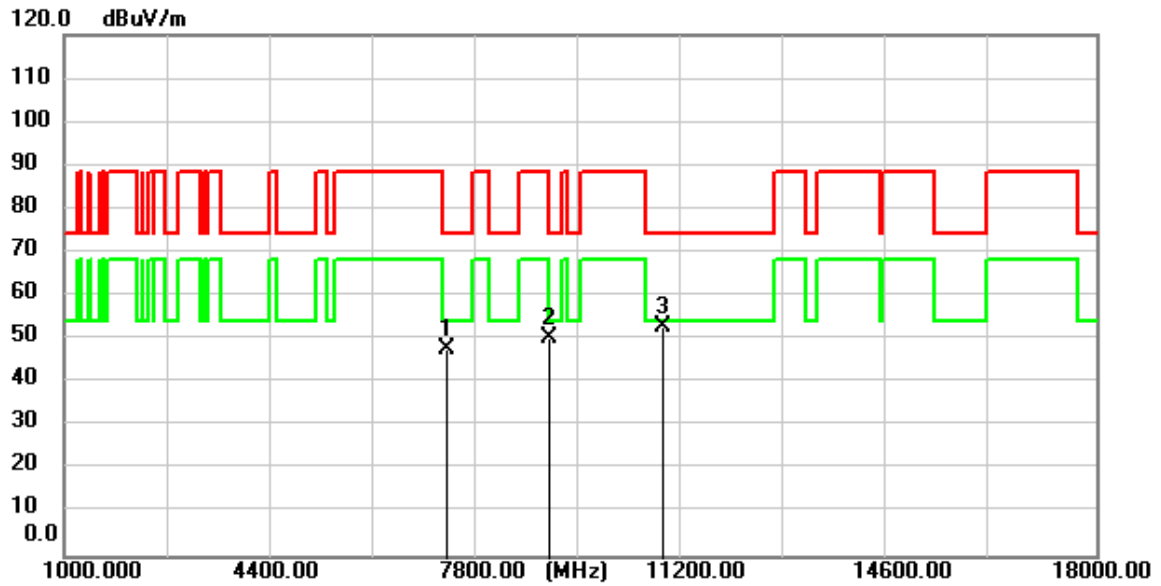


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7305.300	54.28	-6.52	47.76	74.00	-26.24	peak
2	8980.650	54.05	-3.55	50.50	88.20	-37.70	peak
3	10851.500	54.33	-1.59	52.74	74.00	-21.26	peak

Test Mode: 09; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

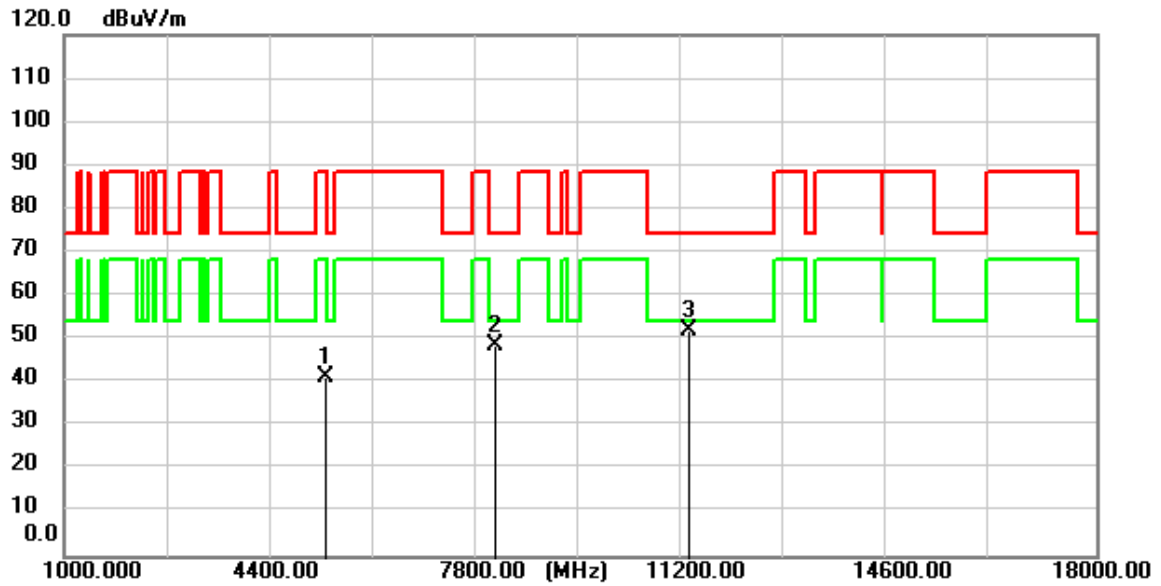


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5289.950	53.78	-12.49	41.29	88.20	-46.91	peak
2	8084.750	53.76	-5.04	48.72	74.00	-25.28	peak
3	11284.150	53.70	-1.66	52.04	74.00	-21.96	peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

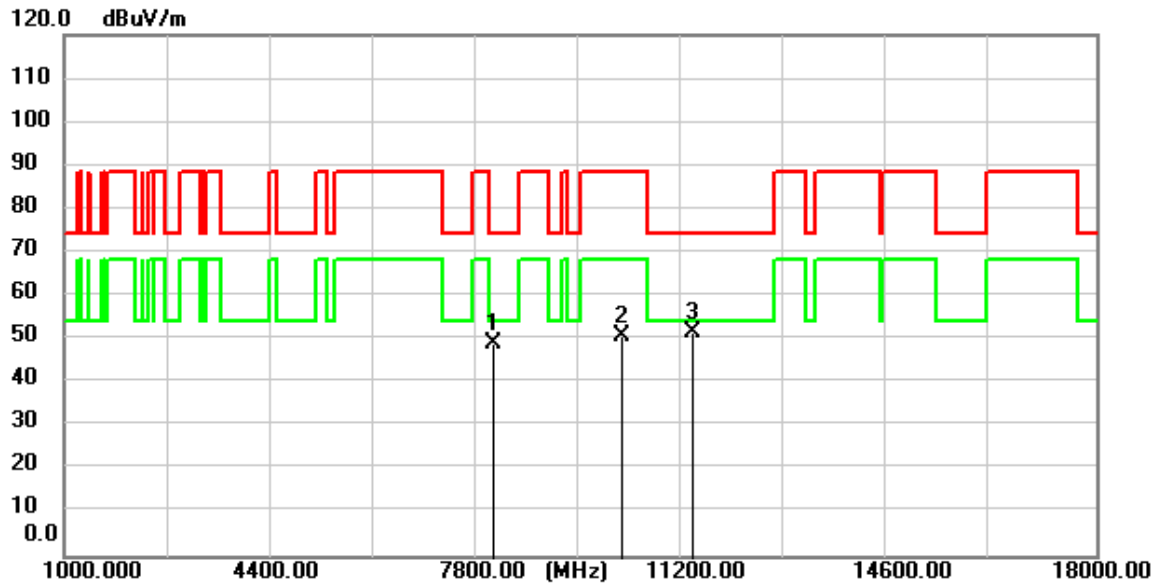


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8055.850	54.00	-5.10	48.90	74.00	-25.10	peak
2	10177.450	52.33	-1.54	50.79	88.20	-37.41	peak
3	11364.050	53.26	-1.66	51.60	74.00	-22.40	peak

Test Mode: 09; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

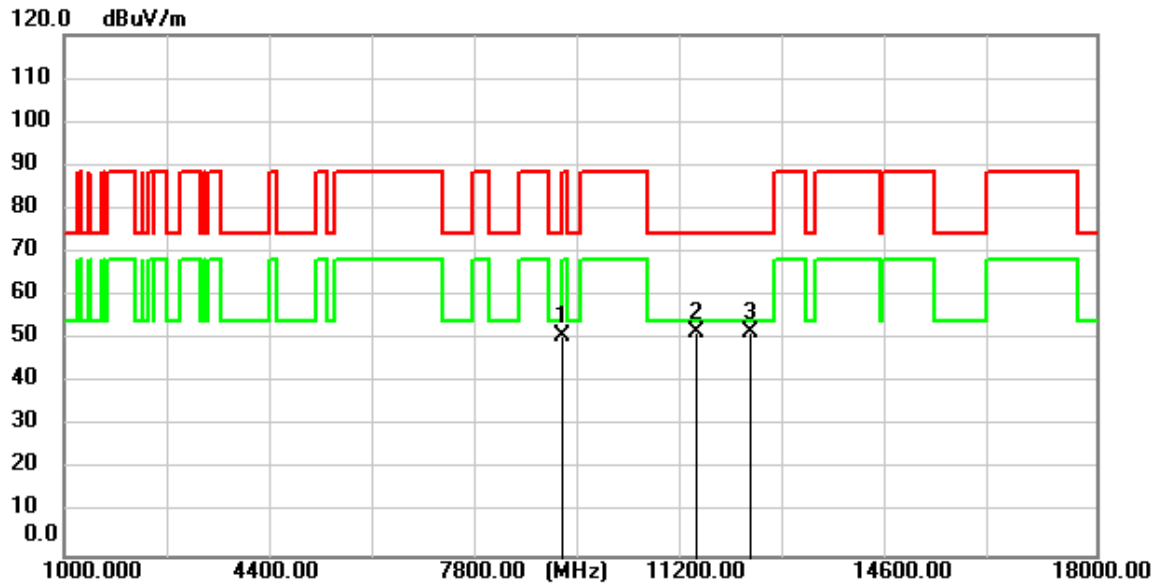


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9195.700	53.96	-3.05	50.91	74.00	-23.09	peak
2	11404.850	53.12	-1.67	51.45	74.00	-22.55	peak
3	12310.950	52.64	-1.21	51.43	74.00	-22.57	peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

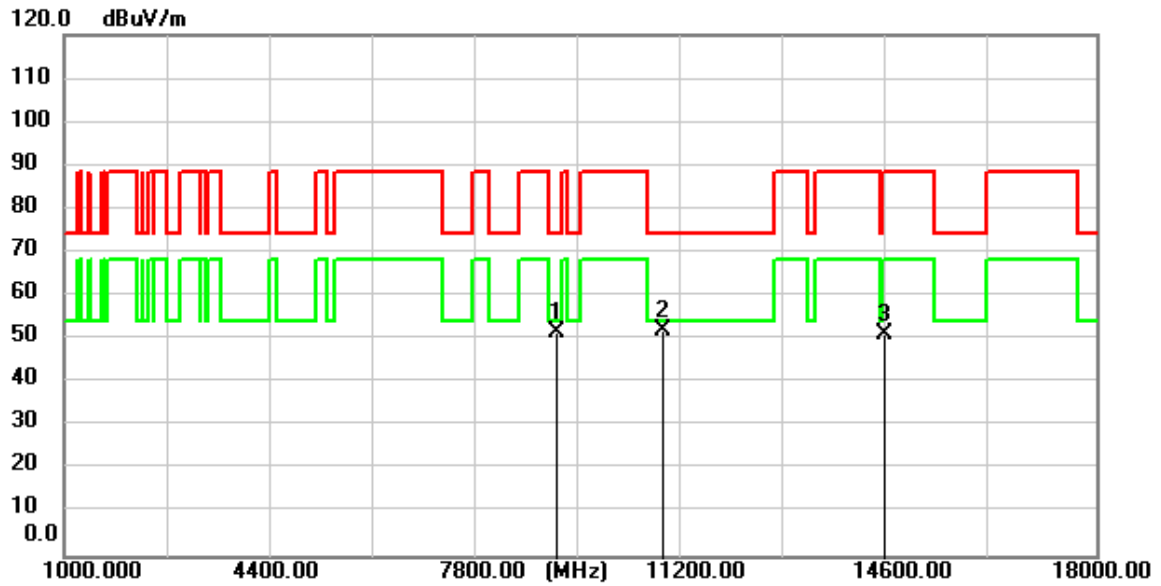


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9119.200	54.71	-3.22	51.49	74.00	-22.51	peak
2	10865.950	53.77	-1.60	52.17	74.00	-21.83	peak
3	14526.900	52.88	-1.46	51.42	88.20	-36.78	peak

Test Mode: 09; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

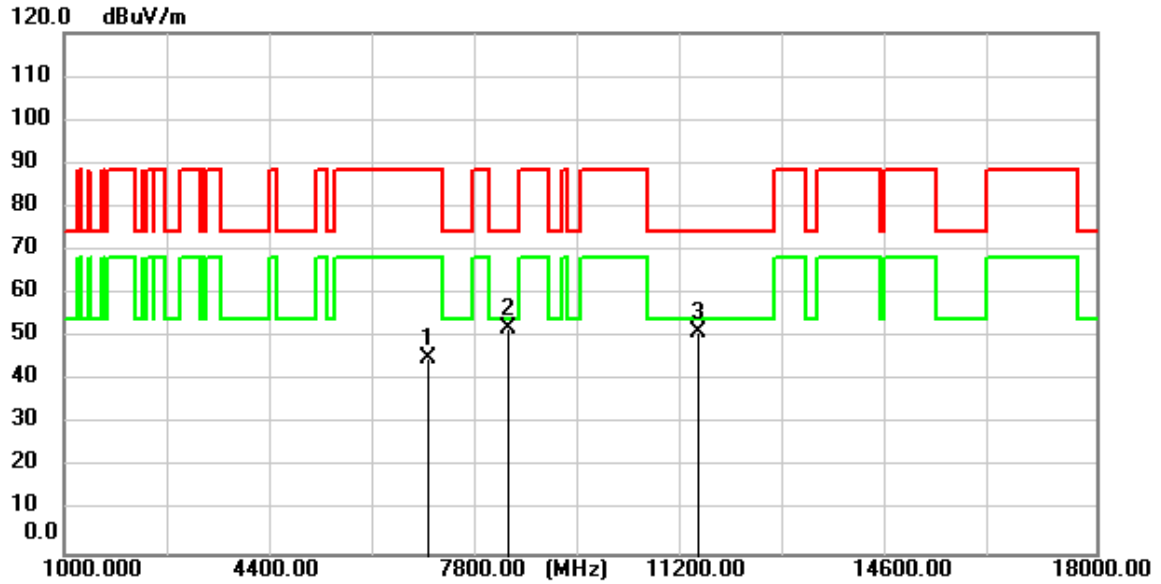


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6991.650	52.22	-6.87	45.35	88.20	-42.85	peak
2	8309.150	56.80	-4.67	52.13	74.00	-21.87	peak
3	11452.450	52.98	-1.68	51.30	74.00	-22.70	peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

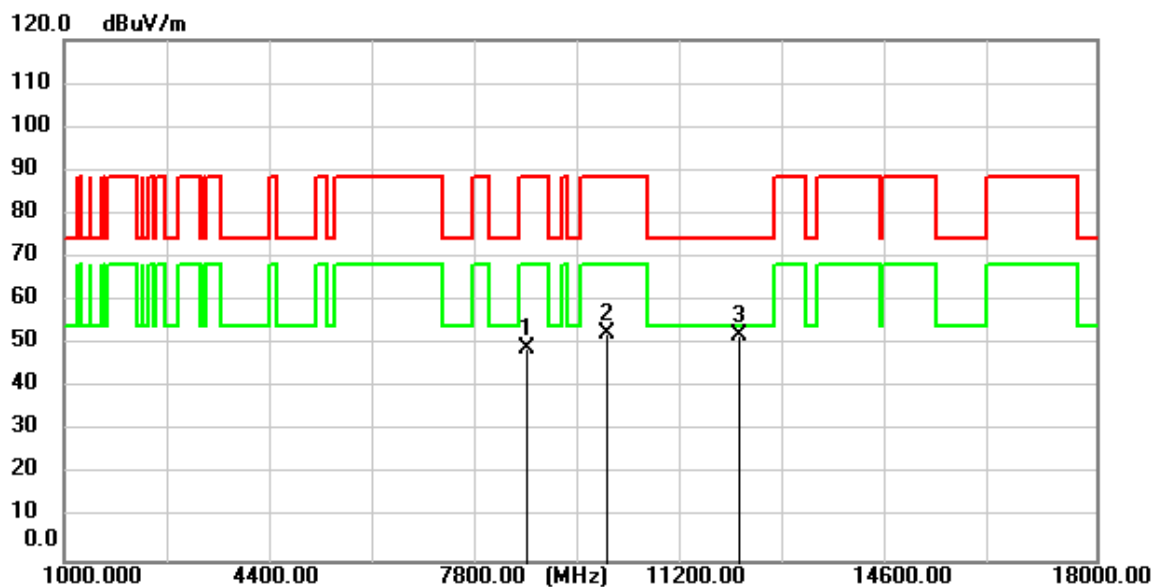


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8620.250	53.33	-4.15	49.18	88.20	-39.02	peak
2	9942.000	53.84	-1.54	52.30	88.20	-35.90	peak
3	12120.550	53.76	-1.50	52.26	74.00	-21.74	peak

Test Mode: 09; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

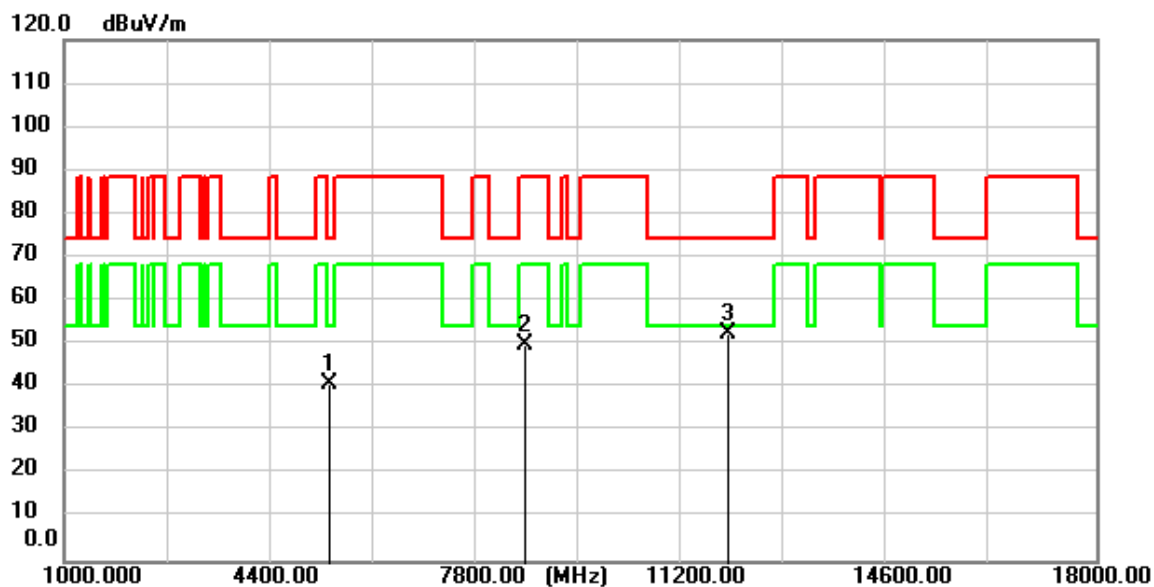


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5359.650	53.22	-12.41	40.81	74.00	-33.19	peak
2	8596.450	54.16	-4.19	49.97	88.20	-38.23	peak
3	11945.450	54.40	-1.72	52.68	74.00	-21.32	peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

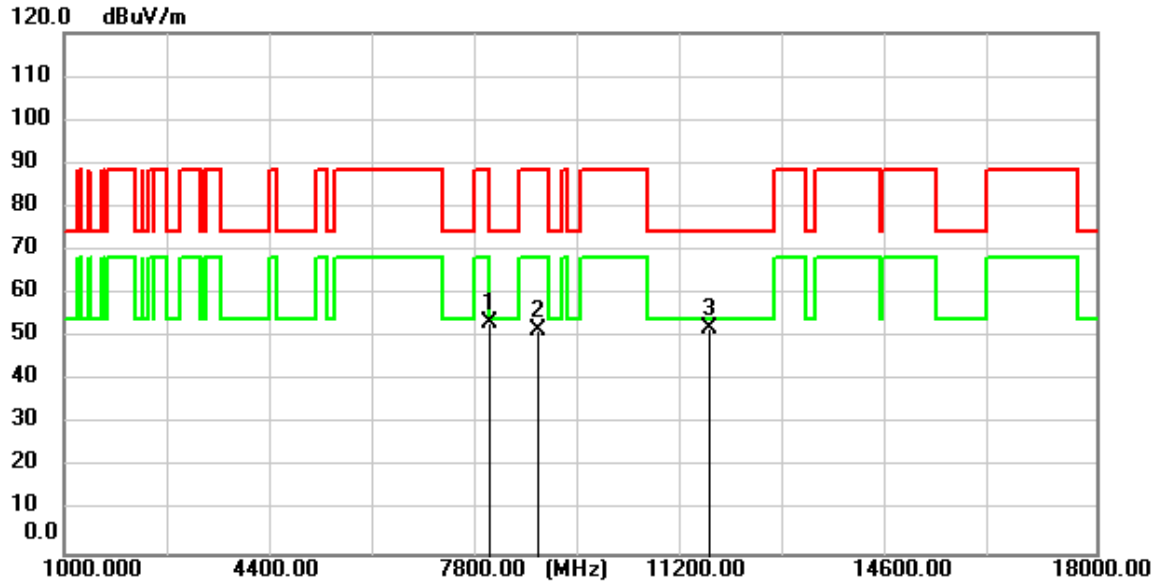


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7993.800	58.51	-5.21	53.30	88.20	-34.90	peak
2	8803.000	55.70	-3.85	51.85	88.20	-36.35	peak
3	11630.950	53.75	-1.70	52.05	74.00	-21.95	peak

Test Mode: 09; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

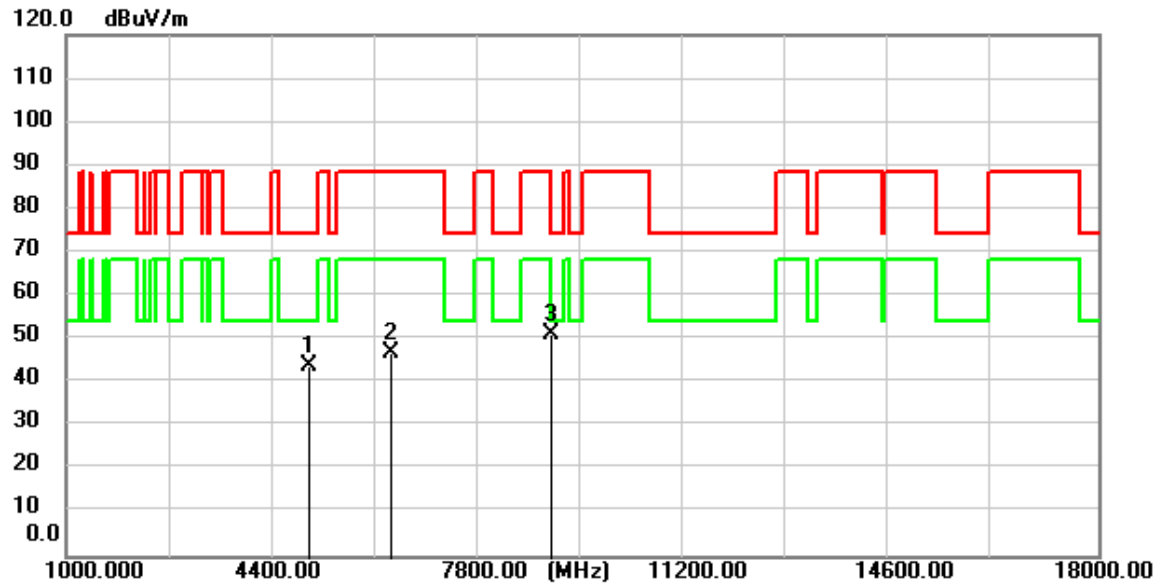


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5008.600	56.62	-12.83	43.79	74.00	-30.21	peak
2	6342.250	55.80	-8.95	46.85	88.20	-41.35	peak
3	8983.200	54.77	-3.54	51.23	88.20	-36.97	peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

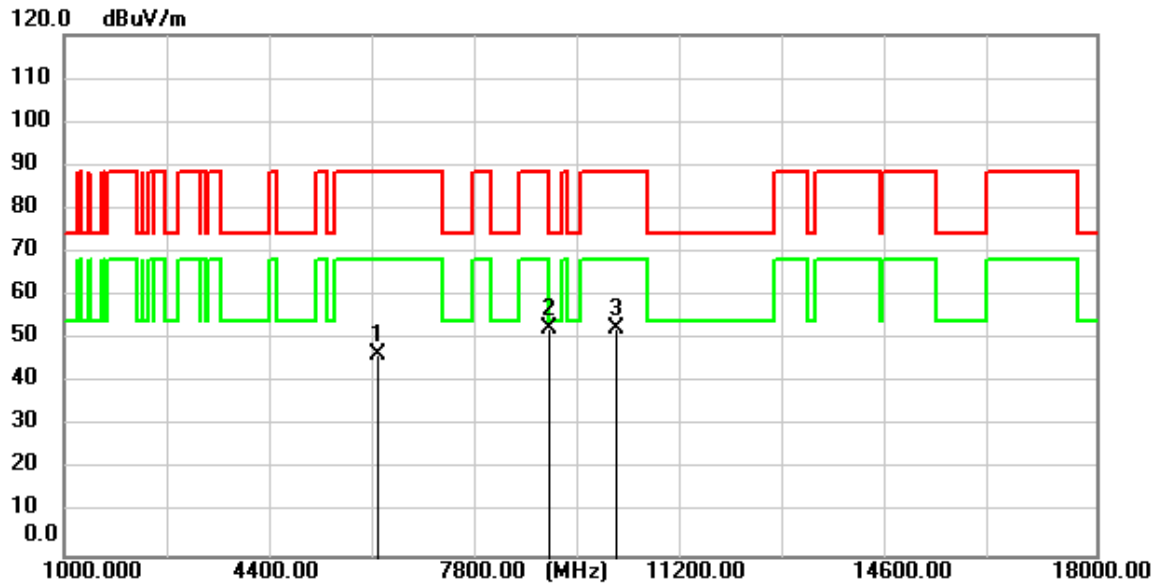


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6183.300	56.05	-9.69	46.36	88.20	-41.84	peak
2	8989.150	55.91	-3.52	52.39	88.20	-35.81	peak
3	10099.250	53.97	-1.54	52.43	88.20	-35.77	peak

Test Mode: 09; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:middle

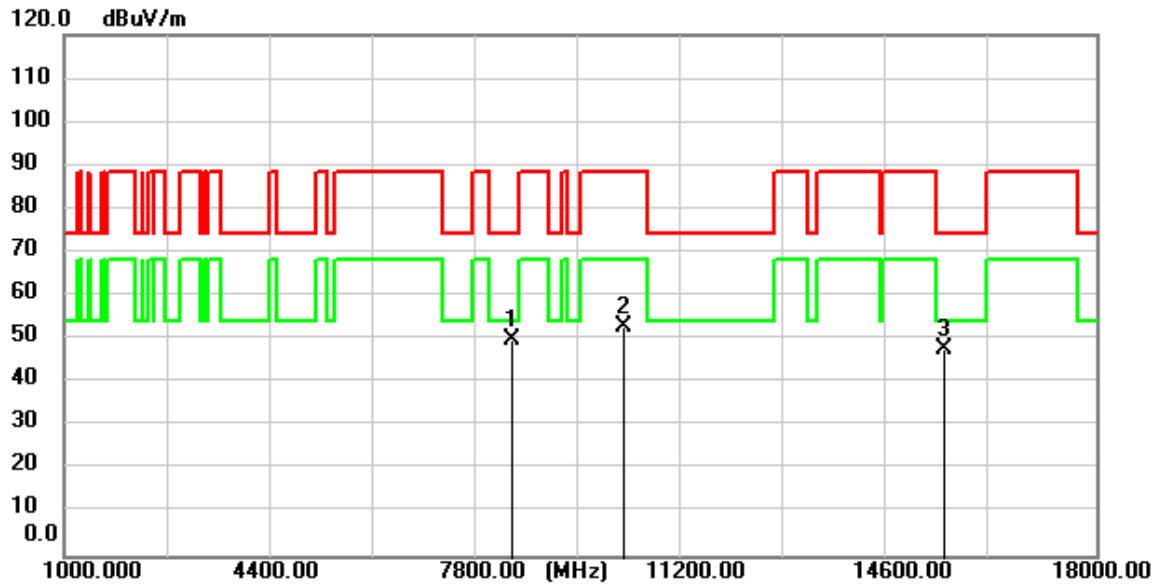


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8370.350	54.34	-4.57	49.77	74.00	-24.23	peak
2	10216.550	54.42	-1.54	52.88	88.20	-35.32	peak
3	15484.000	52.53	-4.67	47.86	74.00	-26.14	peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:middle

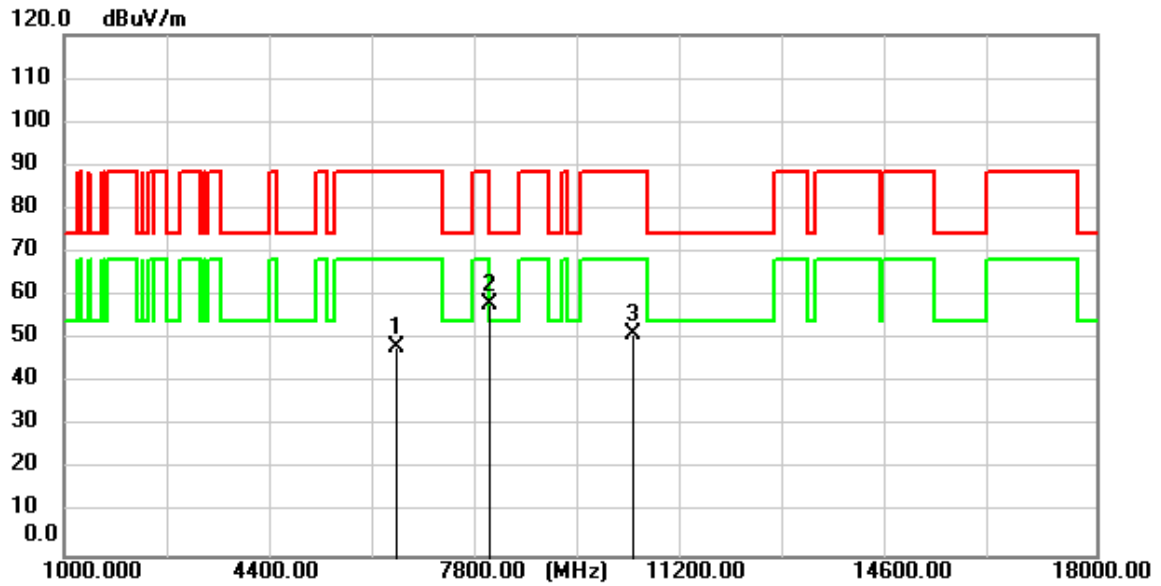


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6482.500	56.71	-8.31	48.40	88.20	-39.80	peak
2	7998.050	63.08	-5.20	57.88	88.20	-30.32	peak
3	10370.400	52.72	-1.55	51.17	88.20	-37.03	peak

Test Mode: 09; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

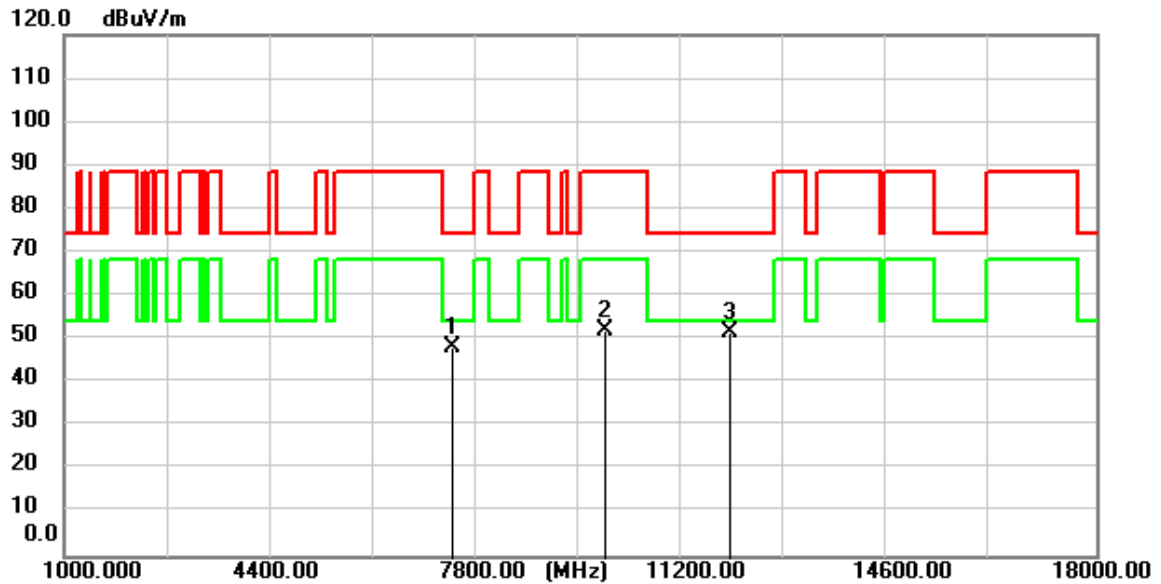


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7402.200	54.46	-6.41	48.05	74.00	-25.95	peak
2	9891.850	53.42	-1.55	51.87	88.20	-36.33	peak
3	11976.900	53.16	-1.70	51.46	74.00	-22.54	peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

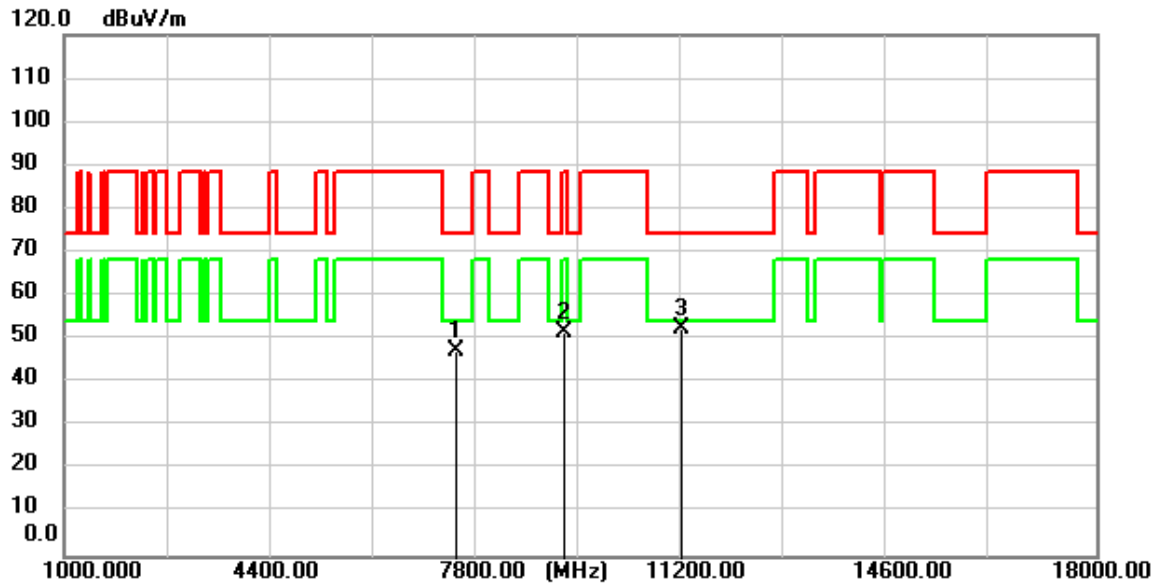


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7458.300	53.78	-6.29	47.49	74.00	-26.51	peak
2	9218.650	54.63	-2.99	51.64	88.20	-36.56	peak
3	11154.100	54.34	-1.63	52.71	74.00	-21.29	peak

Test Mode: 09; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:Low

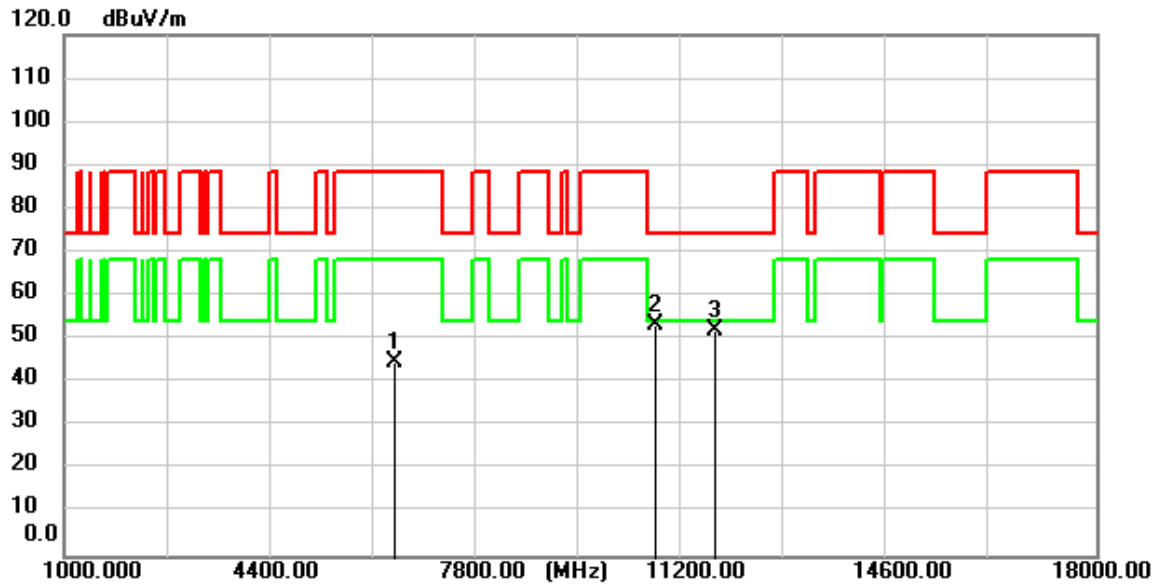


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6429.800	53.15	-8.55	44.60	88.20	-43.60	peak
2	10750.350	54.85	-1.58	53.27	74.00	-20.73	peak
3	11714.250	53.58	-1.71	51.87	74.00	-22.13	peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:Low

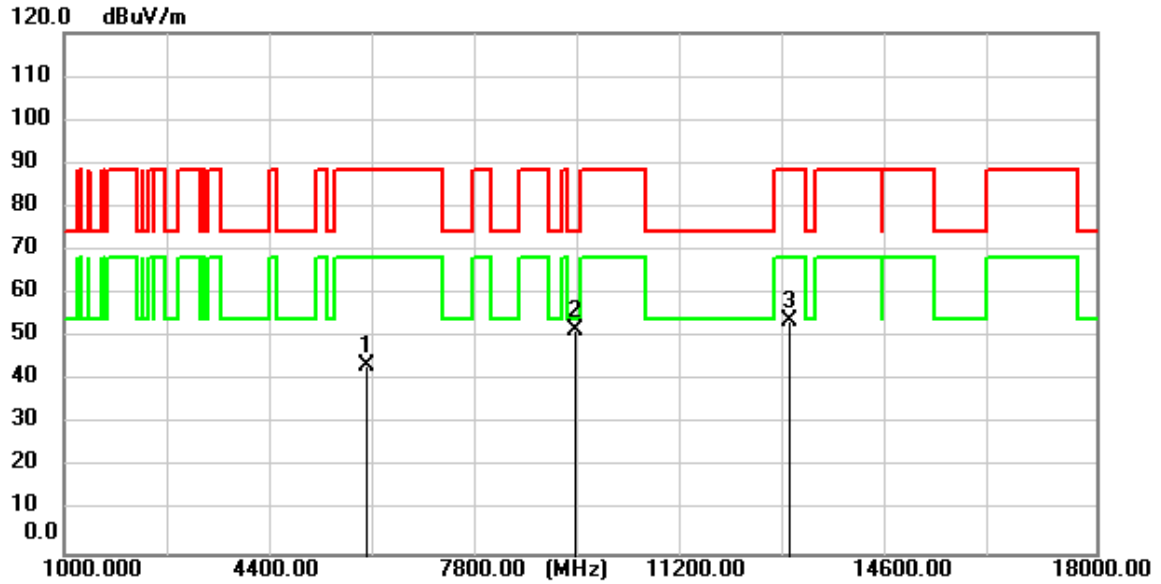


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5995.450	53.85	-10.50	43.35	88.20	-44.85	peak
2	9415.000	54.10	-2.55	51.55	74.00	-22.45	peak
3	12948.450	54.00	-0.22	53.78	88.20	-34.42	peak

Test Mode: 09; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:Low

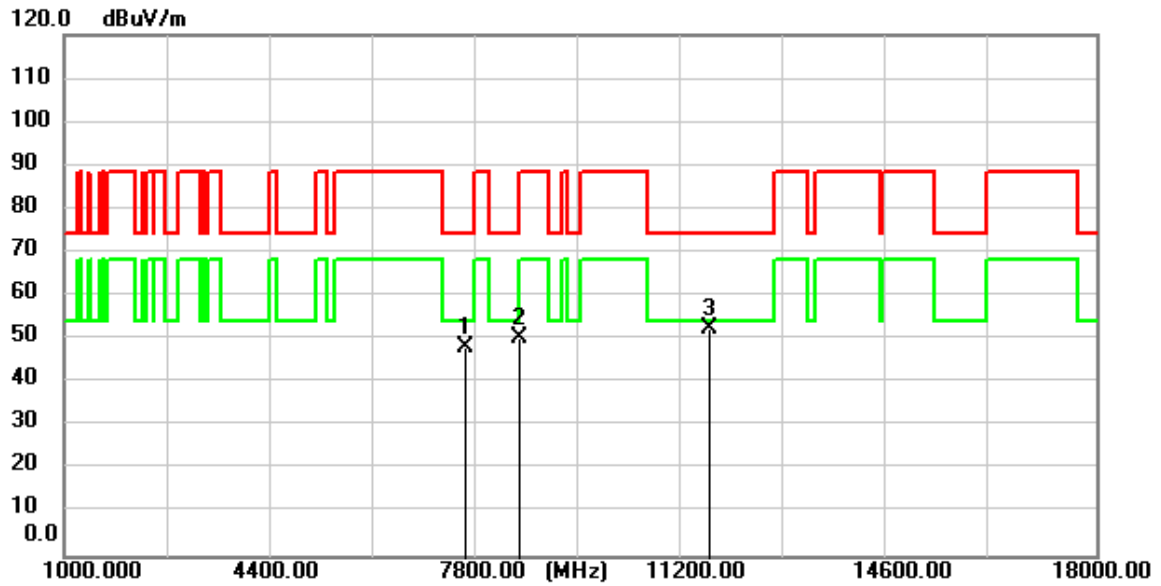


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7613.000	54.16	-5.98	48.18	74.00	-25.82	peak
2	8512.300	54.79	-4.34	50.45	88.20	-37.75	peak
3	11638.600	54.08	-1.71	52.37	74.00	-21.63	peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:Low

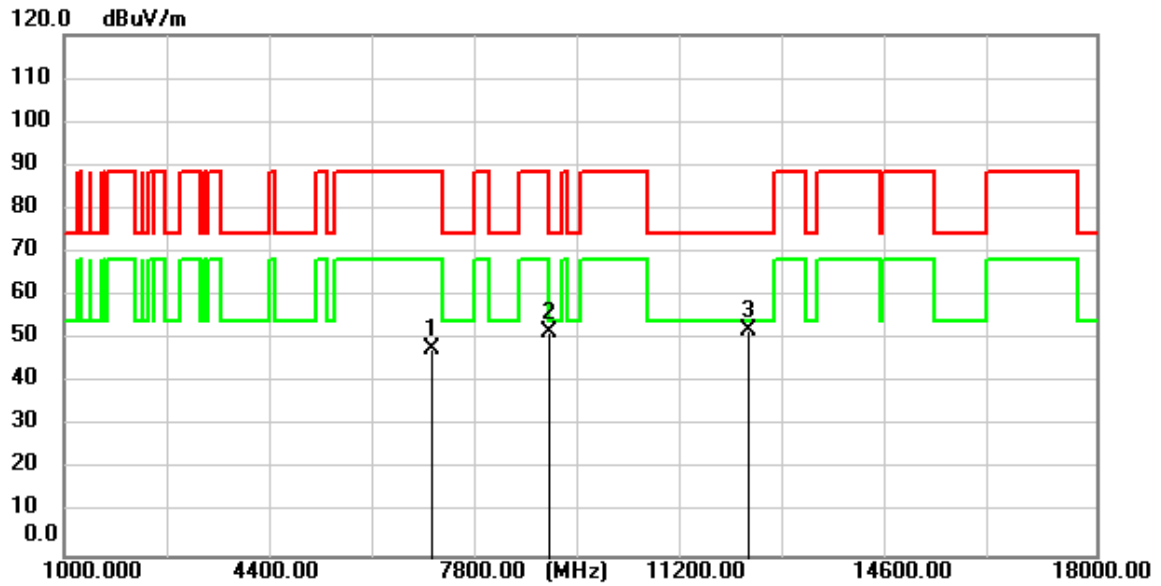


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7035.850	54.58	-6.82	47.76	88.20	-40.44	peak
2	9000.200	55.33	-3.50	51.83	74.00	-22.17	peak
3	12260.800	53.51	-1.29	52.22	74.00	-21.78	peak

Test Mode: 10; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

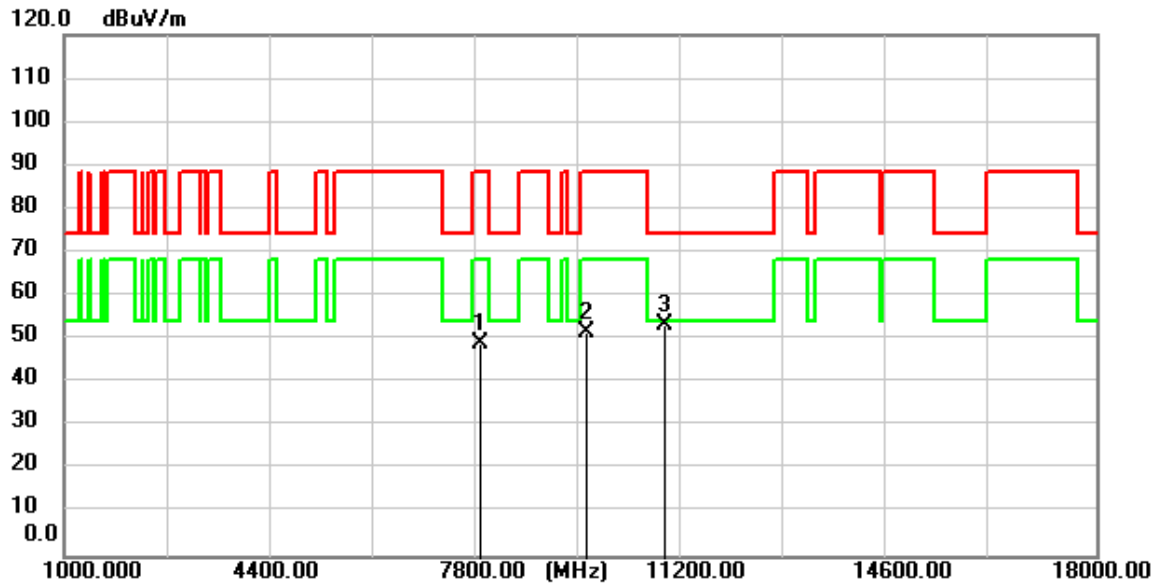


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7862.050	54.62	-5.48	49.14	88.20	-39.06	peak
2	9614.750	53.62	-2.10	51.52	88.20	-36.68	peak
3	10884.650	54.95	-1.60	53.35	74.00	-20.65	peak

Test Mode: 10; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

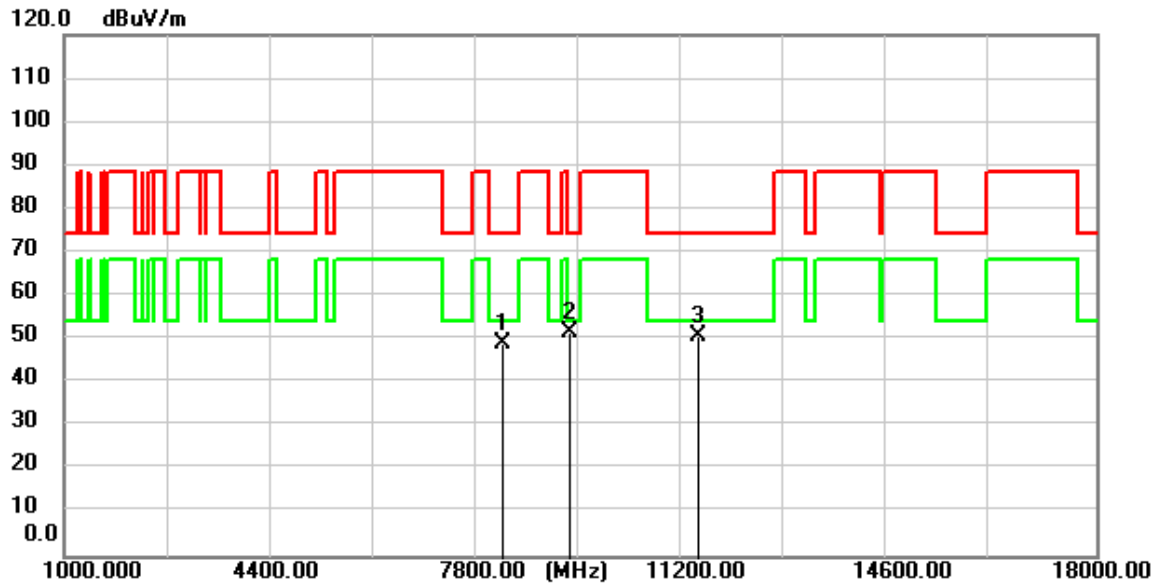


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8218.200	53.97	-4.81	49.16	74.00	-24.84	peak
2	9329.150	54.19	-2.74	51.45	74.00	-22.55	peak
3	11443.950	52.44	-1.68	50.76	74.00	-23.24	peak

Test Mode: 10; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

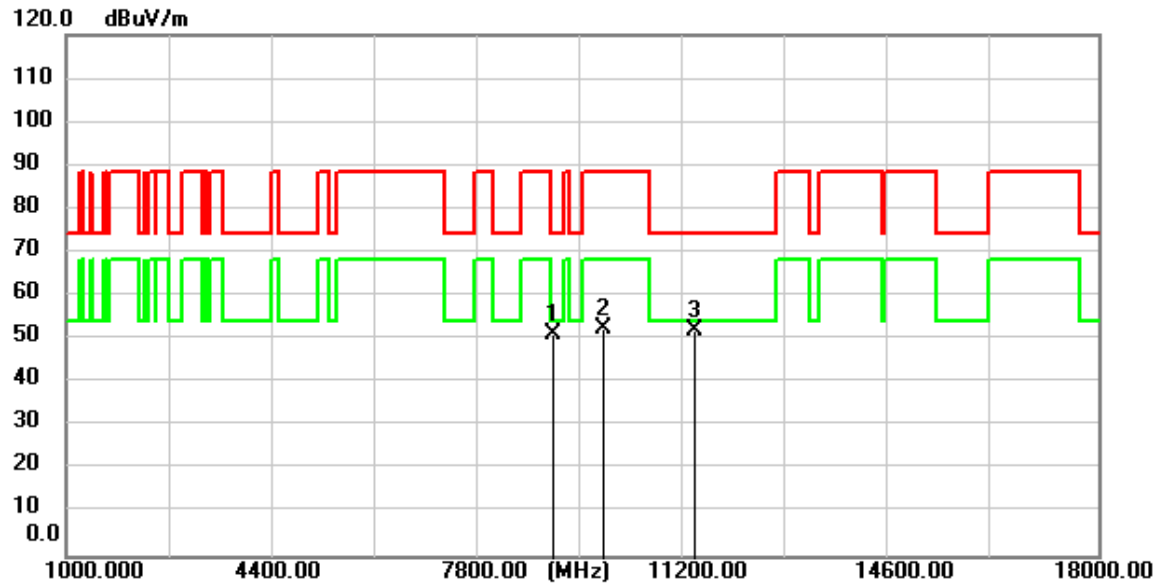


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9010.400	54.60	-3.48	51.12	74.00	-22.88	peak
2	9827.250	54.07	-1.60	52.47	88.20	-35.73	peak
3	11354.700	53.71	-1.66	52.05	74.00	-21.95	peak

Test Mode: 10; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

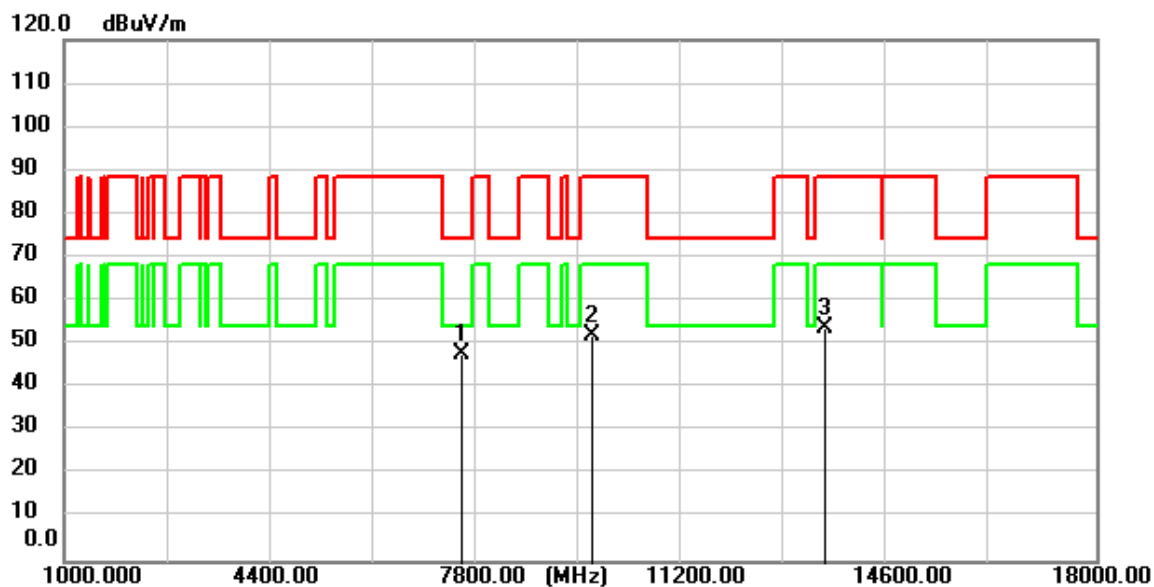


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7555.200	53.92	-6.10	47.82	74.00	-26.18	peak
2	9700.600	54.05	-1.90	52.15	88.20	-36.05	peak
3	13537.500	53.28	0.33	53.61	88.20	-34.59	peak

Test Mode: 10; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

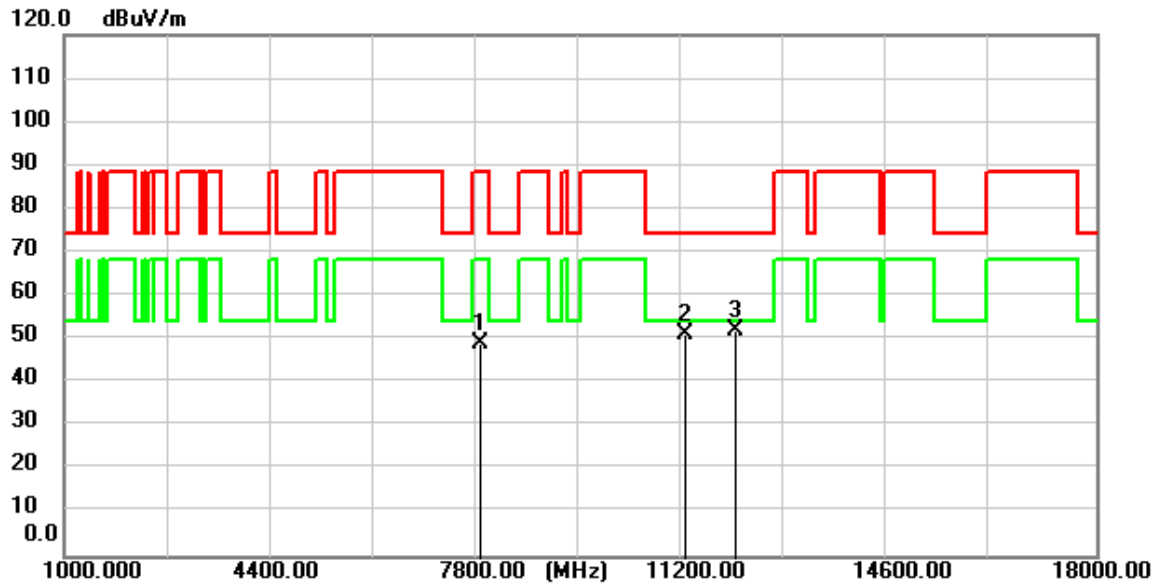


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7854.400	54.73	-5.49	49.24	88.20	-38.96	peak
2	11219.550	52.74	-1.64	51.10	74.00	-22.90	peak
3	12039.800	53.88	-1.62	52.26	74.00	-21.74	peak

Test Mode: 10; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

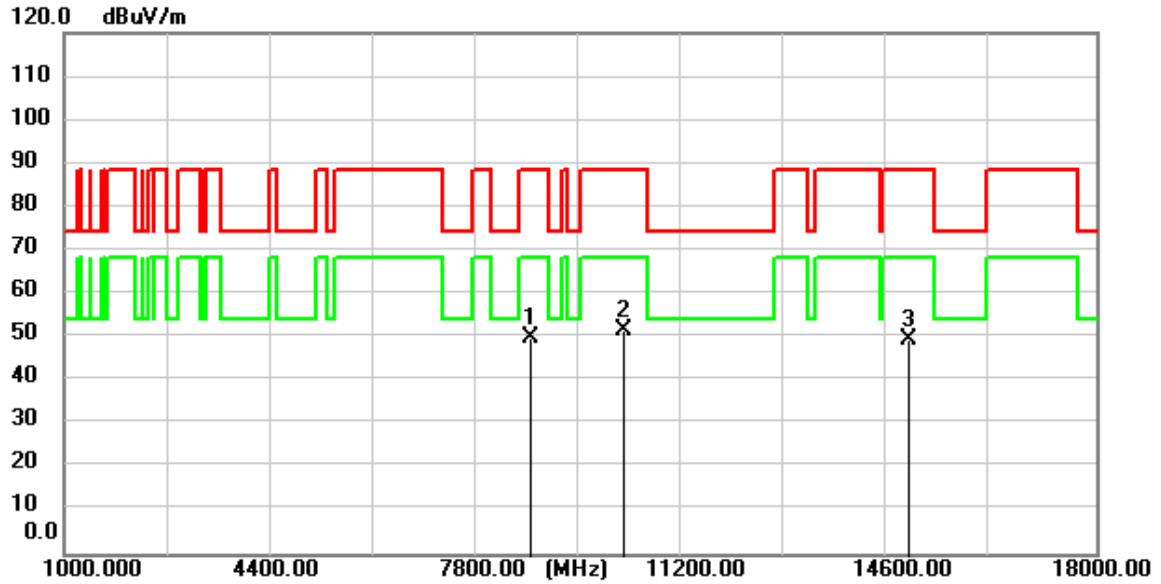


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8698.450	54.16	-4.03	50.13	88.20	-38.07	peak
2	10230.150	53.00	-1.55	51.45	88.20	-36.75	peak
3	14901.750	52.38	-2.72	49.66	88.20	-38.54	peak

Test Mode: 10; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

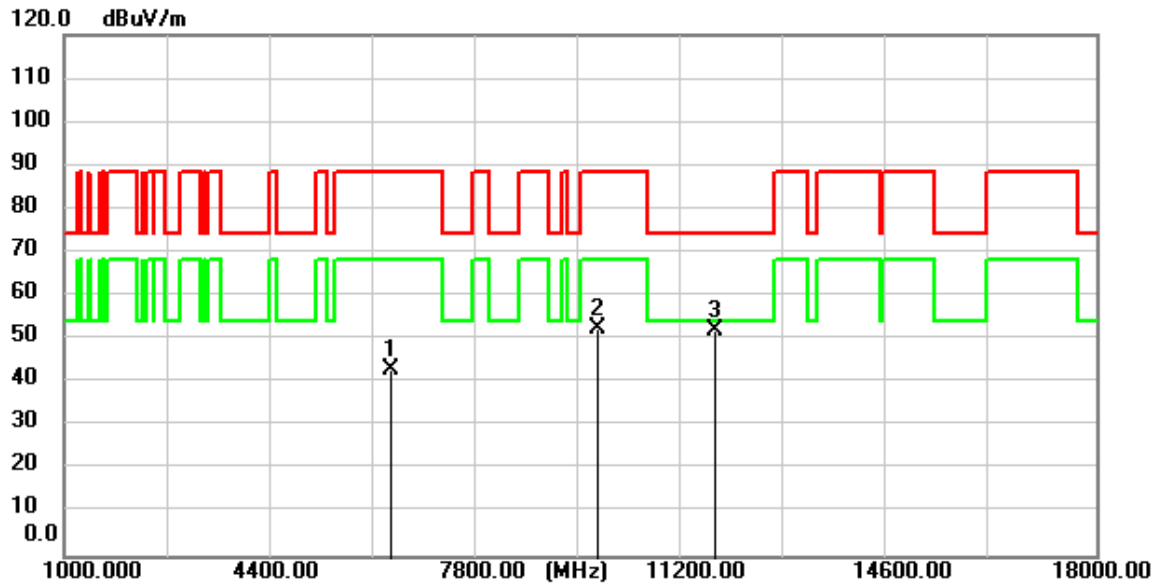


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6367.750	52.07	-8.84	43.23	88.20	-44.97	peak
2	9780.500	54.39	-1.72	52.67	88.20	-35.53	peak
3	11707.450	53.57	-1.71	51.86	74.00	-22.14	peak

Test Mode: 10; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

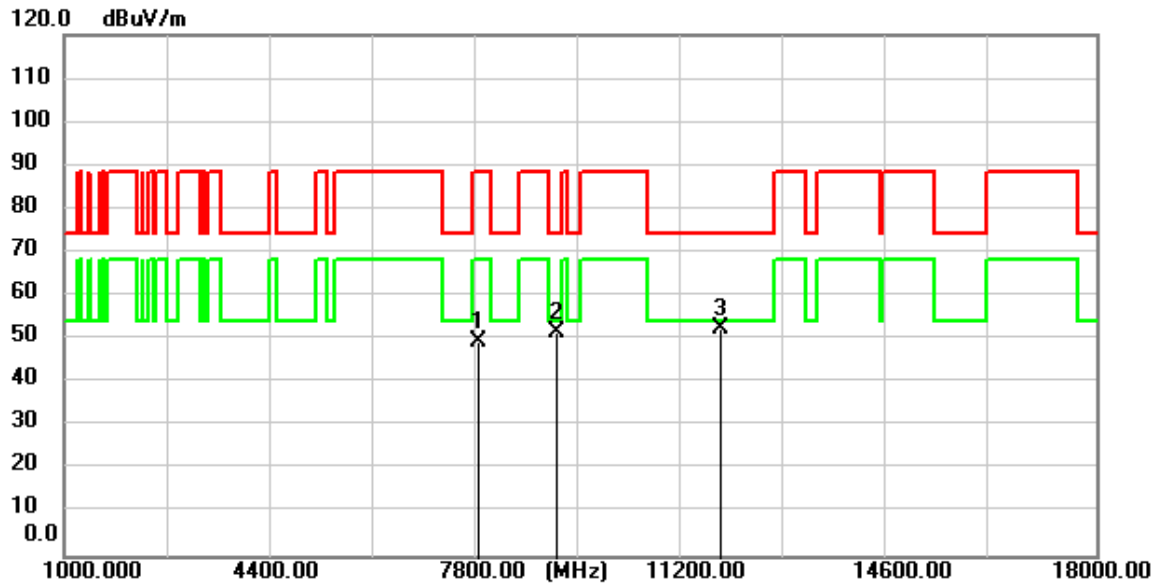


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7830.600	55.17	-5.54	49.63	88.20	-38.57	peak
2	9122.600	54.92	-3.21	51.71	74.00	-22.29	peak
3	11803.500	54.28	-1.73	52.55	74.00	-21.45	peak

Test Mode: 10; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

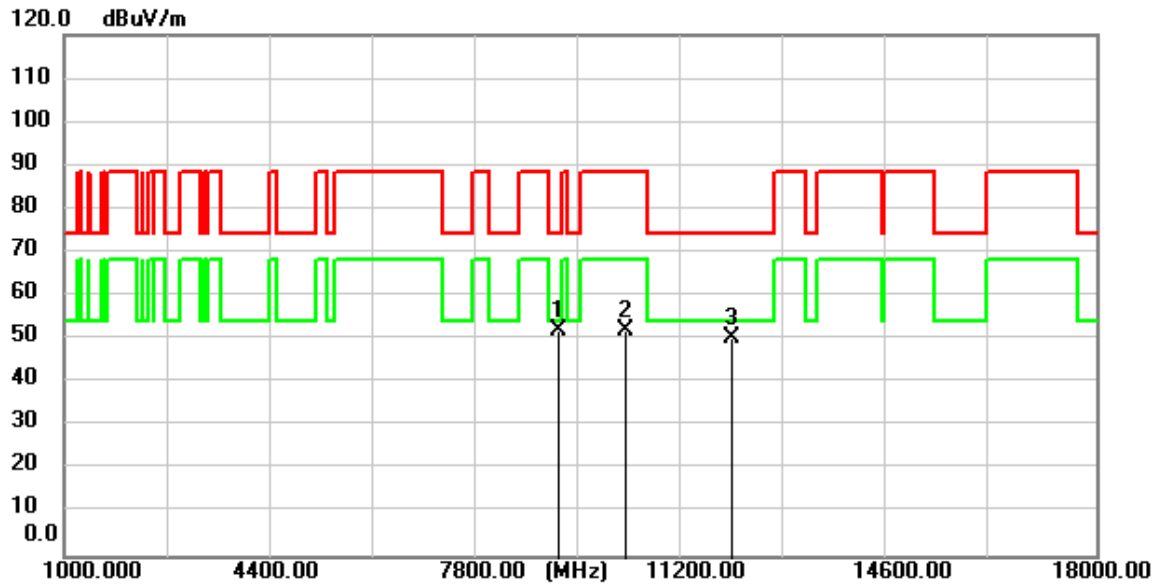


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9131.950	55.34	-3.20	52.14	74.00	-21.86	peak
2	10242.900	53.79	-1.55	52.24	88.20	-35.96	peak
3	11991.350	52.19	-1.69	50.50	74.00	-23.50	peak

Test Mode: 10; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

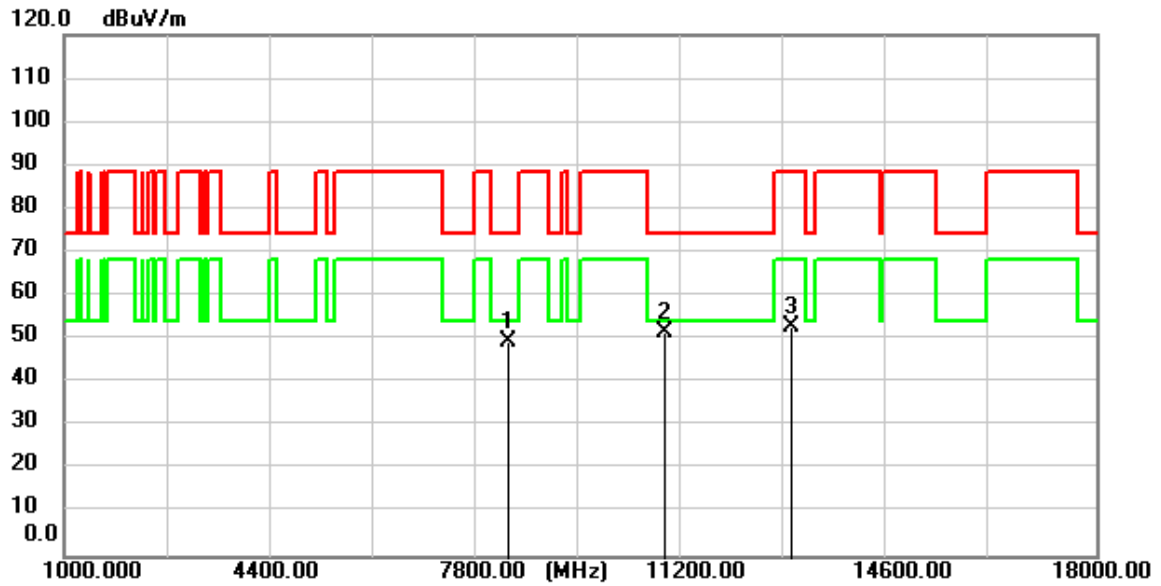


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8312.550	54.17	-4.67	49.50	74.00	-24.50	peak
2	10881.250	53.09	-1.60	51.49	74.00	-22.51	peak
3	12957.800	53.20	-0.21	52.99	88.20	-35.21	peak

Test Mode: 10; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

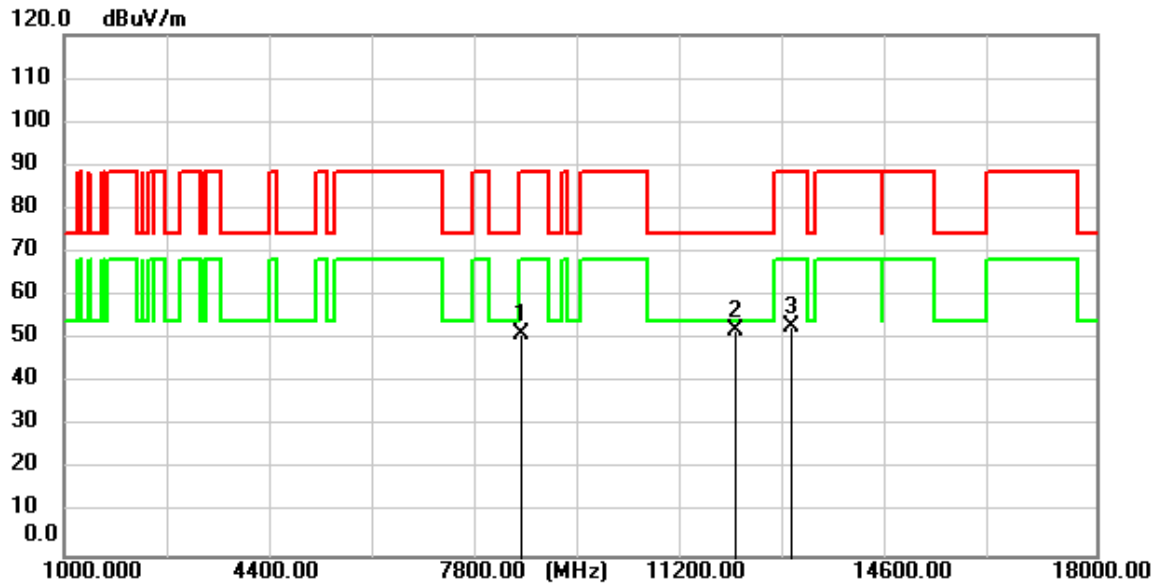


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8519.100	55.33	-4.32	51.01	88.20	-37.19	peak
2	12047.450	53.54	-1.62	51.92	74.00	-22.08	peak
3	12980.750	53.01	-0.17	52.84	88.20	-35.36	peak

Test Mode: 10; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

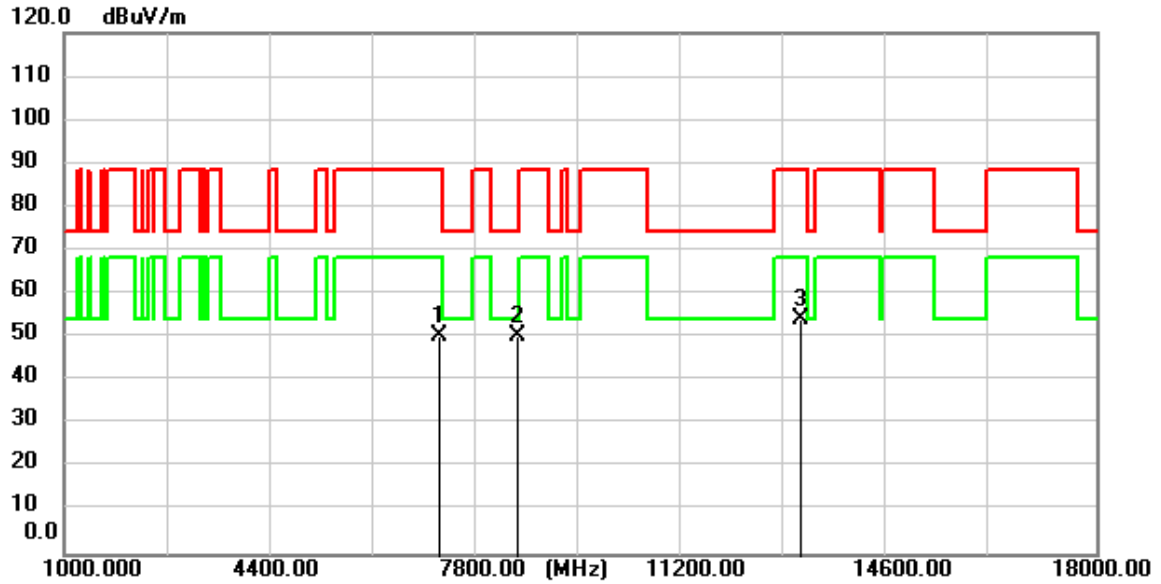


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7176.100	57.18	-6.66	50.52	88.20	-37.68	peak
2	8447.700	54.63	-4.44	50.19	74.00	-23.81	peak
3	13123.550	54.18	0.04	54.22	88.20	-33.98	peak

Test Mode: 10; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

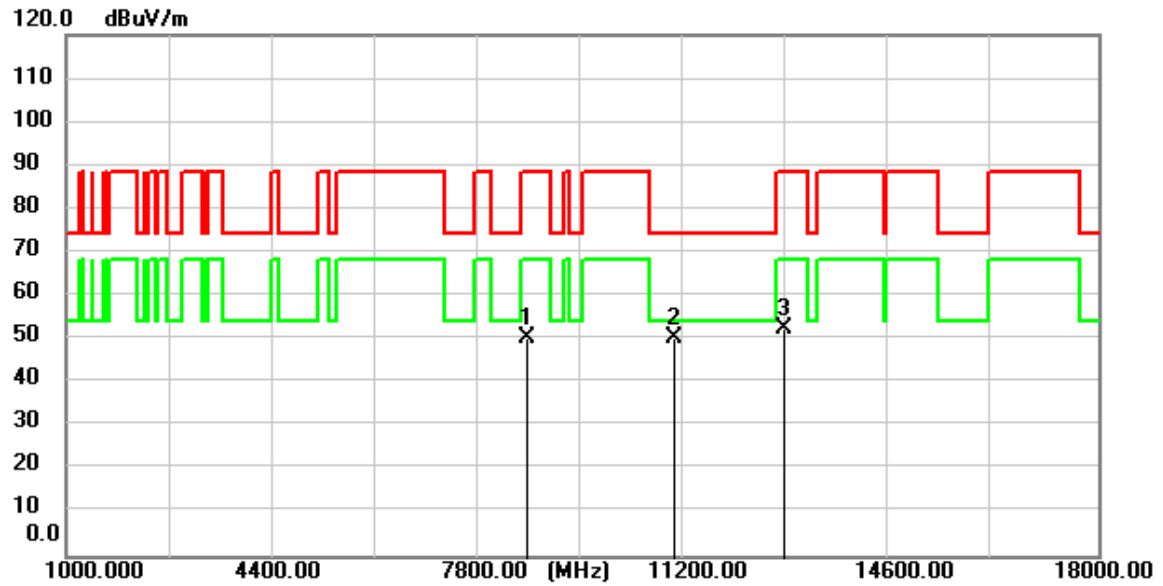


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8593.900	54.48	-4.20	50.28	88.20	-37.92	peak
2	11025.750	51.81	-1.62	50.19	74.00	-23.81	peak
3	12801.400	53.08	-0.45	52.63	88.20	-35.57	peak

Test Mode: 10; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

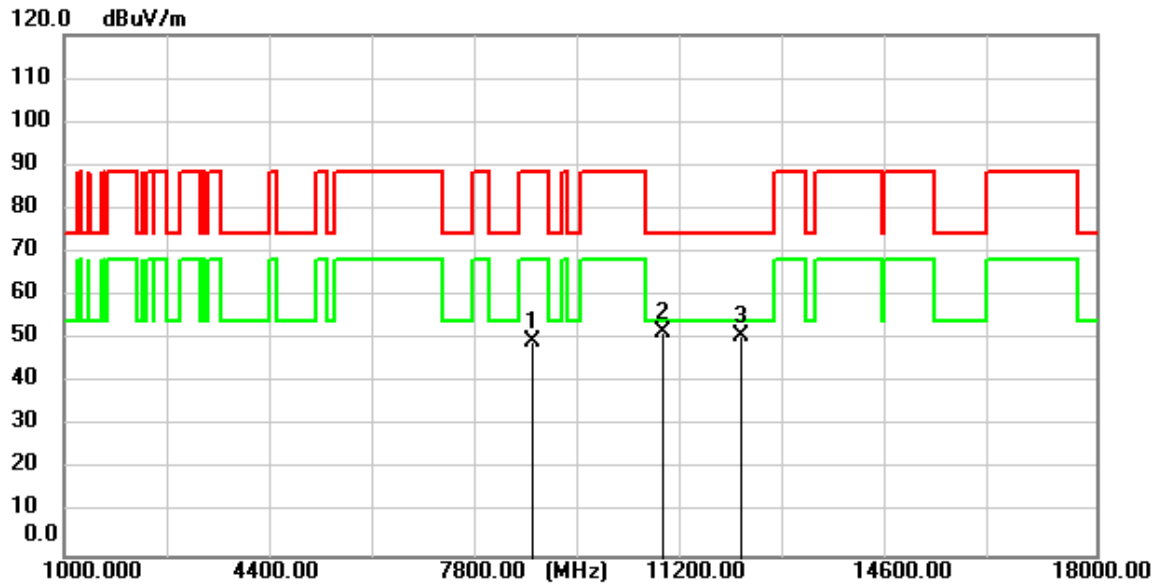


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8715.450	53.45	-4.00	49.45	88.20	-38.75	peak
2	10875.300	53.14	-1.60	51.54	74.00	-22.46	peak
3	12140.950	52.33	-1.47	50.86	74.00	-23.14	peak

Test Mode: 10; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:middle

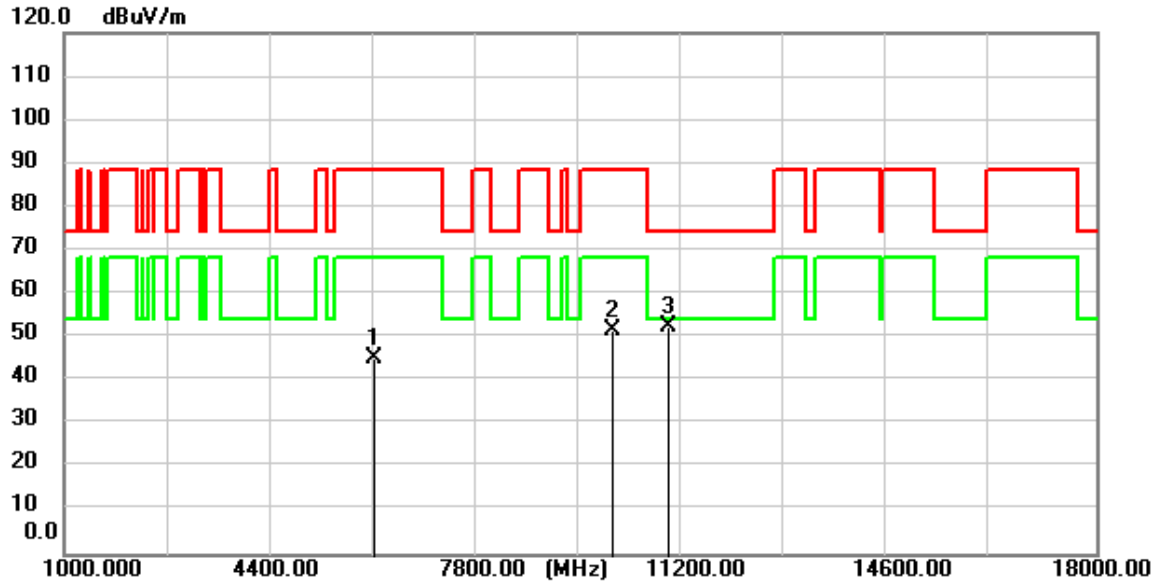


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6099.150	55.16	-10.07	45.09	88.20	-43.11	peak
2	10026.150	52.99	-1.53	51.46	88.20	-36.74	peak
3	10955.200	54.15	-1.60	52.55	74.00	-21.45	peak

Test Mode: 10; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:middle

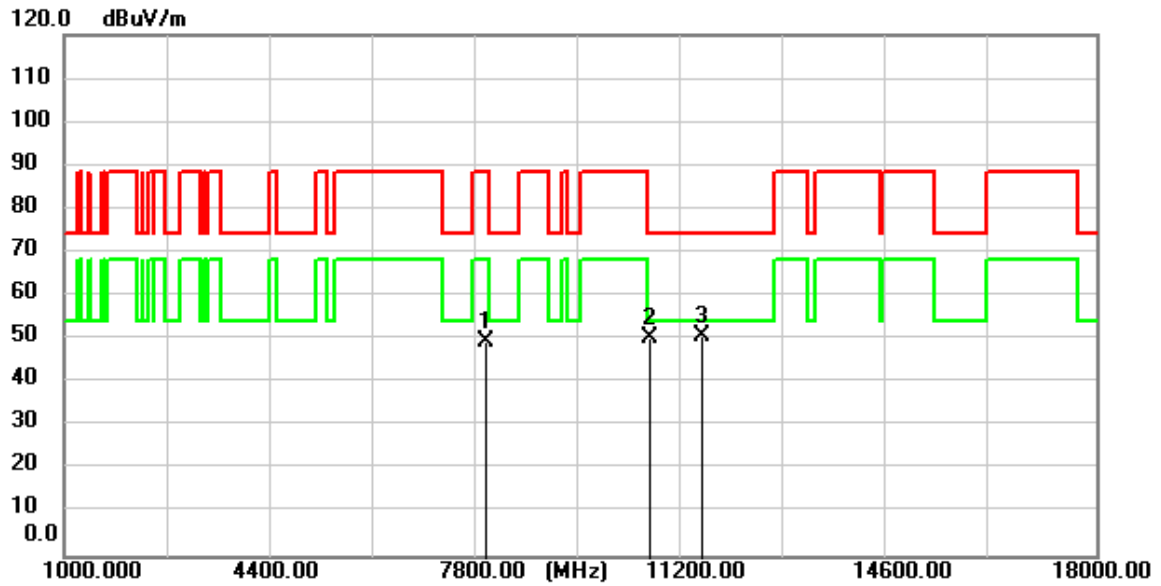


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7953.000	54.94	-5.29	49.65	88.20	-38.55	peak
2	10649.200	52.03	-1.58	50.45	74.00	-23.55	peak
3	11504.300	52.52	-1.68	50.84	74.00	-23.16	peak

Test Mode: 10; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

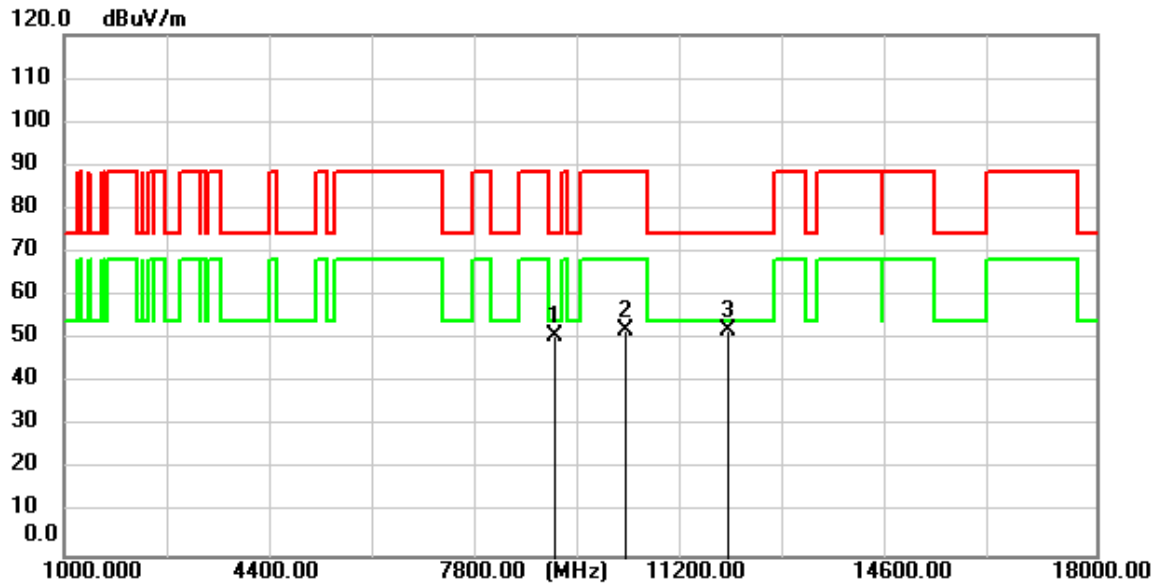


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9081.800	54.20	-3.32	50.88	74.00	-23.12	peak
2	10254.800	53.60	-1.55	52.05	88.20	-36.15	peak
3	11925.900	53.64	-1.73	51.91	74.00	-22.09	peak

Test Mode: 10; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

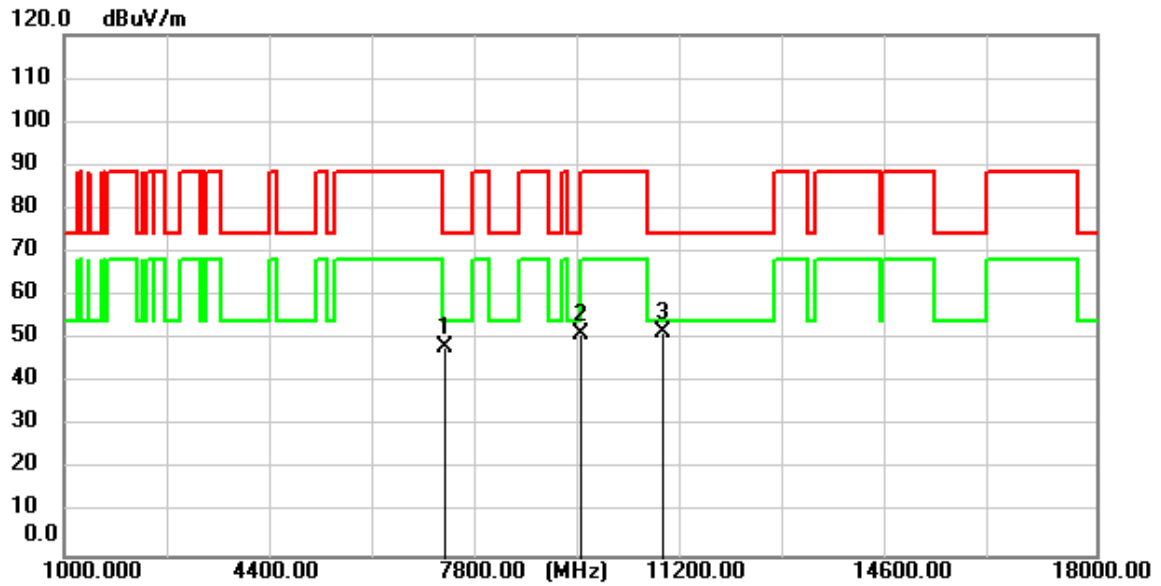


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7256.850	54.60	-6.57	48.03	74.00	-25.97	peak
2	9515.300	53.72	-2.32	51.40	88.20	-36.80	peak
3	10860.850	53.38	-1.60	51.78	74.00	-22.22	peak

Test Mode: 10; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:Low

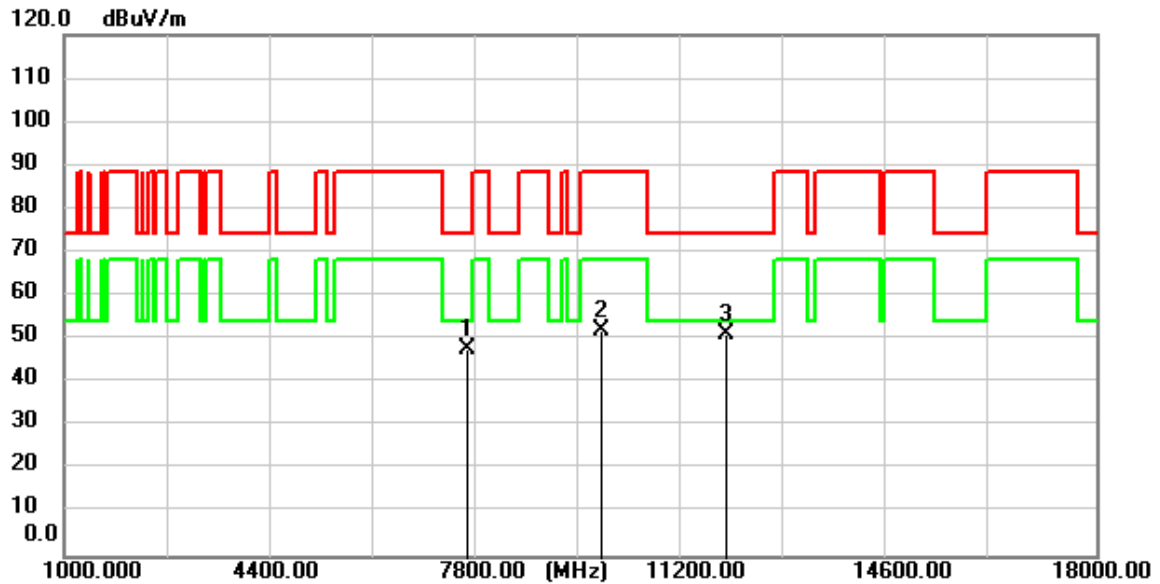


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7622.350	53.61	-5.96	47.65	74.00	-26.35	peak
2	9825.550	53.47	-1.61	51.86	88.20	-36.34	peak
3	11902.950	52.84	-1.74	51.10	74.00	-22.90	peak

Test Mode: 10; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:Low

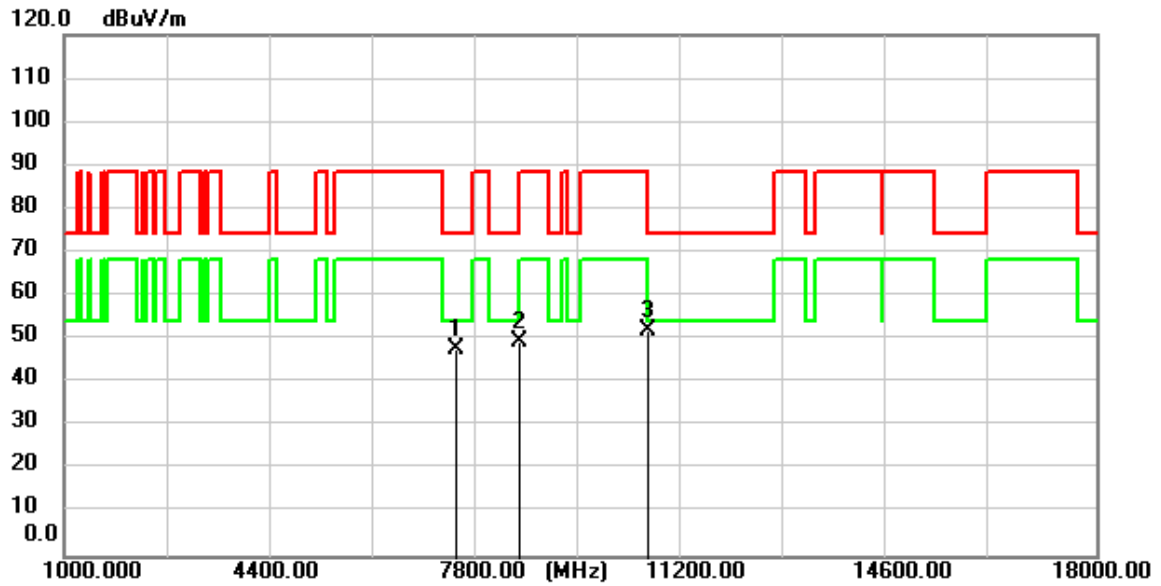


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7453.200	53.93	-6.30	47.63	74.00	-26.37	peak
2	8480.850	54.06	-4.39	49.67	74.00	-24.33	peak
3	10599.900	53.78	-1.57	52.21	88.20	-35.99	peak

Test Mode: 10; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

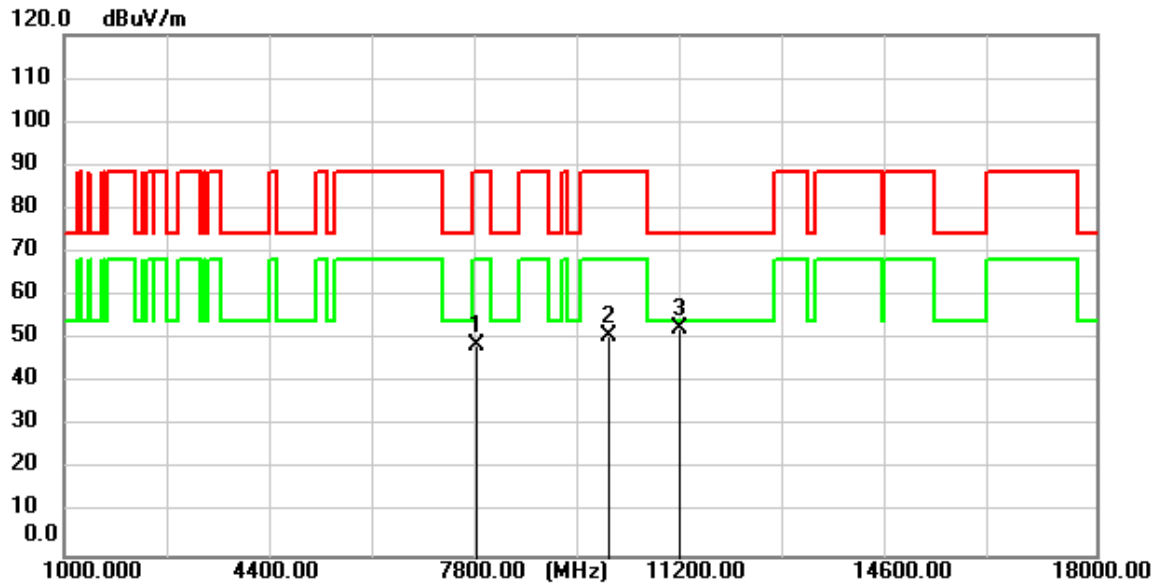


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7785.550	54.32	-5.64	48.68	88.20	-39.52	peak
2	9961.550	52.37	-1.53	50.84	88.20	-37.36	peak
3	11137.100	54.00	-1.63	52.37	74.00	-21.63	peak

Test Mode: 10; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:middle

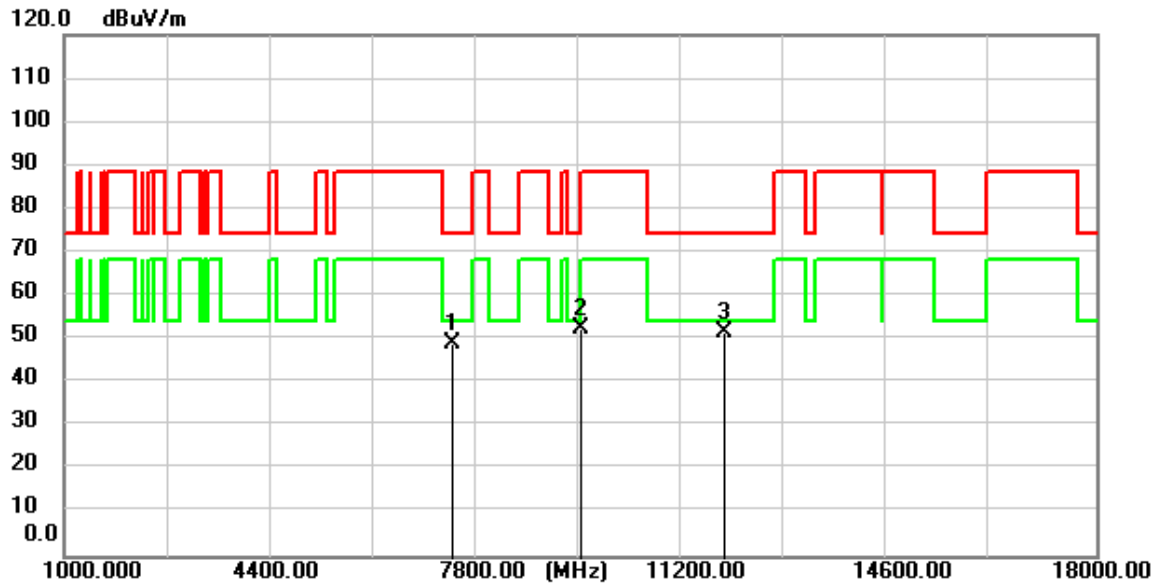


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7397.100	55.35	-6.41	48.94	74.00	-25.06	peak
2	9485.550	54.98	-2.38	52.60	74.00	-21.40	peak
3	11848.550	53.37	-1.74	51.63	74.00	-22.37	peak

Test Mode: 10; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:High

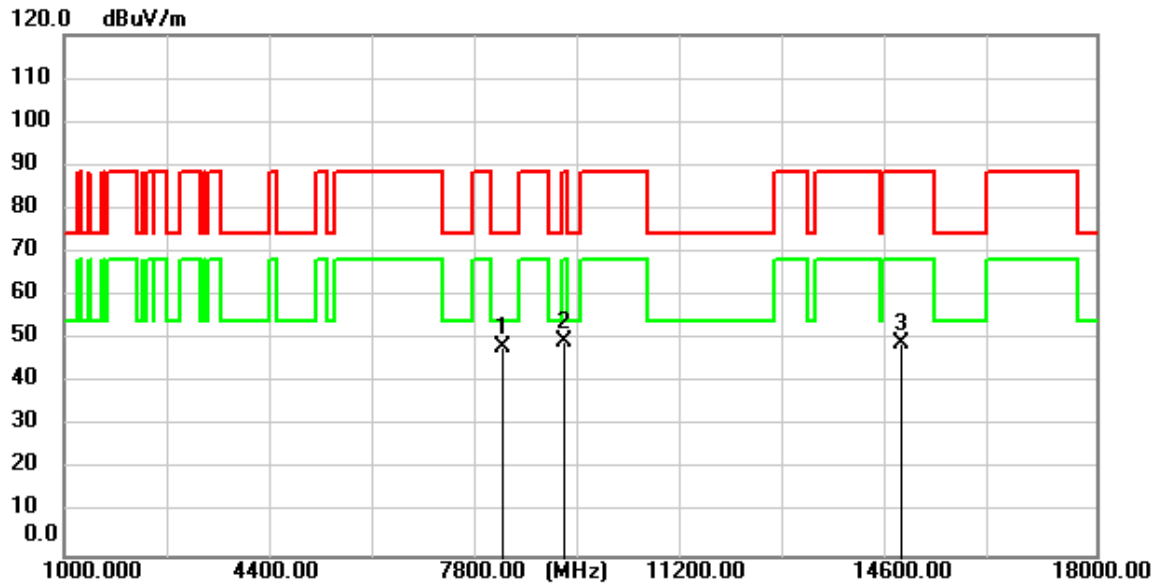


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8217.350	53.01	-4.82	48.19	74.00	-25.81	peak
2	9220.350	52.41	-2.99	49.42	88.20	-38.78	peak
3	14798.050	51.24	-2.37	48.87	88.20	-39.33	peak

Test Mode: 10; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:High

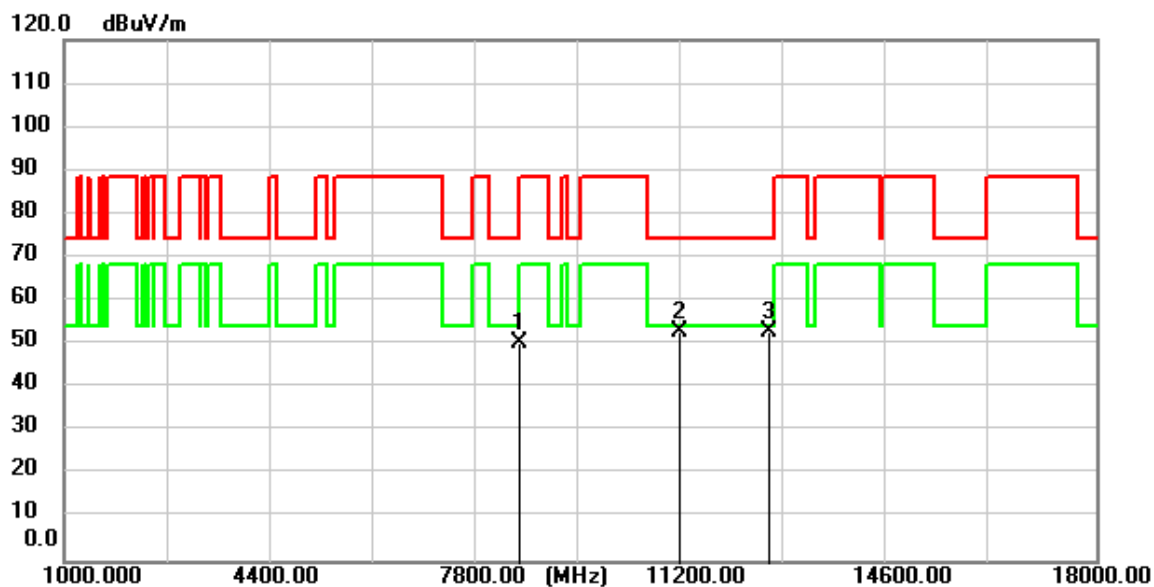


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8508.900	54.85	-4.34	50.51	88.20	-37.69	peak
2	11143.900	54.35	-1.63	52.72	74.00	-21.28	peak
3	12607.600	53.55	-0.74	52.81	74.00	-21.19	peak

Test Mode: 10; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:Low

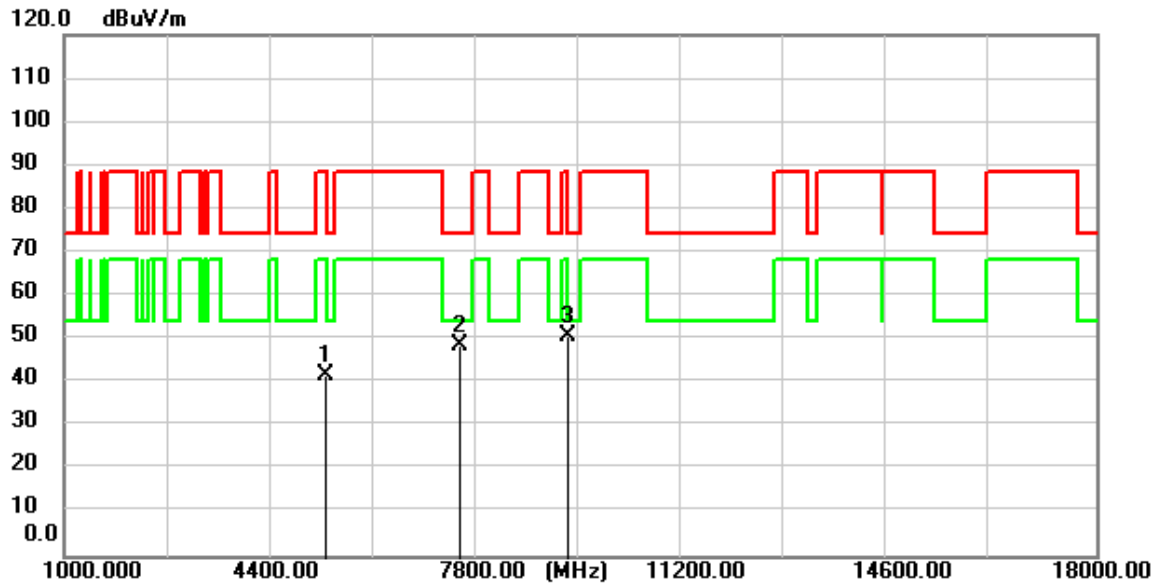


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5316.300	54.32	-12.47	41.85	88.20	-46.35	peak
2	7528.000	54.78	-6.16	48.62	74.00	-25.38	peak
3	9285.800	53.82	-2.84	50.98	88.20	-37.22	peak

Test Mode: 10; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:Low

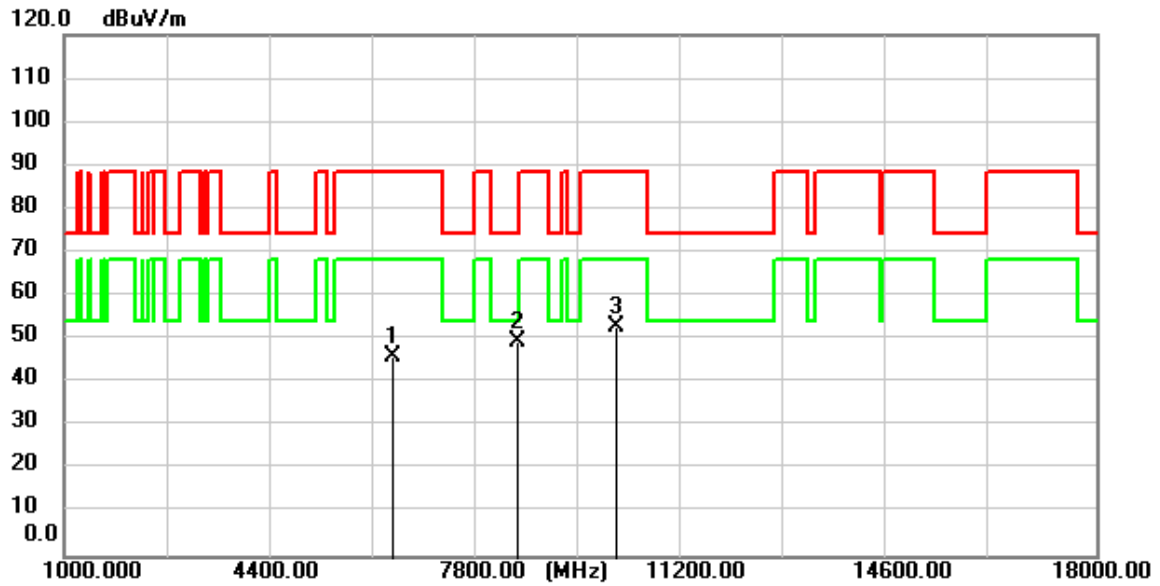


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6401.750	54.93	-8.68	46.25	88.20	-41.95	peak
2	8480.000	53.83	-4.39	49.44	74.00	-24.56	peak
3	10089.900	54.34	-1.54	52.80	88.20	-35.40	peak

Test Mode: 10; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:High

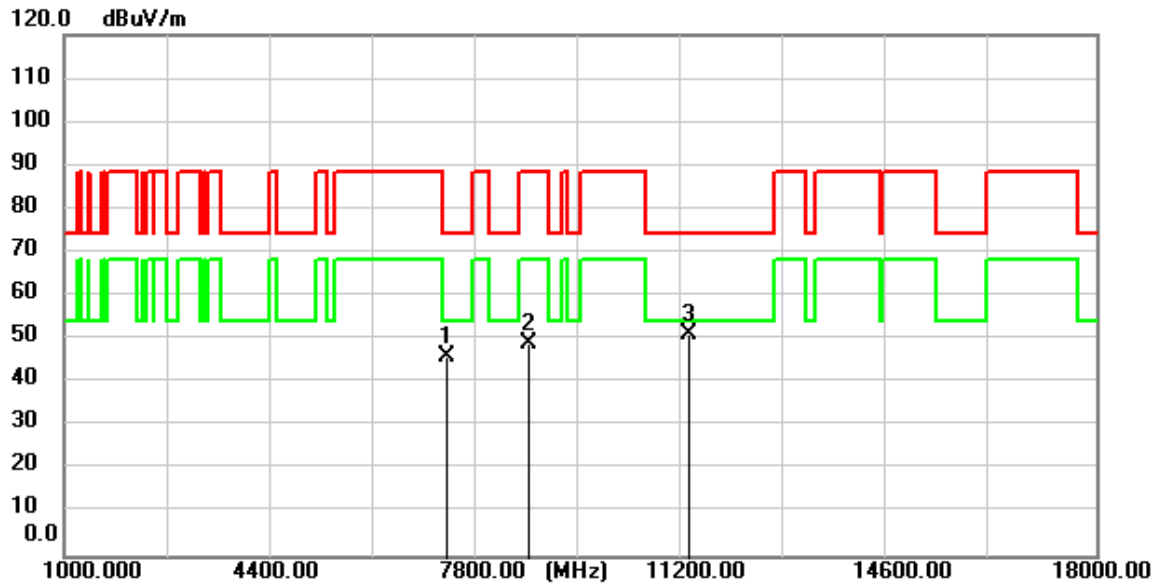


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7303.600	52.72	-6.52	46.20	74.00	-27.80	peak
2	8634.700	53.20	-4.13	49.07	88.20	-39.13	peak
3	11278.200	52.98	-1.66	51.32	74.00	-22.68	peak

Test Mode: 10; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:High

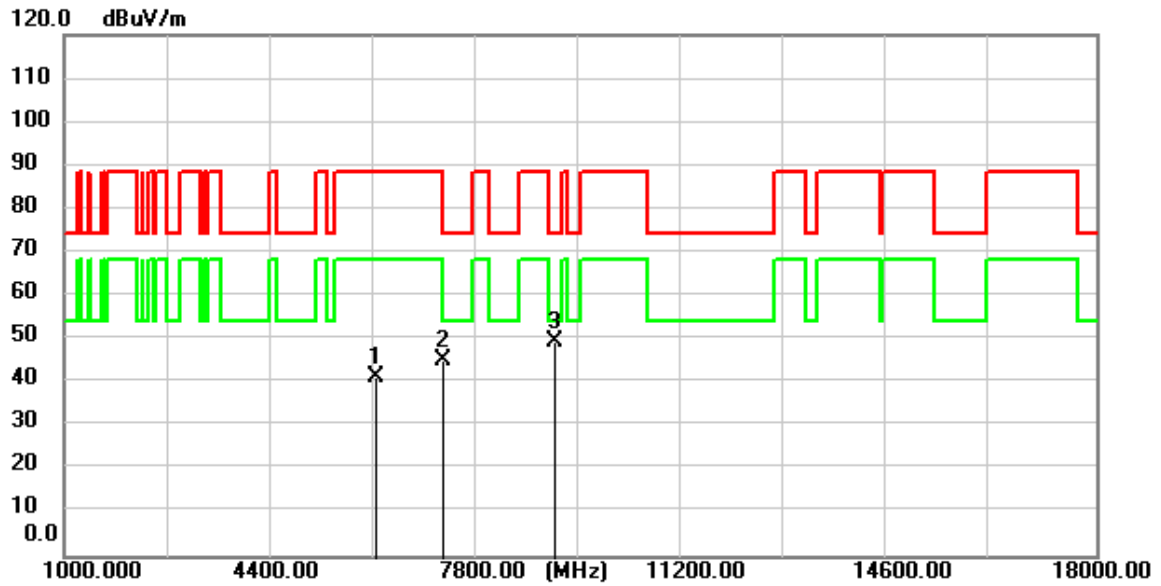


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6150.150	51.14	-9.84	41.30	88.20	-46.90	peak
2	7236.450	52.01	-6.59	45.42	88.20	-42.78	peak
3	9083.500	52.80	-3.30	49.50	74.00	-24.50	peak

Test Mode: 11; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

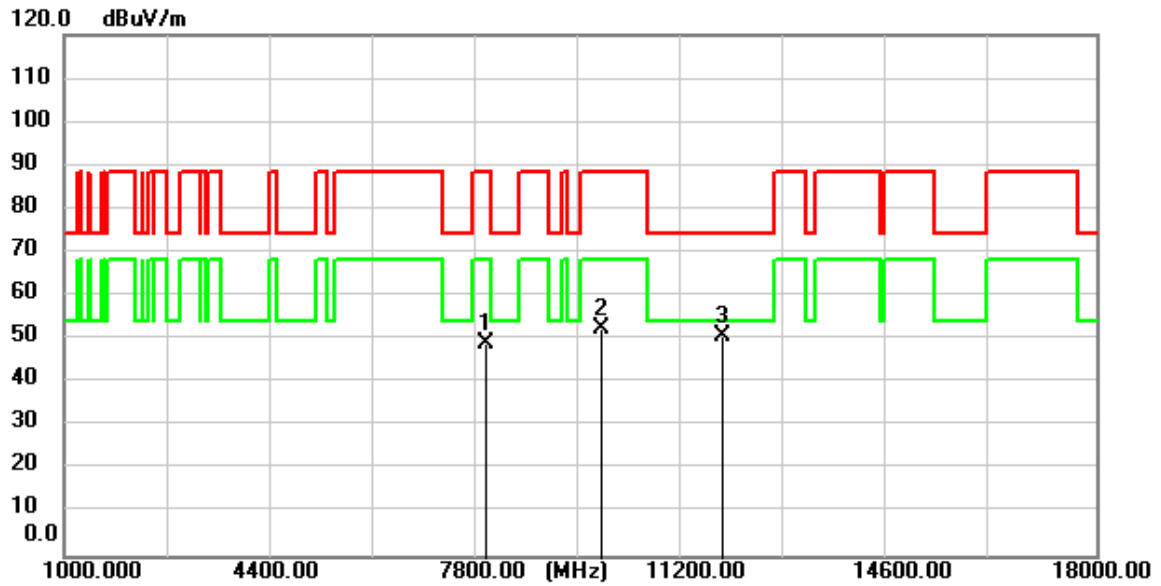


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7937.700	54.46	-5.33	49.13	88.20	-39.07	peak
2	9854.450	54.24	-1.55	52.69	88.20	-35.51	peak
3	11839.200	52.47	-1.73	50.74	74.00	-23.26	peak

Test Mode: 11; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

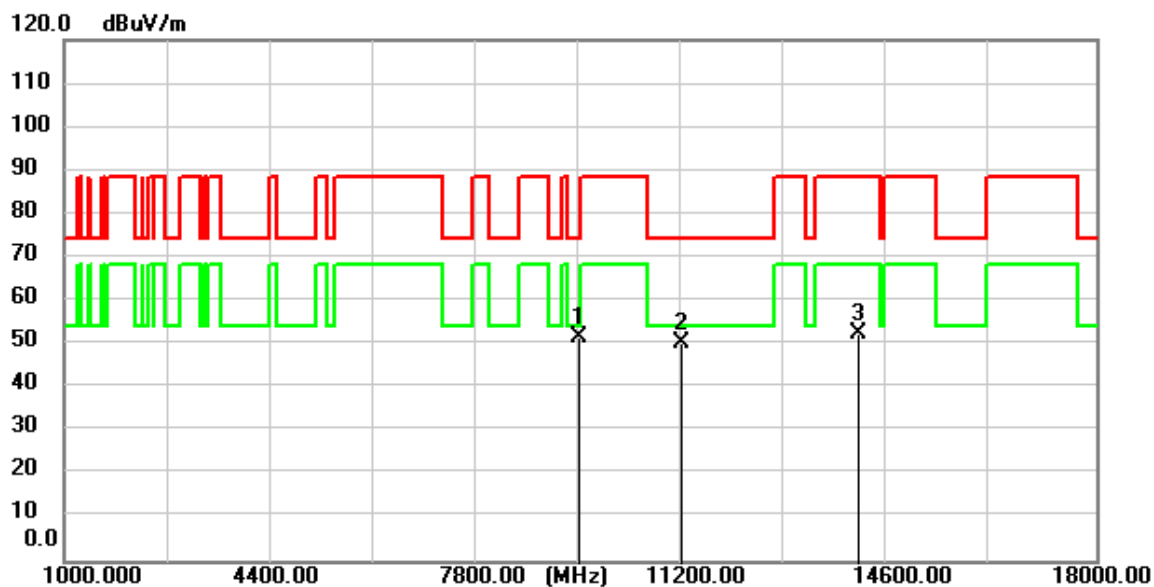


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9482.150	54.09	-2.40	51.69	74.00	-22.31	peak
2	11166.000	52.06	-1.63	50.43	74.00	-23.57	peak
3	14080.650	52.15	0.33	52.48	88.20	-35.72	peak

Test Mode: 11; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

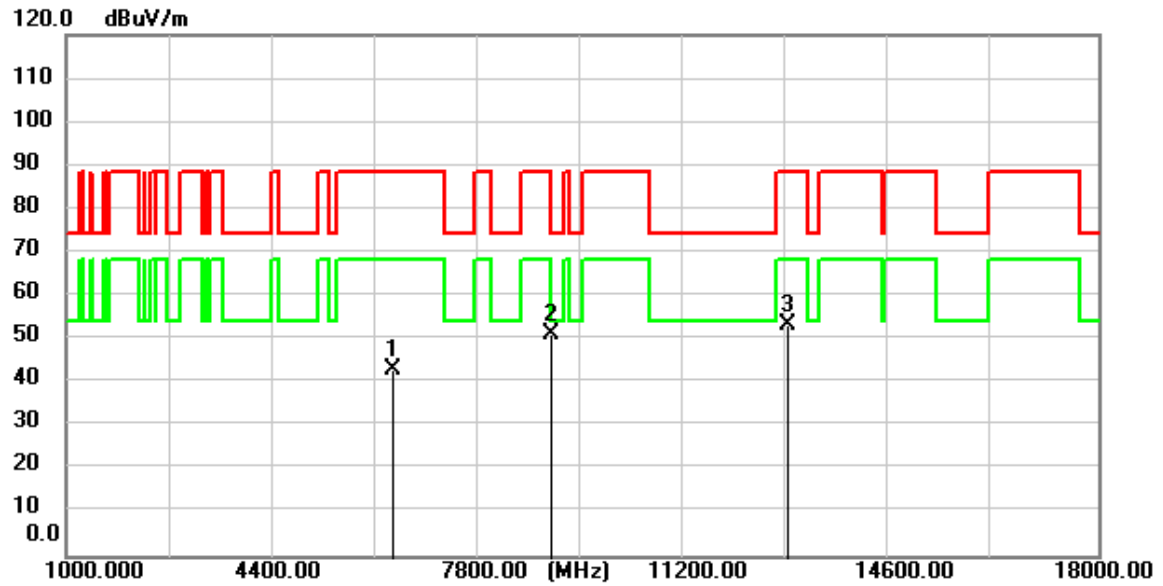


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6364.350	52.06	-8.85	43.21	88.20	-44.99	peak
2	9003.600	54.56	-3.49	51.07	74.00	-22.93	peak
3	12868.550	53.60	-0.35	53.25	88.20	-34.95	peak

Test Mode: 11; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

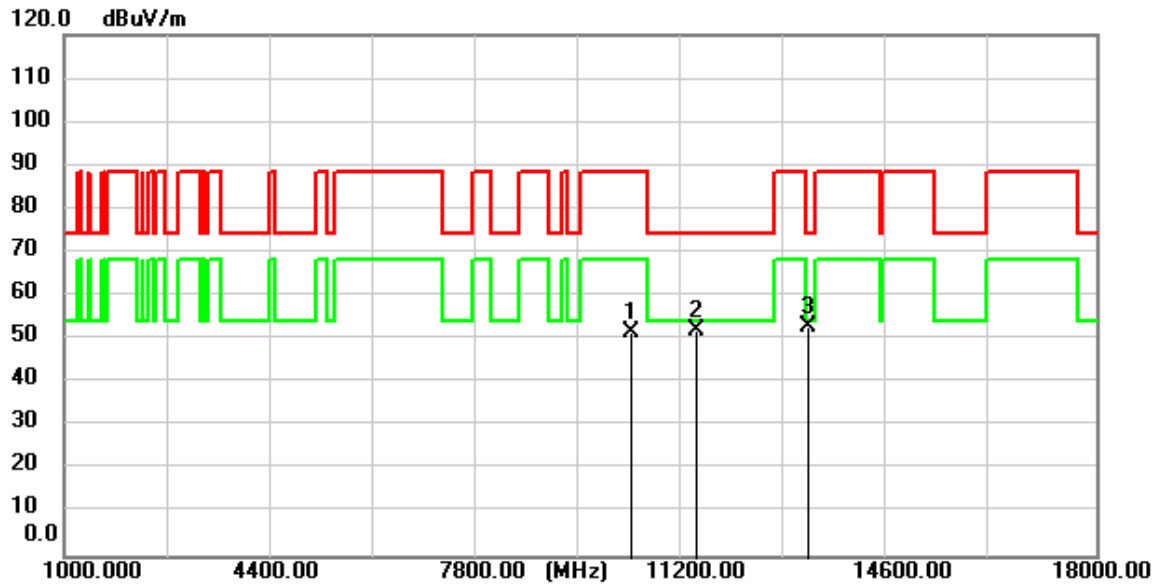


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10316.850	53.14	-1.55	51.59	88.20	-36.61	peak
2	11406.550	53.58	-1.67	51.91	74.00	-22.09	peak
3	13255.300	52.60	0.13	52.73	74.00	-21.27	peak

Test Mode: 11; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

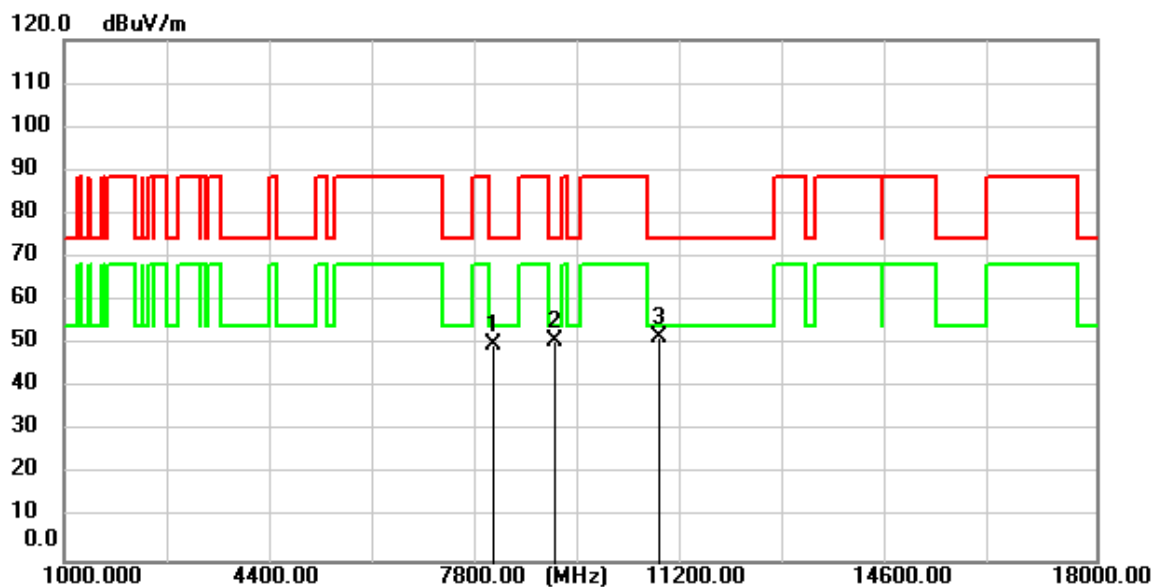


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8066.900	55.08	-5.08	50.00	74.00	-24.00	peak
2	9086.050	53.97	-3.30	50.67	74.00	-23.33	peak
3	10804.750	53.11	-1.59	51.52	74.00	-22.48	peak

Test Mode: 11; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

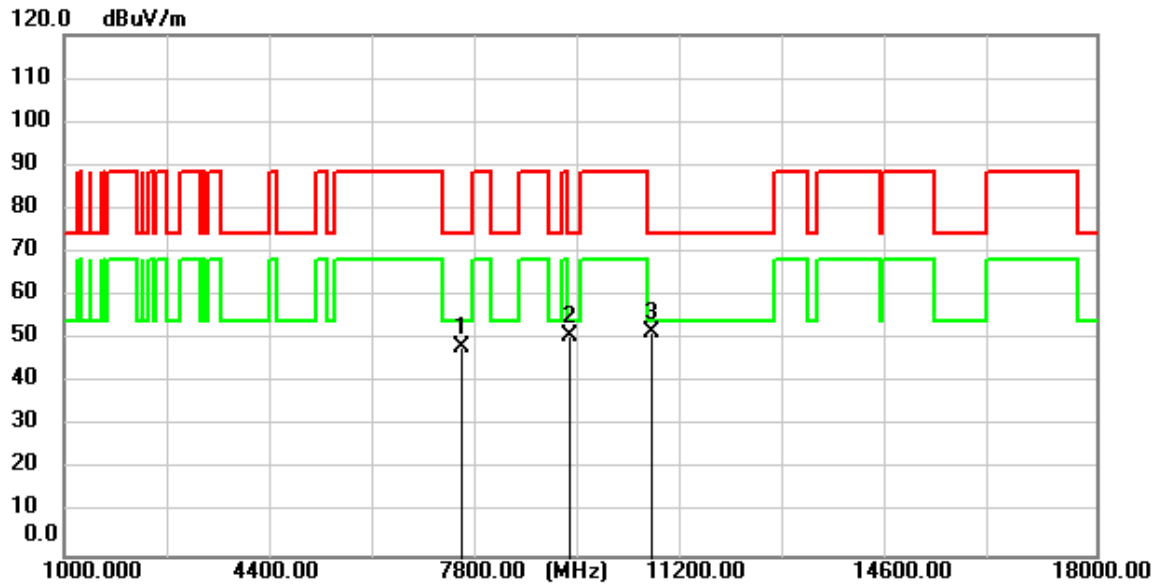


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7549.250	54.36	-6.11	48.25	74.00	-25.75	peak
2	9320.650	53.69	-2.76	50.93	74.00	-23.07	peak
3	10689.150	53.38	-1.58	51.80	74.00	-22.20	peak

Test Mode: 11; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

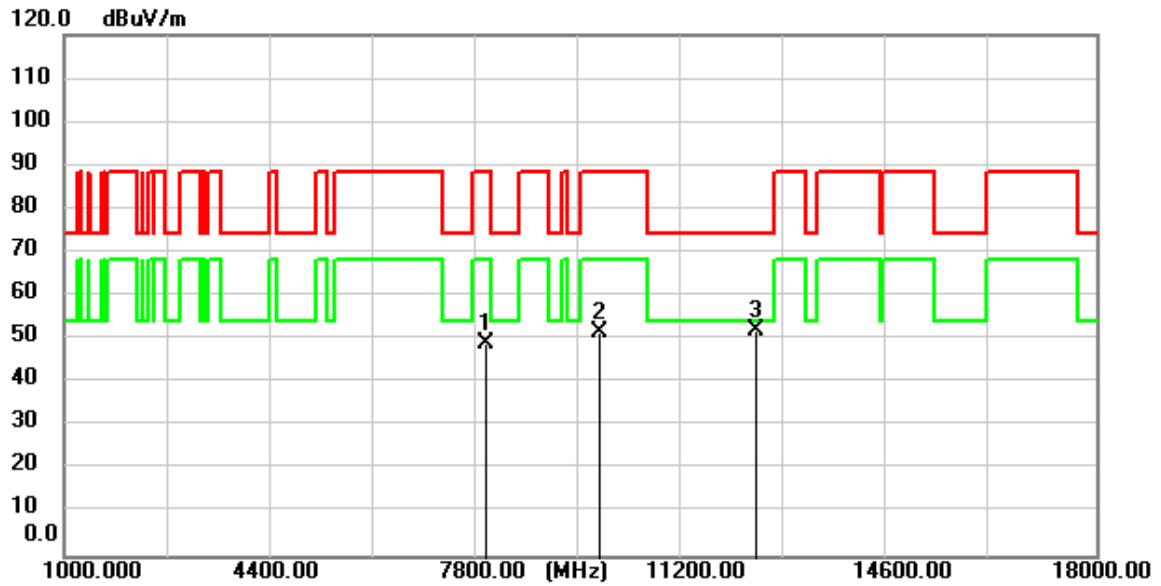


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7949.600	54.58	-5.31	49.27	88.20	-38.93	peak
2	9822.150	53.09	-1.61	51.48	88.20	-36.72	peak
3	12404.450	53.22	-1.07	52.15	74.00	-21.85	peak

Test Mode: 11; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

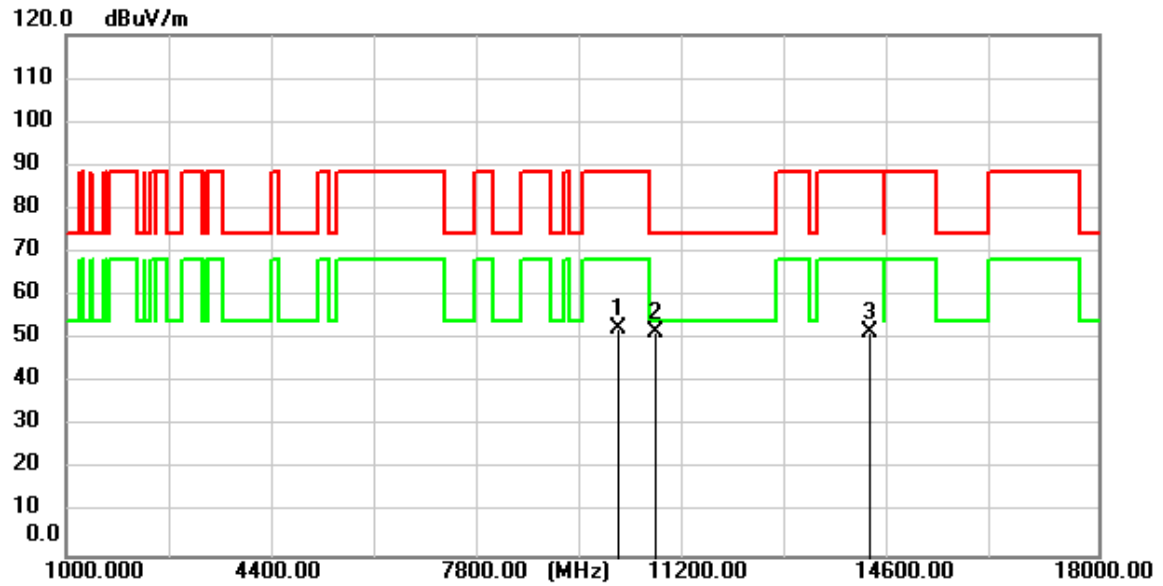


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10081.400	53.91	-1.54	52.37	88.20	-35.83	peak
2	10720.600	53.35	-1.58	51.77	74.00	-22.23	peak
3	14233.650	52.08	-0.32	51.76	88.20	-36.44	peak

Test Mode: 11; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

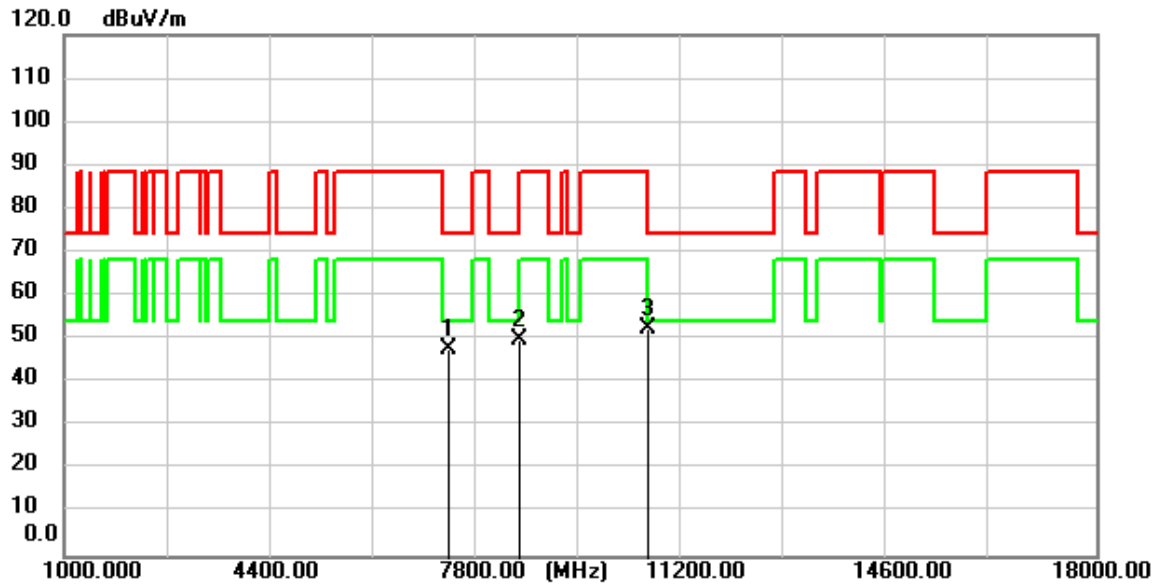


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7321.450	54.18	-6.50	47.68	74.00	-26.32	peak
2	8481.700	54.22	-4.39	49.83	74.00	-24.17	peak
3	10616.050	54.07	-1.57	52.50	74.00	-21.50	peak

Test Mode: 11; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

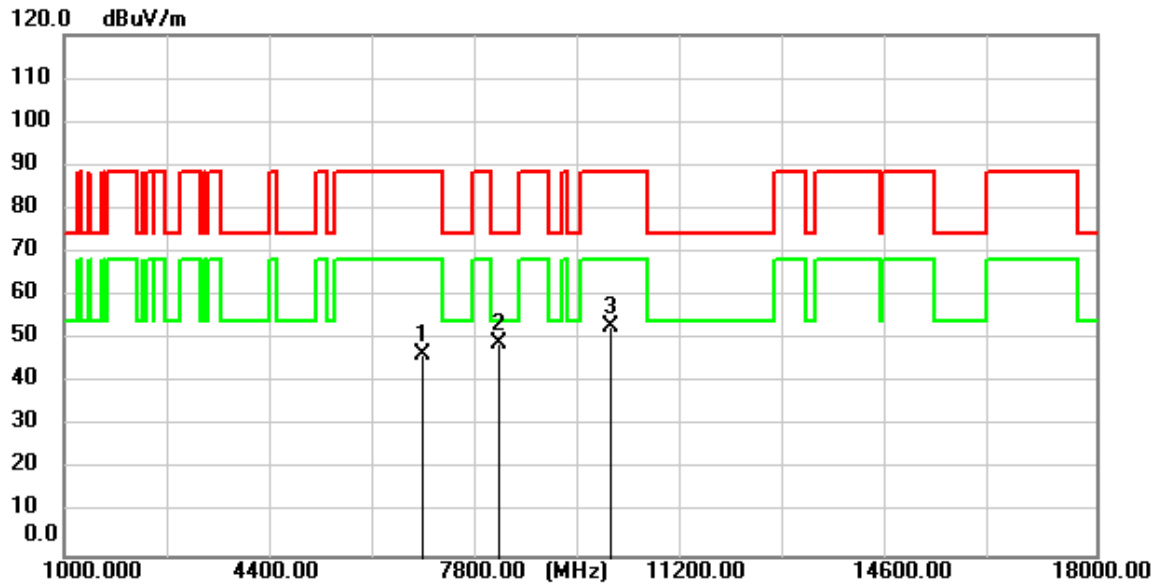


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6890.500	53.53	-6.99	46.54	88.20	-41.66	peak
2	8148.500	54.07	-4.94	49.13	74.00	-24.87	peak
3	9987.050	54.30	-1.53	52.77	88.20	-35.43	peak

Test Mode: 11; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

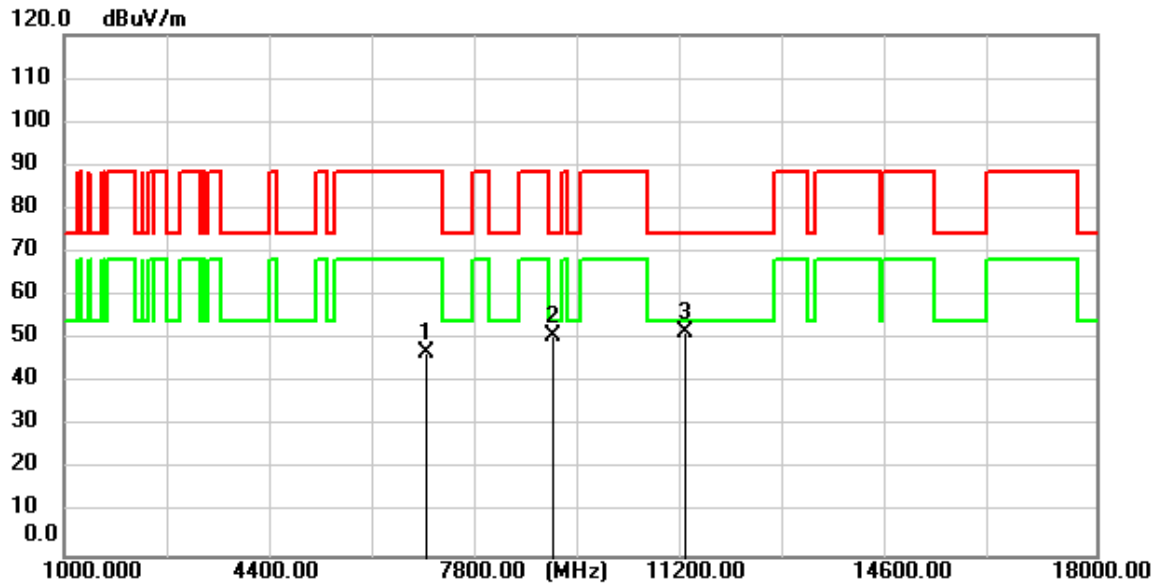


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6952.550	54.03	-6.92	47.11	88.20	-41.09	peak
2	9044.400	54.09	-3.40	50.69	74.00	-23.31	peak
3	11219.550	53.31	-1.64	51.67	74.00	-22.33	peak

Test Mode: 11; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

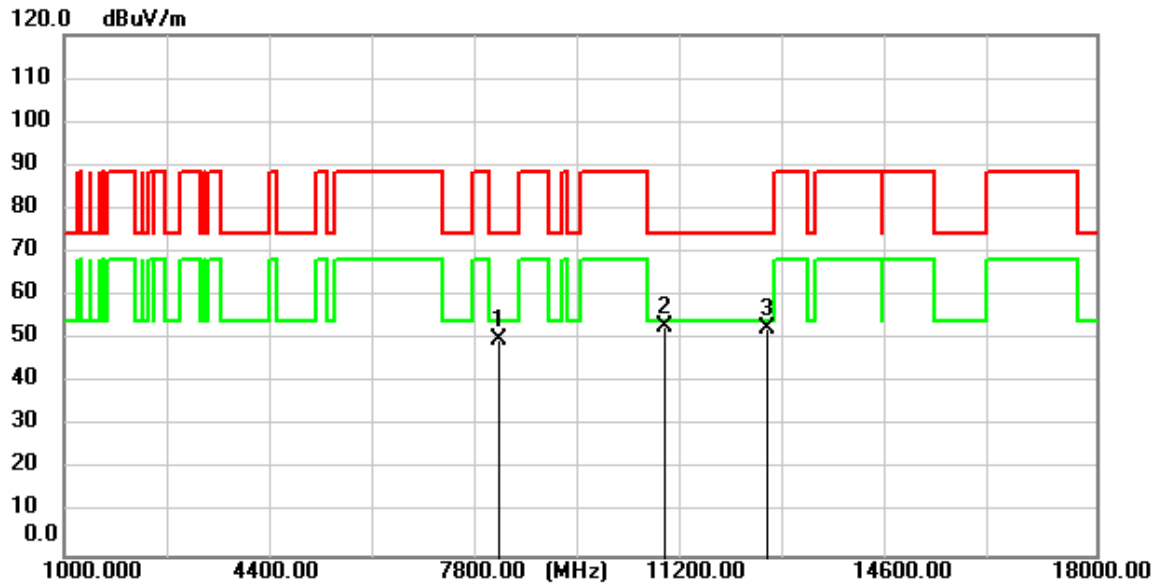


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8157.000	54.67	-4.92	49.75	74.00	-24.25	peak
2	10911.000	54.67	-1.59	53.08	74.00	-20.92	peak
3	12573.600	53.39	-0.80	52.59	74.00	-21.41	peak

Test Mode: 11; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

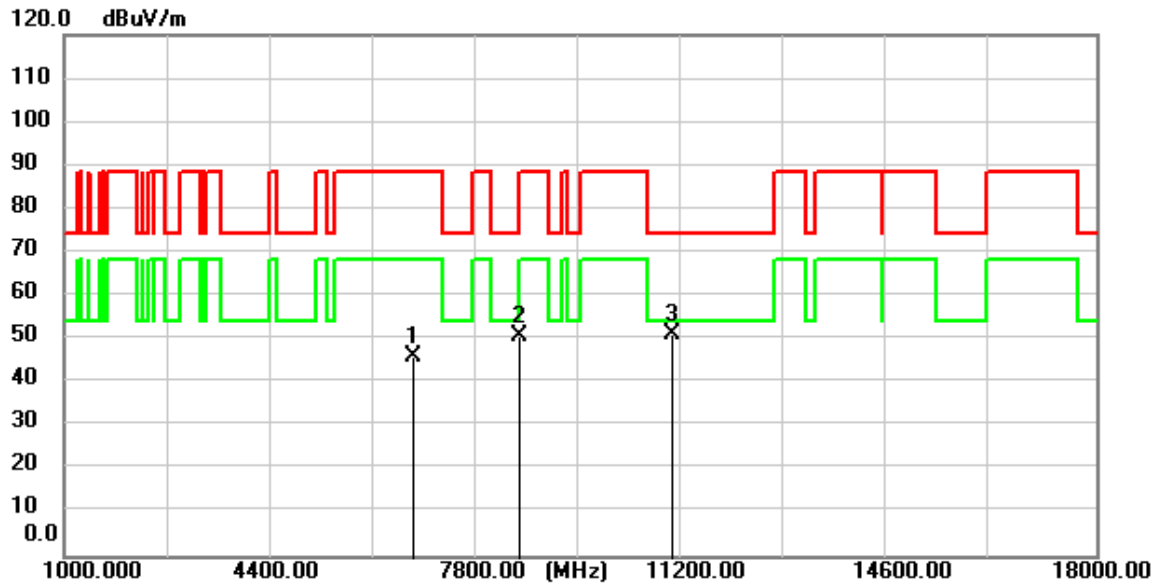


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6751.100	53.20	-7.14	46.06	88.20	-42.14	peak
2	8512.300	55.07	-4.34	50.73	88.20	-37.47	peak
3	11015.550	52.79	-1.62	51.17	74.00	-22.83	peak

Test Mode: 11; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:Low

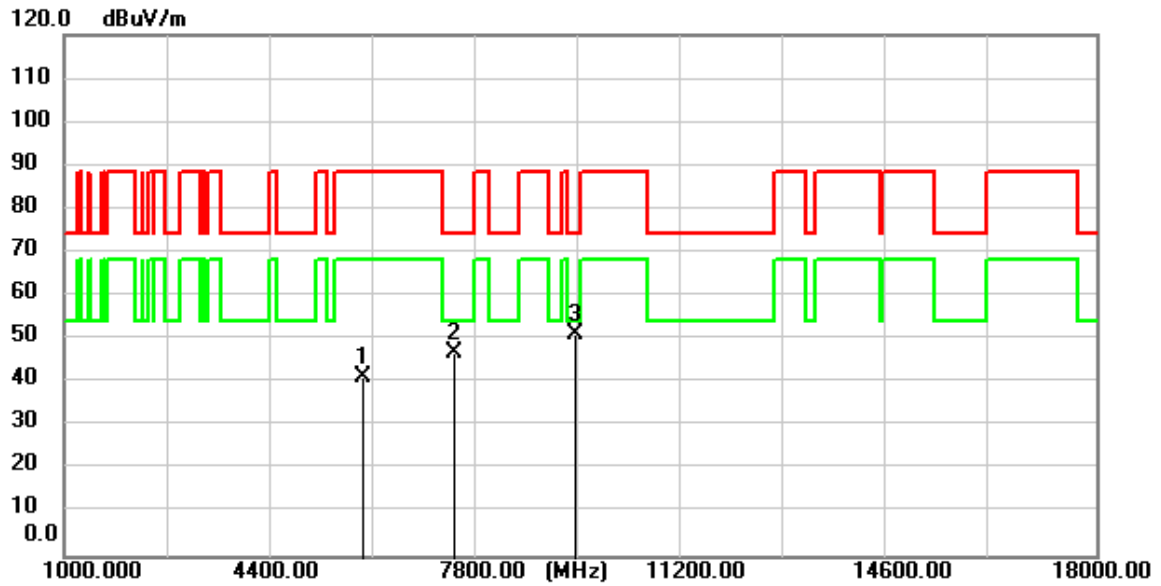


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5906.200	52.29	-10.84	41.45	88.20	-46.75	peak
2	7415.800	53.28	-6.38	46.90	74.00	-27.10	peak
3	9416.700	53.56	-2.54	51.02	74.00	-22.98	peak

Test Mode: 11; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:middle

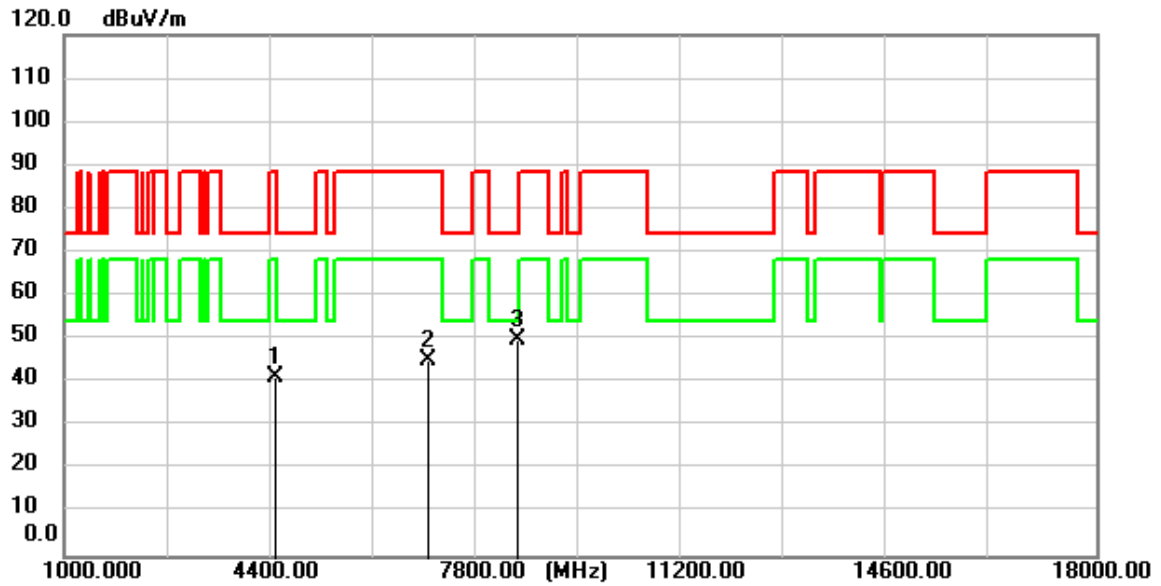


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4462.900	55.44	-13.90	41.54	88.20	-46.66	peak
2	6984.850	51.97	-6.89	45.08	88.20	-43.12	peak
3	8459.600	54.32	-4.42	49.90	74.00	-24.10	peak

Test Mode: 11; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:middle

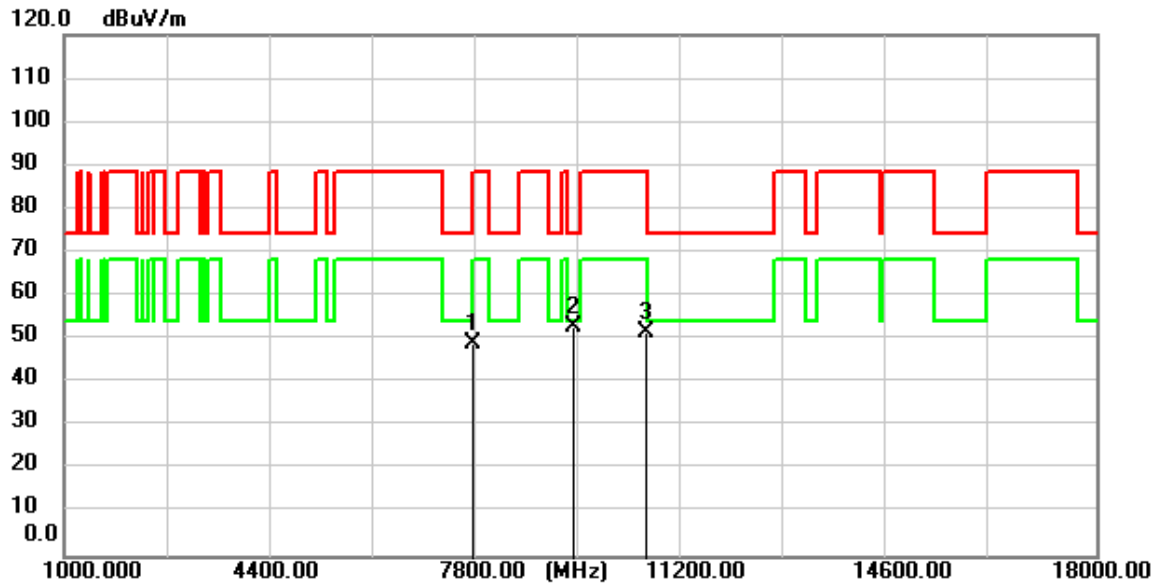


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7720.950	54.90	-5.76	49.14	74.00	-24.86	peak
2	9387.800	55.43	-2.61	52.82	74.00	-21.18	peak
3	10583.750	53.16	-1.57	51.59	88.20	-36.61	peak

Test Mode: 11; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

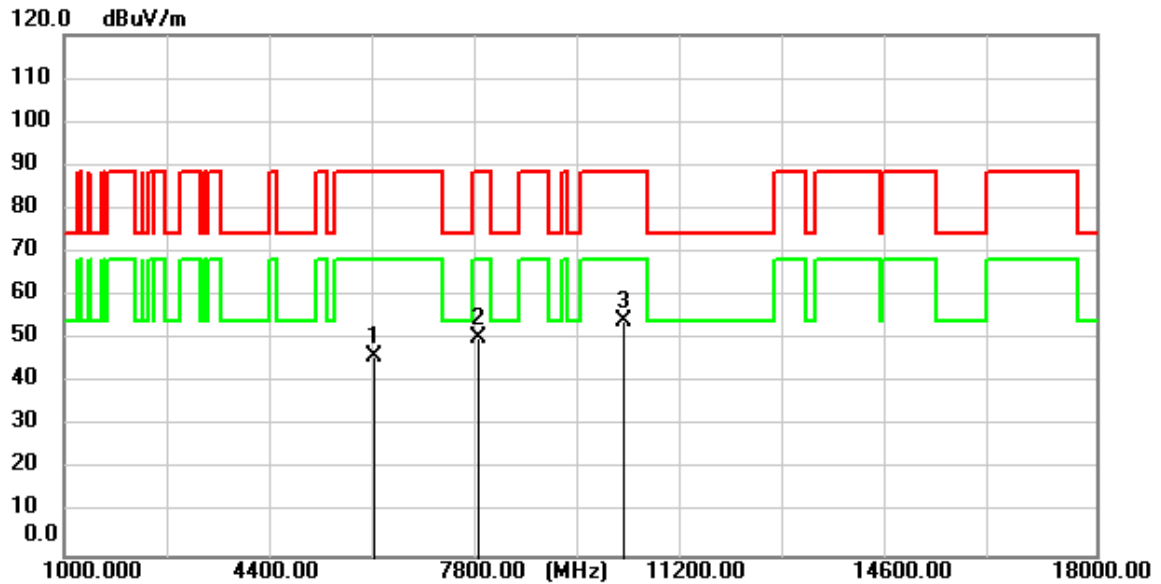


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6094.050	56.01	-10.09	45.92	88.20	-42.28	peak
2	7815.300	56.09	-5.57	50.52	88.20	-37.68	peak
3	10216.550	55.92	-1.54	54.38	88.20	-33.82	peak

Test Mode: 11; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:40MHz; Channel:High

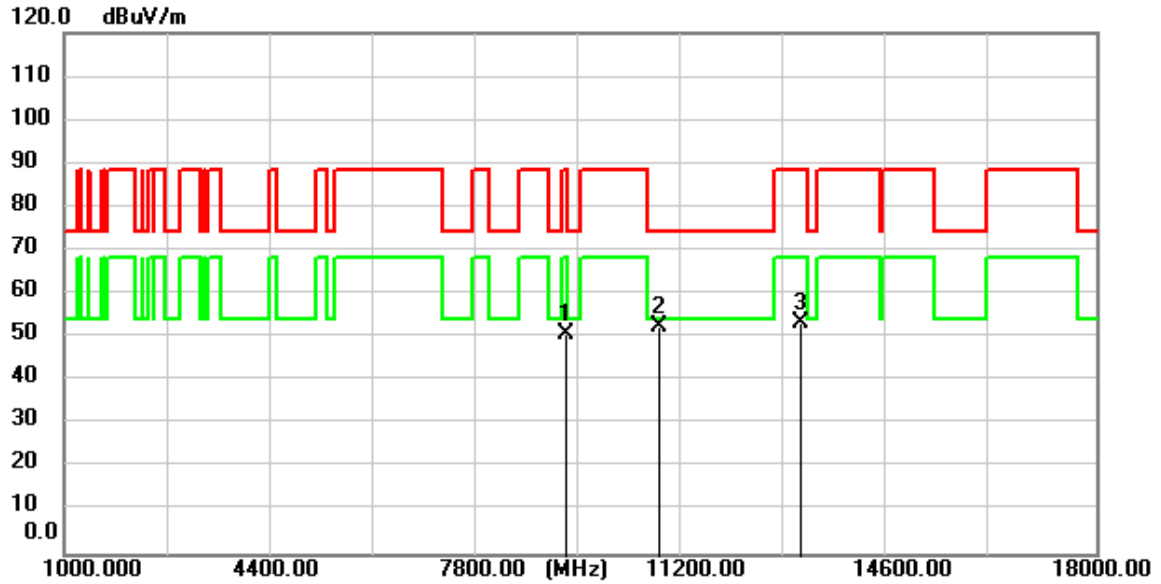


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9273.900	53.80	-2.87	50.93	88.20	-37.27	peak
2	10788.600	53.95	-1.58	52.37	74.00	-21.63	peak
3	13106.550	53.34	0.03	53.37	88.20	-34.83	peak

Test Mode: 11; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:Low

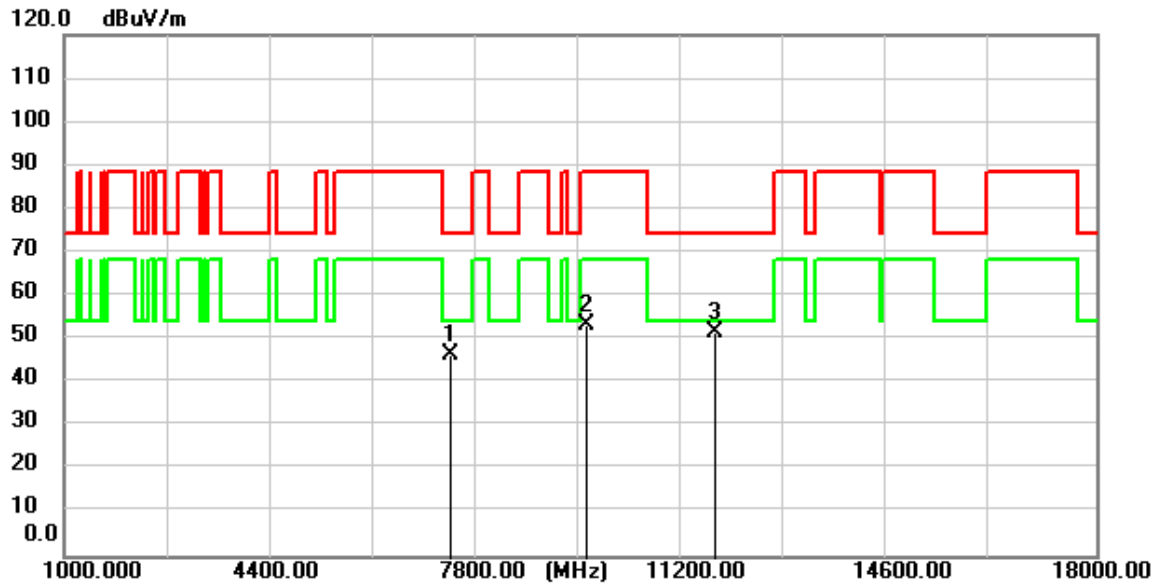


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7361.400	52.88	-6.45	46.43	74.00	-27.57	peak
2	9617.300	55.26	-2.08	53.18	88.20	-35.02	peak
3	11711.700	53.36	-1.71	51.65	74.00	-22.35	peak

Test Mode: 11; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:Low

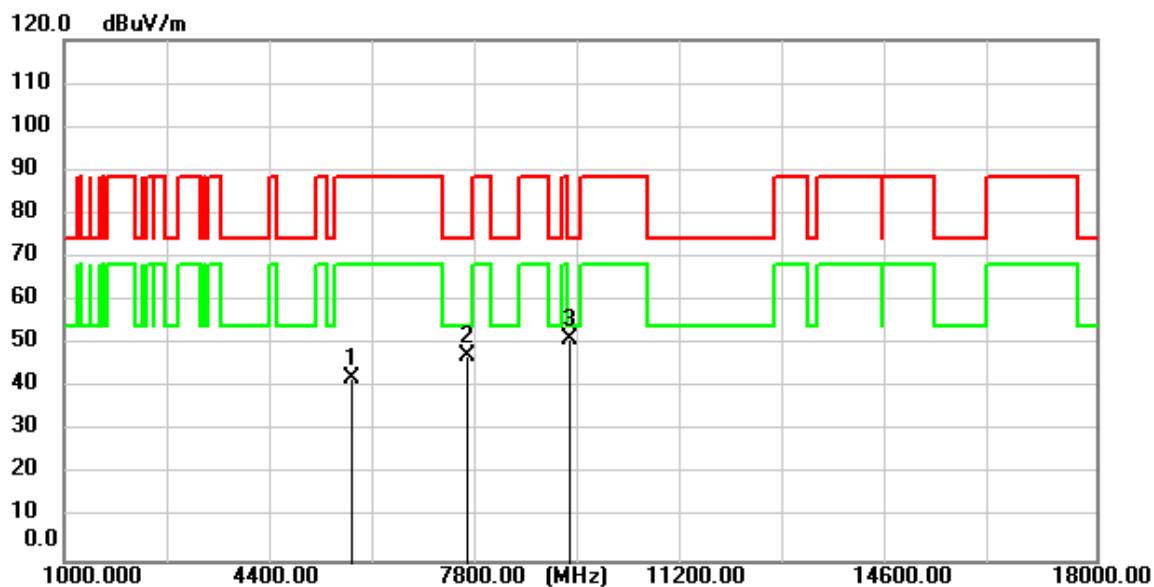


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5740.450	53.67	-11.48	42.19	88.20	-46.01	peak
2	7616.400	53.51	-5.97	47.54	74.00	-26.46	peak
3	9319.800	53.84	-2.76	51.08	74.00	-22.92	peak

Test Mode: 11; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:High

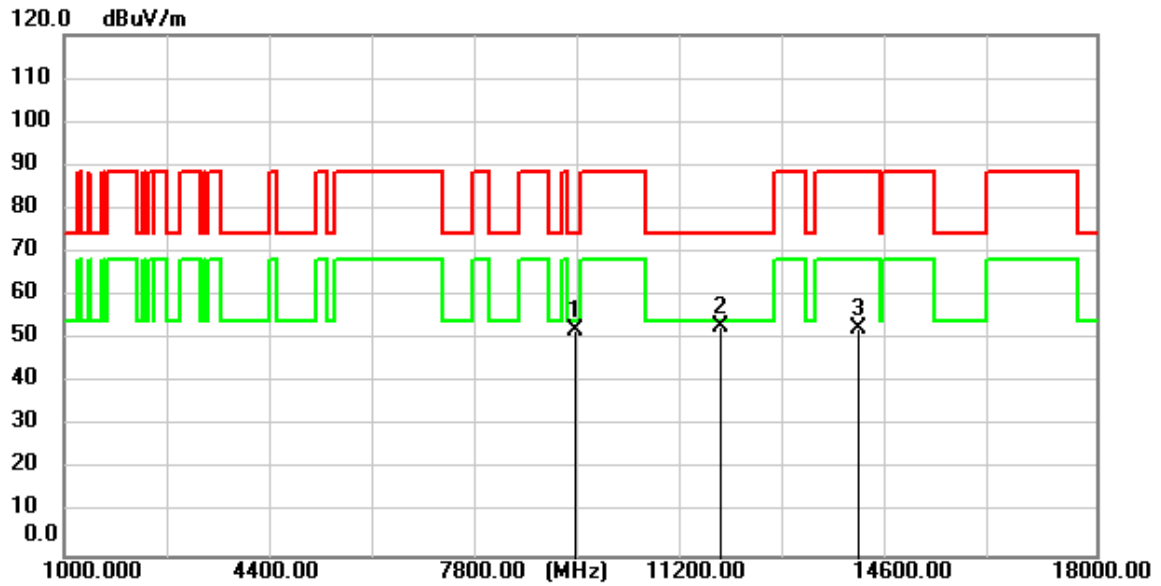


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9425.200	54.56	-2.52	52.04	74.00	-21.96	peak
2	11810.300	54.69	-1.73	52.96	74.00	-21.04	peak
3	14078.950	52.35	0.34	52.69	88.20	-35.51	peak

Test Mode: 11; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:80MHz; Channel:High

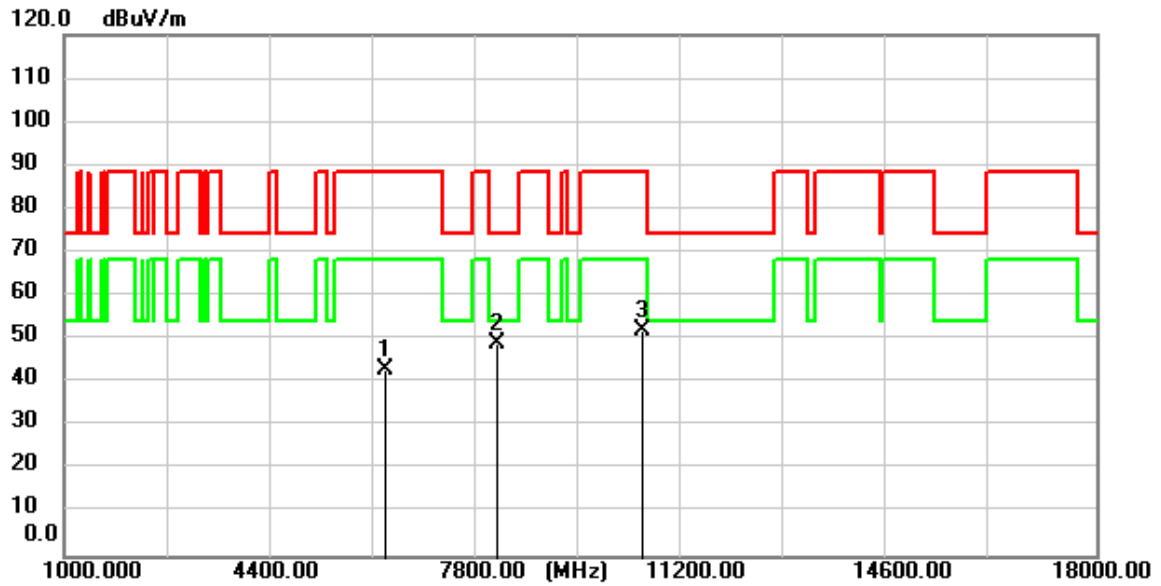


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6288.700	52.26	-9.20	43.06	88.20	-45.14	peak
2	8111.950	54.07	-5.00	49.07	74.00	-24.93	peak
3	10531.900	53.80	-1.56	52.24	88.20	-35.96	peak

Test Mode: 11; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:High

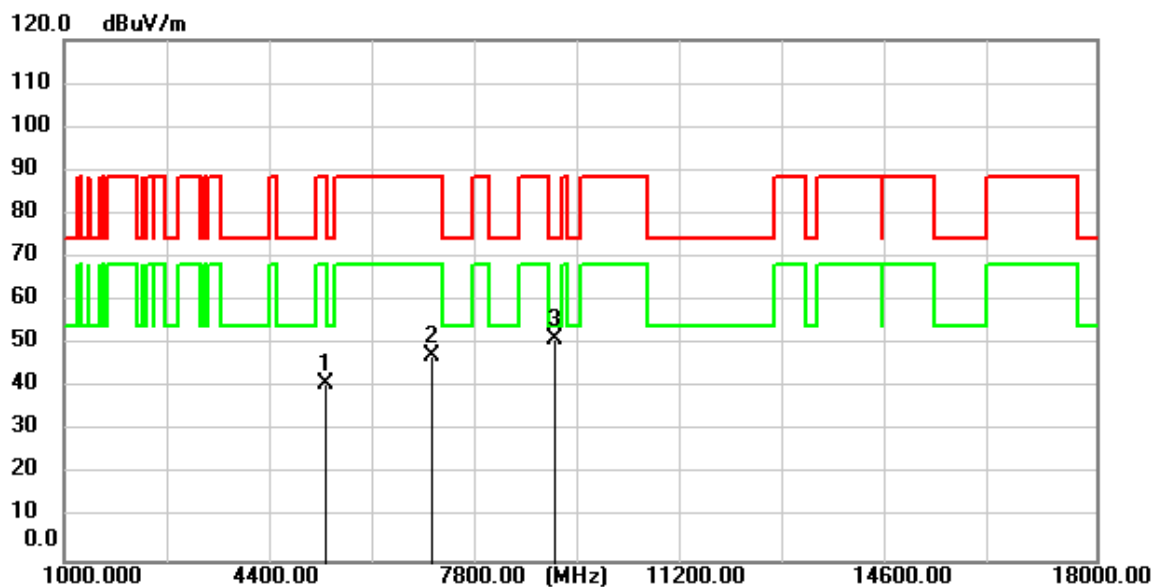


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5284.850	53.43	-12.50	40.93	88.20	-47.27	peak
2	7039.250	54.10	-6.82	47.28	88.20	-40.92	peak
3	9078.400	54.74	-3.32	51.42	74.00	-22.58	peak

Test Mode: 11; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:160MHz; Channel:High

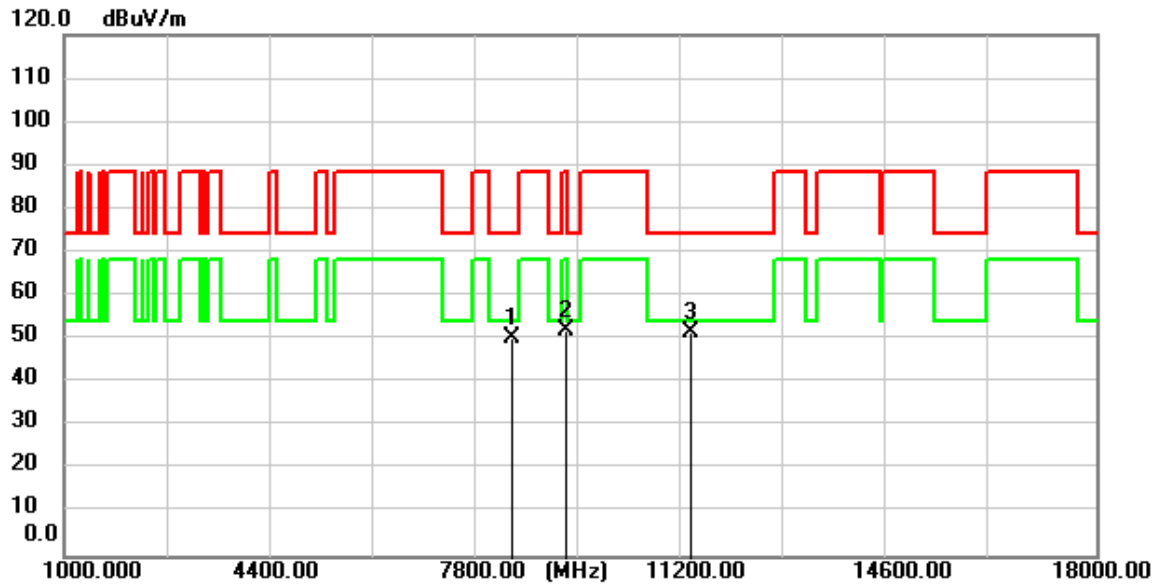


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8376.300	55.13	-4.56	50.57	74.00	-23.43	peak
2	9256.050	55.15	-2.91	52.24	88.20	-35.96	peak
3	11302.850	53.50	-1.65	51.85	74.00	-22.15	peak

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

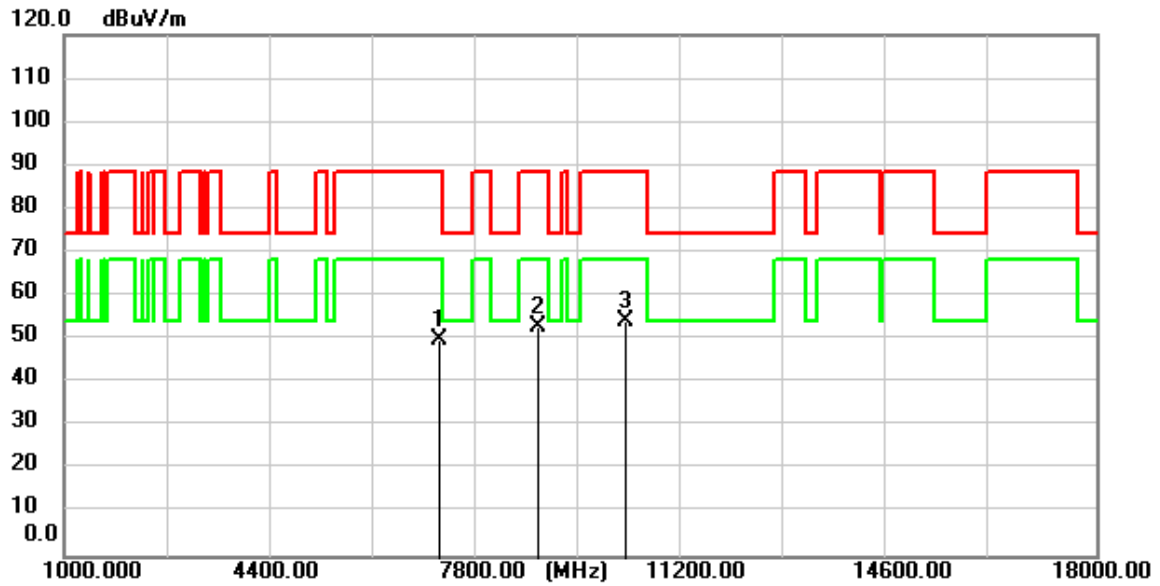


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7172.700	56.40	-6.67	49.73	88.20	-38.47	peak
2	8787.700	56.75	-3.87	52.88	88.20	-35.32	peak
3	10236.950	55.87	-1.55	54.32	88.20	-33.88	peak

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

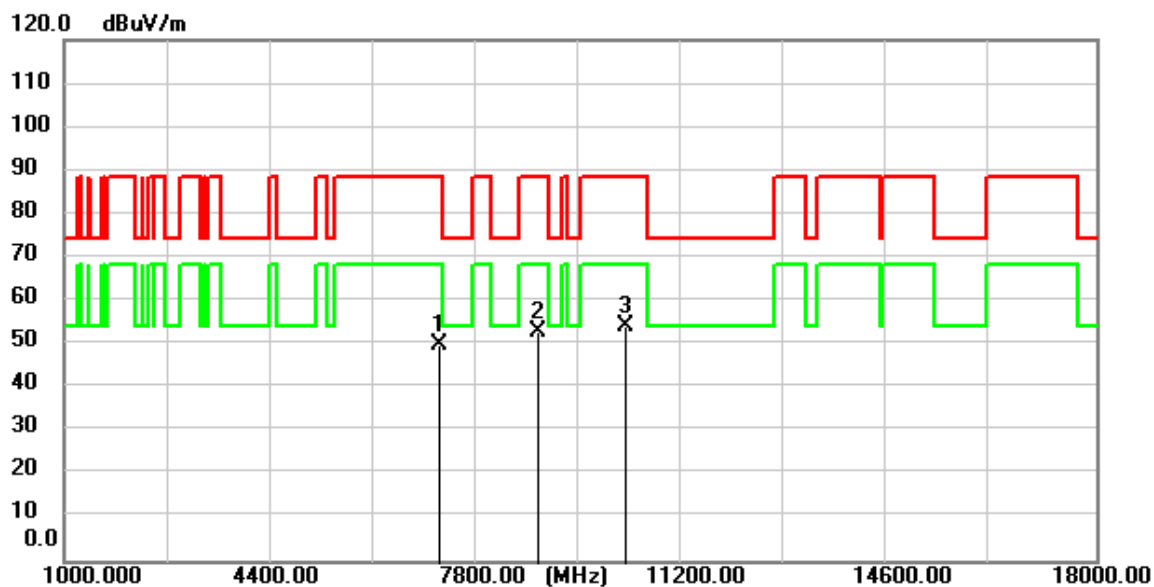


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7172.700	56.40	-6.67	49.73	88.20	-38.47	peak
2	8787.700	56.75	-3.87	52.88	88.20	-35.32	peak
3	10236.950	55.87	-1.55	54.32	88.20	-33.88	peak

Test Mode: 09; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

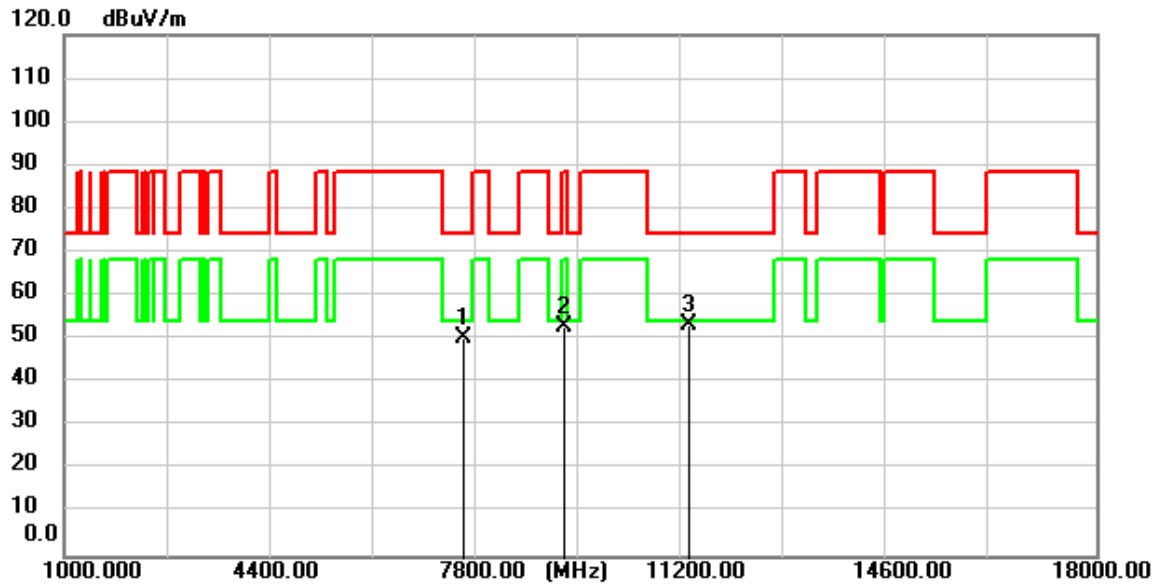


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7589.200	56.21	-6.03	50.18	74.00	-23.82	peak
2	9212.700	56.08	-3.02	53.06	88.20	-35.14	peak
3	11292.650	55.01	-1.66	53.35	74.00	-20.65	peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

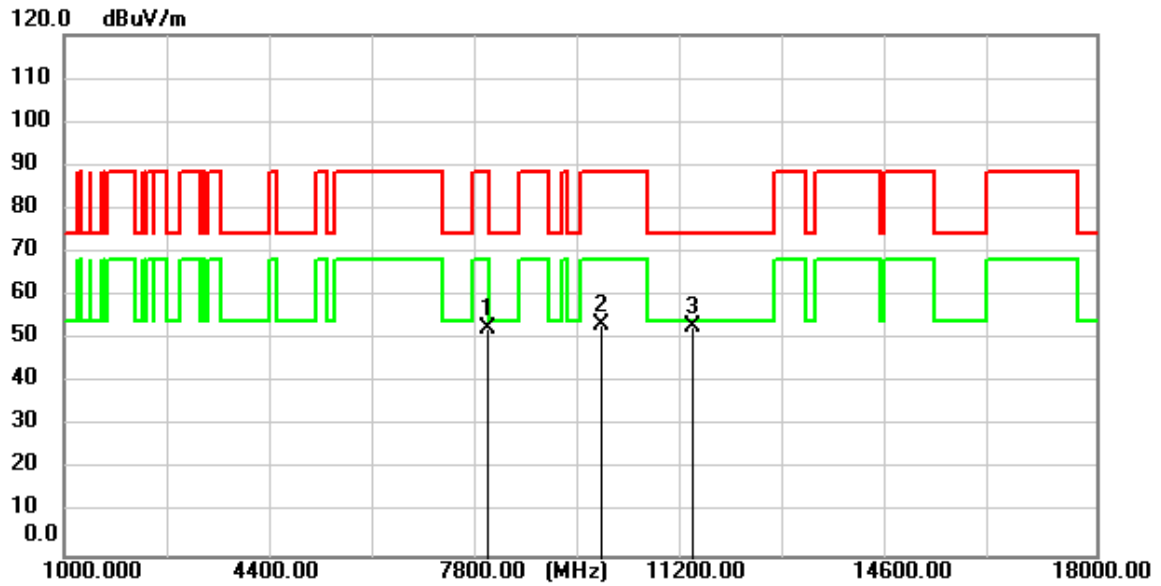


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7981.050	57.95	-5.24	52.71	88.20	-35.49	peak
2	9845.950	55.03	-1.57	53.46	88.20	-34.74	peak
3	11362.350	54.62	-1.66	52.96	74.00	-21.04	peak

Test Mode: 10; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

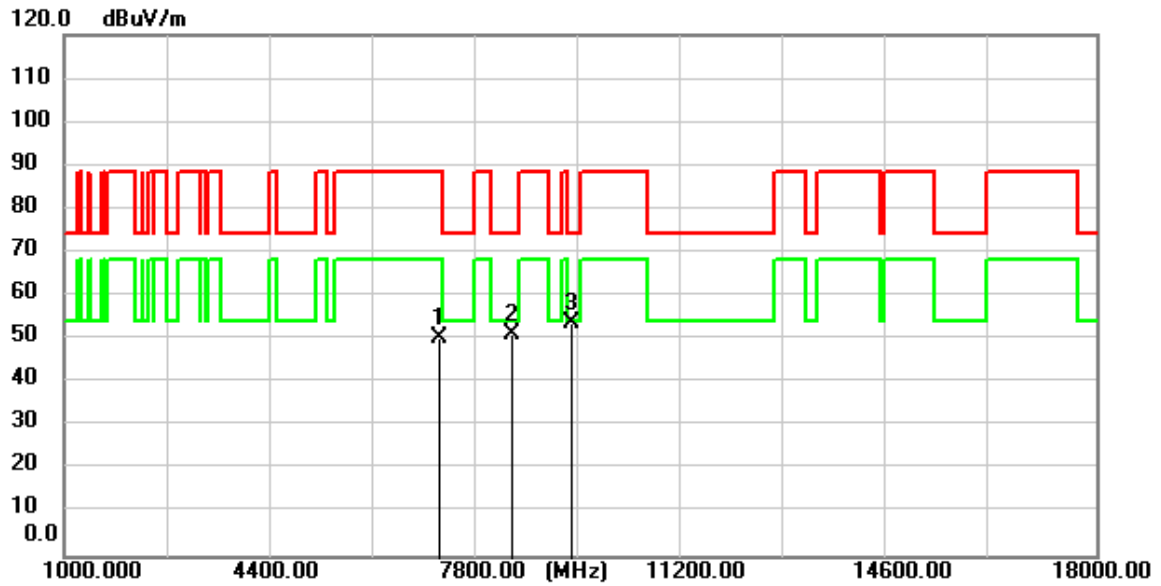


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7168.450	57.00	-6.68	50.32	88.20	-37.88	peak
2	8377.150	55.94	-4.56	51.38	74.00	-22.62	peak
3	9353.800	56.41	-2.68	53.73	74.00	-20.27	peak

Test Mode: 10; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

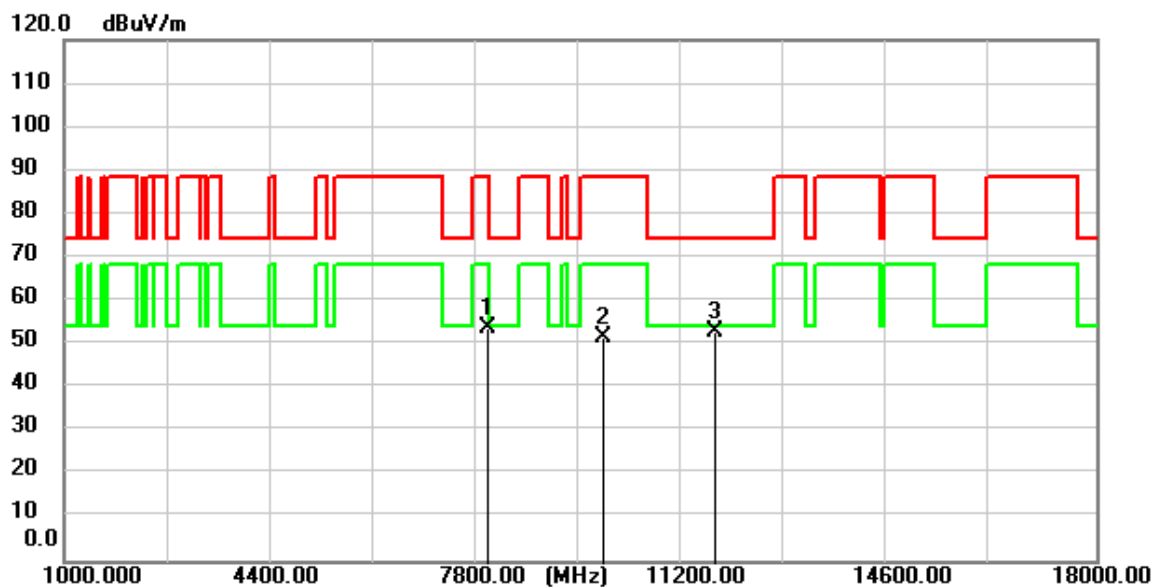


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7978.500	58.90	-5.24	53.66	88.20	-34.54	peak
2	9884.200	53.37	-1.54	51.83	88.20	-36.37	peak
3	11714.250	54.62	-1.71	52.91	74.00	-21.09	peak

Test Mode: 08; Polarity: Horizontal; ; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

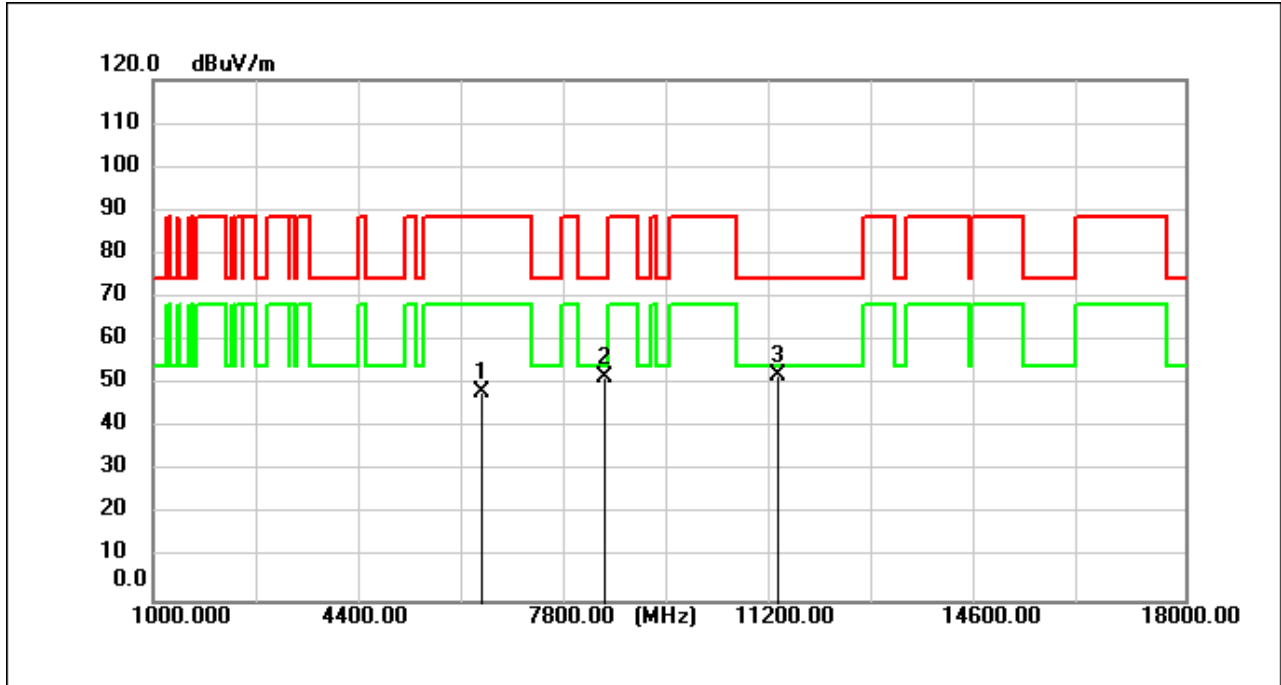


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6405.150	56.81	-8.67	48.14	88.20	-40.06	peak
2	8446.000	56.00	-4.45	51.55	74.00	-22.45	peak
3	11273.100	53.63	-1.65	51.98	74.00	-22.02	peak

Test Mode: 08; Polarity: Vertical; ; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

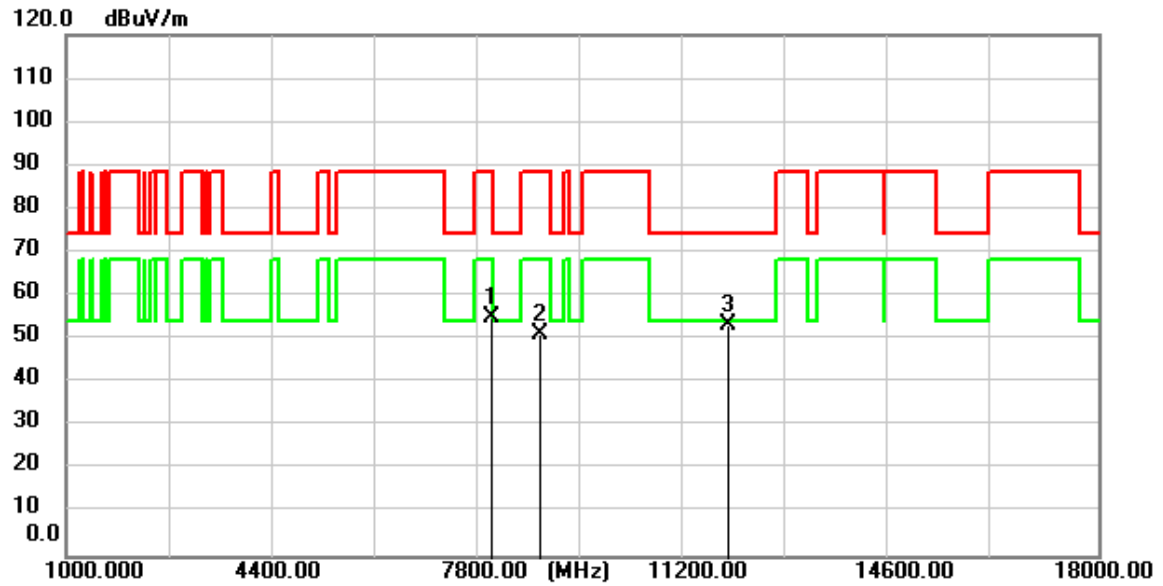


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8000.600	60.11	-5.20	54.91	88.20	-33.29	peak
2	8798.750	55.02	-3.86	51.16	88.20	-37.04	peak
3	11885.100	55.06	-1.74	53.32	74.00	-20.68	peak

Test Mode: 10; Polarity: Horizontal; ; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

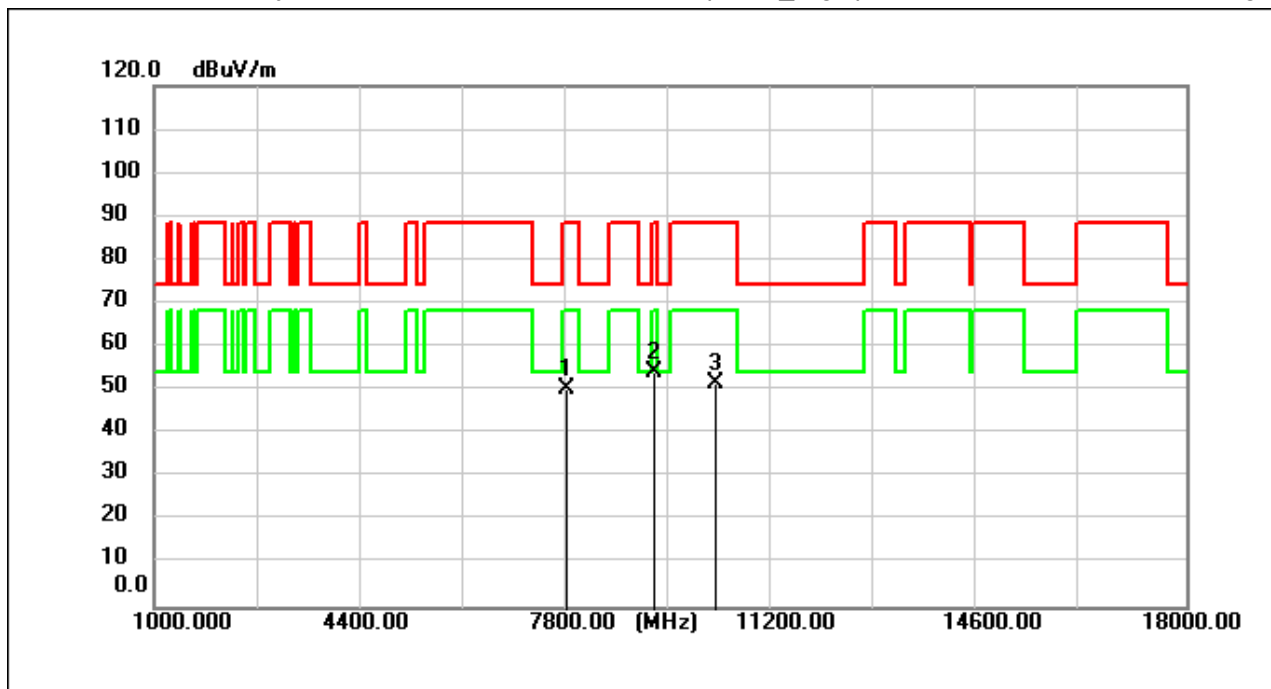


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7783.850	56.06	-5.64	50.42	88.20	-37.78	peak
2	9214.400	57.10	-3.01	54.09	88.20	-34.11	peak
3	10237.800	53.20	-1.55	51.65	88.20	-36.55	peak

Test Mode: 10; Polarity: Vertical; ; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

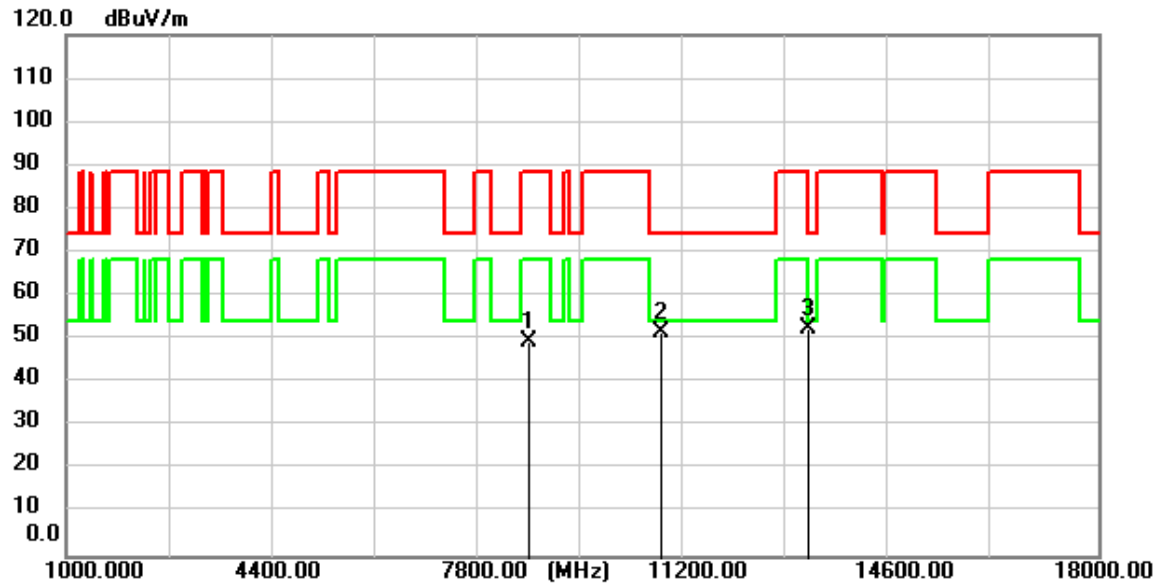


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8619.400	53.60	-4.15	49.45	88.20	-38.75	peak
2	10796.250	53.02	-1.59	51.43	74.00	-22.57	peak
3	13227.250	52.48	0.11	52.59	88.20	-35.61	peak

Test Mode: 11; Polarity: Horizontal; ; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

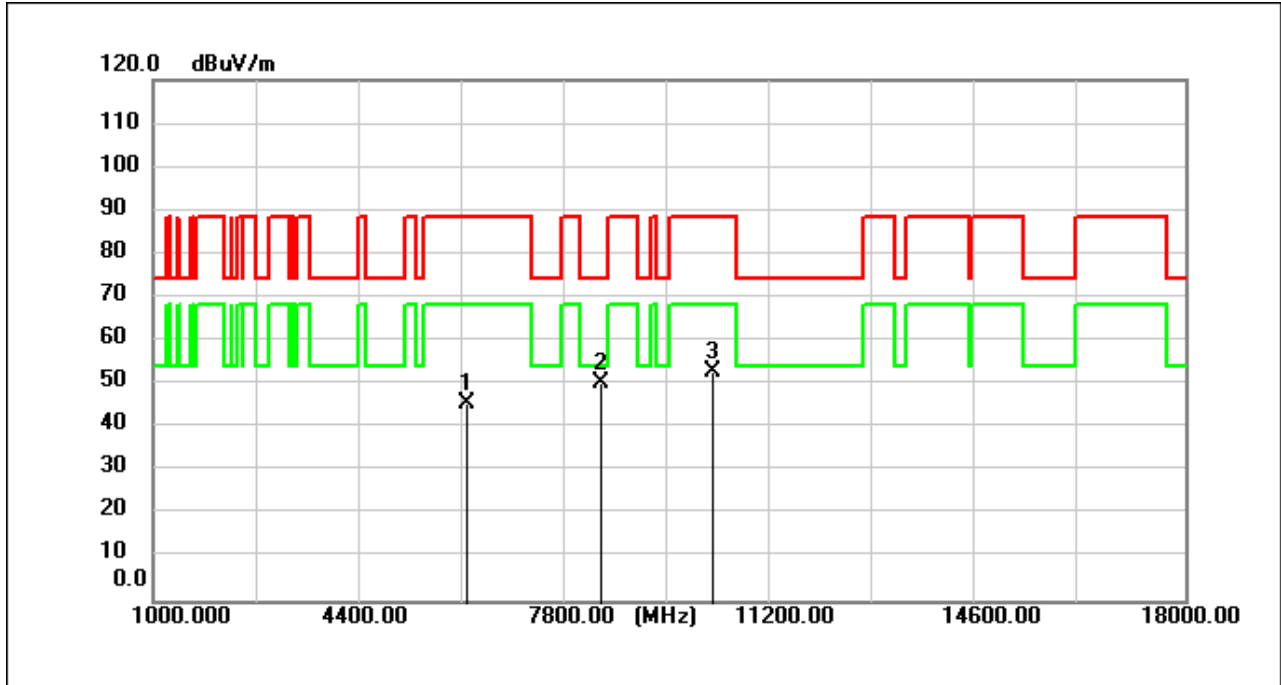


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6181.600	55.41	-9.70	45.71	88.20	-42.49	peak
2	8379.700	54.75	-4.56	50.19	74.00	-23.81	peak
3	10229.300	54.40	-1.55	52.85	88.20	-35.35	peak

Test Mode: 11; Polarity: Vertical; ; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

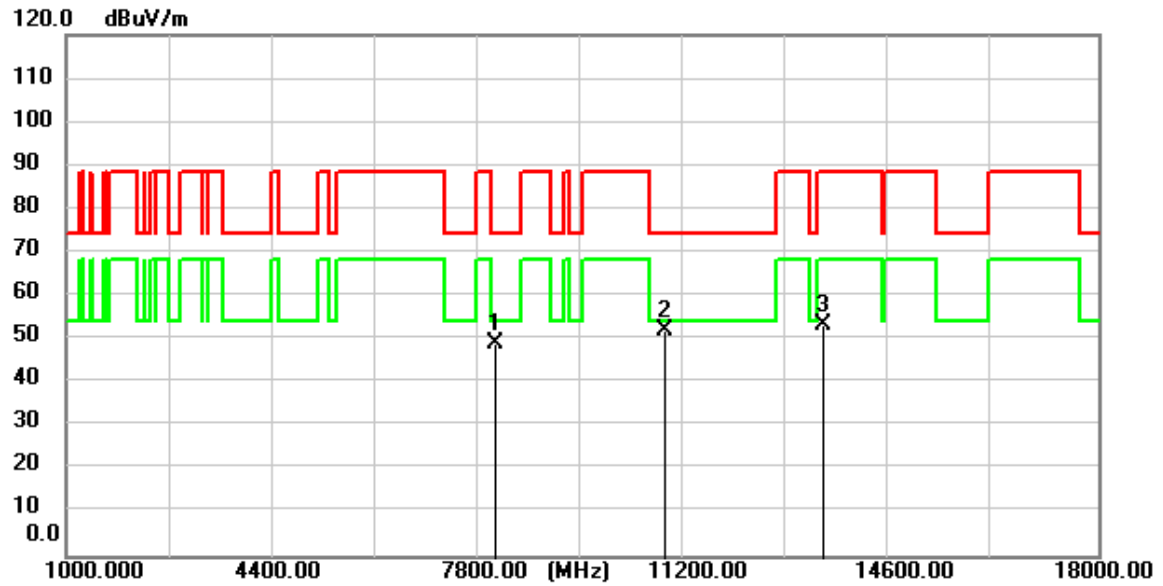


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8067.750	54.36	-5.08	49.28	74.00	-24.72	peak
2	10862.550	53.46	-1.60	51.86	74.00	-22.14	peak
3	13449.100	53.04	0.27	53.31	88.20	-34.89	peak

Test Mode: 11; Polarity: Horizontal; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

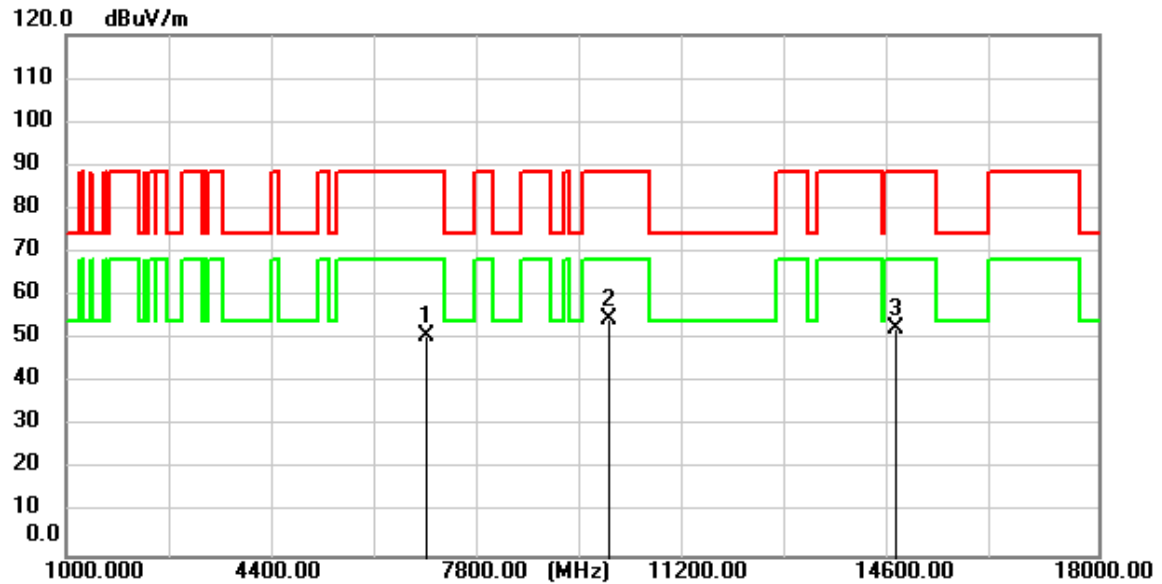


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6947.450	57.53	-6.93	50.60	88.20	-37.60	peak
2	9931.800	56.09	-1.54	54.55	88.20	-33.65	peak
3	14678.200	54.68	-1.97	52.71	88.20	-35.49	peak

Test Mode: 11; Polarity: Vertical; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

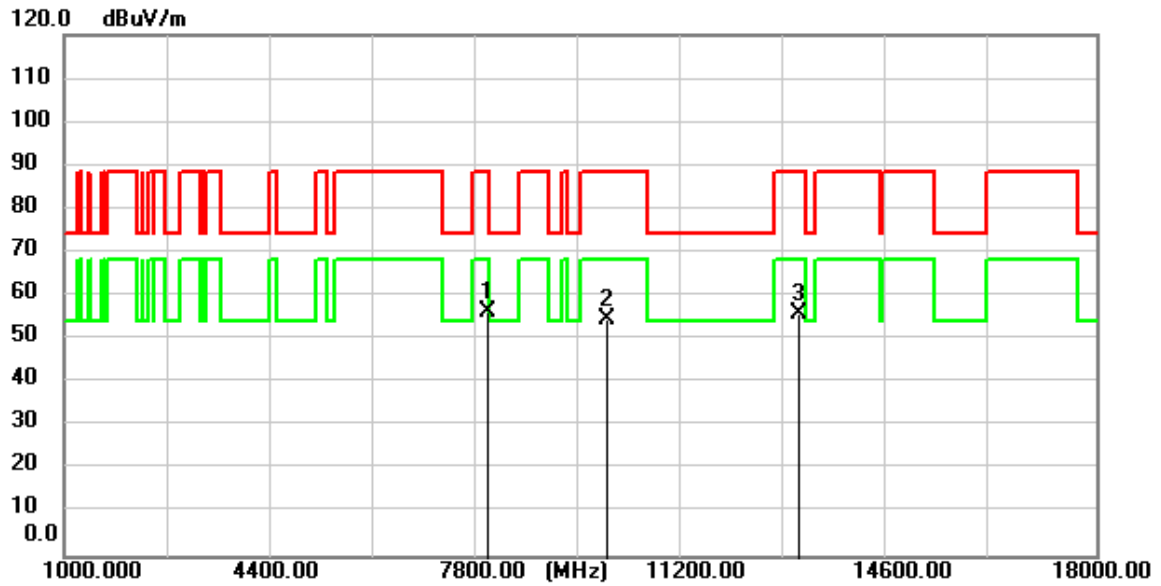


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7977.650	61.44	-5.25	56.19	88.20	-32.01	peak
2	9946.250	55.99	-1.54	54.45	88.20	-33.75	peak
3	13088.700	55.98	0.00	55.98	88.20	-32.22	peak

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

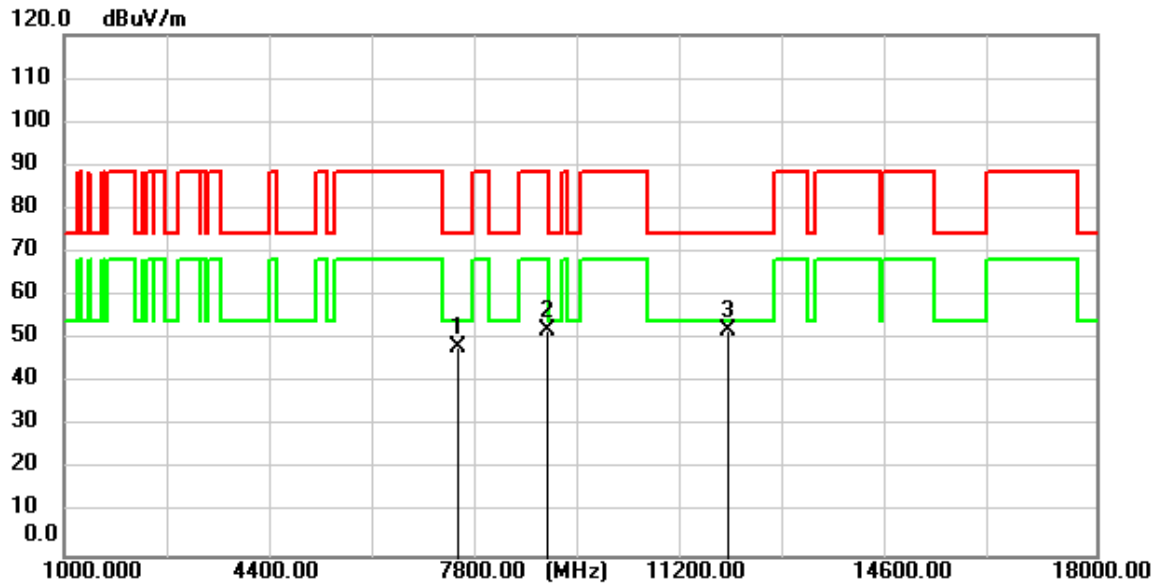


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7477.000	54.63	-6.25	48.38	74.00	-25.62	peak
2	8946.650	55.59	-3.62	51.97	88.20	-36.23	peak
3	11936.100	53.90	-1.73	52.17	74.00	-21.83	peak

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

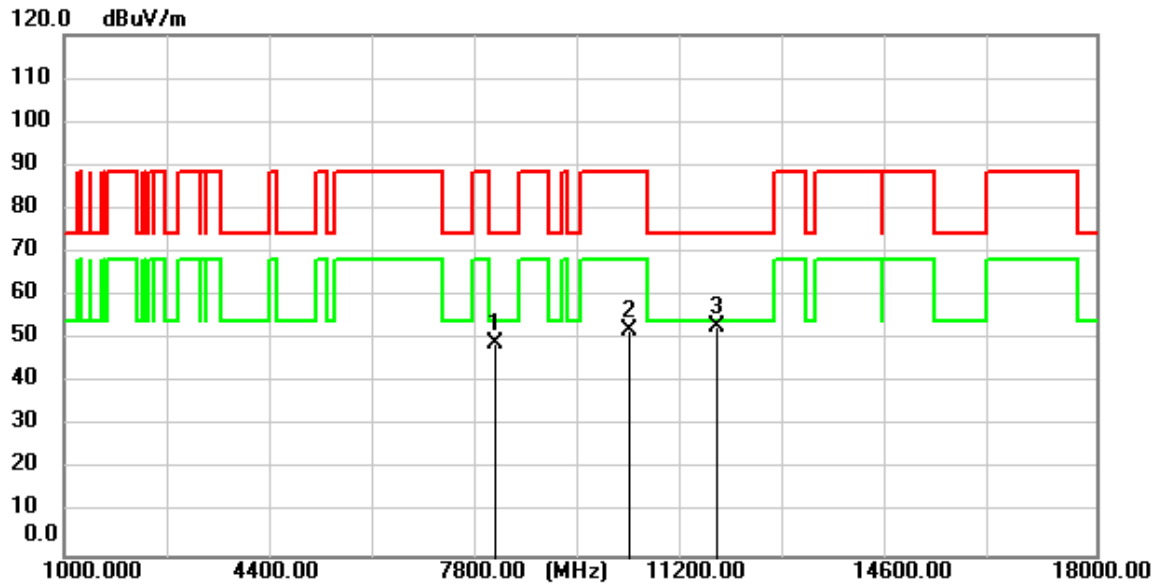


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8099.200	54.30	-5.02	49.28	74.00	-24.72	peak
2	10306.650	53.80	-1.55	52.25	88.20	-35.95	peak
3	11732.950	54.50	-1.71	52.79	74.00	-21.21	peak

Test Mode: 09; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

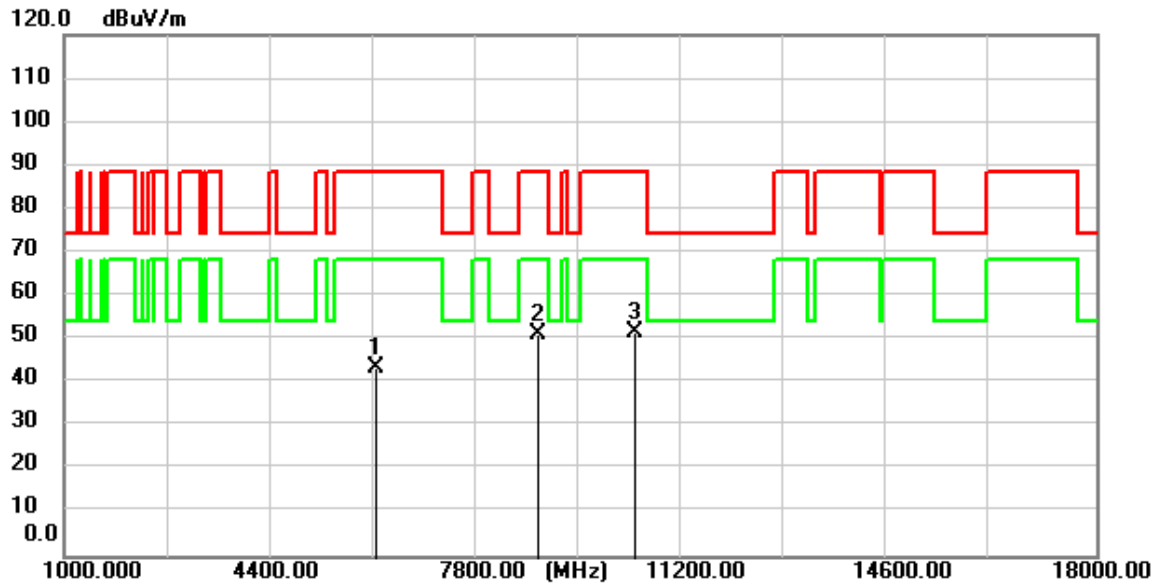


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6146.750	53.22	-9.86	43.36	88.20	-44.84	peak
2	8791.100	54.87	-3.87	51.00	88.20	-37.20	peak
3	10404.400	53.32	-1.56	51.76	88.20	-36.44	peak

Test Mode: 09; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

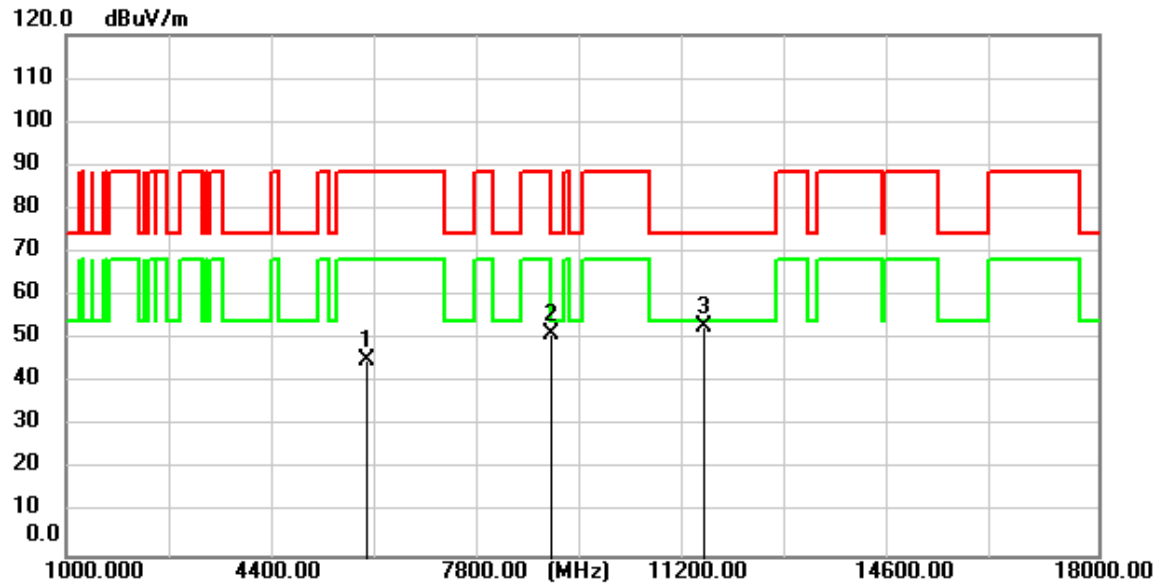


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5941.050	55.75	-10.71	45.04	88.20	-43.16	peak
2	8975.550	54.58	-3.56	51.02	88.20	-37.18	peak
3	11515.350	54.75	-1.68	53.07	74.00	-20.93	peak

Test Mode: 10; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

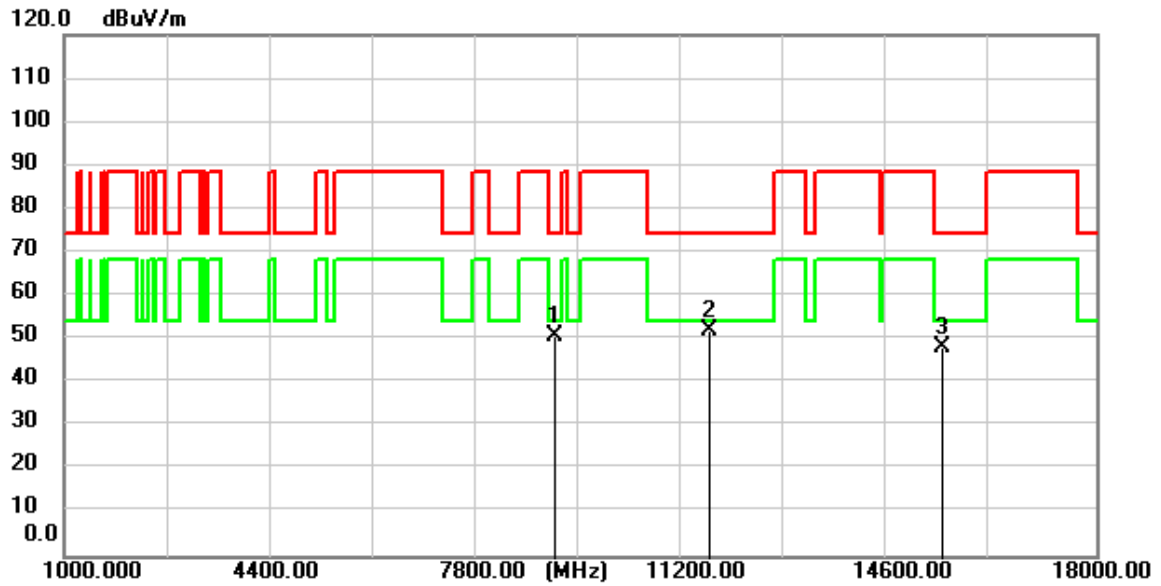


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9061.400	54.13	-3.36	50.77	74.00	-23.23	peak
2	11614.800	53.94	-1.70	52.24	74.00	-21.76	peak
3	15466.150	52.90	-4.62	48.28	74.00	-25.72	peak

Test Mode: 10; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

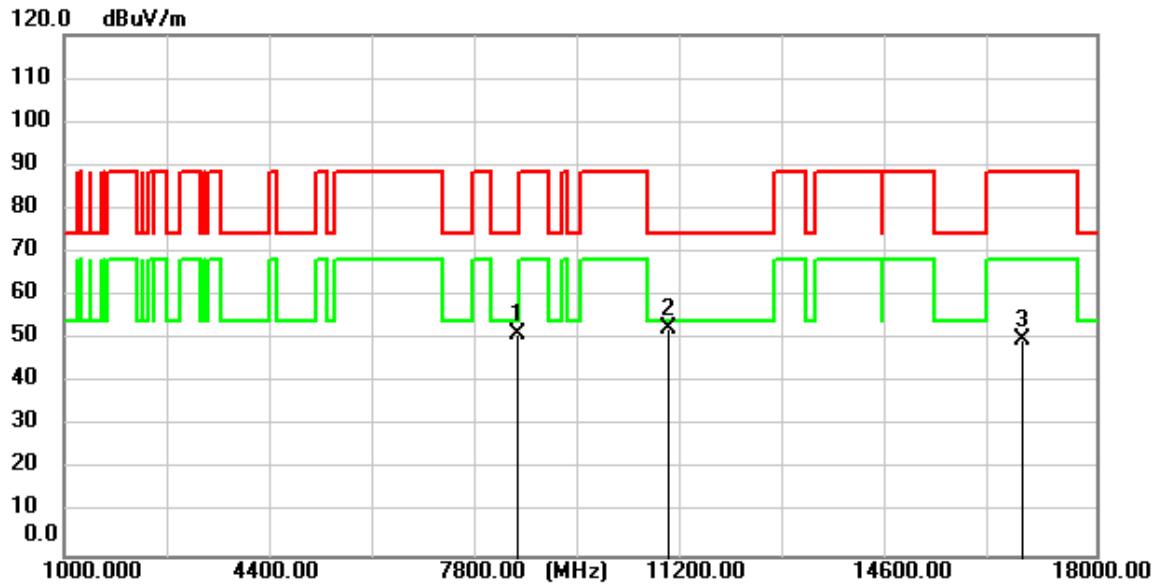


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8454.500	55.70	-4.43	51.27	74.00	-22.73	peak
2	10935.650	53.90	-1.60	52.30	74.00	-21.70	peak
3	16780.250	51.30	-1.52	49.78	88.20	-38.42	peak

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

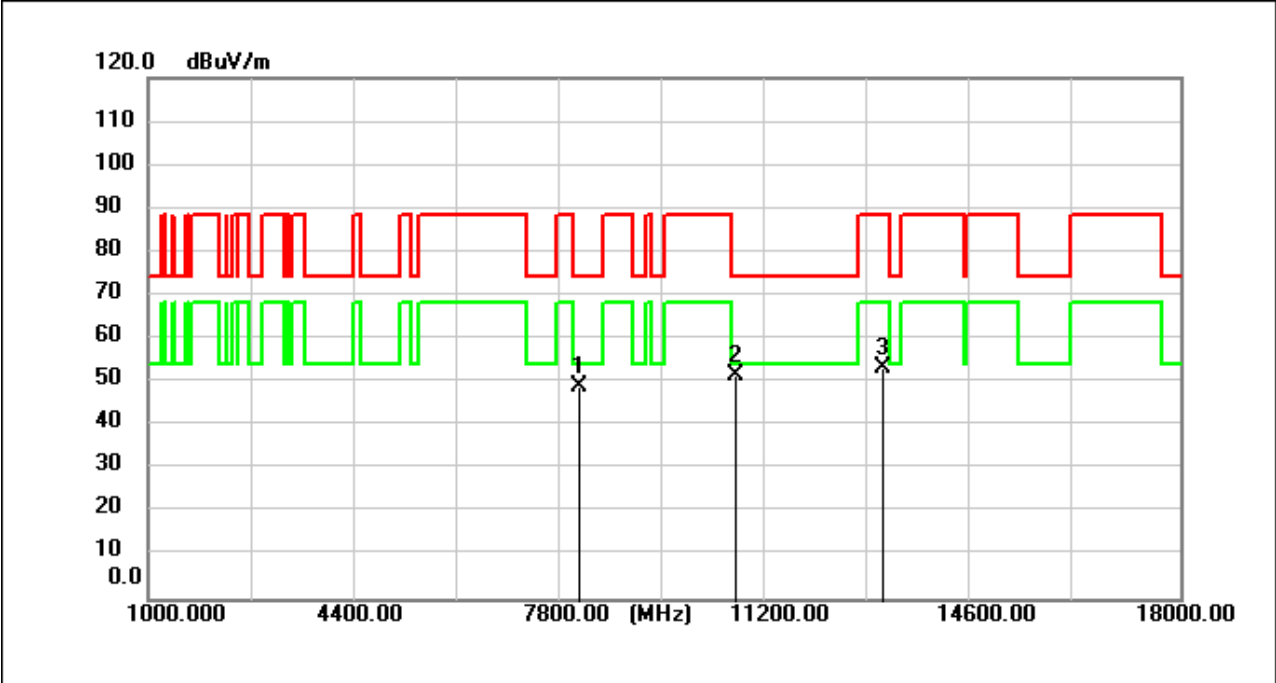


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8106.000	54.18	-5.01	49.17	74.00	-24.83	peak
2	10671.300	53.43	-1.58	51.85	74.00	-22.15	peak
3	13098.050	53.44	0.01	53.45	88.20	-34.75	peak

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

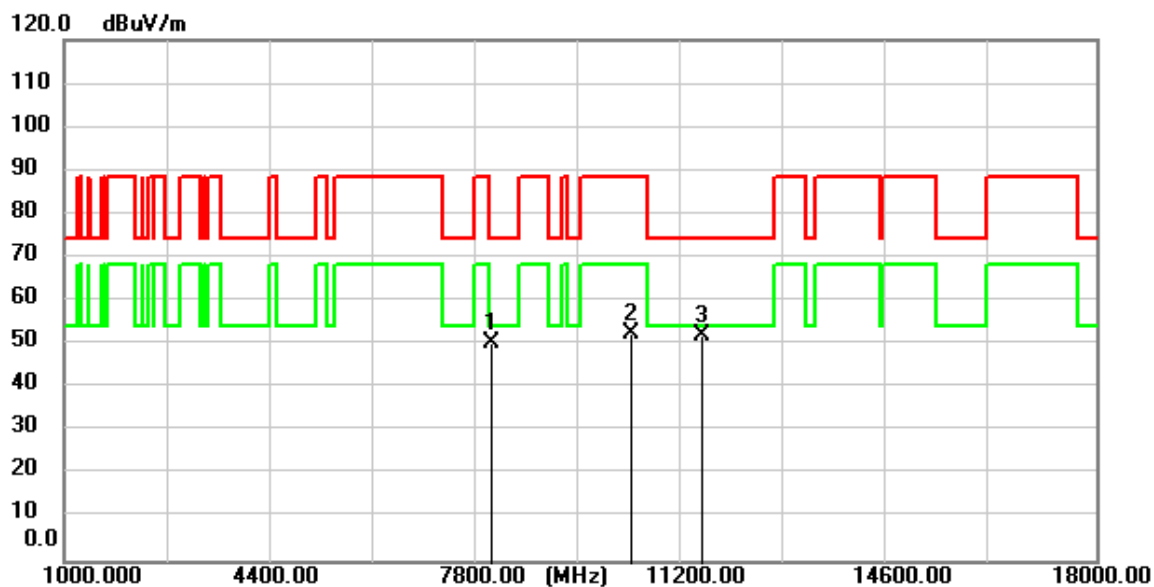


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8031.200	55.38	-5.14	50.24	74.00	-23.76	peak
2	10320.250	53.86	-1.55	52.31	88.20	-35.89	peak
3	11512.800	53.58	-1.68	51.90	74.00	-22.10	peak

Test Mode: 10; Polarity: Horizontal; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

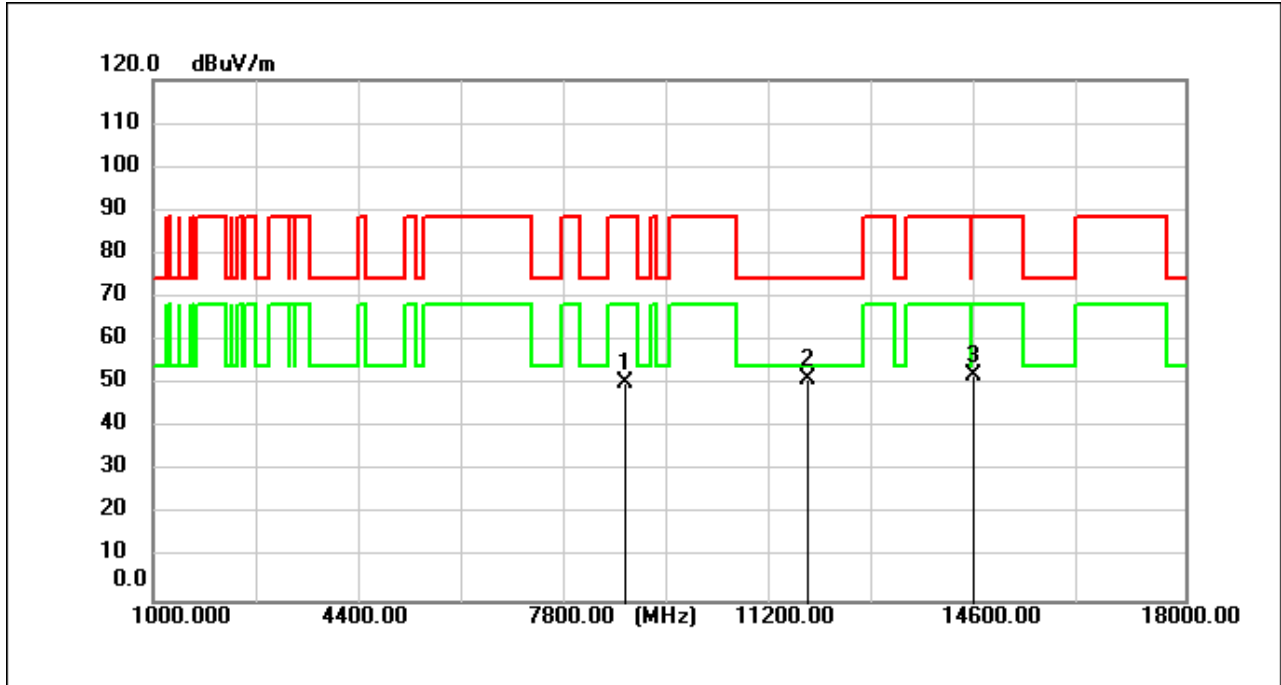


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8763.050	54.37	-3.92	50.45	88.20	-37.75	peak
2	11767.800	52.93	-1.72	51.21	74.00	-22.79	peak
3	14512.450	53.41	-1.42	51.99	88.20	-36.21	peak

Test Mode: 10; Polarity: Vertical; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

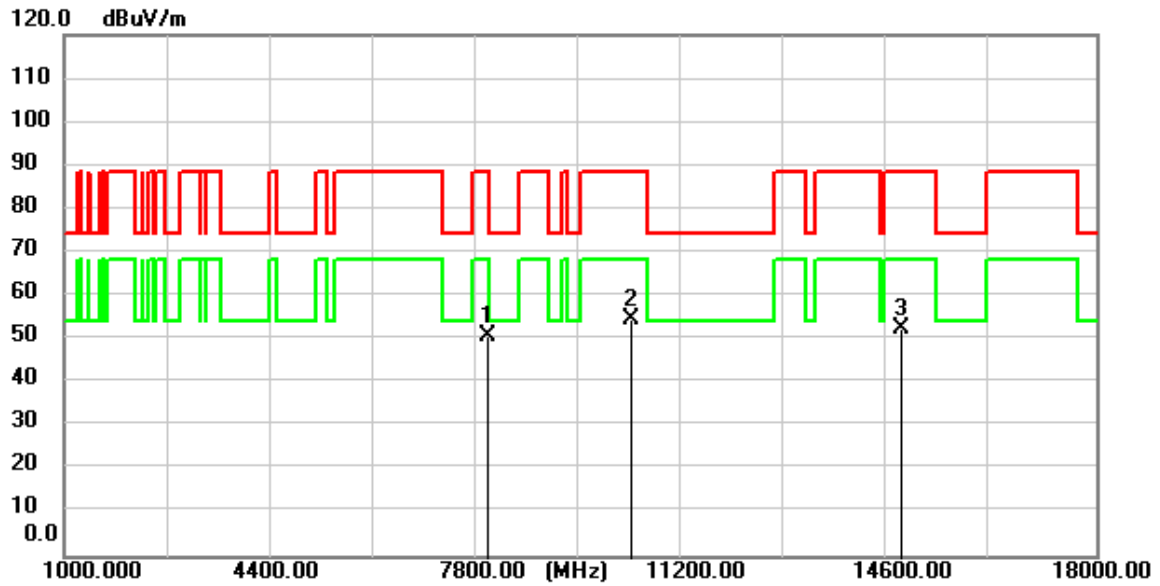


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7968.300	55.96	-5.27	50.69	88.20	-37.51	peak
2	10331.300	56.04	-1.55	54.49	88.20	-33.71	peak
3	14804.000	55.01	-2.39	52.62	88.20	-35.58	peak

Test Mode: 11; Polarity: Horizontal; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

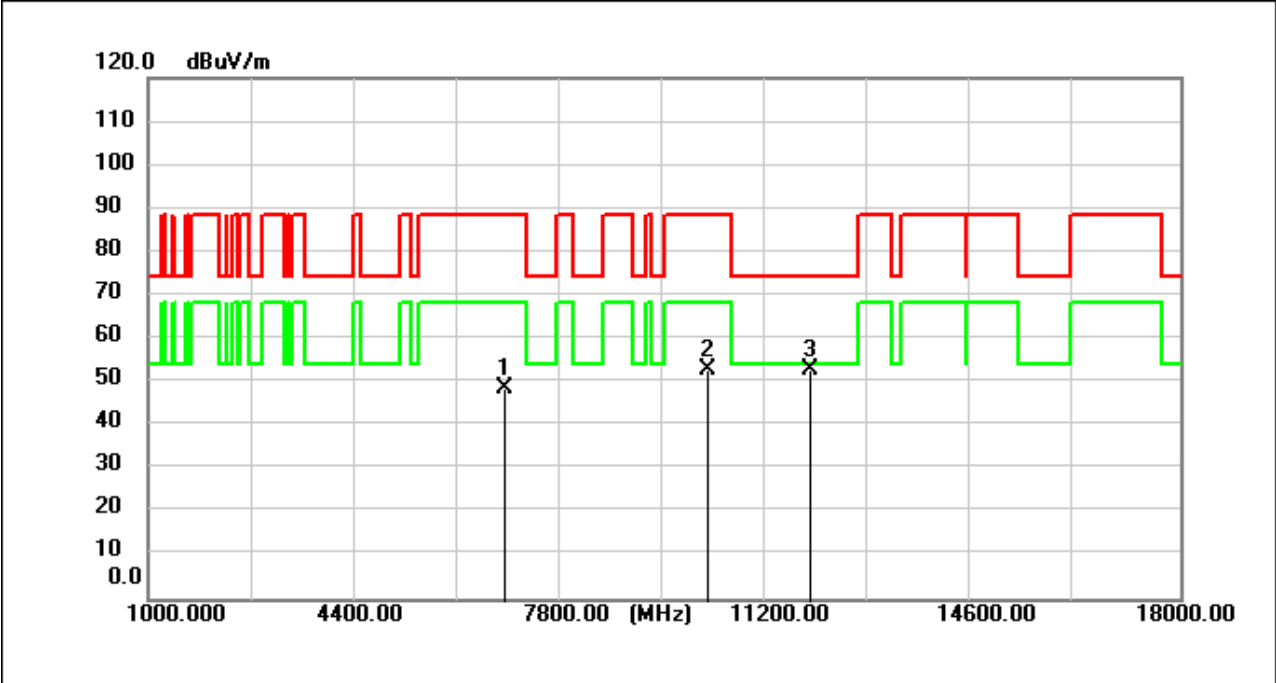

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6872.650	55.75	-7.01	48.74	88.20	-39.46	peak
2	10226.750	54.46	-1.55	52.91	88.20	-35.29	peak
3	11908.900	54.67	-1.74	52.93	74.00	-21.07	peak

Test Mode: 11; Polarity: Vertical; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

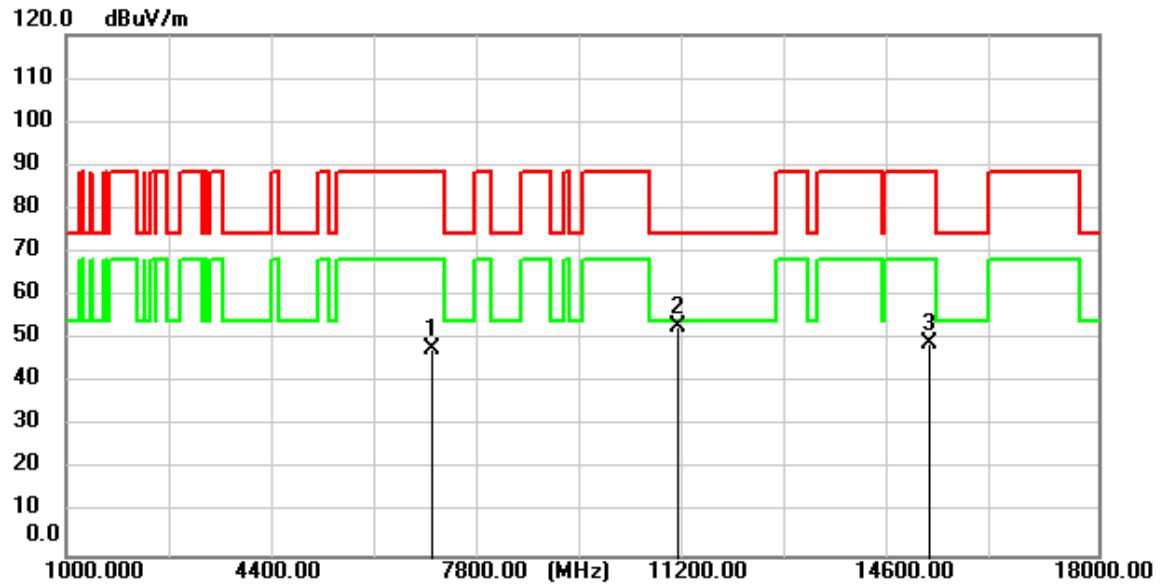

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7034.150	54.58	-6.82	47.76	88.20	-40.44	peak
2	11081.000	54.72	-1.63	53.09	74.00	-20.91	peak
3	15215.400	52.93	-3.77	49.16	88.20	-39.04	peak



Report No.: KSCR250100002805

Page: 155 of 161

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for KSCR2501000028AT

9 EUT Constructional Details (EUT Photos)

Refer to Appendix_Photographs of EUT Constructional Details for KSCR2501000028AT

10 Appendix

1. Maximum Conducted Output Power-SISO

1.1 Test Result

1.1.1 Power

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)		Verdict
						ANT1	Limit	
NTNV	802.11a	SISO	5955	/	/	6.34	/	Pass
			6175	/	/	6.80	/	Pass
			6415	/	/	6.67	/	Pass
	802.11ax (HEW160)	SISO	6025	2xRU996	Left	12.35	/	Pass
			6185	2xRU996	Left	12.25	/	Pass
			6345	2xRU996	Left	12.21	/	Pass

Note1: Antenna Gain: Ant1: 2.83dBi;

1.1.2 EIRP

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	E.I.R.P (dBm)		Verdict
						ANT1	Limit	
NTNV	802.11a	SISO	5955	/	/	9.17	<=24	Pass
			6175	/	/	9.63	<=24	Pass
			6415	/	/	9.50	<=24	Pass
	802.11ax (HEW160)	SISO	6025	2xRU996	Left	15.18	<=24	Pass
			6185	2xRU996	Left	15.08	<=24	Pass
			6345	2xRU996	Left	15.04	<=24	Pass

Note1: Antenna Gain: Ant1: 2.83dBi;
Note2: E.I.R.P = Measured Power + Antenna Gain

1.1.3 Power

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)		Verdict
						ANT1	Limit	
NTNV	802.11a	SISO	6435	/	/	7.23	/	Pass
			6475	/	/	7.02	/	Pass
			6515	/	/	7.01	/	Pass
	802.11ax (HEW160)	SISO	6505	2xRU996	Left	12.77	/	Pass

Note1: Antenna Gain: Ant1: 1.28dBi;

1.1.4 EIRP

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	E.I.R.P (dBm)		Verdict
						ANT1	Limit	
NTNV	802.11a	SISO	6435	/	/	8.51	<=24	Pass
			6475	/	/	8.30	<=24	Pass
			6515	/	/	8.29	<=24	Pass

	802.11ax (HEW160)	SISO	6505	2xRU996	Left	14.05	<=24	Pass
Note1: Antenna Gain: Ant1: 1.28dBi; Note2: E.I.R.P = Measured Power + Antenna Gain								

1.1.5 Power

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)		Verdict
						ANT1	Limit	
NTNV	802.11a	SISO	6535	/	/	7.03	/	Pass
			6715	/	/	6.88	/	Pass
			6855	/	/	7.46	/	Pass
	802.11ax (HEW160)	SISO	6665	2xRU996	Left	12.33	/	Pass
		SISO	6825	2xRU996	Left	12.28	/	Pass
Note1: Antenna Gain: Ant1: 1.10dBi;								

1.1.6 EIRP

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	E.I.R.P (dBm)		Verdict
						ANT1	Limit	
NTNV	802.11a	SISO	6535	/	/	8.13	<=24	Pass
			6715	/	/	7.98	<=24	Pass
			6855	/	/	8.56	<=24	Pass
	802.11ax (HEW160)	SISO	6665	2xRU996	Left	13.43	<=24	Pass
		SISO	6825	2xRU996	Left	13.38	<=24	Pass
Note1: Antenna Gain: Ant1: 1.10dBi; Note2: E.I.R.P = Measured Power + Antenna Gain								

1.1.7 Power

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)		Verdict
						ANT1	Limit	
NTNV	802.11a	SISO	6875	/	/	7.09	/	Pass
			7015	/	/	7.61	/	Pass
			7115	/	/	7.38	/	Pass
	802.11ax (HEW160)	SISO	6985	2xRU996	Left	12.54	/	Pass
Note1: Antenna Gain: Ant1: 0.56dBi;								

1.1.8 EIRP

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	E.I.R.P (dBm)		Verdict
						ANT1	Limit	
NTNV	802.11a	SISO	6875	/	/	7.65	<=24	Pass
			7015	/	/	8.17	<=24	Pass
			7115	/	/	7.94	<=24	Pass
	802.11ax (HEW160)	SISO	6985	2xRU996	Left	13.10	<=24	Pass
Note1: Antenna Gain: Ant1: 0.56dBi; Note2: E.I.R.P = Measured Power + Antenna Gain								

2. Maximum Conducted Output Power-MIMO

2.1 Test Result

2.1.1 Power

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)				Verdict
						ANT1	ANT2	MIMO	Limit	
NTNV	802.11a	MIMO	5955	/	/	0.63	0.31	3.48	/	Pass
			6175	/	/	0.22	0.45	3.35	/	Pass
			6415	/	/	0.37	0.52	3.46	/	Pass
	802.11ax (HEW20)	MIMO	5955	RU26	Left	-7.22	-7.30	-4.25	/	Pass
				RU106	Left	-2.55	-1.52	1.01	/	Pass
				RU242	Left	1.08	1.11	4.11	/	Pass
			6175	RU242	Left	1.05	1.30	4.19	/	Pass
			6415	RU26	Right	-7.99	-6.95	-4.43	/	Pass
				RU106	Right	-2.76	-1.04	1.19	/	Pass
				RU242	Left	0.65	1.45	4.08	/	Pass
	802.11ax (HEW40)	MIMO	5965	RU484	Left	3.51	2.42	6.01	/	Pass
			6165	RU484	Left	3.33	3.79	6.58	/	Pass
			6405	RU484	Left	3.50	3.26	6.39	/	Pass
	802.11ax (HEW80)	MIMO	5985	RU996	Left	6.56	6.15	9.37	/	Pass
			6145	RU996	Left	6.15	7.03	9.62	/	Pass
			6385	RU996	Left	6.87	6.70	9.80	/	Pass
	802.11ax (HEW160)	MIMO	6025	2xRU996	Left	9.62	9.02	12.34	/	Pass
			6185	2xRU996	Left	9.20	9.28	12.25	/	Pass
			6345	2xRU996	Left	9.37	9.31	12.35	/	Pass

Note1: Antenna Gain: Ant1: 2.83dBi; Ant2: 2.56dBi;

2.1.2 EIRP

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	E.I.R.P (dBm)				Verdict
						ANT1	ANT2	MIMO	Limit	
NTNV	802.11a	MIMO	5955	/	/	3.46	2.87	6.19	<=24	Pass
			6175	/	/	3.05	3.01	6.04	<=24	Pass
			6415	/	/	3.20	3.08	6.15	<=24	Pass
	802.11ax (HEW20)	MIMO	5955	RU26	Left	-4.39	-4.74	-1.55	<=24	Pass
				RU106	Left	0.28	1.04	3.69	<=24	Pass
				RU242	Left	3.91	3.67	6.80	<=24	Pass
			6175	RU242	Left	3.88	3.86	6.88	<=24	Pass
			6415	RU26	Right	-5.16	-4.39	-1.75	<=24	Pass
				RU106	Right	0.07	1.52	3.87	<=24	Pass
				RU242	Left	3.48	4.01	6.76	<=24	Pass
	802.11ax (HEW40)	MIMO	5965	RU484	Left	6.34	4.98	8.72	<=24	Pass
			6165	RU484	Left	6.16	6.35	9.27	<=24	Pass
			6405	RU484	Left	6.33	5.82	9.09	<=24	Pass
	802.11ax (HEW80)	MIMO	5985	RU996	Left	9.39	8.71	12.07	<=24	Pass
			6145	RU996	Left	8.98	9.59	12.31	<=24	Pass
			6385	RU996	Left	9.70	9.26	12.50	<=24	Pass

	802.11ax (HEW160)	MIMO	6025	2xRU996	Left	12.45	11.58	15.05	<=24	Pass
			6185	2xRU996	Left	12.03	11.84	14.95	<=24	Pass
			6345	2xRU996	Left	12.20	11.87	15.05	<=24	Pass
Note1: Antenna Gain: Ant1: 2.83dBi; Ant2: 2.56dBi; Note2: E.I.R.P = Measured Power + Antenna Gain										

2.1.3 Power

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)				Verdict
						ANT1	ANT2	MIMO	Limit	
NTNV	802.11a	MIMO	6435	/	/	1.89	0.38	4.21	/	Pass
			6475	/	/	0.75	1.26	4.02	/	Pass
			6515	/	/	1.52	0.77	4.17	/	Pass
	802.11ax (HEW20)	MIMO	6435	RU26	Left	-7.02	-7.64	-4.31	/	Pass
				RU106	Left	-1.44	-1.80	1.39	/	Pass
				RU242	Left	1.26	2.14	4.73	/	Pass
			6475	RU242	Left	1.28	2.31	4.84	/	Pass
			6515	RU242	Left	1.80	2.18	5.00	/	Pass
	802.11ax (HEW40)	MIMO	6445	RU484	Left	3.96	3.58	6.78	/	Pass
			6485	RU484	Left	3.65	4.07	6.88	/	Pass
			6525	RU484	Left	4.78	3.64	7.26	/	Pass
	802.11ax (HEW80)	MIMO	6465	RU996	Left	7.11	7.03	10.08	/	Pass
			6545	RU996	Left	6.98	7.30	10.15	/	Pass
	802.11ax (HEW160)	MIMO	6505	2xRU996	Left	9.57	9.66	12.63	/	Pass
Note1: Antenna Gain: Ant1: 1.28dBi; Ant2: -0.95dBi;										

2.1.4 EIRP

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	E.I.R.P (dBm)				Verdict
						ANT1	ANT2	MIMO	Limit	
NTNV	802.11a	MIMO	6435	/	/	3.17	-0.57	4.70	<=24	Pass
			6475	/	/	2.03	0.31	4.26	<=24	Pass
			6515	/	/	2.80	-0.18	4.57	<=24	Pass
	802.11ax (HEW20)	MIMO	6435	RU26	Left	-5.74	-8.59	-3.92	<=24	Pass
				RU106	Left	-0.16	-2.75	1.75	<=24	Pass
				RU242	Left	2.54	1.19	4.93	<=24	Pass
			6475	RU242	Left	2.56	1.36	5.01	<=24	Pass
			6515	RU242	Left	3.08	1.23	5.26	<=24	Pass
	802.11ax (HEW40)	MIMO	6445	RU484	Left	5.24	2.63	7.14	<=24	Pass
			6485	RU484	Left	4.93	3.12	7.13	<=24	Pass
			6525	RU484	Left	6.06	2.69	7.70	<=24	Pass
	802.11ax (HEW80)	MIMO	6465	RU996	Left	8.39	6.08	10.40	<=24	Pass
			6545	RU996	Left	8.26	6.35	10.42	<=24	Pass
	802.11ax (HEW160)	MIMO	6505	2xRU996	Left	10.85	8.71	12.92	<=24	Pass
Note1: Antenna Gain: Ant1: 1.28dBi; Ant2: -0.95dBi; Note2: E.I.R.P = Measured Power + Antenna Gain										

2.1.5 Power

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)				Verdict
						ANT1	ANT2	MIMO	Limit	
NTNV	802.11a	MIMO	6535	/	/	0.44	0.67	3.57	/	Pass
			6715	/	/	0.51	0.50	3.52	/	Pass
			6855	/	/	0.48	0.55	3.53	/	Pass
	802.11ax (HEW20)	MIMO	6535	RU26	Left	-7.56	-7.07	-4.30	/	Pass
				RU106	Left	-1.77	-1.80	1.23	/	Pass
				RU242	Left	1.38	0.73	4.08	/	Pass
			6715	RU242	Left	0.77	1.24	4.02	/	Pass
			6855	RU26	Right	-7.55	-7.68	-4.60	/	Pass
				RU106	Right	-1.70	-2.37	0.99	/	Pass
				RU242	Left	0.87	0.94	3.92	/	Pass
	802.11ax (HEW40)	MIMO	6565	RU484	Left	2.82	3.60	6.24	/	Pass
			6725	RU484	Left	3.29	3.15	6.23	/	Pass
			6845	RU484	Left	3.20	3.31	6.27	/	Pass
	802.11ax (HEW80)	MIMO	6625	RU996	Left	6.83	7.22	10.04	/	Pass
			6705	RU996	Left	6.40	6.18	9.30	/	Pass
			6785	RU996	Left	6.55	6.02	9.30	/	Pass
	802.11ax (HEW160)	MIMO	6665	2xRU996	Left	8.96	9.70	12.36	/	Pass
			6825	2xRU996	Left	9.47	8.04	11.82	/	Pass

Note1: Antenna Gain: Ant1: 1.10dBi; Ant2: 0.52dBi;

2.1.6 EIRP

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	E.I.R.P (dBm)				Verdict
						ANT1	ANT2	MIMO	Limit	
NTNV	802.11a	MIMO	6535	/	/	1.54	1.19	4.38	<=24	Pass
			6715	/	/	1.61	1.02	4.34	<=24	Pass
			6855	/	/	1.58	1.07	4.34	<=24	Pass
	802.11ax (HEW20)	MIMO	6535	RU26	Left	-6.46	-6.55	-3.49	<=24	Pass
				RU106	Left	-0.67	-1.28	2.05	<=24	Pass
				RU242	Left	2.48	1.25	4.92	<=24	Pass
			6715	RU242	Left	1.87	1.76	4.83	<=24	Pass
			6855	RU26	Right	-6.45	-7.16	-3.78	<=24	Pass
				RU106	Right	-0.60	-1.85	1.83	<=24	Pass
				RU242	Left	1.97	1.46	4.73	<=24	Pass
	802.11ax (HEW40)	MIMO	6565	RU484	Left	3.92	4.12	7.03	<=24	Pass
			6725	RU484	Left	4.39	3.67	7.06	<=24	Pass
			6845	RU484	Left	4.30	3.83	7.08	<=24	Pass
	802.11ax (HEW80)	MIMO	6625	RU996	Left	7.93	7.74	10.85	<=24	Pass
			6705	RU996	Left	7.50	6.70	10.13	<=24	Pass
			6785	RU996	Left	7.65	6.54	10.14	<=24	Pass
	802.11ax (HEW160)	MIMO	6665	2xRU996	Left	10.06	10.22	13.15	<=24	Pass
			6825	2xRU996	Left	10.57	8.56	12.69	<=24	Pass

Note1: Antenna Gain: Ant1: 1.10dBi; Ant2: 0.52dBi;
Note2: E.I.R.P = Measured Power + Antenna Gain

2.1.7 Power

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)				Verdict
						ANT1	ANT2	MIMO	Limit	
NTNV	802.11a	MIMO	6875	/	/	1.28	0.76	4.04	/	Pass
			7015	/	/	1.22	1.20	4.22	/	Pass
			7115	/	/	0.42	1.52	4.02	/	Pass
	802.11ax (HEW20)	MIMO	6875	RU242	Left	1.42	1.96	4.71	/	Pass
			7015	RU242	Left	2.08	1.56	4.84	/	Pass
			7115	RU26	Right	-9.33	-8.80	-6.05	/	Pass
				RU52	Right	-5.93	-5.92	-2.91	/	Pass
				RU106	Right	-4.88	-4.05	-1.43	/	Pass
				RU242	Left	1.29	2.30	4.83	/	Pass
	802.11ax (HEW40)	MIMO	6885	RU484	Left	4.14	3.44	6.81	/	Pass
			7005	RU484	Left	3.40	4.41	6.94	/	Pass
			7085	RU484	Left	4.29	3.45	6.90	/	Pass
	802.11ax (HEW80)	MIMO	6865	RU996	Left	7.26	6.40	9.86	/	Pass
			6945	RU996	Left	6.94	7.03	10.00	/	Pass
			7025	RU996	Left	6.18	7.78	10.06	/	Pass
	802.11ax (HEW160)	MIMO	6985	2xRU996	Left	9.03	10.29	12.72	/	Pass

Note1: Antenna Gain: Ant1: 0.56dBi; Ant2: 0.56dBi;

2.1.8 EIRP

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	E.I.R.P (dBm)				Verdict
						ANT1	ANT2	MIMO	Limit	
NTNV	802.11a	MIMO	6875	/	/	1.84	1.32	4.60	<=24	Pass
			7015	/	/	1.78	1.76	4.78	<=24	Pass
			7115	/	/	0.98	2.08	4.58	<=24	Pass
	802.11ax (HEW20)	MIMO	6875	RU242	Left	1.98	2.52	5.27	<=24	Pass
			7015	RU242	Left	2.64	2.12	5.40	<=24	Pass
			7115	RU26	Right	-8.77	-8.24	-5.49	<=24	Pass
				RU52	Right	-5.37	-5.36	-2.35	<=24	Pass
				RU106	Right	-4.32	-3.49	-0.87	<=24	Pass
				RU242	Left	1.85	2.86	5.39	<=24	Pass
	802.11ax (HEW40)	MIMO	6885	RU484	Left	4.70	4.00	7.37	<=24	Pass
			7005	RU484	Left	3.96	4.97	7.50	<=24	Pass
			7085	RU484	Left	4.85	4.01	7.46	<=24	Pass
	802.11ax (HEW80)	MIMO	6865	RU996	Left	7.82	6.96	10.42	<=24	Pass
			6945	RU996	Left	7.50	7.59	10.56	<=24	Pass
			7025	RU996	Left	6.74	8.34	10.62	<=24	Pass
	802.11ax (HEW160)	MIMO	6985	2xRU996	Left	9.59	10.85	13.28	<=24	Pass

Note1: Antenna Gain: Ant1: 0.56dBi; Ant2: 0.56dBi;
Note2: E.I.R.P = Measured Power + Antenna Gain

- End of the Report -