


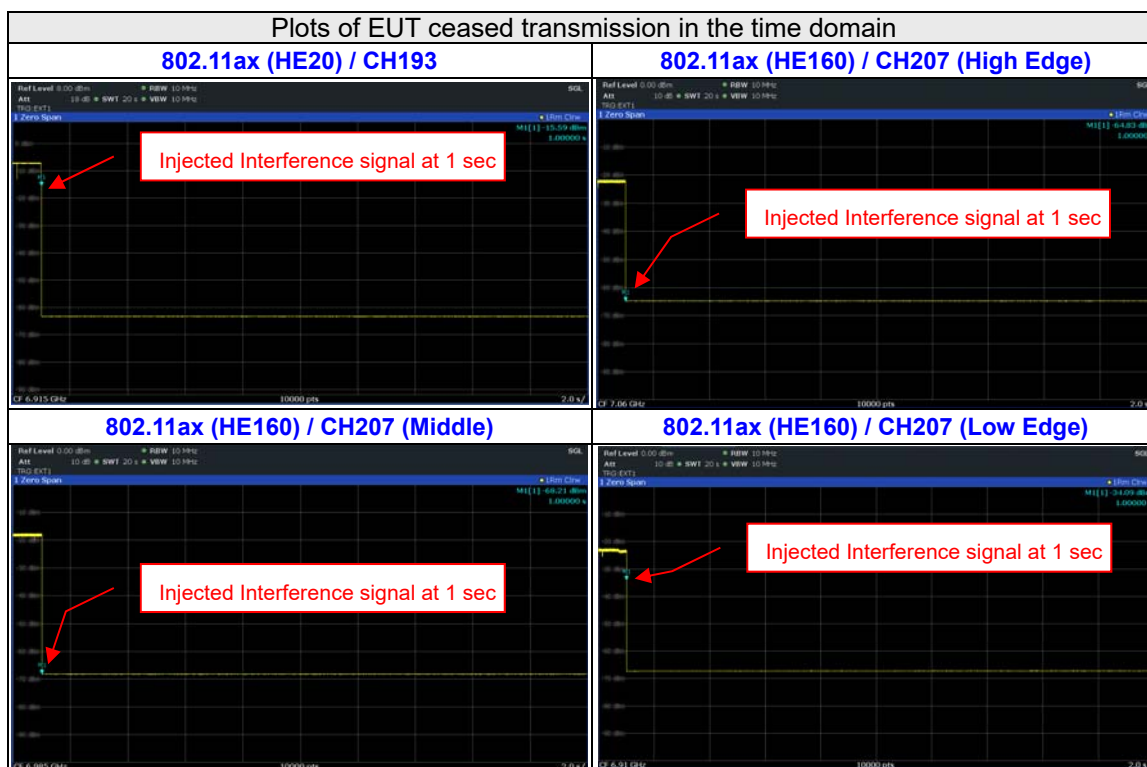


4.8 Frequency Stability Measurement

4.8.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.8.2 Test Setup

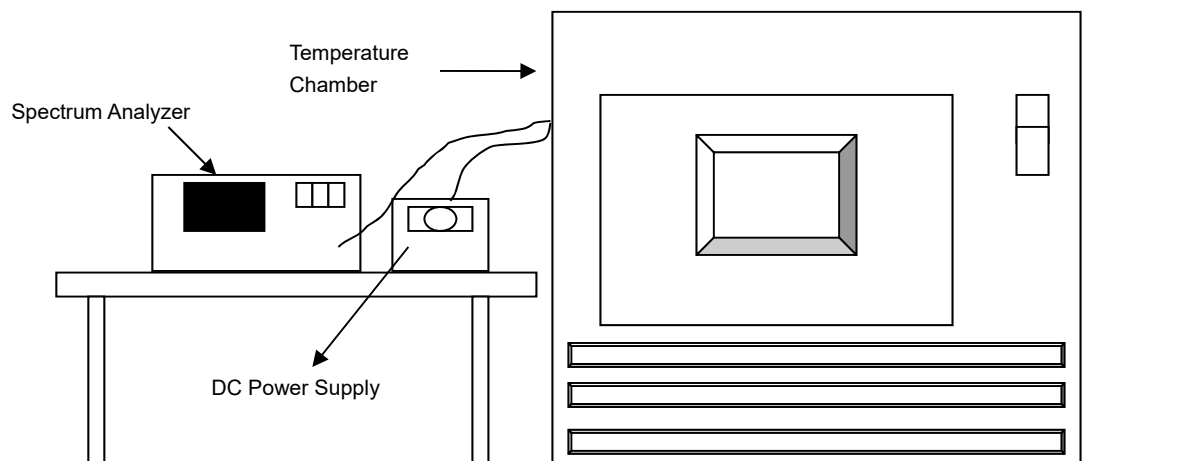

4.8.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.8.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes.
- Repeat step (d) with the temperature chamber set to the next desired temperature until measurements down to the lowest specified temperature have been completed..
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.8.5 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.8.6 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 5955MHz									
TEMP. (°C)	Power Supply (Vdc)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
70	3.3	5954.9822	Pass	5954.9769	Pass	5954.9812	Pass	5954.9778	Pass
60	3.3	5954.9729	Pass	5954.9785	Pass	5954.9782	Pass	5954.9775	Pass
50	3.3	5954.9753	Pass	5954.9745	Pass	5954.9766	Pass	5954.9721	Pass
40	3.3	5954.9742	Pass	5954.9721	Pass	5954.9746	Pass	5954.9748	Pass
30	3.3	5955.0046	Pass	5955.0023	Pass	5955.0009	Pass	5955.0047	Pass
20	3.3	5955.021	Pass	5955.026	Pass	5955.0236	Pass	5955.0222	Pass
10	3.3	5954.9978	Pass	5954.9963	Pass	5954.9971	Pass	5954.9951	Pass
0	3.3	5954.9951	Pass	5954.9972	Pass	5954.9971	Pass	5954.993	Pass
-10	3.3	5954.9725	Pass	5954.9729	Pass	5954.9752	Pass	5954.9743	Pass

Frequency Stability Versus Voltage									
Operating Frequency: 5955MHz									
TEMP. (°C)	Power Supply (Vdc)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
20	3.795	5955.02	Pass	5955.025	Pass	5955.0225	Pass	5955.0214	Pass
	3.3	5955.021	Pass	5955.026	Pass	5955.0236	Pass	5955.0222	Pass
	2.805	5955.0211	Pass	5955.0261	Pass	5955.0224	Pass	5955.0217	Pass

4.9 Operational Restrictions for 6 GHz U-NII Devices

4.9.1 Limits of Operational Restrictions for 6 GHz U-NII Devices

In the 5.925-7.125 GHz band, client devices, except fixed client devices, must operate under the control of a standard power access point, indoor access point or subordinate devices; Subordinate devices must operate under the control of an indoor access point.

4.9.2 Test Setup

N/A

4.9.3 Test Instruments

N/A

4.9.4 Test Procedure

N/A.


4.9.5 Test Results


Device is an indoor client device under the control of a low power indoor access point. Please refer to the declaration letter exhibit supplied within this application.

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).


Annex A - Band-Edge Measurement (Mode 1)

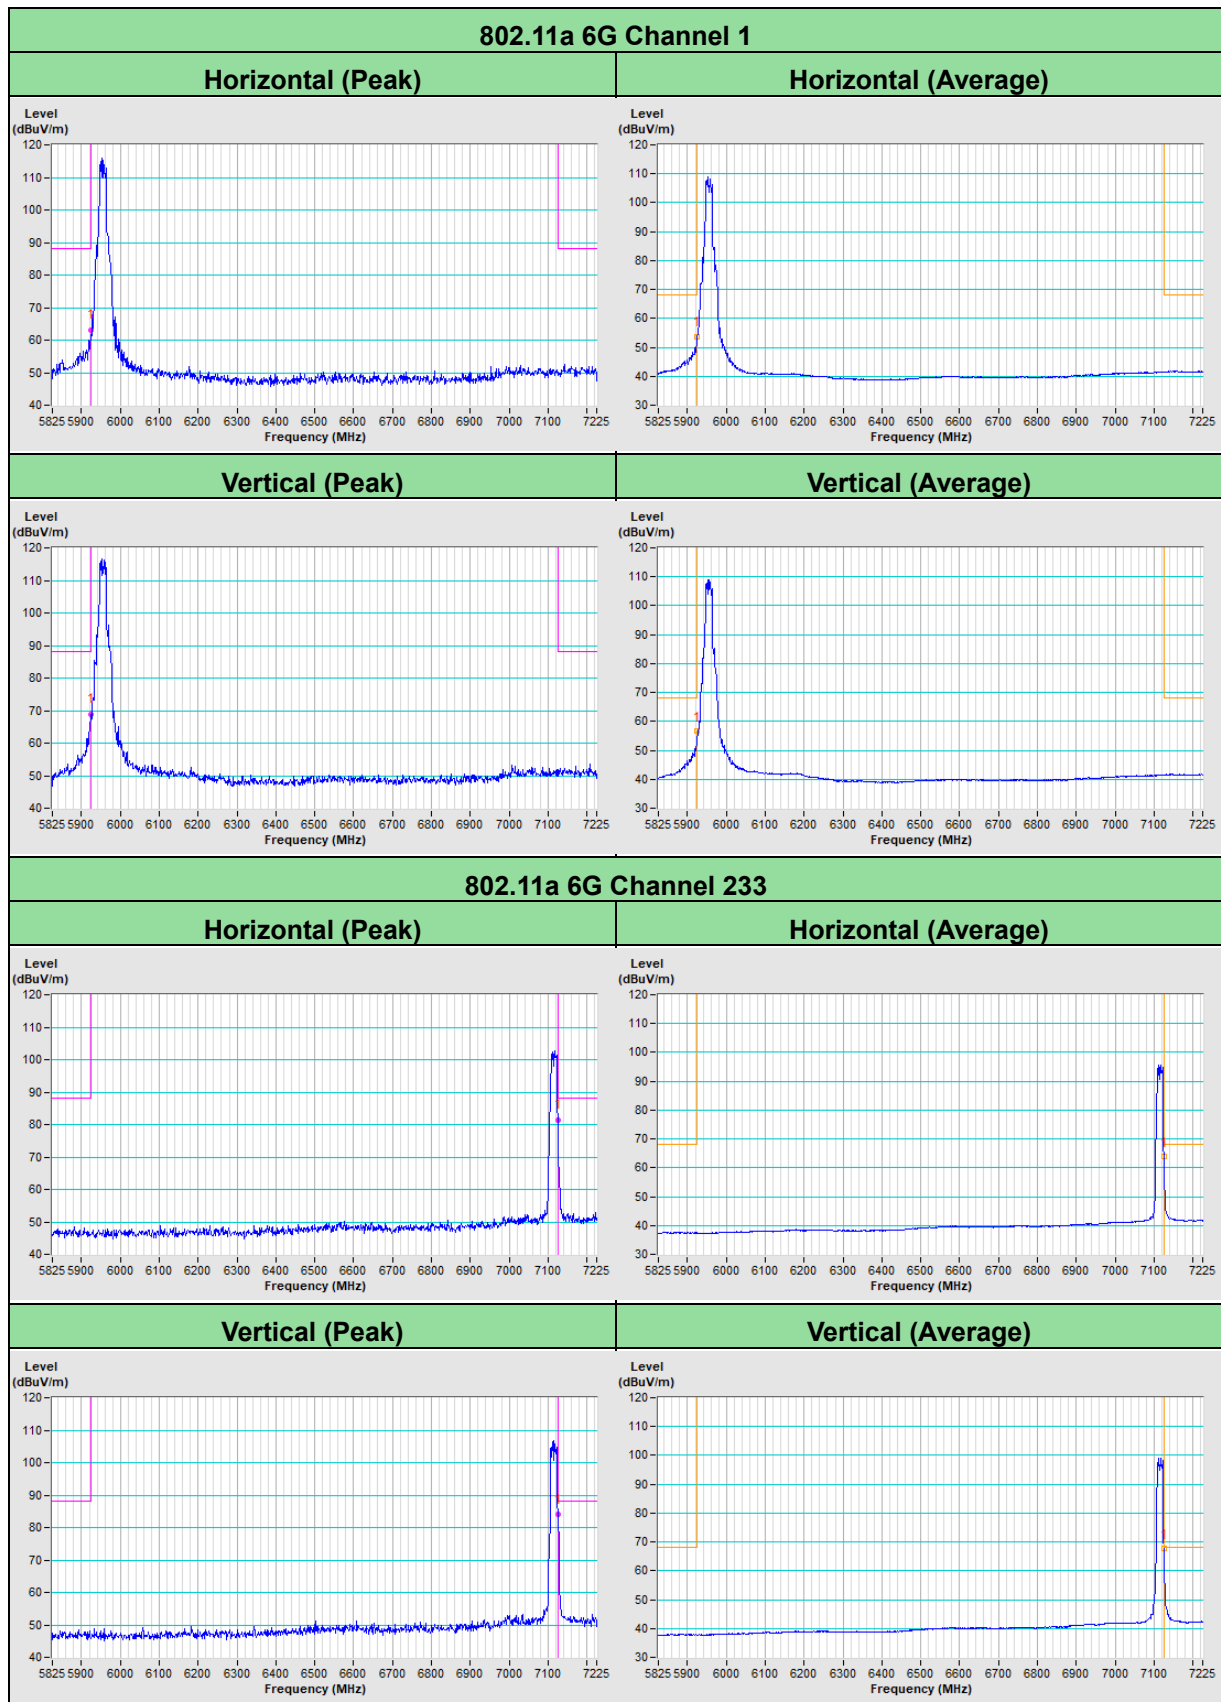

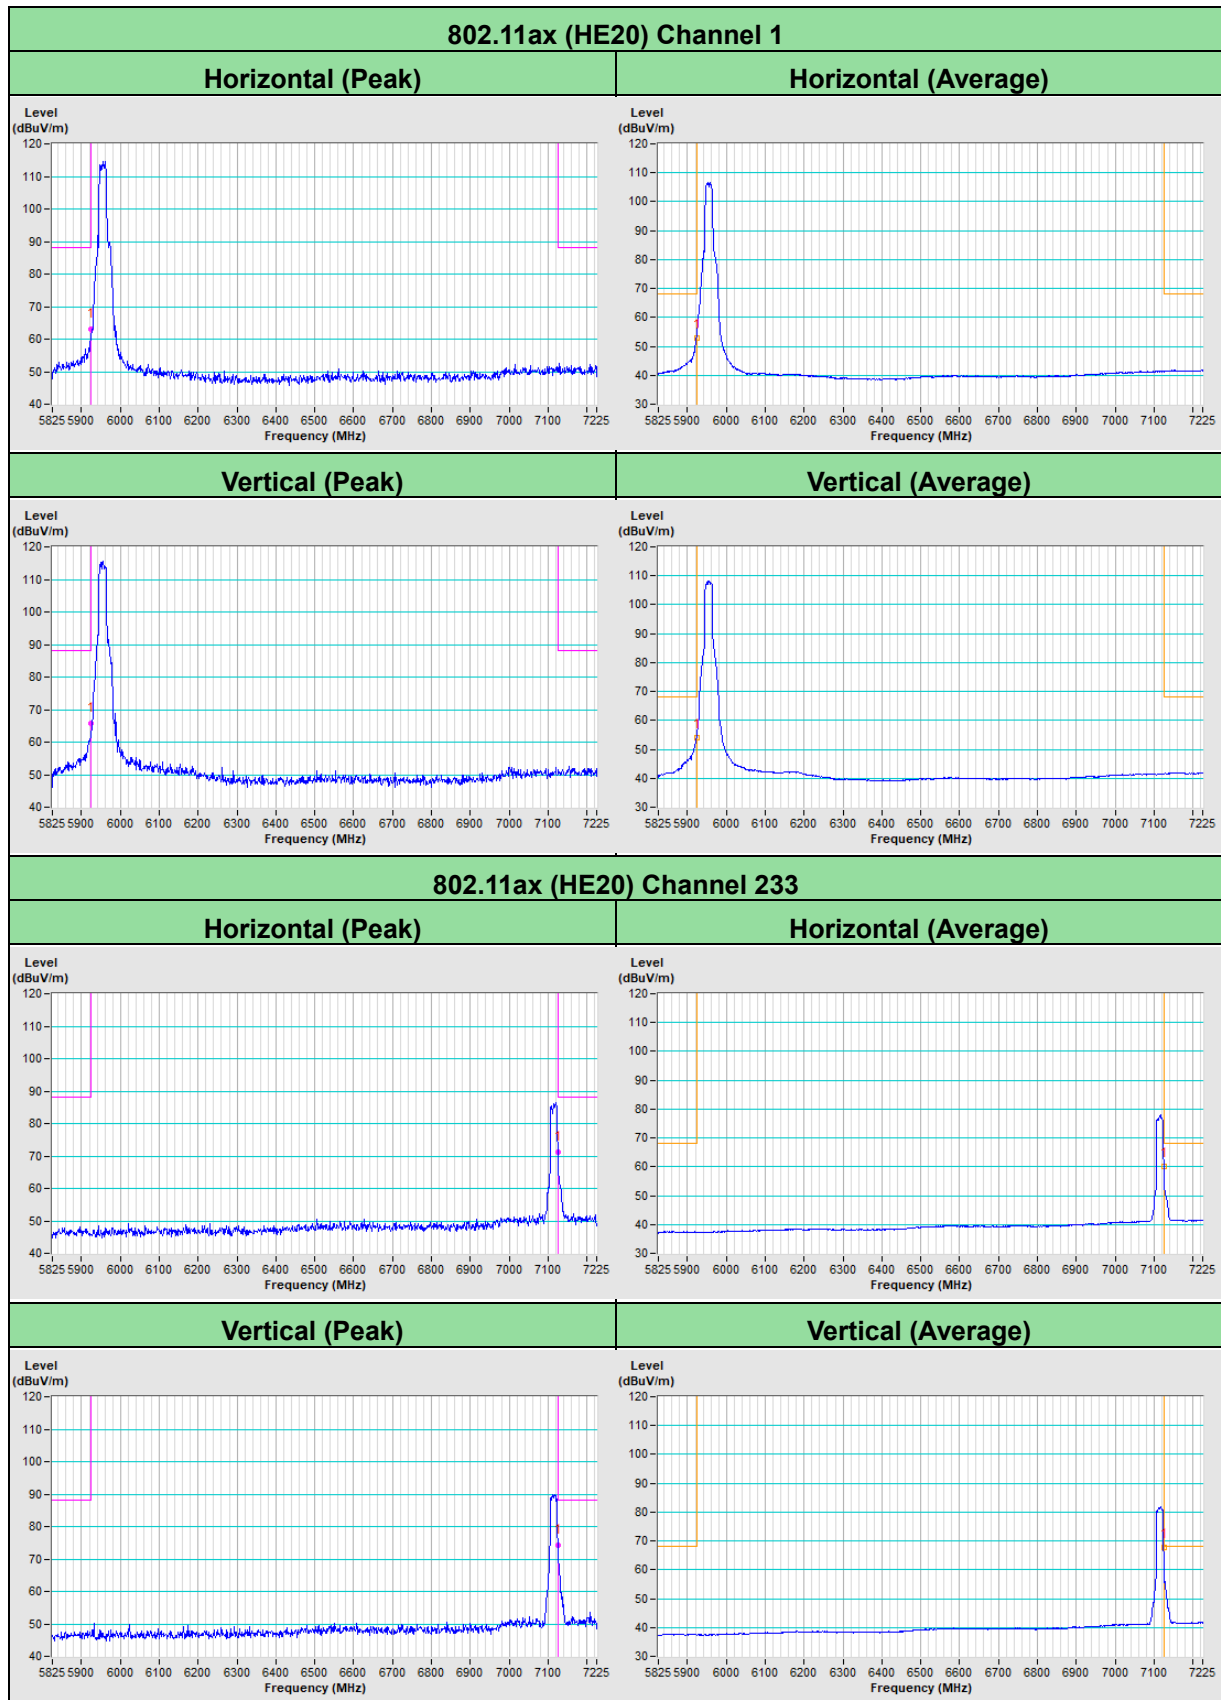


802.11ax (HE40) Channel 3


Horizontal (Peak)

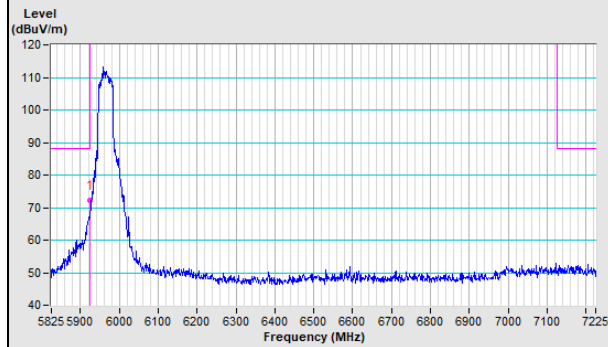


Horizontal (Average)

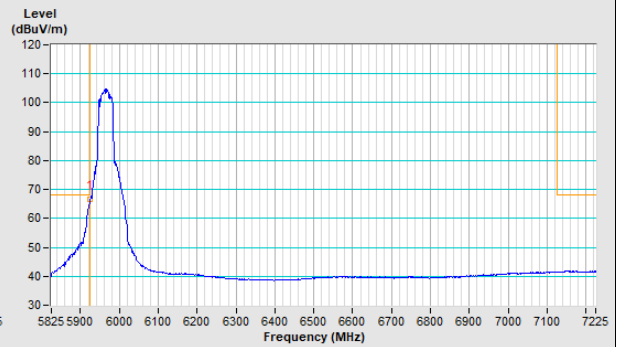

Vertical (Peak)

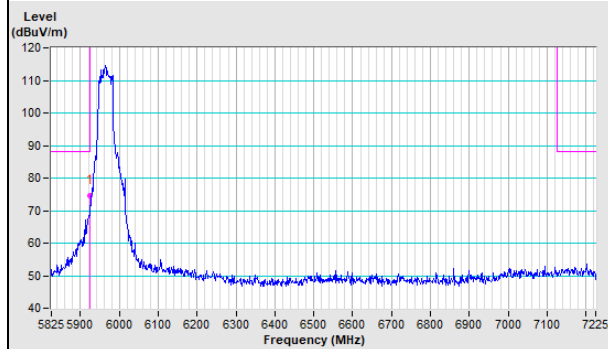


Vertical (Average)

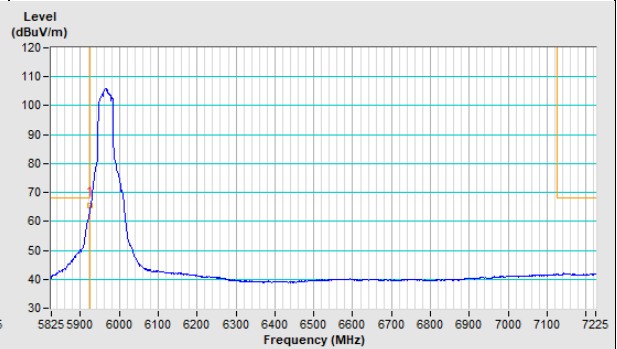


802.11ax (HE40) Channel 227


Horizontal (Peak)

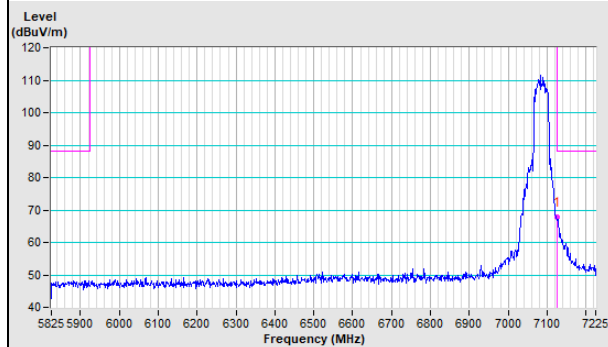


Horizontal (Average)

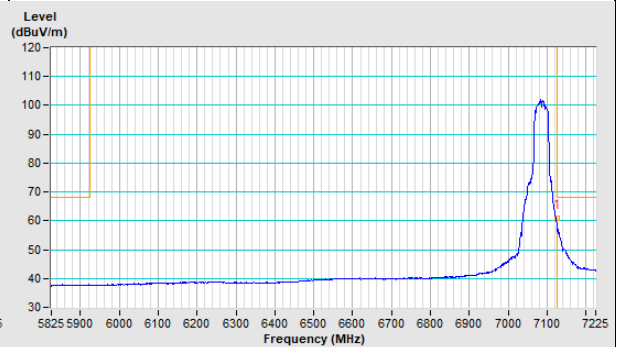



Vertical (Peak)

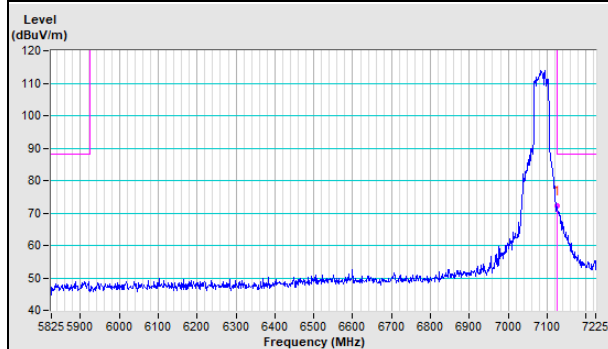


Vertical (Average)

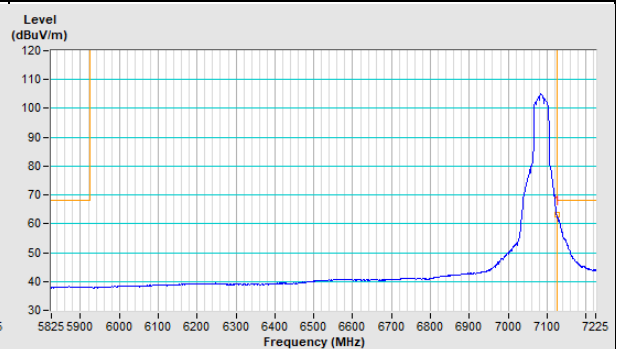

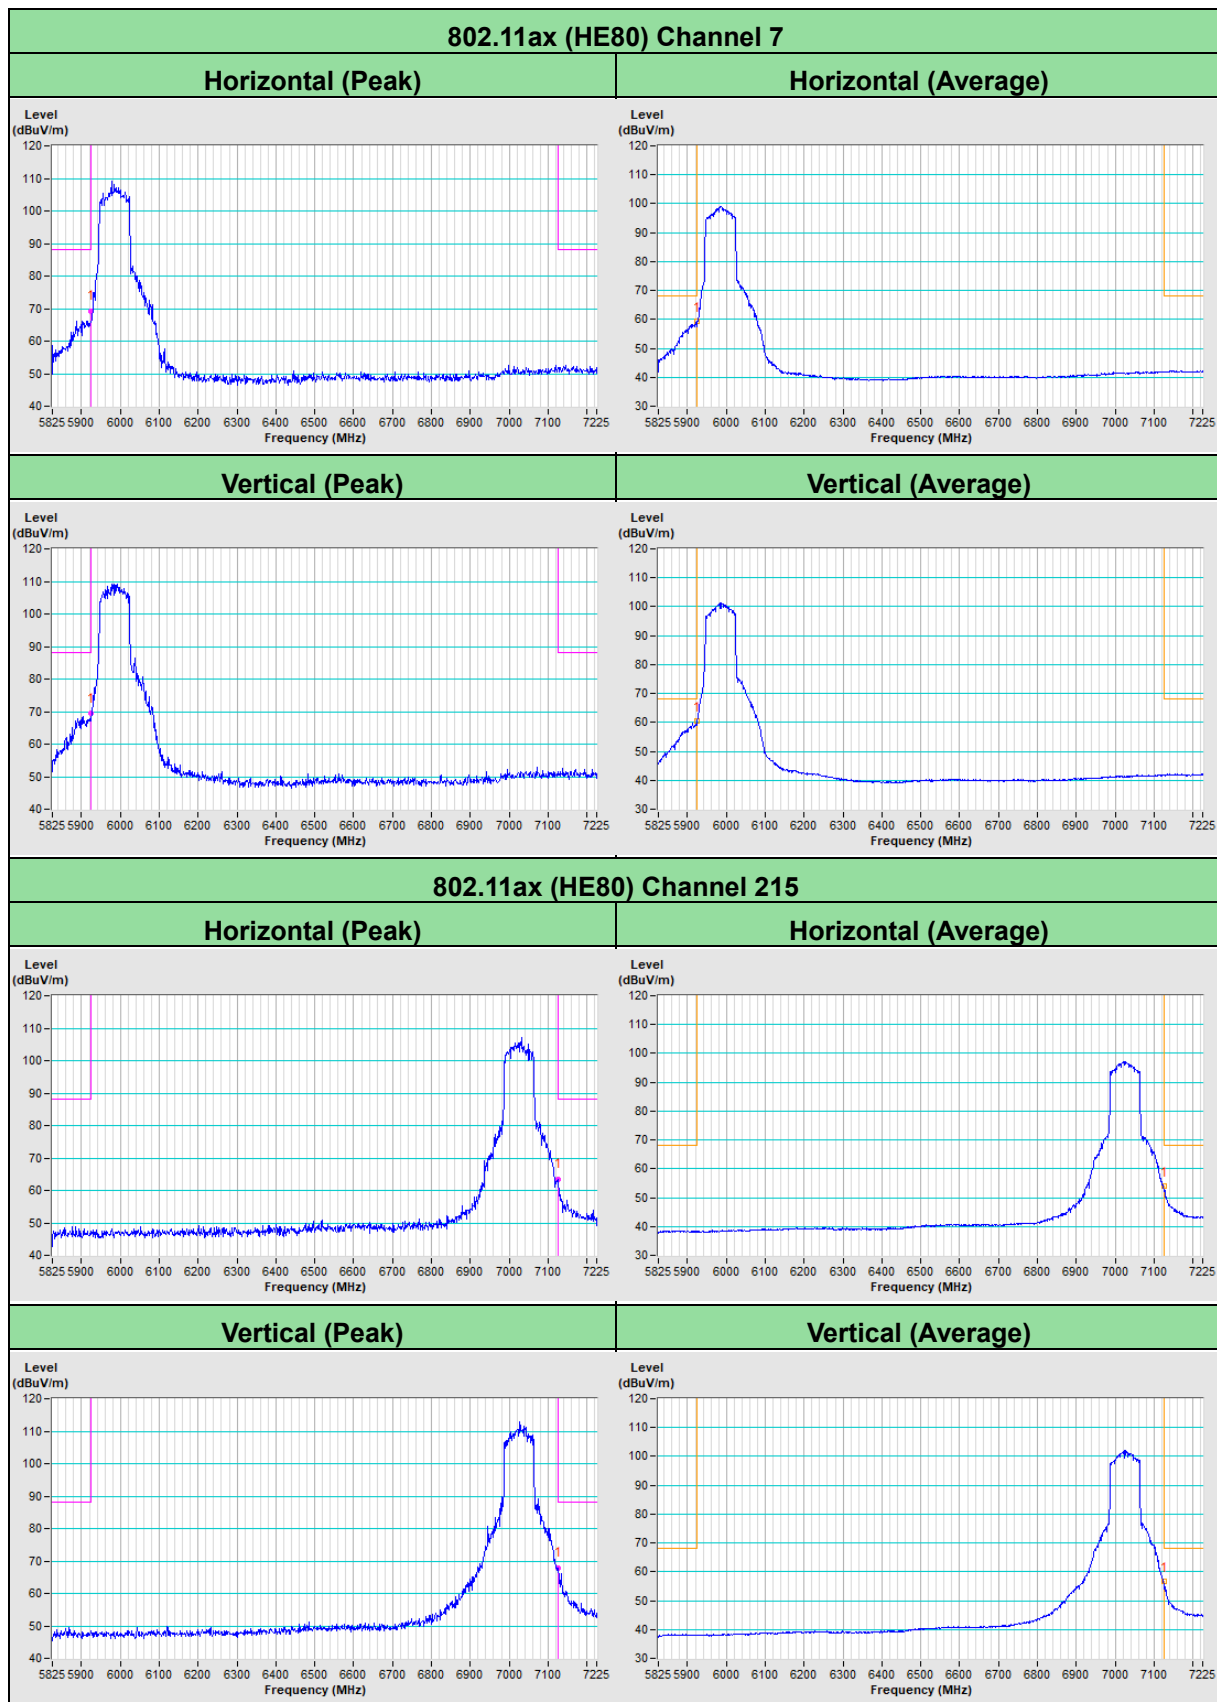


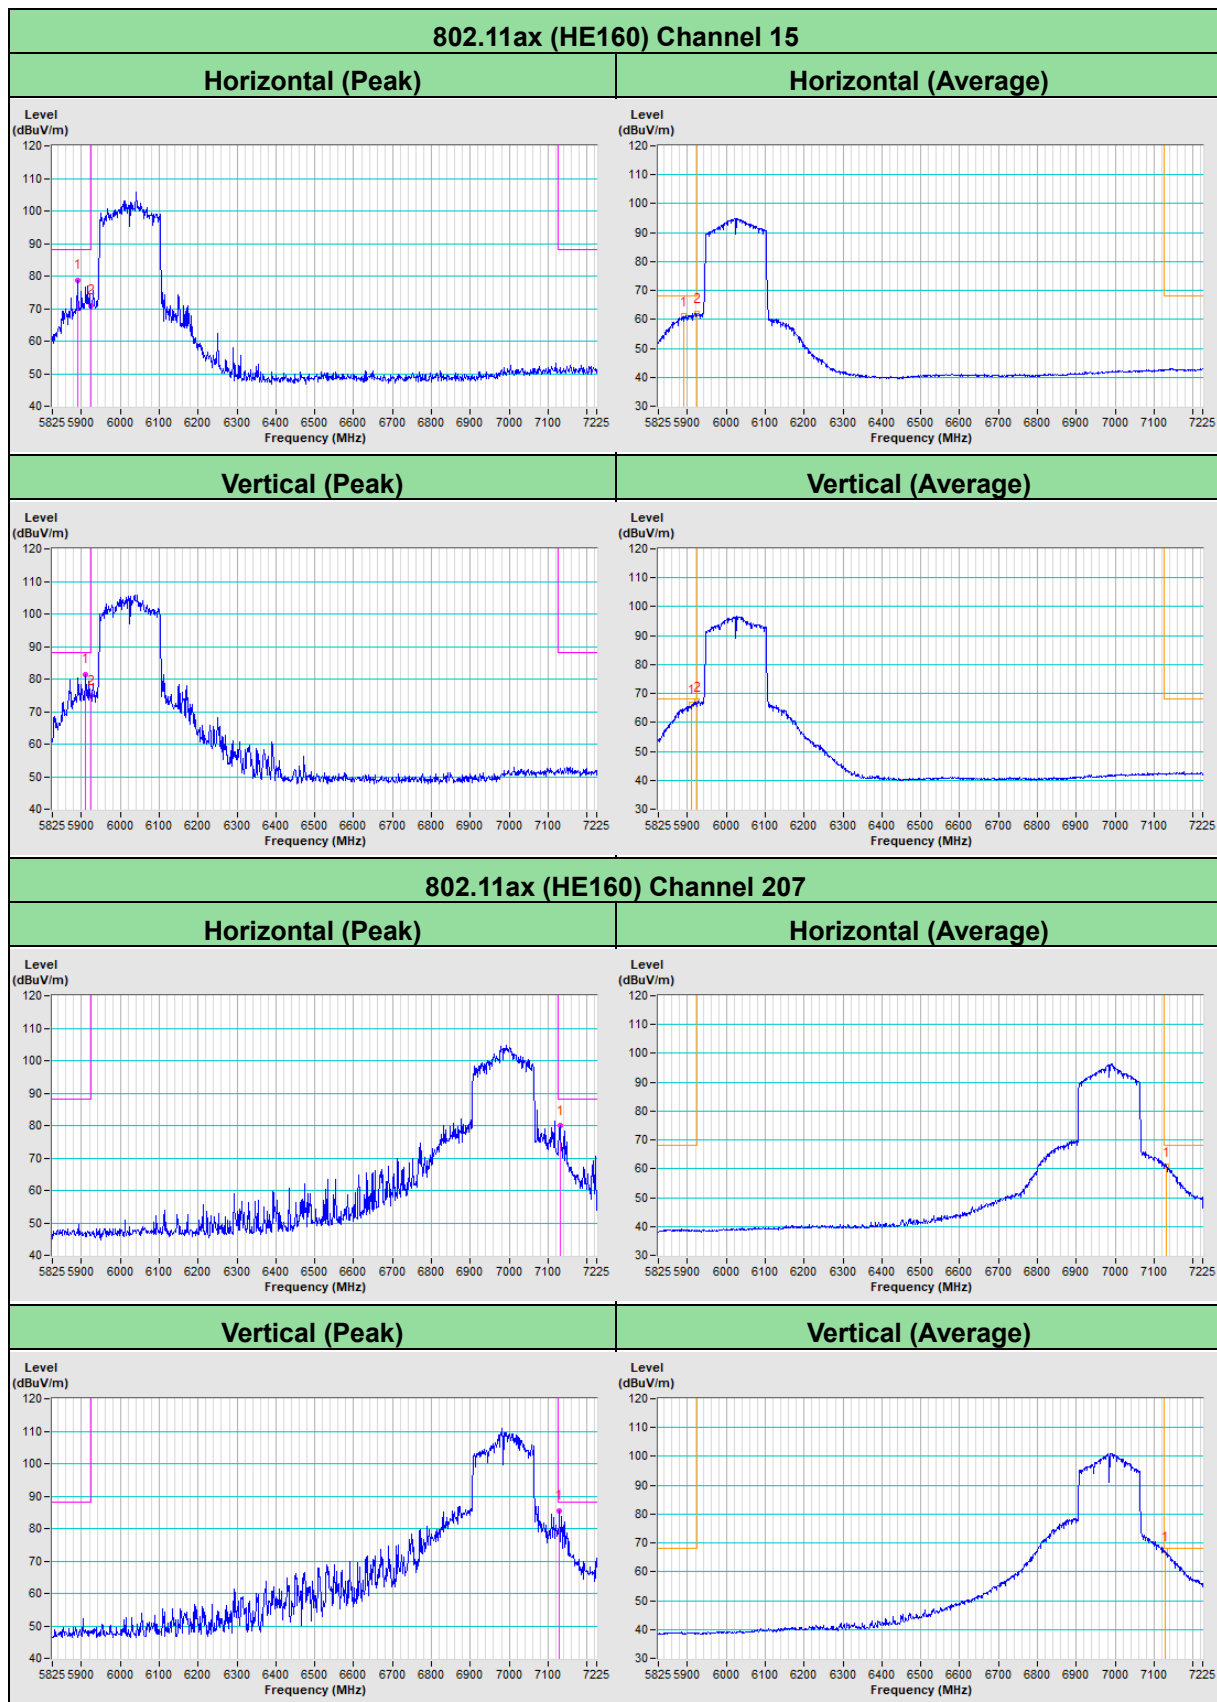

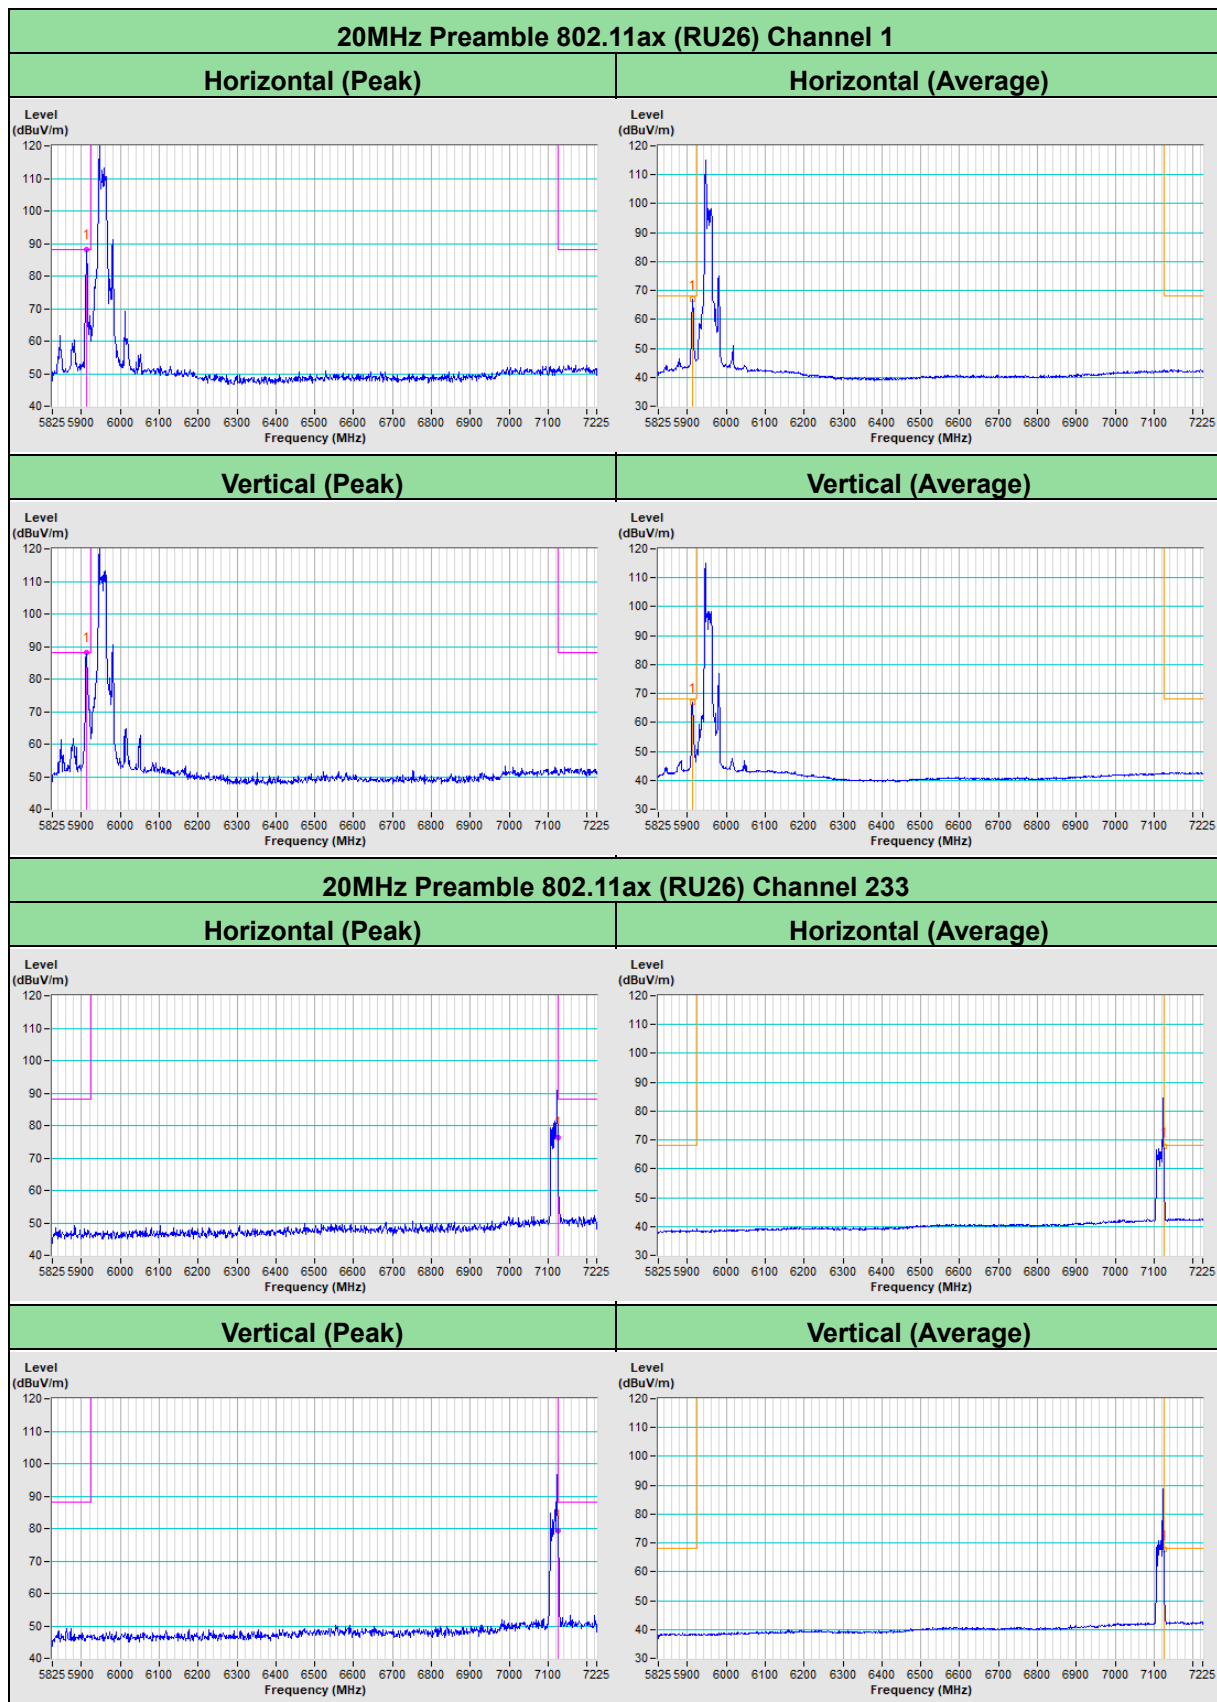


20MHz Preamble 802.11ax (RU52) Channel 233


Horizontal (Peak)

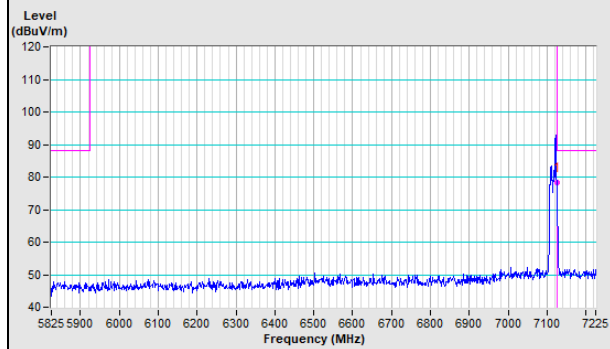


Horizontal (Average)

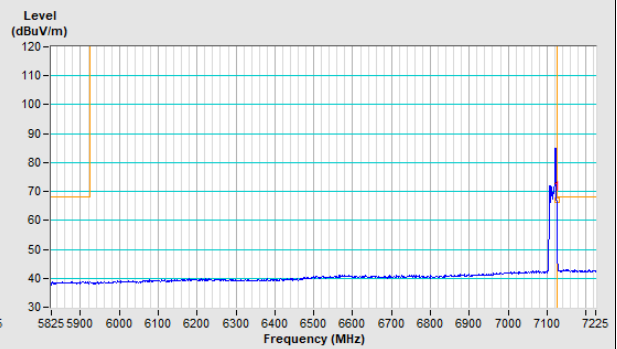


Vertical (Peak)

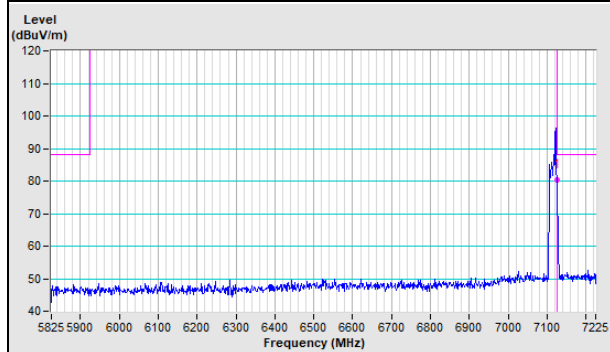



Vertical (Average)

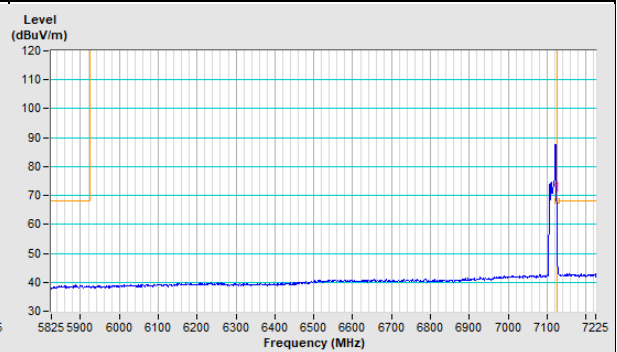


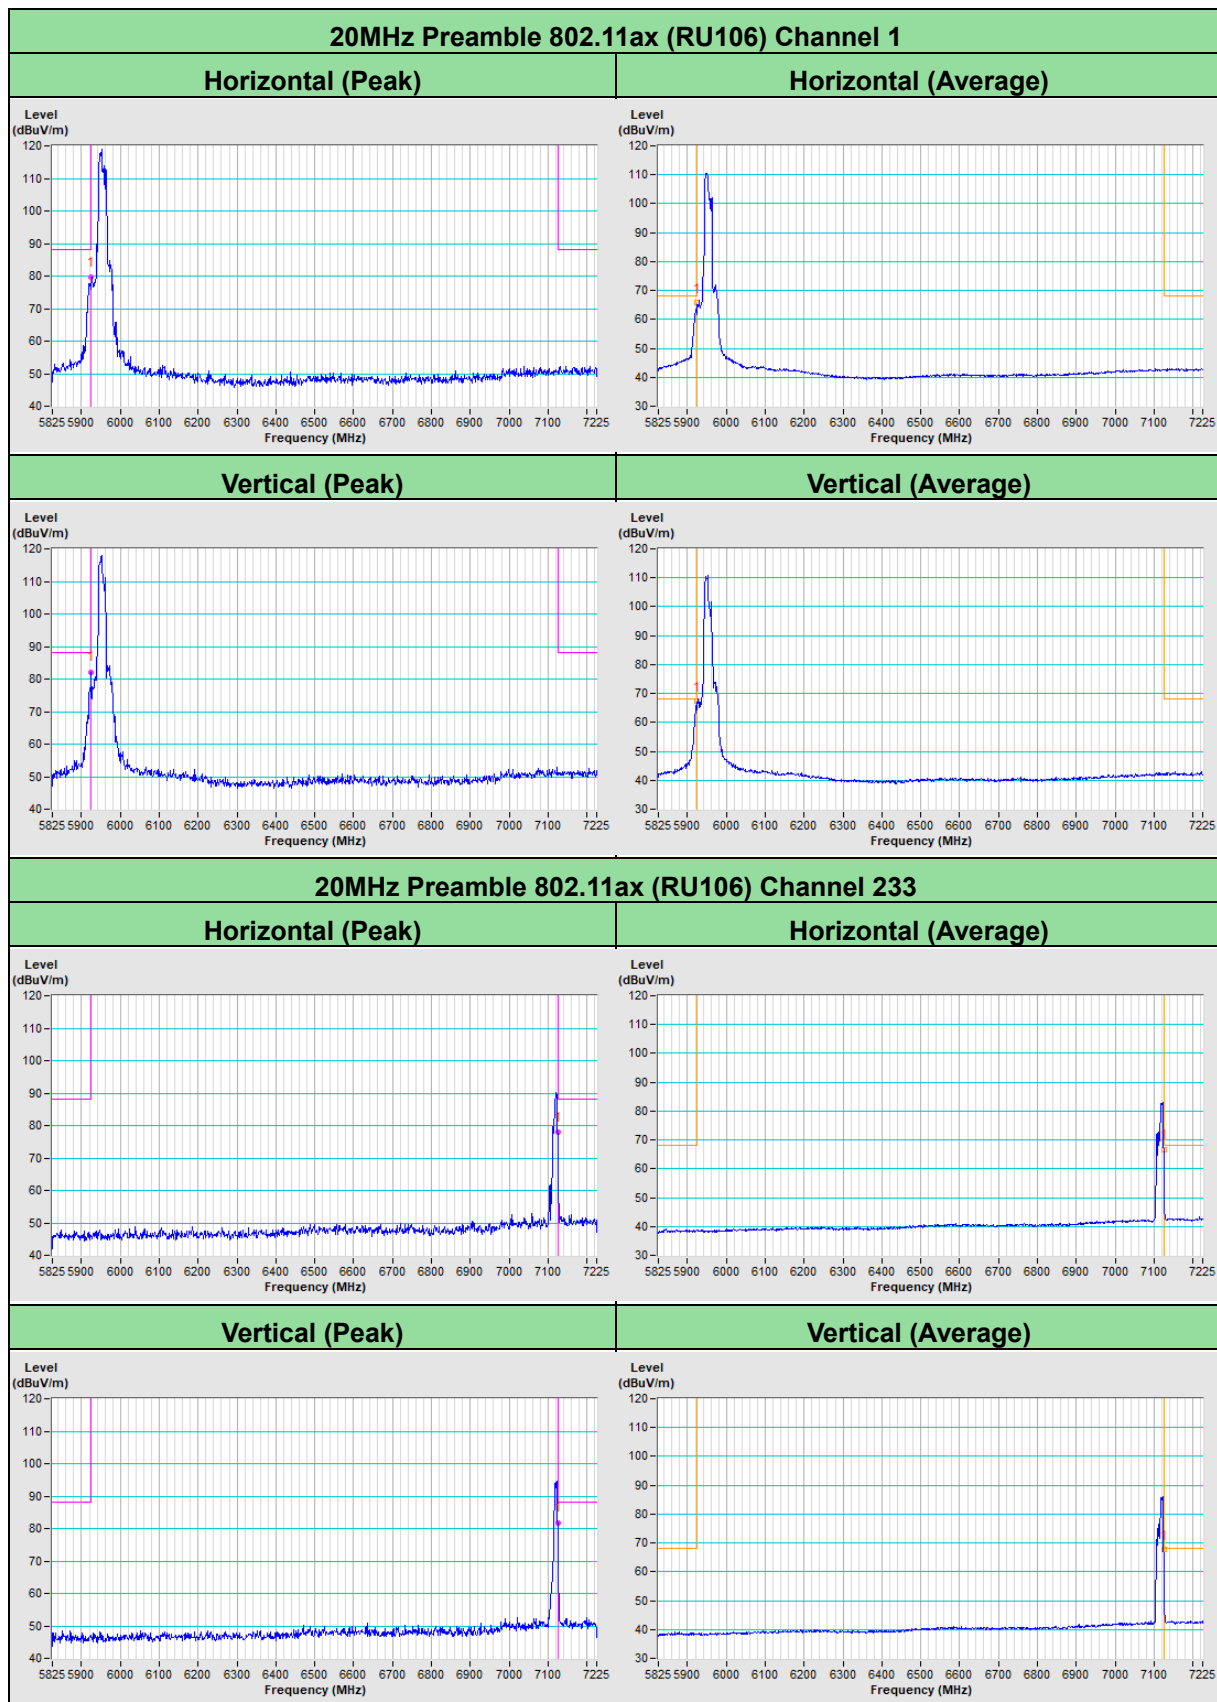


Annex A - Band-Edge Measurement (Mode 2)

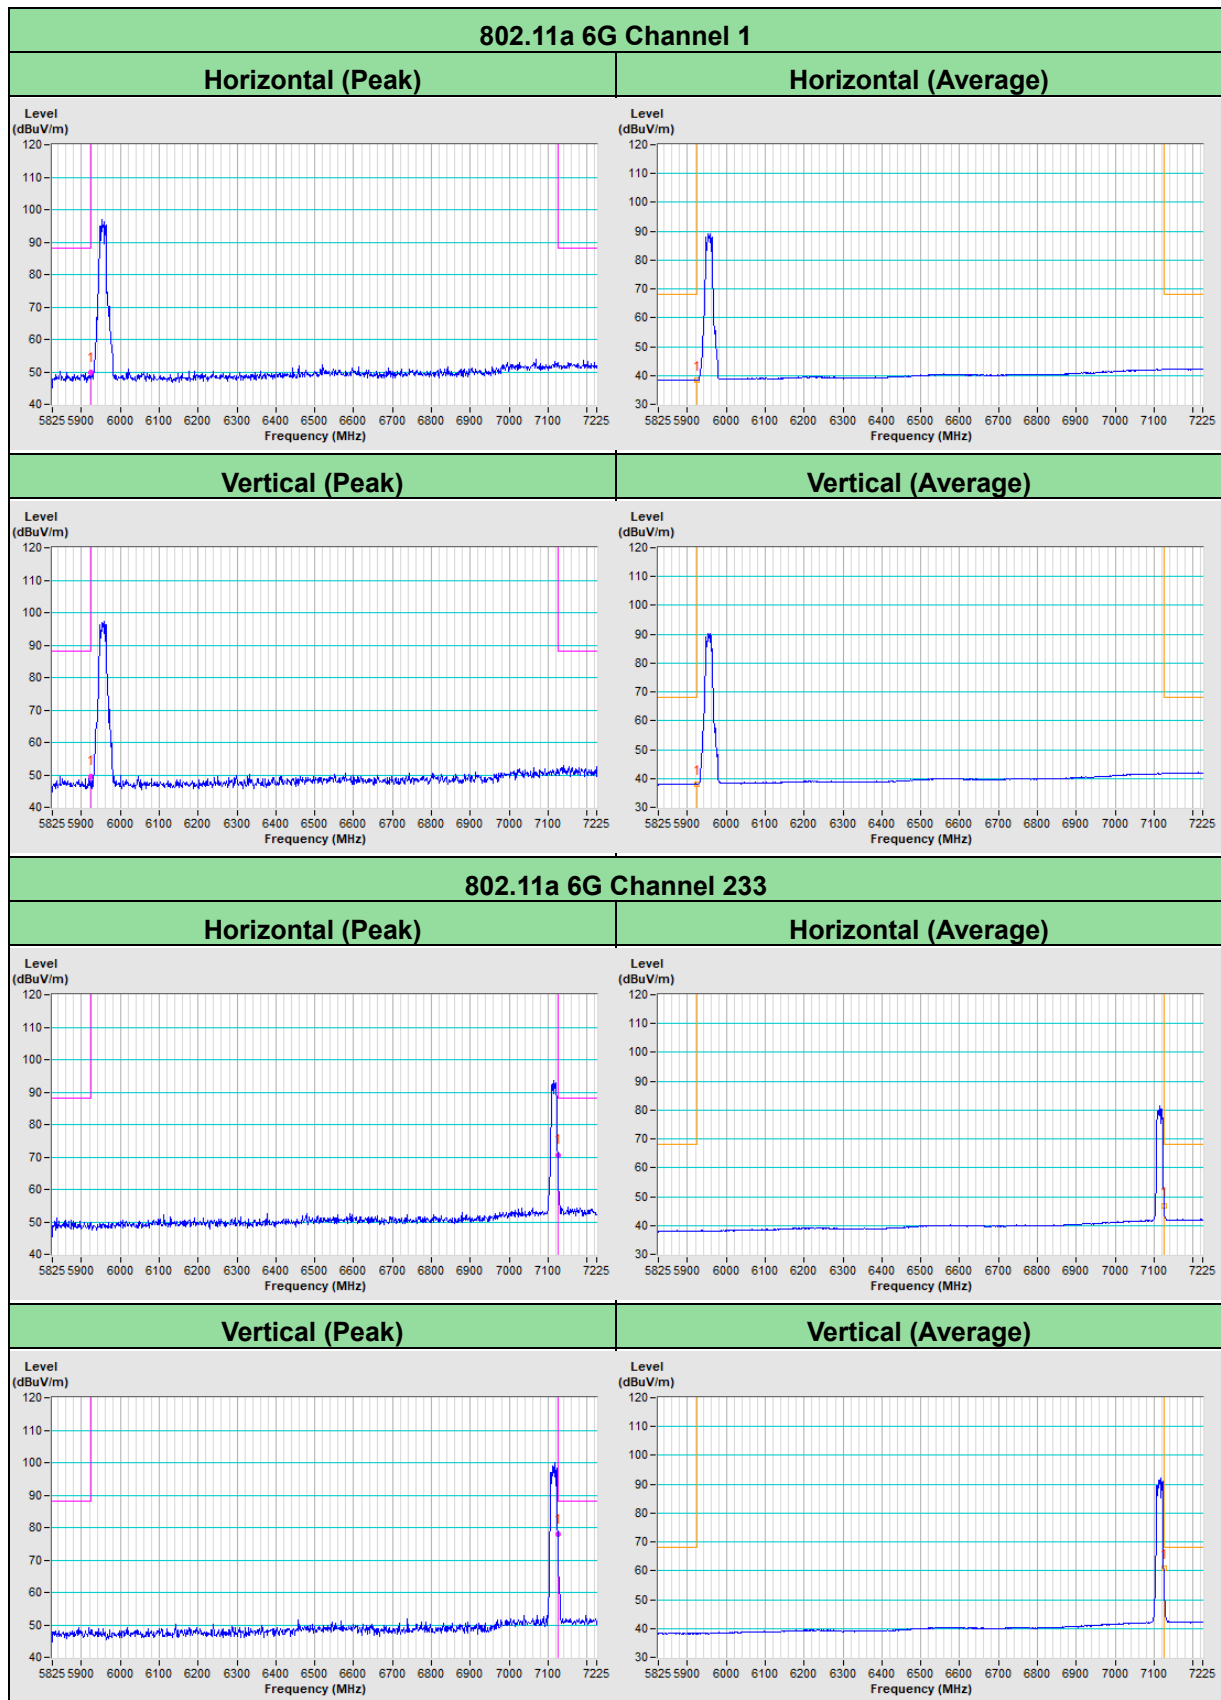

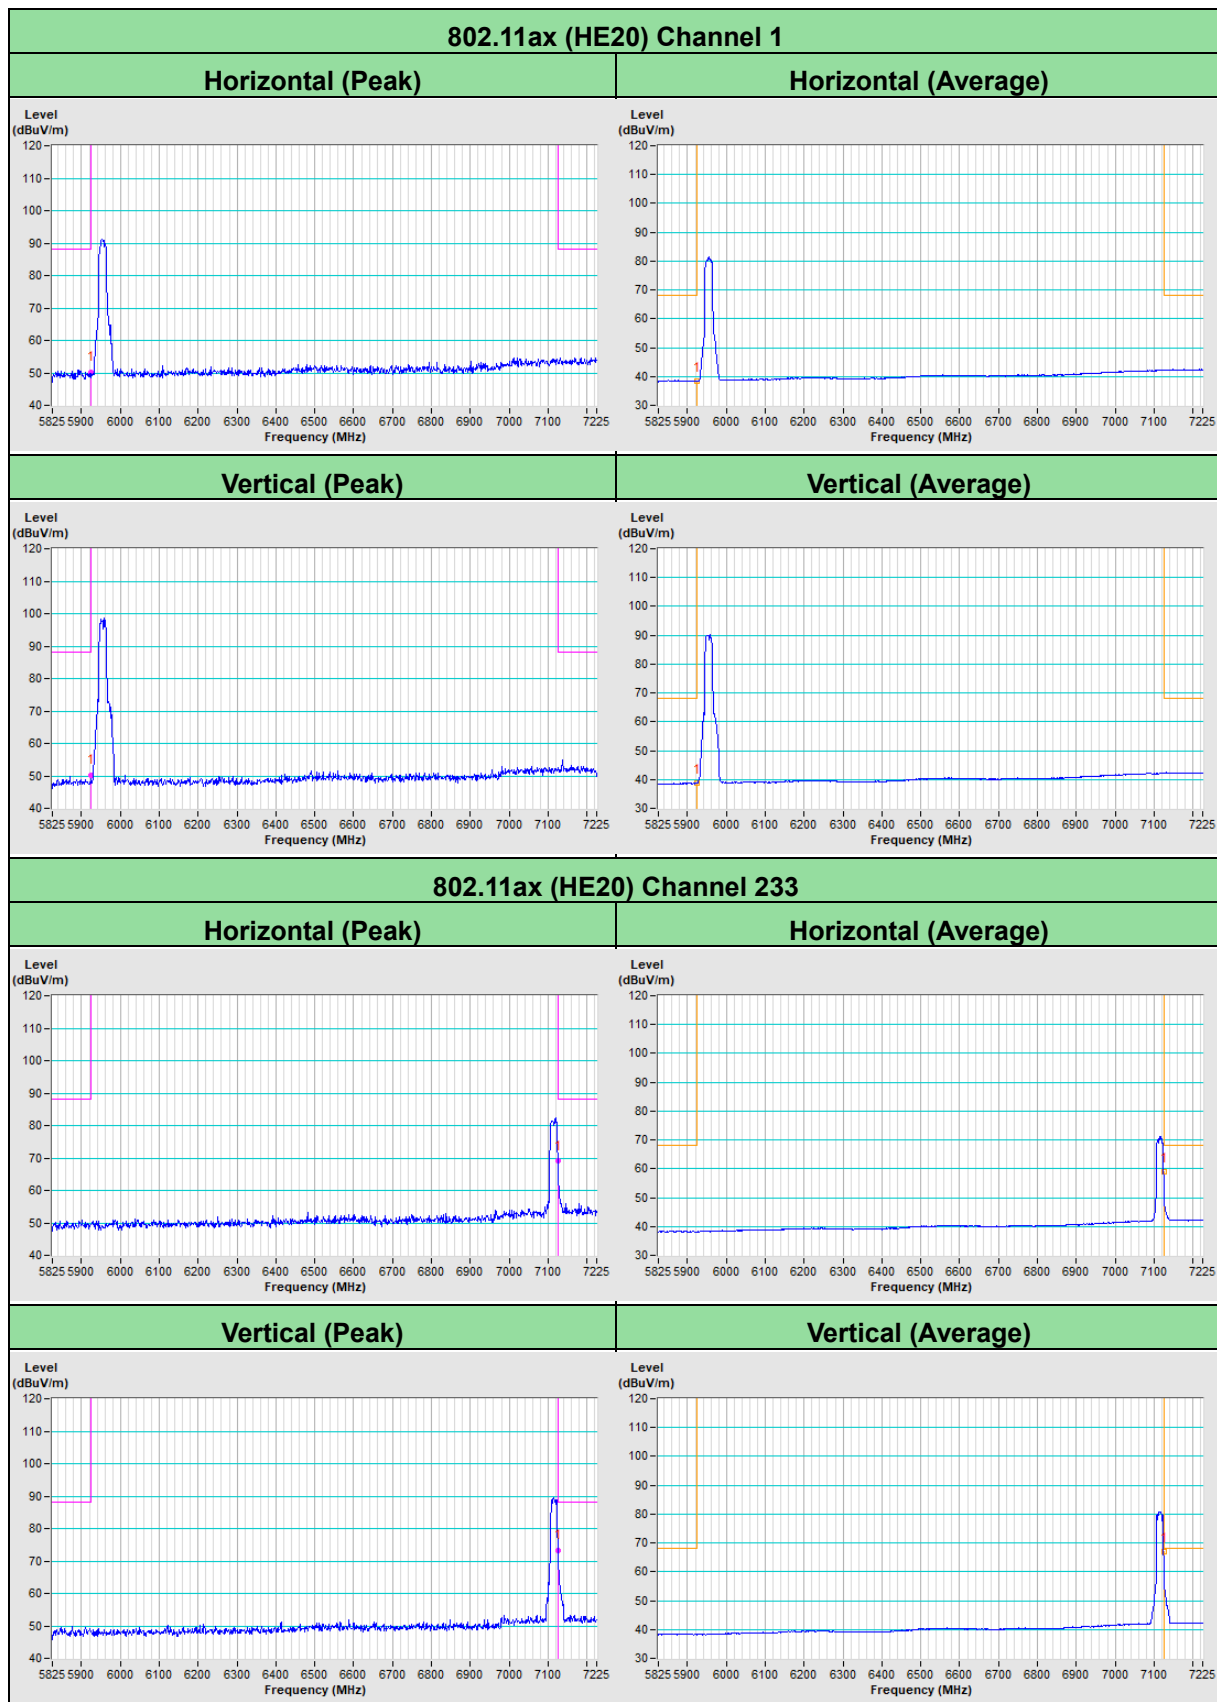


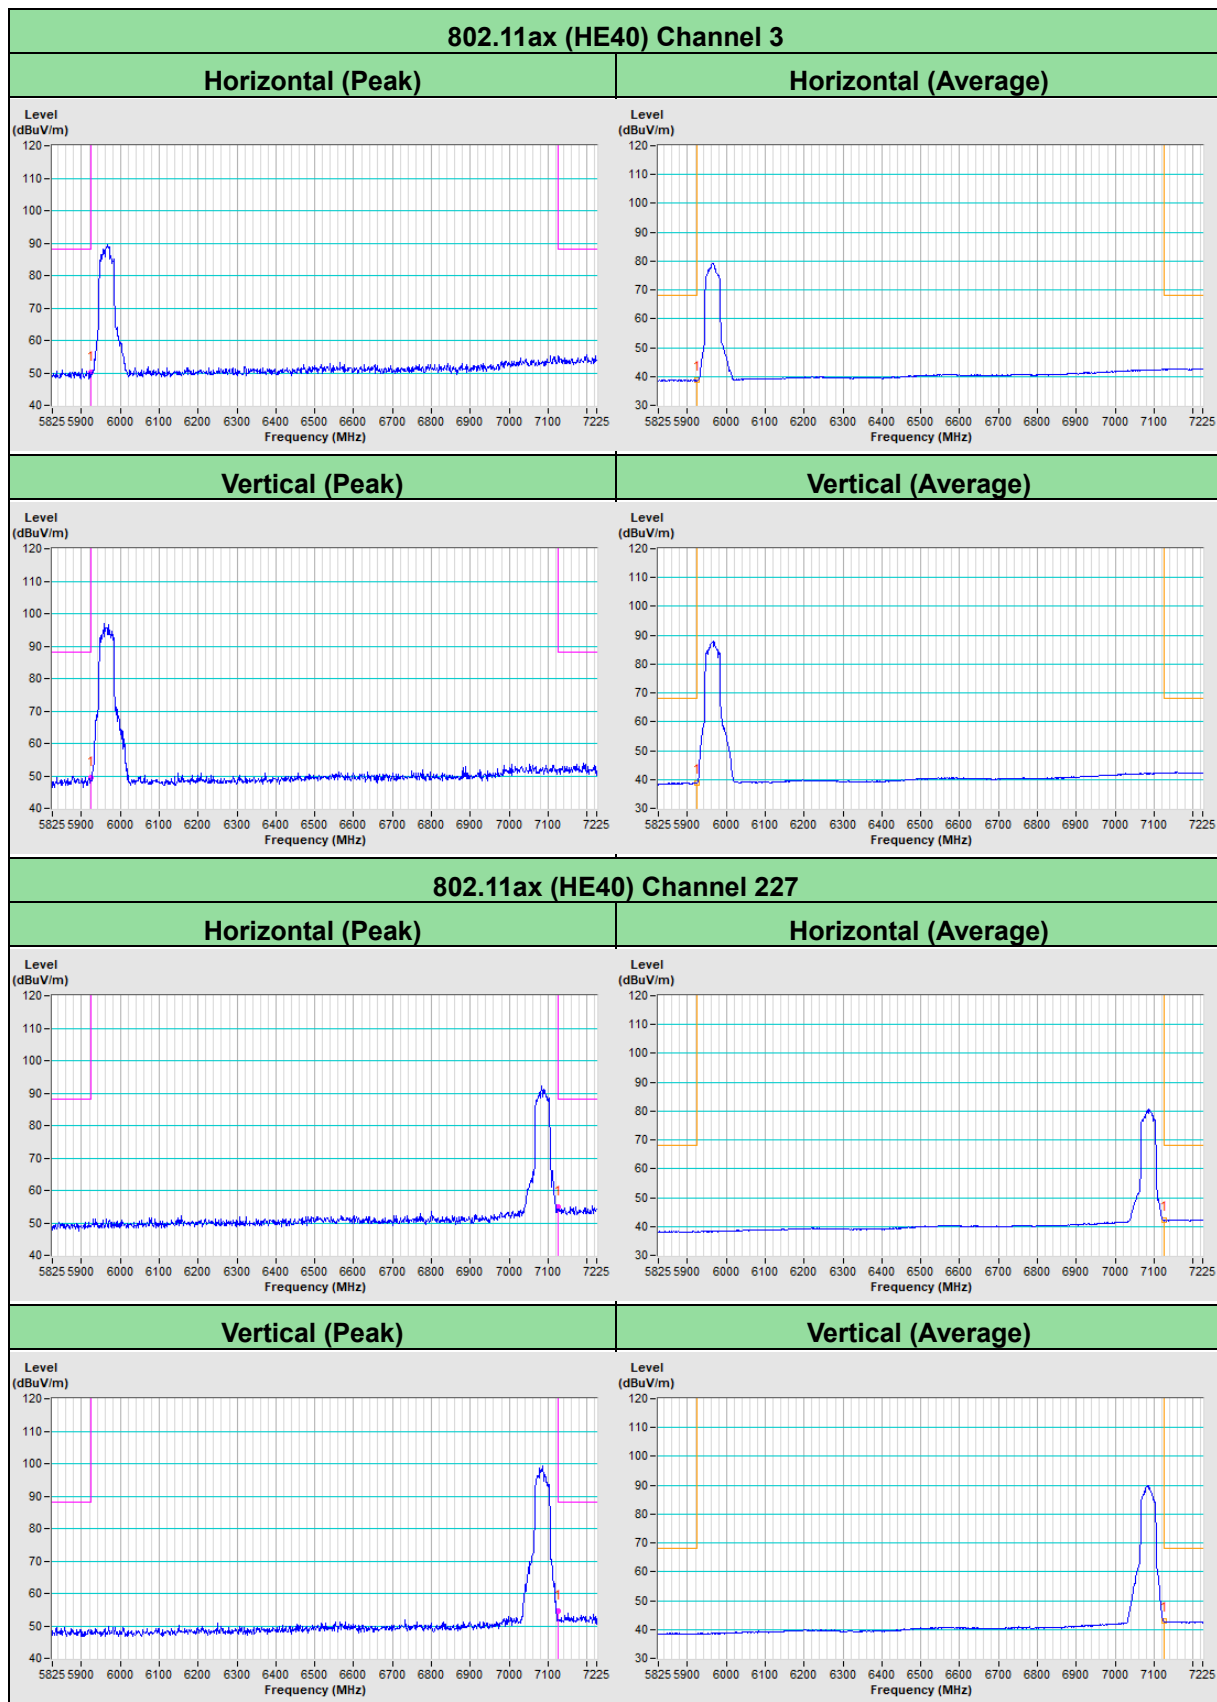

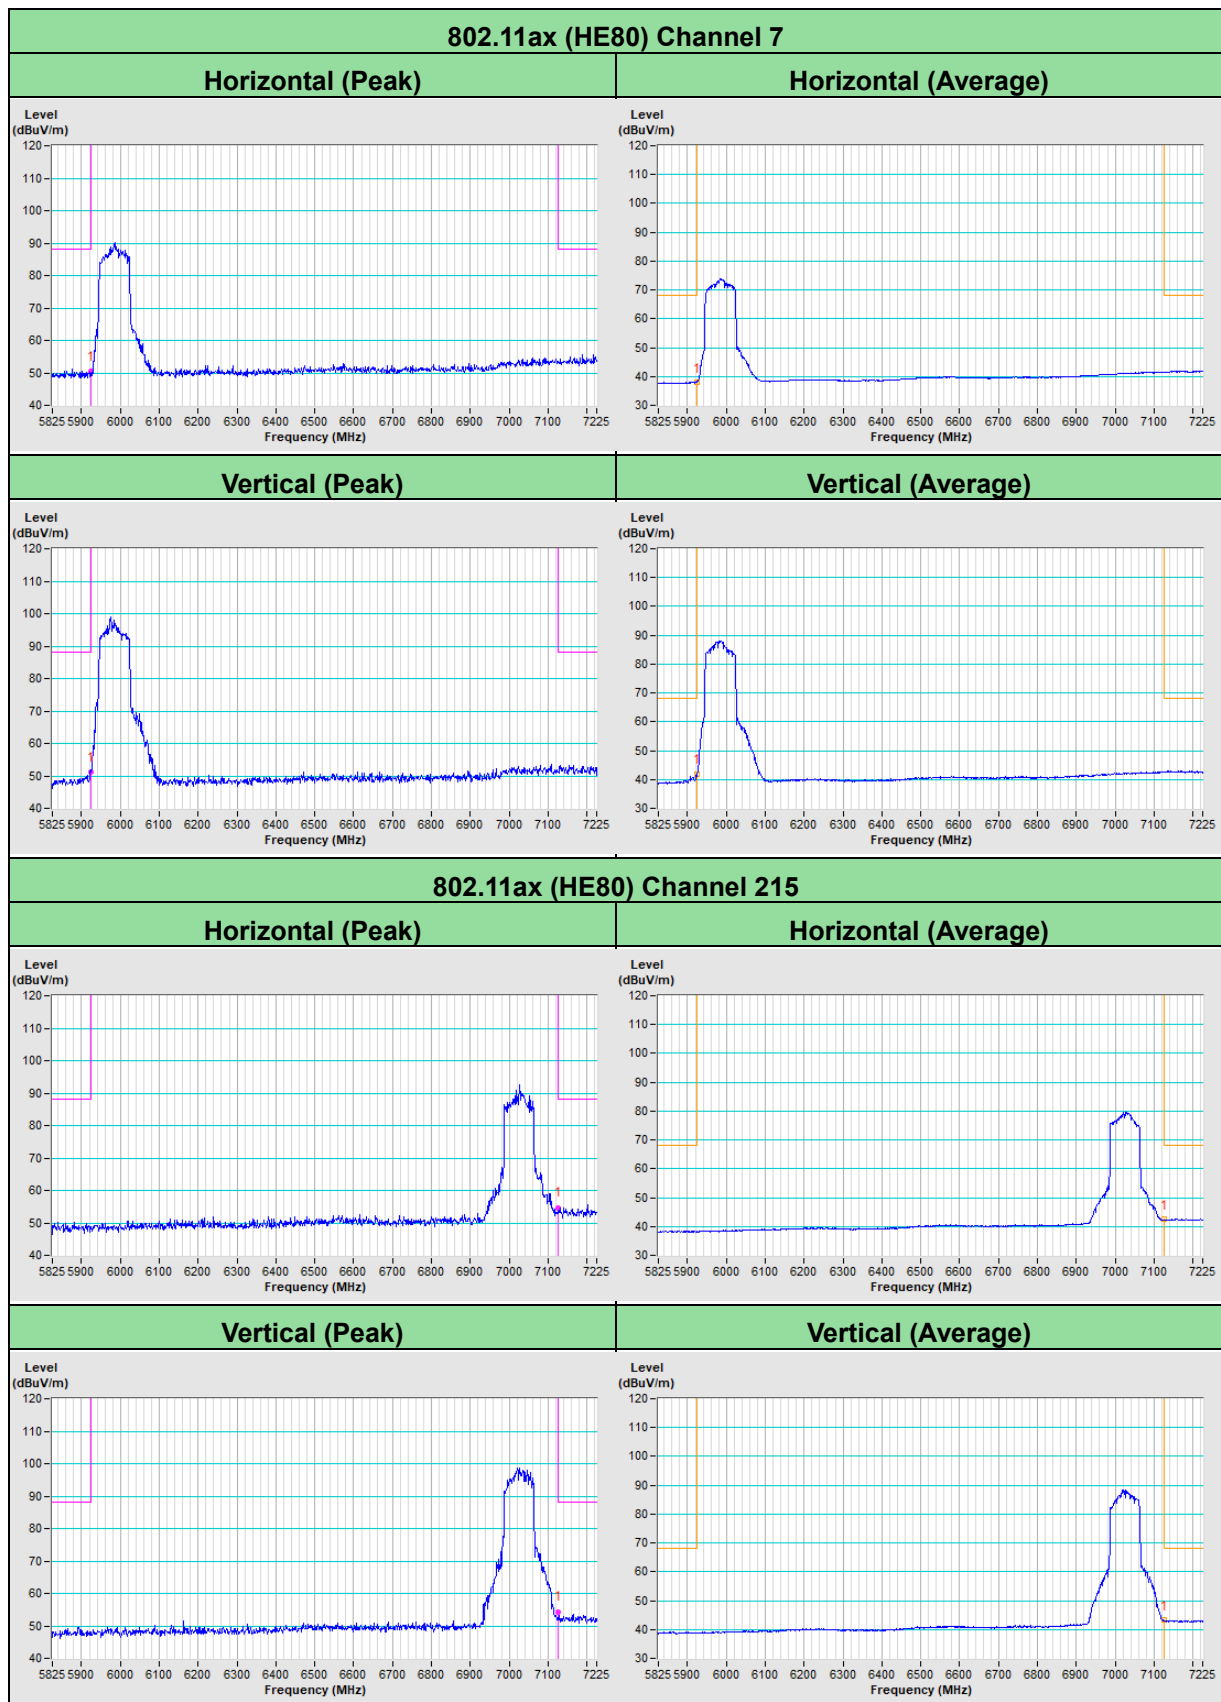


802.11ax (HE160) Channel 15


Horizontal (Peak)

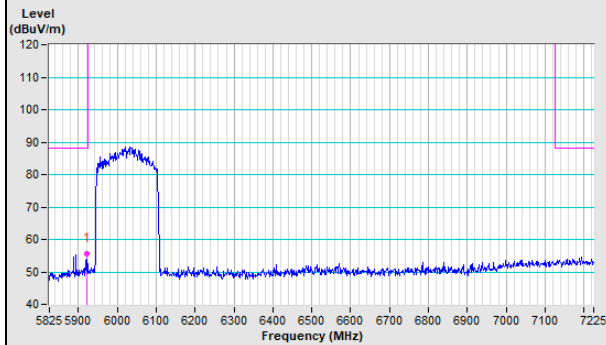


Horizontal (Average)

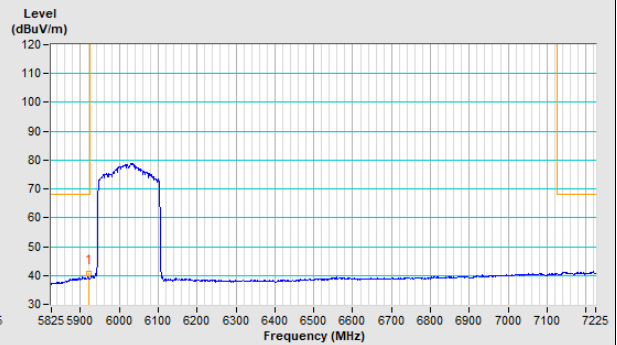

Vertical (Peak)

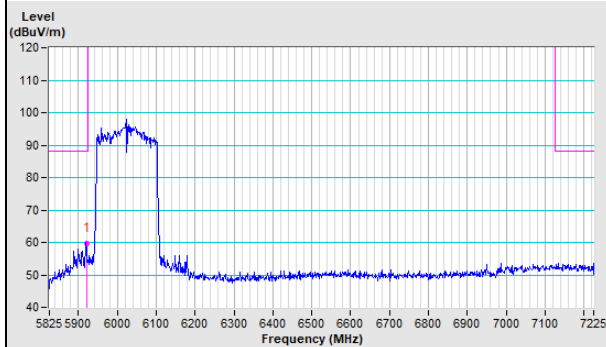


Vertical (Average)

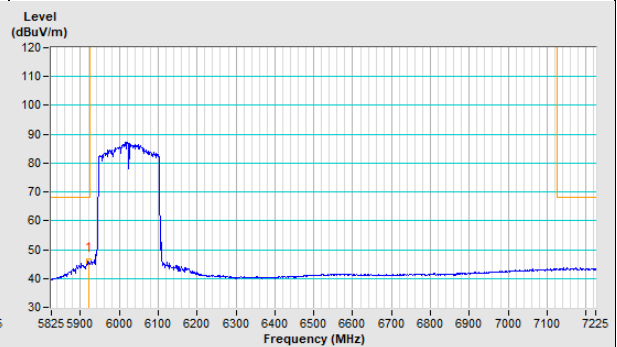


802.11ax (HE160) Channel 207


Horizontal (Peak)

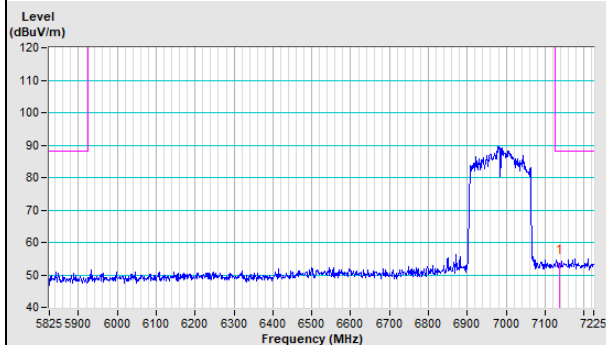


Horizontal (Average)

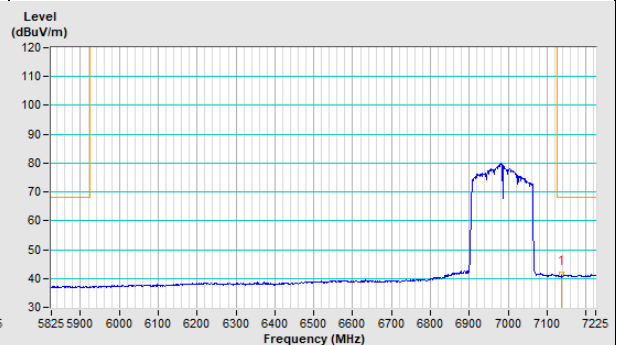


Vertical (Peak)

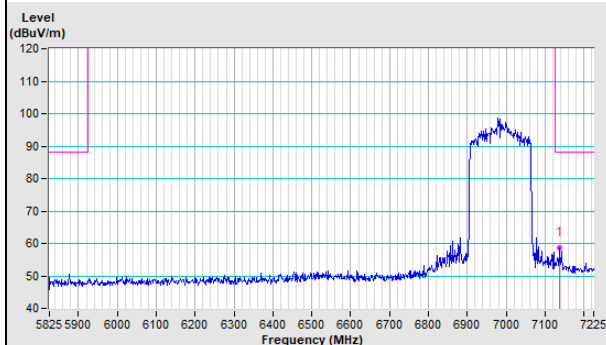


Vertical (Average)

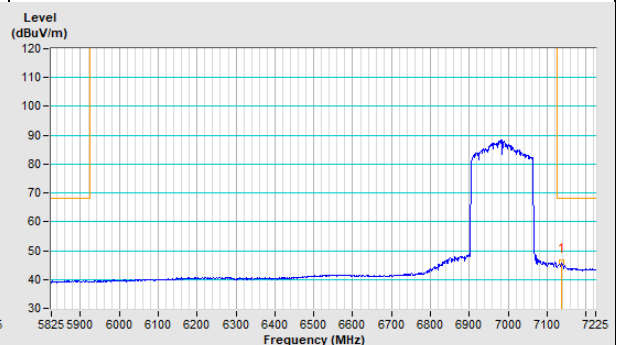

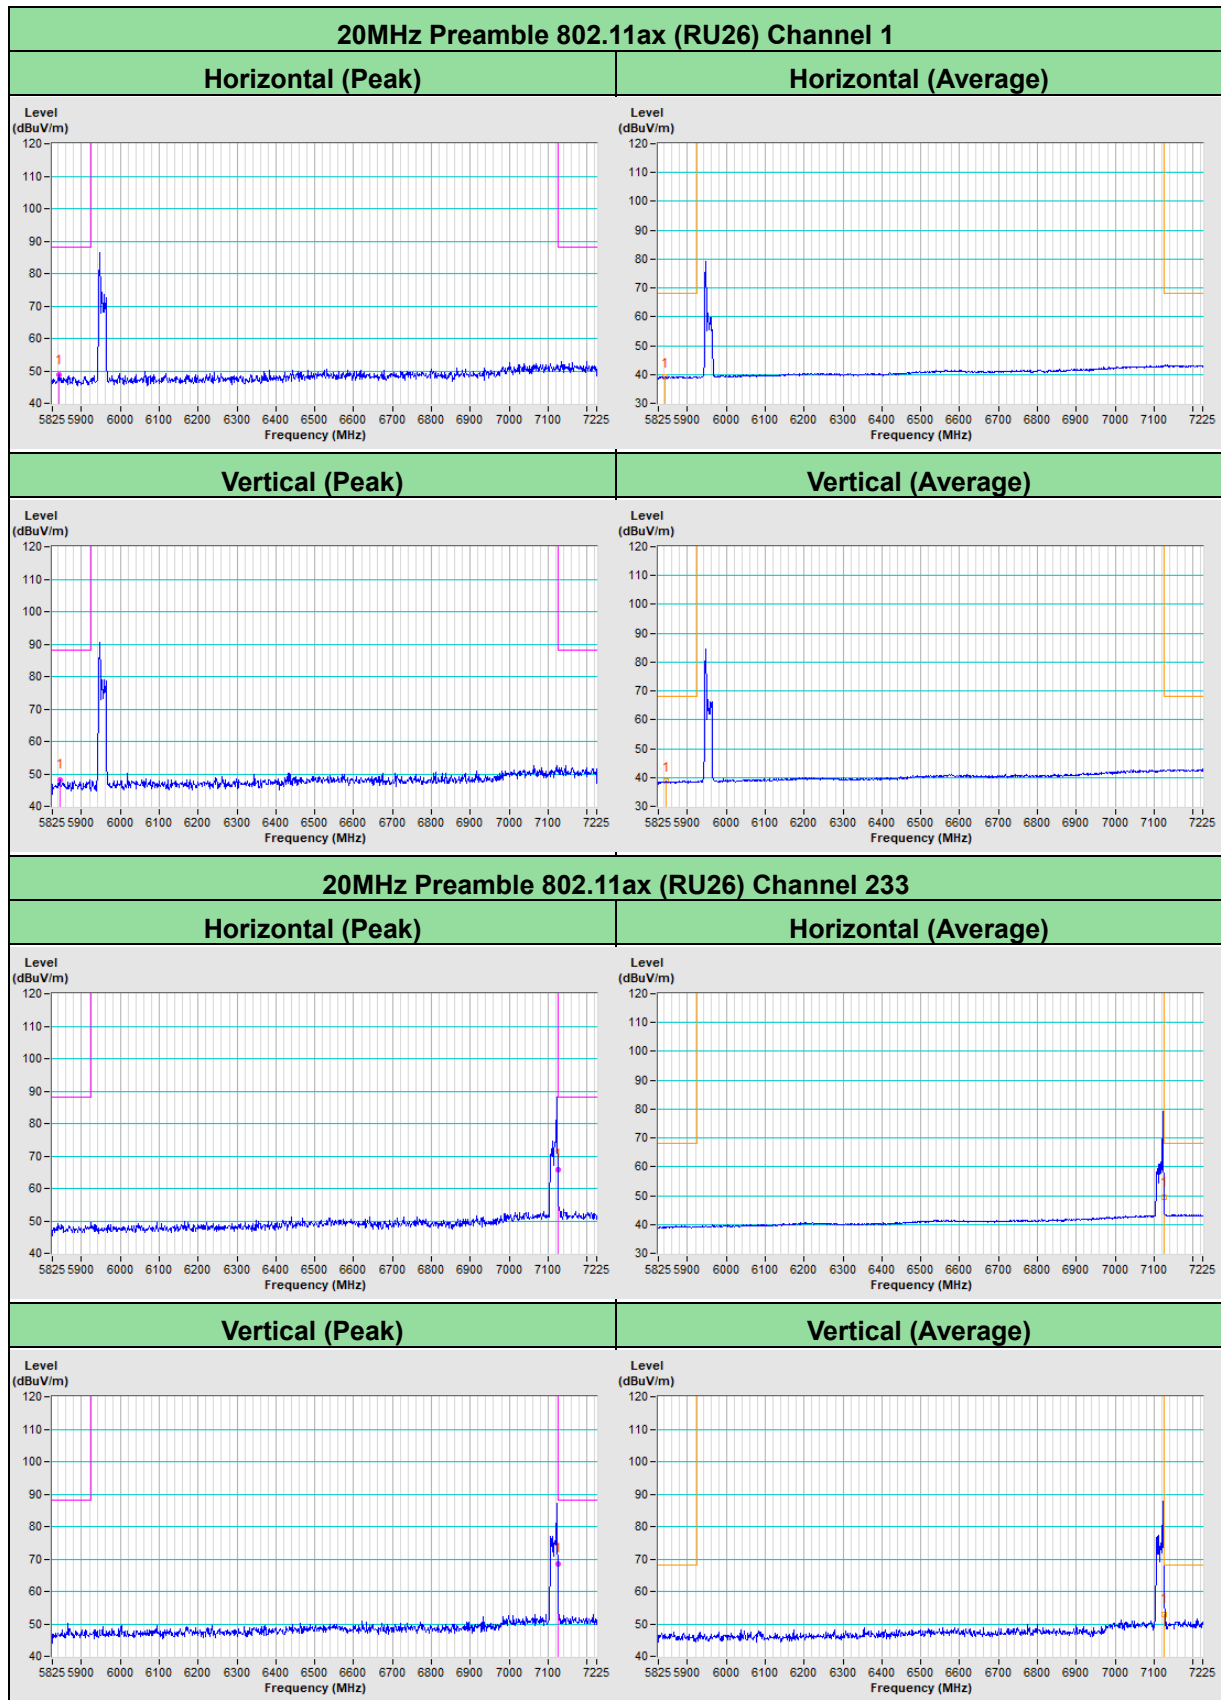


20MHz Preamble 802.11ax (RU52) Channel 233


Horizontal (Peak)

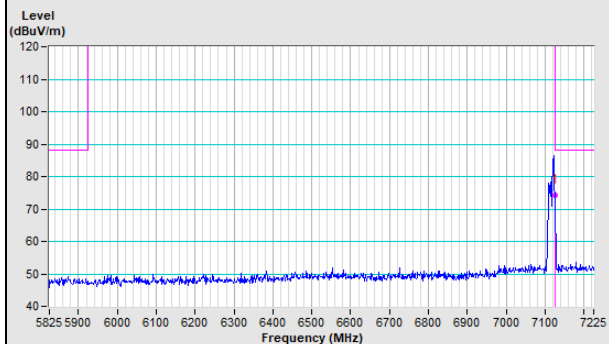


Horizontal (Average)

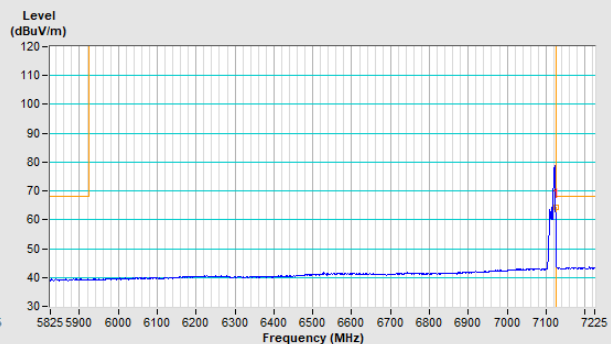


Vertical (Peak)

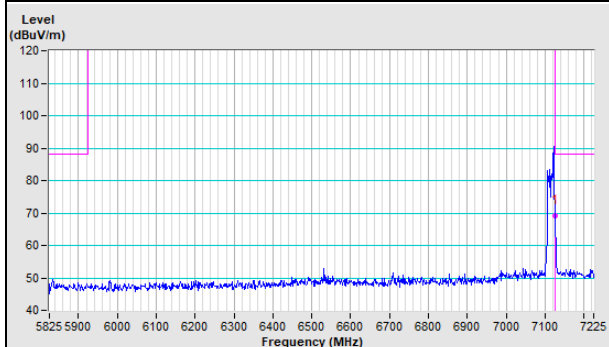

Vertical (Average)

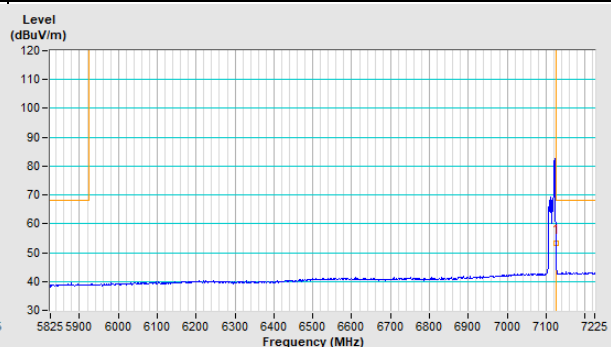

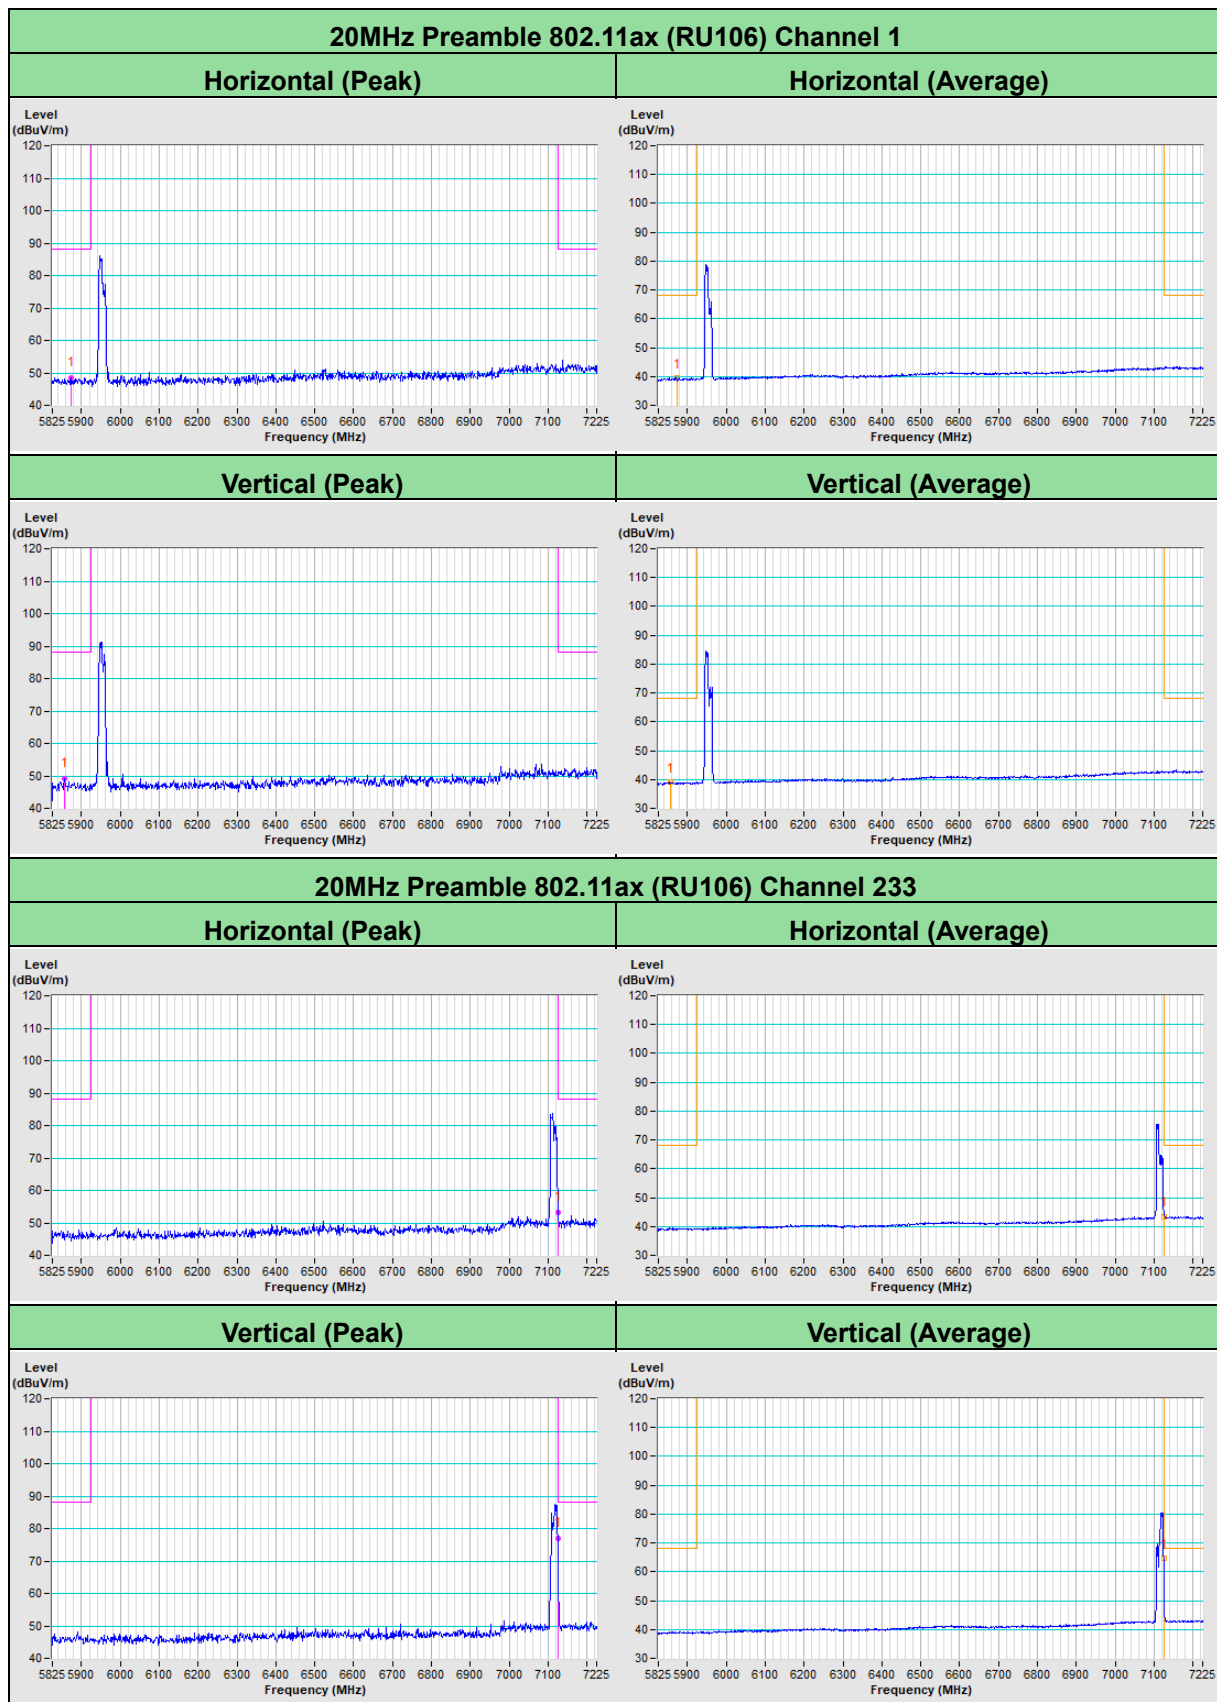

Appendix A– Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---