

Bluetooth-Konnektivität



Öffnen Sie die Batterieabdeckung


Schalten Sie den Schalter ein und installieren Sie die Batterie



Die Kopplungsanzeige blinkt und gibt den Kopplungsstatus ein

Bluetooth zum Verbinden des Geräts einschalten

Caractéristiques

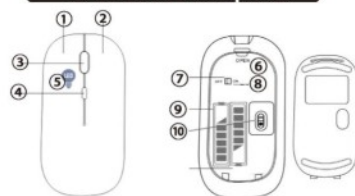

1, le bouton gauche

2, le bouton droit

3, rouleaux

4, DPI

5, indicateur de code paire Bluetooth

6, ouvrez le couvercle de la batterie


7, interrupteur d'alimentation - off

8, interrupteur d'alimentation - on

9, batterie

10, moteur optoélectronique

Connectivité Bluetooth

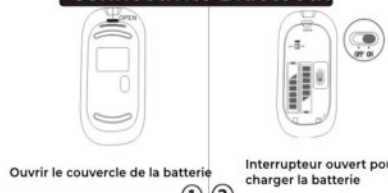

Ouvrir le couvercle de la batterie


Interrupteur ouvert pour charger la batterie



Le voyant d'appariement clignote pour entrer dans l'état d'appariement

Ouvrez l'appareil Bluetooth pour la connexion

製品の特徴

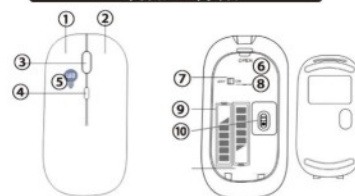

1, 左キー

2, 右クリック

3, ローラー

4, DPI

5, BluetoothコードLED

6, 電池カバーを開ける

7, 通電スイッチ・オフ

8, 通電スイッチ・オン

9, 電池

10, 光電エンジン

Bluetooth接続



バッテリーカバーを開く


スイッチを入れ電池を入れる



ペアリングLEDが点滅しペアリング状態になる

デバイスのBluetoothを接続するために開く

产品特点

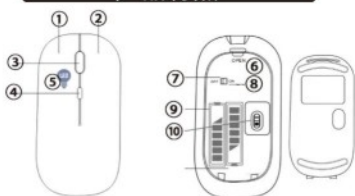

1, 左键

2, 右键

3, 滚轮

4, DPI

5, 蓝牙对码指示灯

6, 打开电池盖

7, 通电开关 关

8, 通电开关 开

9, 电池

10, 光电引擎

蓝牙连接



打开电池盖

打开开关, 装入电池




对码指示灯闪烁, 进入对码状态

打开设备蓝牙进行连接

199

Characteristics

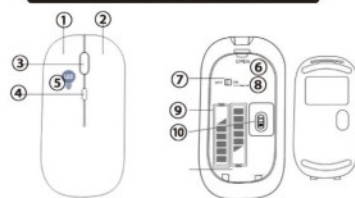

1. Left click
2. Right click
3. Roller
4. DPI
5. Bluetooth code checking indicator light
6. Open the battery cover
7. Power on switch off
8. Power on switch on
9. Battery
10. Optoelectronic engine

199

Bluetooth connection



Open the battery cover ① ② Turn on the switch and install the battery




The pairing indicator light flashes and enters pairing status

Turn on device Bluetooth to connect

199


Características del producto

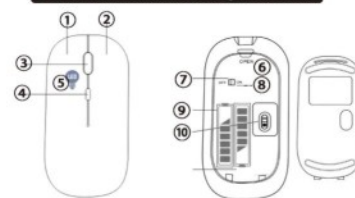

1. botón izquierdo
2. botón derecho
3. rodillos
4. DPI
5. indicador de código Bluetooth
6. abra la tapa de la batería
7. interruptor de encendido - apagado
8. interruptor de encendido - encendido
9. batería
10. motor fotoeléctrico

199

Conexión Bluetooth

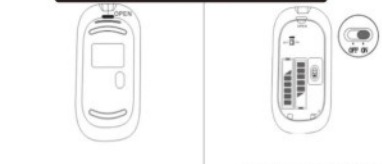

Abir la tapa de la batería ① ② Encienda el interruptor y cargue la batería




El indicador de emparejamiento parpadea y entra en el Estado de emparejamiento

Abra el Bluetooth del dispositivo para conectarse

199

Produktmerkmale

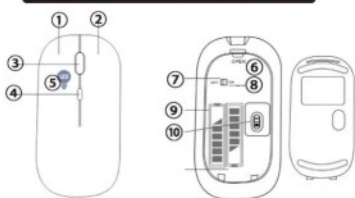

1. Linksklick
2. Rechtsklick
3. Walze
4. DPI
5. Kontrollleuchte des Bluetooth-Codes
6. Öffnen Sie die Batterieabdeckung
7. Einschalten des Schalters ausschalten
8. Einschalten Schalter einschalten
9. Batterie
10. Optoelektronischer Motor

199

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

The devices has been evaluated to meet general RF exposure requirement , the device can be used in portable exposure condition without restriction